

nrcm-kmeanss

August 28, 2023

Name: A.Pavani

Roll no: 20X01A6701

Branch: Data Science

Coleege: Narasimha Reddy Engineering College

Project Title: Analysis and prediction of “Mall_Customers.csv” of american mall markets called as Phonix Mall to find out how many customers are visited to a particular a shop .On the basis of these prediction of anual income vs spending score .

0.0.1 Disclimer:In these particular data set we assume annual income as a a centriod and spending score from the range 1-100 called as data nodes of the cluster.

Problem Statement:The american finanace market as per the GDP of 2011 ‘phoenix_trillums Mall’ as in the first range out of five.The owner of mall is wants be exact which particluar shop all product search in different kind of clusters in entire mall. As a data science engineer predict futurestic financial market for upcoming GDP rate based on number of clusters. The client wants atlear top five clusters(shops).

```
[1]: #import the numpy, matlot, pandas libery's
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
```

```
[3]: #Read the dataset take variable name called "dataset" only.
dataset = pd.read_csv("/content/Mall_Customers.csv")

# without printing this data add in separet variable as input variable Cagpital_
↳X only. loc index by select the all row ,
#and give the required colum index like[3,4].for this particular dataset.
X = dataset.iloc[:,[3,4]].values
```

```
[11]: ## <THE ELBOW METHOD>
#from sklearn used "sklearn.cluster" attribute and import KMeans
#Take a distance from from centroid to cluster point with WrapsColumnExpression.
```

```

# Assume you have 10 cluster and iterate the for up to range 10 with iterater
↳ kmeans++.
# Fit the model if value comes too samlla in range.
#For clustering in wcss ,inertia is adding / appending is required.(kmeans.
↳ inertia_)#defalut usecase.
#Plot the poarticular graph along with the wcss and your range which you taken
↳ as input variable.
#Add title "The Elbow Method".
#Lable x variable as "No of Customers".
#Lable y variable as "WCSS".
#Plot the graph using plt.show().
from sklearn.cluster import KMeans
wcss = []
for i in range (1,11):
    kmeans = KMeans(n_clusters = i, init="k-means++",random_state = 42)
    kmeans.fit(X)
    wcss.append(kmeans.inertia_)
plt.plot(range(1,11),wcss)
plt.title(" The Elbow Method")
plt.xlabel("No of Clusters")
plt.ylabel("wcss")
plt.show()

```

```


/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(

```

```

/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
  warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
  warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
  warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
  warnings.warn(

```

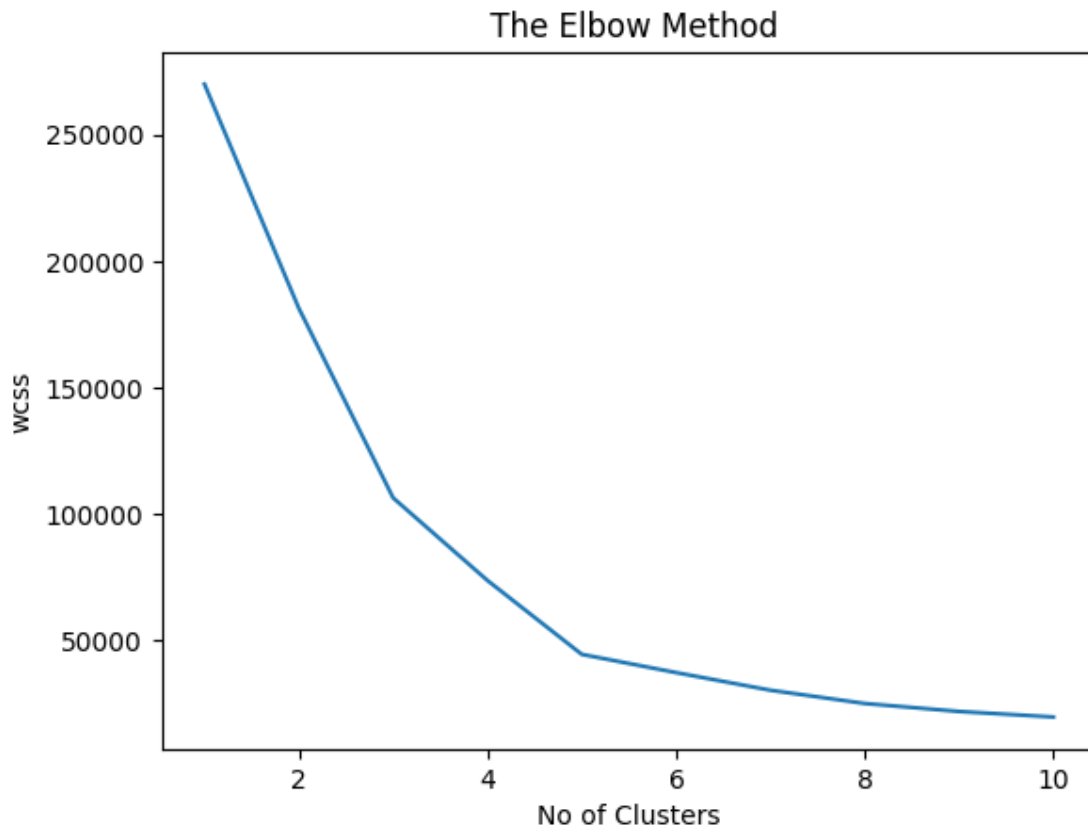

```

[15]: for i in range (1,11):
      kmeans = KMeans(n_clusters = 3, init="k-means++",random_state = 42)
      y_kmeans=kmeans.fit_predict(X)

```

```

/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(
/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870:
FutureWarning: The default value of `n_init` will change from 10 to 'auto' in
1.4. Set the value of `n_init` explicitly to suppress the warning
    warnings.warn(

```

```


[18]: # Take any no of cluster and run you take 5.
plt.scatter(X[y_kmeans == 0, 0], X[y_kmeans == 0, 1], s = 100, c = 'red', label=
    ↪ 'Cluster 1')
plt.scatter(X[y_kmeans == 1, 0], X[y_kmeans == 1, 1], s = 100, c = 'blue',
    ↪ label = 'Cluster 2')

```

```
plt.scatter(X[y_kmeans == 2, 0], X[y_kmeans == 2, 1], s = 100, c = 'purple',
            label = 'Cluster 3')
plt.scatter(X[y_kmeans == 3, 0], X[y_kmeans == 3, 1], s = 100, c = 'green',
            label = 'Cluster 4')
plt.scatter(X[y_kmeans == 4, 0], X[y_kmeans == 4, 1], s = 100, c = 'black',
            label = 'Cluster 5')

#Write Code for rest.SS

plt.scatter(kmeans.cluster_centers[:, 0], kmeans.cluster_centers[:, 1], s =
            300, c = 'yellow', label = 'Centroids')
plt.title('Clusters of customers')
plt.xlabel('Annual Income (k$)')
plt.ylabel('Spending Score (1-100)')
plt.legend()
plt.show()
```

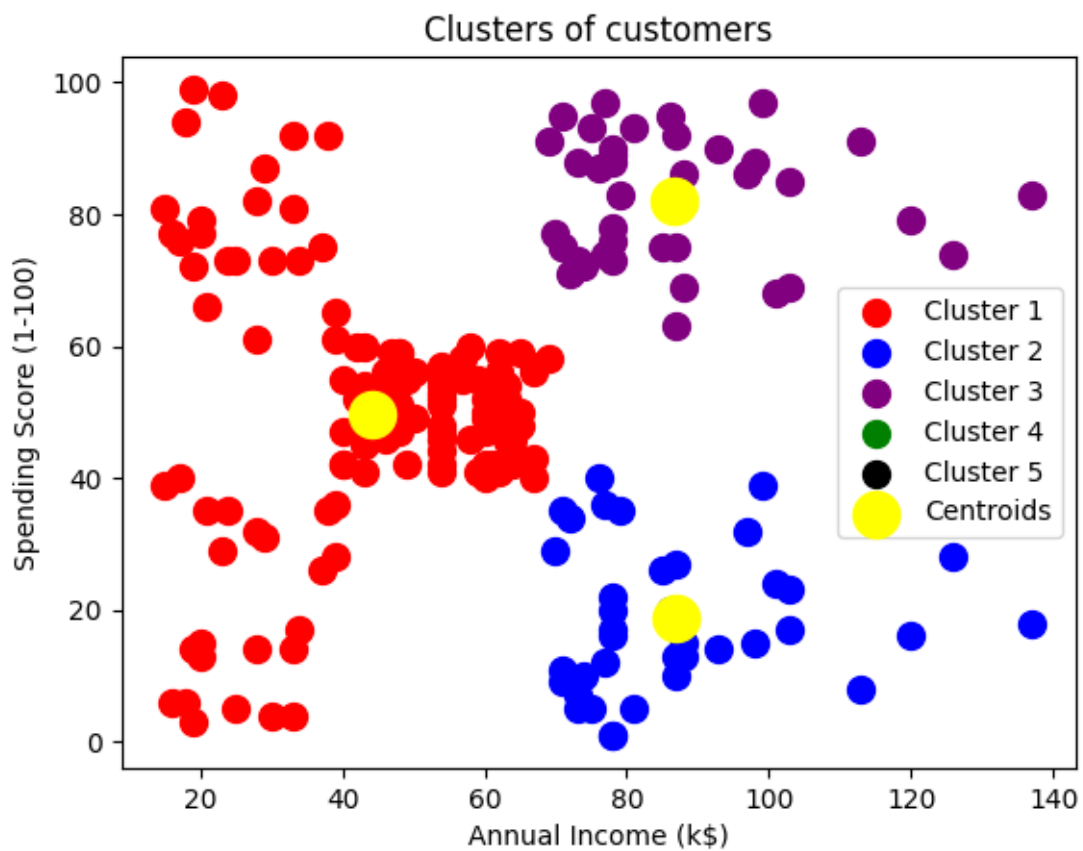

[]:

####Conclusion:** According to the model basics prediction using machine algorithm KMeans clustering we found that cluster 1 which consists red color is a highest cluster which attach more than 50 data nodes.

References: The model building algorithm develop for all kinds of clusterations values. The yellow spots represents centriods which is max to max only 3.