100

Duration : 0.070 s Start: Oct 23, 3:54:26.688 PM End: Oct 23, 3:54:26.758 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 2 3 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Login feature	0.070 s	1	0	1	0	3	0	1	2

FAIL & SKIP SCENARIOS -- 3 --

7	# Feature Name	Scenario Name
-	1 Login feature	Launching application

TAG	Scenario			Feature					
Name		P	F	S	T	P	F	S	
@launching_website	1	0	1	0	1	0	1	0	
@tag	1	0	1	0	1	0	1	0	

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration	
1	<u>Login feature</u>	1	0	1	0	0.070 s	

SCENARIOS SUMMARY -- 6 --




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login feature	Launching application	3	0	1	2	0.065 s

DETAILED SECTION -- 7 -

Login feature

FAILED	DURATION - 0.070 s	Scenarios		Steps	
		Total - 1		Total - 3	
/ 3:54:26.688 PM // s	3:54:26.758 PM /	Pass - 0	1	Pass - 0	3
		Fail - 1		Fail - 1	🦊 ് 📕
		Skip - 0		Skip - 2	

Launching application

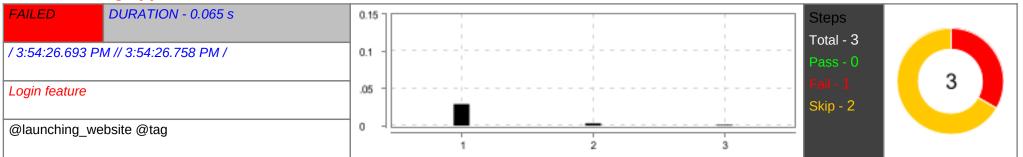

#	Step / Hook Details	Status	Duration
1	Given Admin launch the browser	FAILED	0.029 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefiniton.LoginSteps		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:53)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:141)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:686)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:230)		
	at org. testng. internal. invokers. Test Method With Data Provider Method Worker. call (Test Method With Data Provider Method Worker. java: 81)		
	at org.testng.internal.thread.Async\$AsyncTask.run(Async.java:34)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635)		
	at java.base/java.lang.Thread.run(Thread.java:840)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	29 more Caused by: java.lang.RuntimeException: WebDriver is not initialized. Please call initializeWebDriver() first.		
	at drivers.DriverFactory.getDriver(DriverFactory.java:58)		
	at pageFactory.LoginPage. <init>(LoginPage.java:12)</init>		
	at stepDefiniton.LoginSteps. <init>(LoginSteps.java:20)</init>		
2	When Admin gives the correct LMS portal URL	SKIPPED	0.003 s
3	Then Admin should land on the login page	SKIPPED	0.001 s