Introduction to Econometrics

Section 2A / 2B

Pavitra Kanagaraj

UC Santa Cruz

April 3, 2026

What We'll Do Today

- Build good workflow habits
- Learn how to read datasets
- Set up STATA and learn some basics

Quick Introductions

You (1 min each):

- Name + pronouns
- Major
- 3 words: "Econometrics = ?"

Me:

- First-year PhD Student in Economics
- Research: savings & investment behavior
- Former data journalist

How This Section Will Work

- Be on time (we move fast)
- Use correct Zoom name (LAST NAME, FIRST NAME)
- Camera on at the start (if possible)
- Expect cold-calling (low stakes!)
- Participate however you prefer: Chat, Speaking, or Interrupting
- My office hours are 1-3 pm on Fridays.
- Feel free to mail me your questions: *pkanagar@ucsc.edu*. I respond in 24 hours.

Good Habits (Start Early)

1. **The Folder Setup**
   - /raw_data - Never overwrite your raw data!
   - /clean_data - Manipulated versions of raw data
   - /code - keep `.do` files and master scripts here
   - /output - tables, excel, plots and logs (Can make different sub-folders for each as well)

2. **Code should be self-explanatory**
   - Always comment your steps, anyone should understand.
   - Use descriptive names:
     - Bad: `data_final_v2_revised.do`
     - **Good:** `2026-04-03_clean_wages.do`

Golden Rule: Your code is a recipe. If I have the ingredients (data), it should work in any kitchen (Reproducibility Rule).

Good Habits: Scripting & Documentation

Professional Standards:

- Code runs from start to finish without clicks - self-contained
- Always start with `log using`; it's your record.
- Record your Stata version (`version 19`) in log file
- **Use portable paths, not absolute paths**
  - Bad: `C:/Users/Pavitra/Document`
  - **Good:** `use "./data/wages.dta"`
  - Use `cd` once at the top of your code!

Cryptic & Unreadable

```
use "fruitdat.dta"
rename v1 fruit
label variable fruit "Type of fruit"
rename v2 sales
rename v3 price
label var sales "Sales (units)"
label var price "Price ($)"
sum price if fruit == "apple", det
```

Avoid this: No comments, no spacing, hard to read.

Clean & Commented

```
// load dataset
use "fruitdat.dta"

// name variables
rename v1 fruit
rename v2 sales
rename v3 price

// label variables
label variable fruit "Type of fruit"
label var sales "Sales (units, weekly)"
label var price "Price ($)"

// average price of apples
sum price if fruit == "apple", det
```

Adopt this: *Logical sections, comments, and spacing!*

How to read a dataset?

Checklist:

- *Unit of Observation:* Does each row represent an individual, a state, or a country-year?
- *Identify the Key:* Is there a unique, non-missing variable (like `county_fips` or `person_id`) for every row?
- *Check the Layout:* Is the data "wide" (years as columns) or "long" (years as rows)?
- *Verify the Source:* Is this the *raw* file , or a cleaned version?
- *File Format*: csv, excel or dta?

Classifying Your Data Structure:

- **Cross-section**: Many different units observed at one point in time.
- **Time series**: One single unit observed over many points in time.
- **Panel (Longitudinal)**: Many different units followed over many points in time.

Save your activation key

StataCorp LLC

4905 Lakeway Drive
College Station
Texas 77845

800 STATAPC
800 782 8272
979 696 4600

FAX 979 696 4601
Stata

License and Activation Key **Stata Software**

This License and Activation Key is an *important* document. Three pieces of information on this document — the serial number, code, and authorization — will be required during the installation process of the software you have licensed from StataCorp LLC ("StataCorp"), as further described below.

This document is valuable proof of purchase for your software license. You should store this document in a safe place for record keeping.

Licensed software:	Stata/MP 18 (8 cores)
License type:	Single-user
License term:	Perpetual
Serial number:	50[redacted]46
Code:	[redacted] rz$x og7r avds 7iu4[redacted] Lic9
Authorization:	qLga

(The serial number and code have been partially redacted)

L represents the letter L	1 represents the number one
o represents the letter o	0 represents the number zero

Note: When you type your code and authorization into the computer, you may type in lowercase or uppercase letters; it does not matter. You may also omit or add spaces as you wish.

Notice to user: Please read the following carefully. By installing the software and entering the Activation Key set forth in this document into your computer and unlocking the software, you confirm that you agree to be bound by the terms and conditions of StataCorp's then-current Software End-User License Agreement (as amended from time to time) ("Software License"). If you do not agree to be bound by all the terms and conditions of the Software License, do not enter the codes in this document or otherwise

STATA Interface

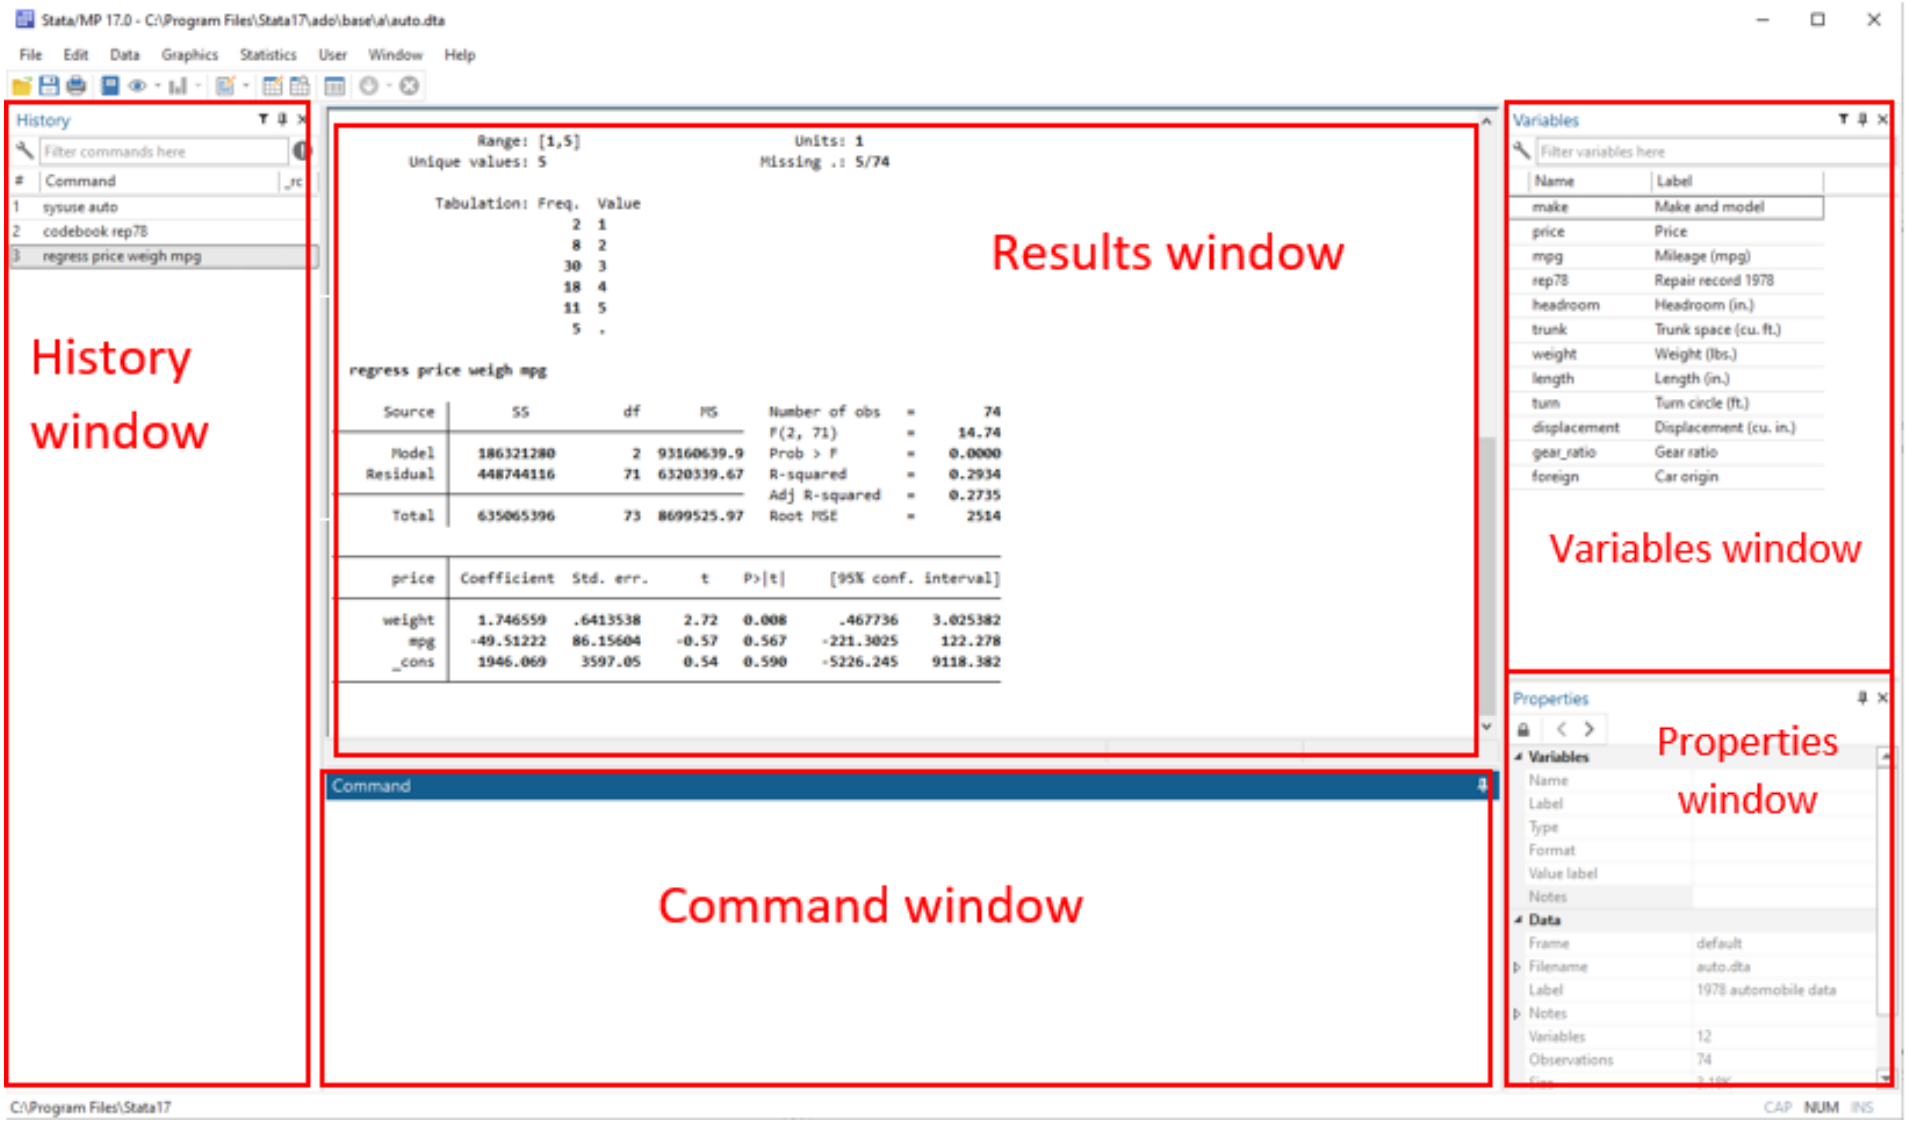

STATA Interface is made up of 5 key windows

Getting Started: Do File

1. **Creating & opening scripts**
   - Type `doedit` in the Command window to create a new do file.
   - To import a `.do` file from your folder, you can drag directly onto the Stata screen and release it.
   - Use *File* $\rightarrow$ *Save As* to keep your "recipe" in your `/code` folder.

2. **Executing your code**
   - Highlight the lines you want to run and click the **Execute (Do)** icon (paper with a right-pointing arrow).
   - **Keyboard Shortcuts:**
     - **Windows:** `Ctrl + D`
     - **Mac:** `Cmd + Shift + D`

Let's Get Live Now

- Running code in STATA, finding help
- Setting up working directory, running a log file
- Importing and examining the data
- How to create, import and save a do-file
- Data wrangling - generating new variables
- Common plots/graphs

Next Time

- Guidelines on submitting problem sets
- More STATA practice

Questions?