Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

1. Scatter Plot for Age vs. Fare by Survived

00:59

e a Python code to plot a scatter plot showing the relationship between the ' and 'Fare' columns in the Titanic dataset, with points color-coded by survival us. The scatter plot should display the following specifications:

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Color the points based on the **Survived** column: **Red** for passengers who did not survive (**Survived = 0**). **Blue** for passengers who survived (**Survived = 1**).
3. Set the title of the plot to **"Age vs. Fare by Survival"**.
4. Label the x-axis as **'Age'** and the y-axis as **'Fare'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer
AgeFareS...
Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.498 s** 498.00 ms

Maximum time **0.498 s** 498.00 ms

1 out of 1 shown test case(s) passed

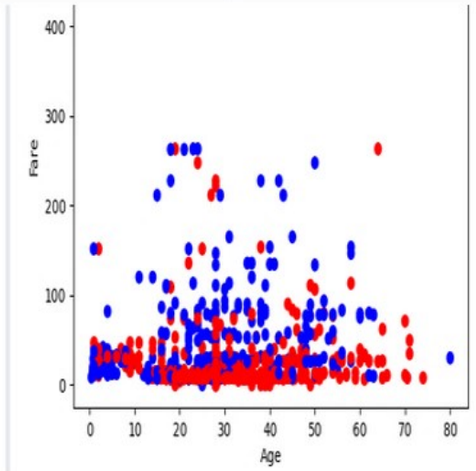

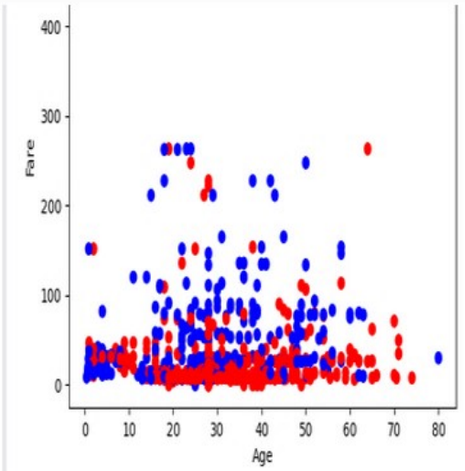

Terminal Test cases
Prev Reset
Type here to search
30°C Clear ENG 23:26 05-05-2026

. Stacked Plot

15:53

ate a stacked area plot to visualize the temperature variations for three different s (City A, City B, and City C) across the months of the year. The temperature is provided for each city in the editor.

r task is to:

- Create a stacked area plot using the data.
- Label the x-axis as "Month", the y-axis as "Temperature", and provide the title "Temperature Variation" for the plot.
- Display the plot showing the temperature variation for each city throughout the months of the year.

Sample Test Cases +

Explorer

stackedpl...

Submi

```python
import matplotlib.pyplot as plt
import pandas as pd

# Data for Months and Temperature for three cities
data = {
```

Average time **0.446 s** 446.00 ms

Maximum time **0.446 s** 446.00 ms

1 out of 1 shown test case(s) passed

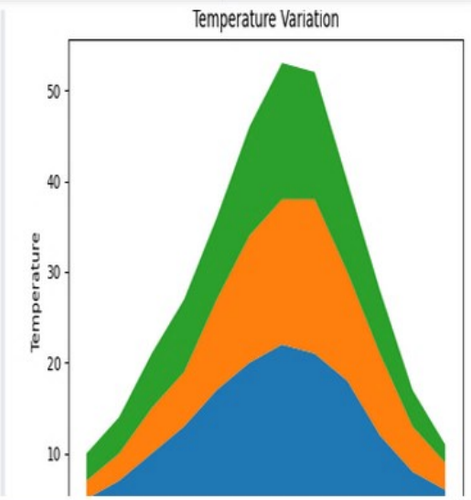

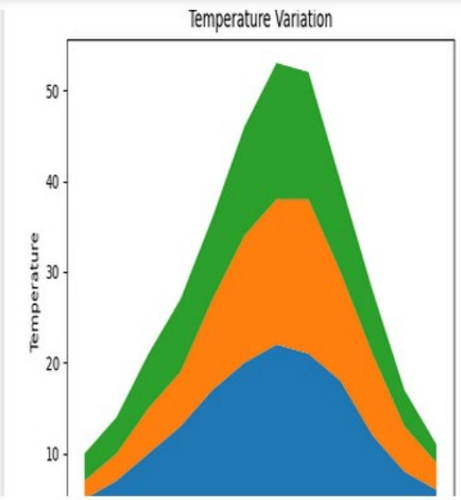

Terminal Test cases

Prev Reset Submit

Type here to search
Earnings upcoming
ENG 23:19 05-05-2026

Course

mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7

DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Titanic Dataset 01:54

e a Python program to analyze and visualize data from the Titanic dataset
ed on the following instructions:

aset Information:

dataset is stored in a CSV file named `titanic.csv` and has been loaded
g the `pandas` library. It contains the following columns:

- `Pclass`: Passenger class (1 = First, 2 = Second, 3 = Third).
- `Gender`: Gender of the passenger (male/female).
- `Age`: Age of the passenger.
- `Survived`: Survival status (0 = Did not survive, 1 = Survived).
- `Fare`: Ticket fare paid by the passenger.

ualization:

epresent these trends, you will create 5 visualizations using Matplotlib. The
alizations should be arranged in a 3x2 grid (3 rows and 2 columns).

Explorer

titanicDat... Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset from the CSV file
df = pd.read_csv('titanic.csv')
```

Average time **2.003 s** 2003.00 ms

Maximum time **2.003 s** 2003.00 ms

1 out of 1 shown test case(s) passed

Test case 1 2003 ms Debug

Expected output

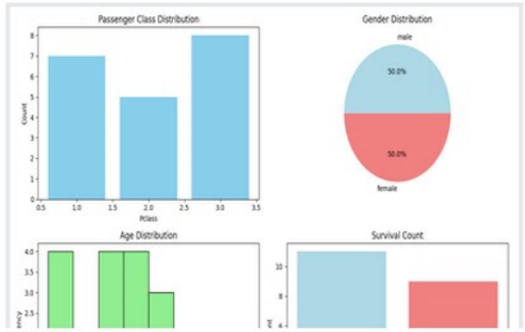

Actual output

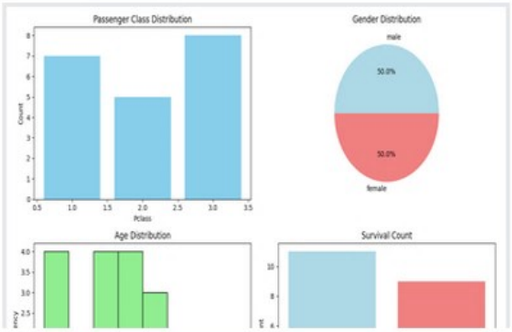

Terminal Test cases

Prev Reset Submit

Type here to search Earnings upcoming ENG 23:19 05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

Histogram of passenger information of Titanic

14:32

e a Python code to plot a histogram for the distribution of the 'Age' column n the Titanic dataset. The histogram should display the frequency of different ranges with the following specifications:

1. Use **30 bins** for the histogram.
2. Set the **edge color** of the bars to **black** (k).
3. Label the x-axis as **'Age'** and the y-axis as **'Frequency'**.
4. Add the title **"Age Distribution"** to the histogram.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

Histogra...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.500 s** 500.00 ms

Maximum time **0.500 s** 500.00 ms

1 out of 1 shown test case(s) passed

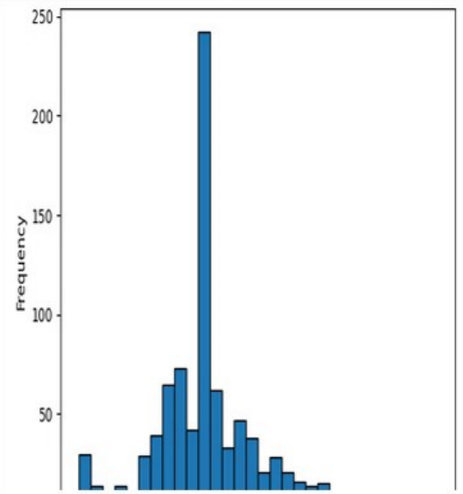

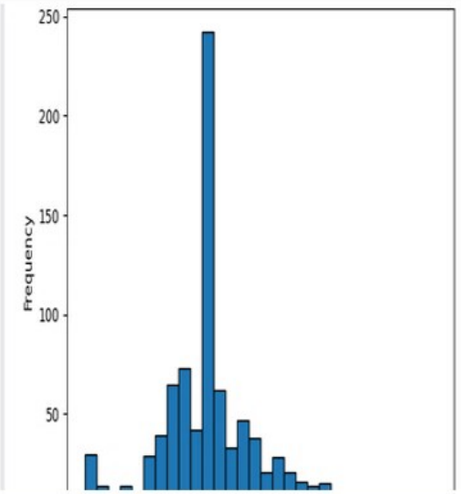

Terminal Test cases

Prev Reset Submit

Type here to search
Hot days ahead
ENG 23:20 05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Bar plot of survival rate of passengers

08:46

e a Python code to plot a bar chart that shows the count of passengers who ived and did not survive in the Titanic dataset. The chart should display the wing specifications:

1. Use the **'Survived'** column to show the count of survivors (0 = Did not survive, 1 = Survived).
2. Set the chart type to **'bar'**.
3. Add the title **"Survival Count"** to the chart.
4. Label the x-axis as **'Survived'** and the y-axis as **'Count'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BarPlotOf...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.528 s** 528.00 ms

Maximum time **0.528 s** 528.00 ms

1 out of 1 shown test case(s) passed

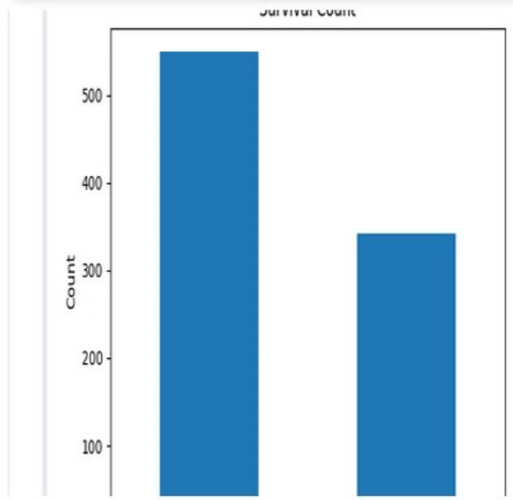

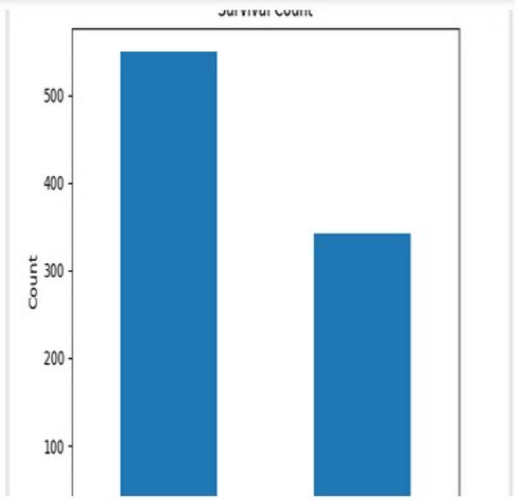

Terminal Test cases

Prev Reset Submit N

Type here to search
Hot days ahead
ENG 23:20 05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Bar Plot for Survival by Gender

25:23

e a Python code to plot a stacked bar chart that shows the count of sengers who survived and did not survive, grouped by gender, in the Titanic aset. The chart should display the following specifications:

1. Group the data by the **'Sex'** column, then use the **value_counts()** function to count the occurrences of survivors (0 = Did not survive, 1 = Survived) for each gender.
2. Use a **stacked bar chart** to display the survival counts.
3. Add the title **"Survival by Gender"** to the chart.
4. Label the x-axis as **'Gender'** and the y-axis as **'Count'**.
5. The legend should indicate **'Not Survived'** and **'Survived'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BarPlotOf...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time
1.210 s
1210.00 ms

Maximum time
1.210 s
1210.00 ms

1 out of 1 shown test case(s) passed

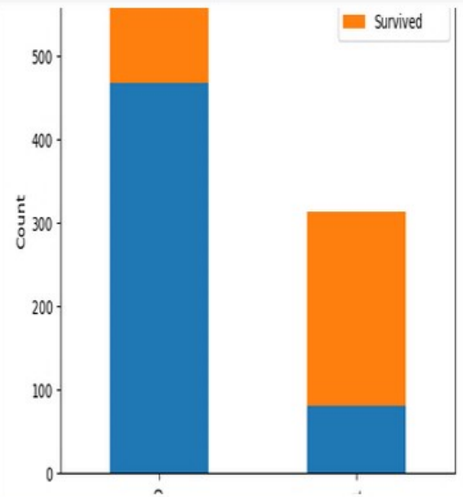

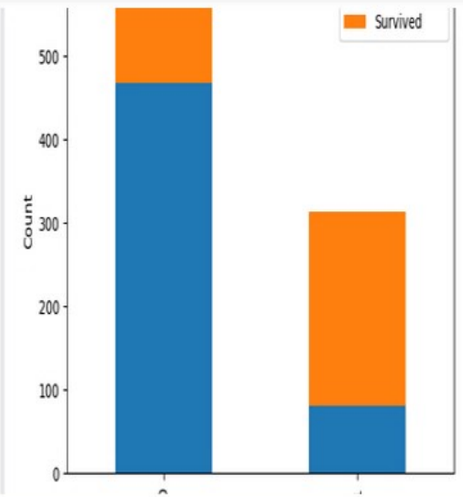

Terminal Test cases

Prev Reset Submit

Type here to search
Hot days ahead
ENG
23:21
05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Bar Plot for Survival by Pclass

09:46

e a Python code to plot a stacked bar chart that shows the count of sengers who survived and did not survive, grouped by passenger class **ass**), in the Titanic dataset. The chart should display the following cifications:

1. Group the data by the **Pclass** column and count the number of survivors (0 = Did not survive, 1 = Survived) for each class using **value_counts()**.
2. Use a **stacked bar chart** to display the survival counts.
3. Add the title **"Survival by Pclass"** to the chart.
4. Label the x-axis as **'Pclass'** and the y-axis as **'Count'**.
5. The legend should indicate **'Not Survived'** and **'Survived'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BarPlotOf...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.810 s** 810.00 ms

Maximum time **0.810 s** 810.00 ms

1 out of 1 shown test case(s) passed

Test case 1 810 ms Debug

Expected output

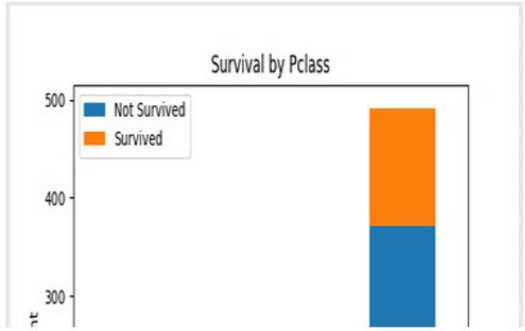

Actual output

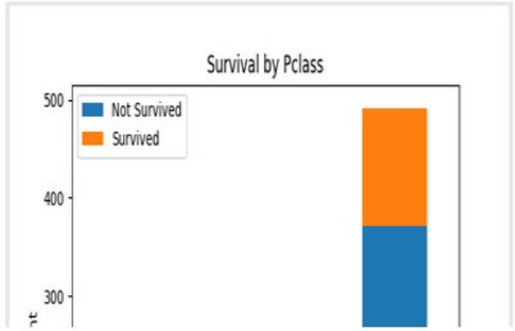

Terminal Test cases

Prev Reset Submit

Type here to search
Hot days ahead
ENG 23:22 05-05-2026

Course

mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7

DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Bar Plot for Survival by Embarked

09:45

e a Python code to plot a stacked bar chart showing the survival count for sengers based on their embarkation location in the Titanic dataset.

chart should display the following specifications:

1. Use the **Embarked** column to determine the embarkation location. After converting this column into dummy variables (using **pd.get_dummies()**), plot the survival count based on the **Embarked_Q** column (representing passengers who embarked from Queenstown) in relation to survival.
2. Set the chart type to 'bar' and make it stacked.
3. Add the title **"Survival by Embarked "** to the chart.
4. Label the x-axis as **'Embarked'** and the y-axis as **'Count'**.
5. Include a legend to distinguish between survivors and non-survivors (label the legend as **'Survived'** and **'Not Survived'**).

Titanic dataset contains columns as shown below,

s e	Survive	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarke

Explorer

BarPlotOf...

Submi

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.633 s** 633.00 ms

Maximum time **0.633 s** 633.00 ms

1 out of 1 shown test case(s) passed

Test case 1 633 ms Debug

Expected output

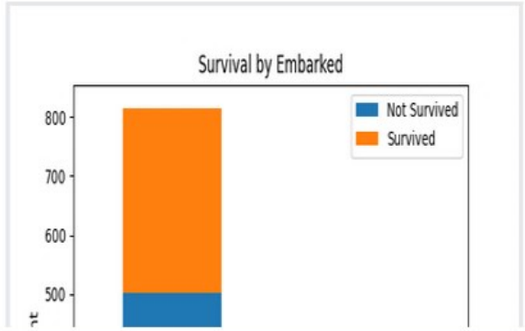

Actual output

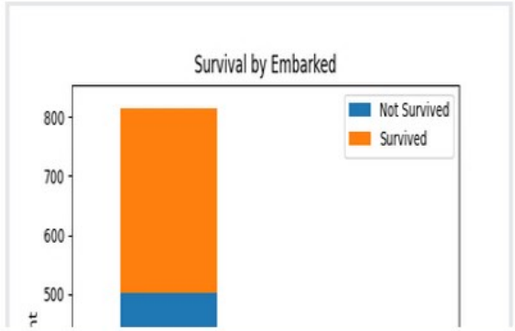

Terminal Test cases

Prev Reset Submit

Type here to search Hot days ahead ENG 23:23 05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
CODETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Box plot for Age Distribution

02:04

e a Python code to plot a boxplot that shows the distribution of the 'Age' mn from the Titanic dataset across different passenger classes. The boxplot uld display the following specifications:

1. Use the **Pclass** column to group the data for the boxplot.
2. Set the title of the plot to **"Age by Pclass"**.
3. Remove the default subtitle with **plt.suptitle('')**.
4. Label the x-axis as **'Pclass'** and the y-axis as **'Age'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BoxPlotF...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **1.383 s** 1383.00 ms

Maximum time **1.383 s** 1383.00 ms

1 out of 1 shown test case(s) passed

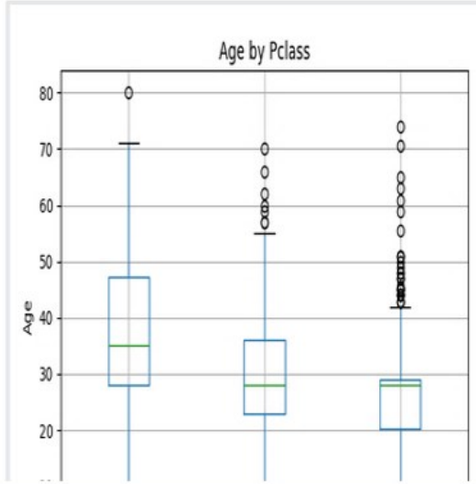

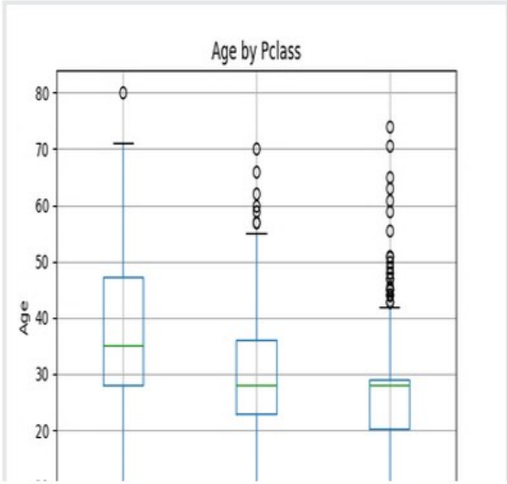

Terminal Test cases

Prev Reset Submit

Type here to search
Humid
ENG
23:23
05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Box Plot for Age by Survived

02:43

e a Python code to plot a boxplot that shows the distribution of the 'Age' mn from the Titanic dataset based on whether passengers survived or not. boxplot should display the following specifications:

1. Use the **Survived** column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to **"Age by Survival"**.
3. Remove the default subtitle with **plt.suptitle('')**.
4. Label the x-axis as **'Survived'** and the y-axis as **'Age'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BoxPlotF...

Submi

```python
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.598 s** 598.00 ms

Maximum time **0.598 s** 598.00 ms

1 out of 1 shown test case(s) passed

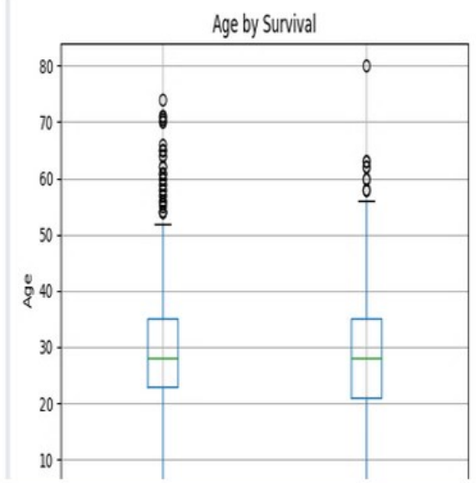

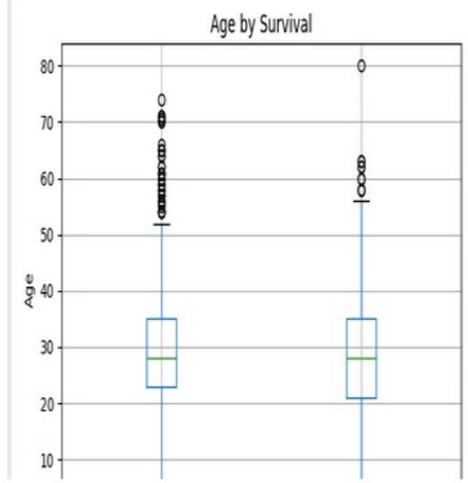

Terminal Test cases

Prev Reset Submit

Type here to search
30°C Clear ENG 23:24 05-05-2026

Course
mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7
DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

. Box Plot for Fare by Pclass

03:19

e a Python code to plot a boxplot that shows the distribution of the 'Fare' mn from the Titanic dataset based on the passenger class (Pclass). The plot should display the following specifications:

1. Use the **Pclass** column to group the data for the boxplot.
2. Set the title of the plot to **"Fare by Pclass"**.
3. Remove the default subtitle with **plt.suptitle('')**.
4. Label the x-axis as **'Pclass'** and the y-axis as **'Fare'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

BoxPlotF...

Submi

```
6
7  # Data Cleaning
8  data['Age'].fillna(data['Age'].median(), inplace=True)
9  data['Embarked'].fillna(data['Embarked'].mode()[0],
   inplace=True)
```

Average time **0.580 s** 580.00 ms

Maximum time **0.580 s** 580.00 ms

1 out of 1 shown test case(s) passed

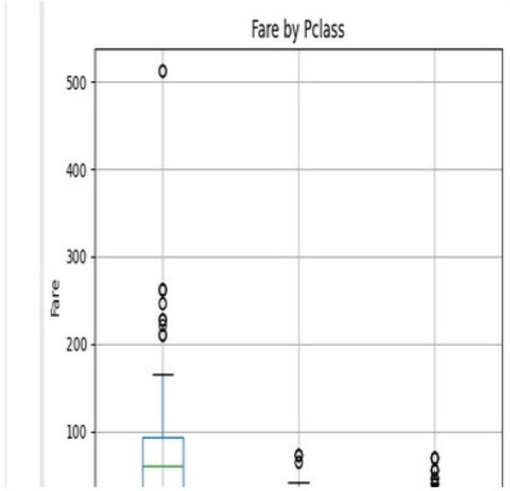

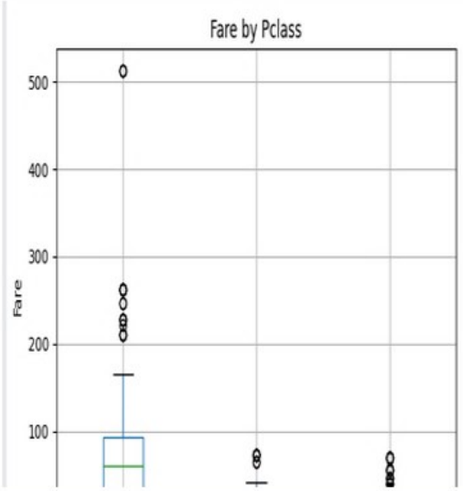

Terminal Test cases

Prev Reset Submit

Type here to search
30°C Clear ENG 23:25 05-05-2026

Course

mitaoe.codetantra.com/secure/course.jsp?eucId=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7

DETANTRA Home Learn Anywhere 202501090006@mitaoe.ac.in Support Logo

0. Scatter Plot for Age vs. Fare

04:45

e a Python code to plot a scatter plot showing the relationship between the ' and 'Fare' columns in the Titanic dataset. The scatter plot should display the wing specifications:

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Set the title of the plot to **"Age vs. Fare"**.
3. Label the x-axis as **'Age'** and the y-axis as **'Fare'**.

Titanic dataset contains columns as shown below,

s e	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Explorer

AgeFareS...

Submi

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')
```

Average time **0.442 s** 442.00 ms

Maximum time **0.442 s** 442.00 ms

1 out of 1 shown test case(s) passed

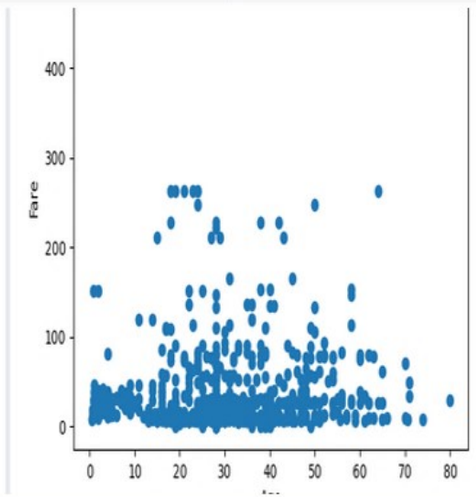

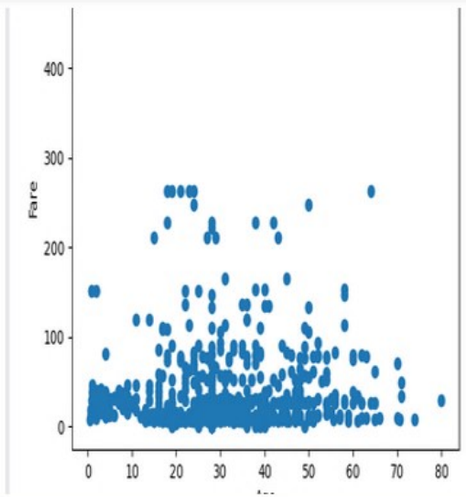

Terminal Test cases

Prev Reset Submit

Type here to search

30°C Clear ENG 23:25 05-05-2026