
Workgroup:	Network Working Group
Internet-Draft:	draft-ietf-rpp-data-objects-01
Published:	2 July 2026
Intended Status:	Standards Track
Expires:	3 January 2027
Authors:	P. Kowalik M. Wullink
	<i>DENIC SIDN Labs</i>

RESTful Provisioning Protocol (RPP) Data Objects

Abstract

This document defines data objects for the RESTful Provisioning Protocol (RPP) and sets up the IANA RPP Data Object Registry to describe and catalogue them. Specifically, it details the logical structure, constraints, and protocol operations (including their inputs, outputs, and business logic) for foundational resources: domain names, contacts, and hosts. In accordance with the RPP architecture [I-D.kowalik-rpp-architecture], these definitions focus entirely on the semantics, remaining independent of any specific data representation or media type (e.g., JSON or XML).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 3 January 2027.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	7
1.1. Conventions and Terminology	7
2. Resource Definition Principles	8
2.1. Primitive Data Types	8
2.1.1. String	8
2.1.2. Integer	8
2.1.3. Boolean	9
2.1.4. Decimal	9
2.1.5. Date	9
2.1.6. Timestamp	9
2.1.7. URL	9
2.1.8. Binary	9
2.1.9. Dictionary	9
2.1.10. Object	9
2.2. Data Element Abstraction	10
2.3. Extensibility	10
2.3.1. Standardised and Private Extensions	10
2.3.2. Extension Points	10
2.4. Data Element Semantics	11
2.5. Reserved Property Names	11
2.6. Operations	12
2.6.1. Authorisation	12
2.6.2. Uniform interface	12
2.6.2.1. Create	12
2.6.2.2. Read	12
2.6.2.3. Update	12
2.6.2.4. Delete	13
2.6.3. Operations beyond uniform interface	13

2.6.4. Transfer Operations	13
2.6.5. Restore Operations	13
2.6.5.1. Redemption Grace Period State Diagram	14
2.6.6. Renew Operations	16
2.7. EPP Compatibility Profile	16
3. External Data Types	16
3.1. Referencing External Data Types	16
3.2. Versioning and Compatibility	17
3.3. JSContact	17
4. Common Data Types	17
4.1. Identifier	17
4.2. Client Identifier	17
4.3. Phone Number	18
5. Associations	18
5.1. Aggregation	18
5.2. Composition	19
5.3. Labelled Aggregation	20
5.4. Dictionary Aggregation	20
5.5. Labelled Composition	21
5.6. Dictionary Composition	22
6. Component Objects	22
6.1. Period Object	23
6.2. Provisioning Metadata Object	23
6.3. Status Object	25
6.4. DNS Resource Record Object	27
6.4.1. RDATA Structures in EPP Profile	28
6.5. DNS Operational Controls Object	29
6.6. DNS Data Object	30
6.7. Authorisation Information Object	30
6.8. Disclose Object	31

6.9. Restore Report Object	31
6.10. Organisation Role Object	33
6.11. Processes Object	34
7. Process Objects	35
7.1. Transfer Process Object	35
7.1.1. Operations	37
7.1.1.1. Create (Transfer Request)	37
7.1.1.2. Read (Transfer Query)	38
7.1.1.3. Delete (Transfer Cancel)	38
7.1.1.4. Approve	38
7.1.1.5. Reject	39
7.2. Restore Process Object	39
7.2.1. Operations	41
7.2.1.1. Create (Restore Request)	41
7.2.1.2. Read (Restore Query)	41
7.2.1.3. Report	42
7.3. Renew Process Object	42
7.3.1. Operations	43
7.3.1.1. Create (Renew Request)	43
7.4. Create Process Object	43
7.4.1. Operations	44
7.4.1.1. Create	44
7.4.1.2. Read	44
8. Domain Name Data Object	44
8.1. Object Description	44
8.2. Data Elements	45
8.3. Operations	48
8.3.1. Create Operation	48
8.3.2. Read Operation	48
8.3.3. Update Operation	49

8.3.4. Delete Operation	49
8.3.5. Renew Operations	50
8.3.5.1. Renew Create Operation	50
8.3.6. Transfer Operations	50
8.3.6.1. Transfer Create Operation	51
8.3.7. Restore Operations	51
8.4. Domain Create Process Object	51
8.4.1. Operations	52
8.4.1.1. Create	52
8.4.1.2. Read	52
9. Contact Data Object	52
9.1. Object Description	52
9.2. Data Elements	53
9.3. Operations	54
9.3.1. Create Operation	54
9.3.2. Read Operation	55
9.3.3. Update Operation	55
9.3.4. Delete Operation	56
9.3.5. Transfer Operations	56
10. Host Data Object	56
10.1. Object Description	56
10.2. Data Elements	56
10.3. Operations	58
10.3.1. Create Operation	58
10.3.2. Read Operation	58
10.3.3. Update Operation	58
10.3.4. Delete Operation	59
10.3.5. Restore Operations	59
11. Organisation Data Object	59
11.1. Object Description	59

11.2. Data Elements	60
11.3. Operations	62
11.3.1. Create Operation	62
11.3.2. Read Operation	63
11.3.3. Update Operation	63
11.3.4. Delete Operation	63
12. User Object	64
12.1. Object Description	64
12.2. Data Elements	64
12.3. Operations	66
12.3.1. Create Operation	66
12.3.2. Read Operation	66
12.3.3. Update Operation	66
12.3.4. Delete Operation	66
13. IANA Considerations	67
13.1. RPP Data Object Registry	67
13.1.1. Registration Policy	67
13.1.2. Registry Structure	67
13.1.3. Initial Registrations	67
13.2. RPP User Role Values Registry	92
14. Security Considerations	92
16. References	94
16.1. Normative References	94
16.2. Informative References	96
Authors' Addresses	96

1. Introduction

The RESTful Provisioning Protocol (RPP) defines a set of data objects used to represent and manage foundational registry resources, including domain names, contacts, and hosts. This initial list is not exhaustive; additional resource and component objects MAY be defined in future revisions or introduced via IANA registration to support new features and operational needs.

In accordance with the RPP architecture [[I-D.kowalik-rpp-architecture](#)], a core architectural principle is the clear distinction between the abstract data model and its concrete data representation. The data model defines the logical structure, relationships, and constraints of the objects, independent of formatting. The data representation defines how these abstract concepts are expressed in specific formats (e.g., JSON, XML, or YAML).

This document focuses on the data model of RPP objects and operations on them, including the data model of operation inputs, outputs as well as the necessary business logic of state transitions. This separation of concerns ensures the protocol maintains a stable semantic foundation that can be consistently implemented across different media types and easily adapted to new representation formats. For instance, the model defines a contact's name as a required string type, but it remains agnostic as to whether that string is ultimately encoded as a JSON property or an XML element.

1.1. Conventions and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

The following terms related to the relationship between host objects and domain objects are used as defined in [Section 1.1](#) of [[RFC5732](#)]:

Subordinate host A host name object that has a subordinate relationship to a superordinate domain name object. For example, host name "ns1.example.com" has a subordinate relationship to domain name "example.com".

Superordinate domain A domain name object to which a host name object is subordinate.

Internal host A host whose name belongs to the namespace of the repository in which the host is being used for delegation purposes.

External host A host whose name does not belong to the namespace of the repository in which the host is being used for delegation purposes.

The following terms are defined and used in this document:

Object Authorisation

Authorisation data related to the object beyond the default client-level authorisation accompanying the request, in order to authorise operations on the object. Typically it is a value related to or derived from an Authorisation Information Object provisioned with the object.

Data Object A top-level provisioned resource object that has an independent lifecycle and identity in the registry. Data Objects carry data elements describing the resource and define the set of operations that can be performed on them.

Component Object A reusable data structure that carries data only, with no operations of its own. Component Objects are embedded within Data Objects or other objects to avoid repetition of common data patterns.

Process Object An object that represents a long-running or multi-step operation initiated on a Data Object. Process Objects carry operation-related state and data, and may define their own operations to interact with the process. They have no independent existence - their lifecycle is bound to the owning Data Object.

Owner Data Object A Data Object which a process (represented as Process Object) was initiated upon and which owns this Process Object.

Unique Identifier The data element of an object whose value uniquely identifies an instance of that object within its applicable scope. The scope is defined by the object: for a Data Object it is typically the server, whereas for a Process Object it is the Owner Data Object. An object definition names its Unique Identifier explicitly in the object preamble. Objects that have no independent identity, such as component objects embedded within another object, have no Unique Identifier.

2. Resource Definition Principles

2.1. Primitive Data Types

RPP data elements use strict typing, meaning that each element must conform exactly to its declared primitive data type, and type violations **MUST** be treated as errors by implementations. The exact specifications for these types, including allowed ranges, encoding, and formatting, are determined by the representation format used (e.g., JSON, XML, CBOR). New RPP non-primitive data types based on existing primitive data types **MAY** be defined to support additional features.

2.1.1. String

A String is a sequence of Unicode characters. Usages **MAY** impose additional constraints on string values, such as maximum length or allowed character sets, based on specific data element definitions. An example of a string is "host.example".

2.1.2. Integer

An Integer is a whole number, positive or negative. Usages **MAY** impose additional constraints on integer values, such as minimum and maximum allowable values, based on specific data element definitions. An example of an integer is 42.

2.1.3. Boolean

A Boolean represents a logical true or false value. An example of a boolean is `true` or `false`, but it MAY be different depending on the native encoding of boolean values in the representation.

2.1.4. Decimal

A Decimal is a number providing an exact, base-10 representation of fractional values within a defined precision. Usage of this type MUST impose additional constraints on decimal values, such as precision or range, based on specific data element definitions. An example of a decimal is 3.14159.

2.1.5. Date

A Date is a full-date calendar date as described in [\[RFC3339\]](#), an example of a date is 2025-10-27.

2.1.6. Timestamp

Timestamp (Date and time attribute) values MUST be represented in Universal Coordinated Time (UTC) using the Gregorian calendar in date-time form as defined in [\[RFC3339\]](#). In EPP Compatibility Profile upper case "T" and "Z" characters MUST be used. An example of a timestamp is 2025-10-27T09:42:51Z.

2.1.7. URL

A Uniform Resource Locator (URL) as defined in [\[RFC1738\]](#). An example of a URL is `"https://host.example"`.

2.1.8. Binary

Raw binary data, implementations MAY choose how to encode the binary data, for example as base64 or hexadecimal string. An example of binary data encoded as base64 is `"U1BQIFNheXMgSGk="`.

2.1.9. Dictionary

Notation: Dictionary[Value Type]

A Dictionary is a collection of key-value pairs where keys are unique Strings and values are of the specified primitive data type. Usages MUST define the constraints on allowed keys and values. A Dictionary differs from an Aggregation Dictionary in that it maps String keys to primitive values rather than to Component or Resource Objects.

2.1.10. Object

An Object is a composite structure containing named properties. The set of allowed property names, their data types, and their constraints are determined by the data element definition that uses this type. Usages MUST specify the expected structure, including any required or optional properties. An Object differs from a Component Object in that it is defined inline as part of a data element rather than being a standalone reusable definition registered separately.

2.2. Data Element Abstraction

Each data object is composed of logical data elements. A data element is a logical unit of information identified by a stable name, independent of its representation in any given media type. The definition for each element specifies its logical name, purpose, cardinality, data type, and constraints. The data type of a data element may also be a reference to another data object, using the target object's stable name.

2.3. Extensibility

The RPP data model is designed to be extensible. Extensions MAY introduce new data objects, add new data elements or associations to existing objects, and define new operations or extend the inputs and outputs of existing operations with additional transient data elements.

2.3.1. Standardised and Private Extensions

RPP distinguishes between standardised and private extensions:

- Standardised extensions MUST be registered with IANA, as described in the IANA Considerations section of this document and in [\[I-D.ietf-rpp-architecture\]](#). Registration ensures global uniqueness of extension identifiers and promotes interoperability across implementations.
- Private (non-standardised) extensions MAY be defined for use within specific implementations or organisations. Private extensions are not required to be registered with IANA, but MUST still use unique identifiers that are unlikely to conflict with standardised extensions or other private extensions. The use of reverse domain notation as a prefix (e.g., `org.example.rpp.myElement`) is RECOMMENDED for private extension identifiers to avoid naming collisions.

2.3.2. Extension Points

The following aspects of the data model are extensible:

- New data objects: Additional resource or component objects MAY be defined by extensions and registered with IANA.
- New data elements: Extensions MAY add new data elements to existing data objects. Such elements follow the same Data Element Semantics as core data elements.
- New associations: Extensions MAY introduce new associations between existing or new objects.
- New operations: Extensions MAY define entirely new operations on existing or new data objects.
- Extended operation inputs and outputs: Extensions MAY add new transient data elements to the inputs or outputs of existing operations.

When an extension adds data elements or transient parameters to a core object or operation, these additions MUST NOT alter the semantics or constraints of existing core data elements.

2.4. Data Element Semantics

The definition of each data element within an object consists of the following attributes:

- **Name:** A human-readable name for the data element.
- **Identifier:** A machine-readable, unique identifier for the element, using camelCase notation.
- **Cardinality:** Specifies the number of times an element may appear. The notation is as follows:
 - 1 for exactly one
 - 0-1 for zero or one
 - 0+ for zero or more
 - and 1+ for one or more
- **Data Type:** Defines the element's data structure, which can be a primitive type, a Common Data Type or a reference to another component object.
- **Description:** Explains the purpose of the data element and any other relevant information.
- **Constraints:** Provides specific validation rules or limitations on top of the data type itself, such as value ranges.
- **Mutability:** Defines the lifecycle of the data element's value. It **MUST** be one of the following:
 - create-only: The element's value is provided during the object's creation and cannot be modified thereafter.
 - read-only: The element's value is managed by the server. It cannot be set or modified directly by the client, though it may change as a result of server-side operations.
 - read-write: The element's value can be set and modified by the client.
- **Direct Access:** An optional flag indicating whether the associated object or objects are additionally exposed as an addressable sub-resource of the containing object. When set to `true`, the associated object or objects are exposed as a sub-resource that can be addressed independently of the containing object, in addition to their inline representation within it. When absent or set to `false`, the element is accessed only inline. The default value is `false`.

The Direct Access flag is applicable only to a data element whose Data Type is an association (Aggregation, Composition, Labelled Aggregation, Dictionary Aggregation, Labelled Composition, or Dictionary Composition) with a Data Object, Component Object, or Process Object, of any cardinality. Where such a data element has a cardinality greater than 1, the associated object type **MUST** define a Unique Identifier, so that an individual associated object can be addressed unambiguously among the collection.

2.5. Reserved Property Names

Data object definitions **MUST NOT** define properties whose names begin with the `@` character. Names beginning with `@` are reserved for use by representation specifications. This prohibition applies to all data object types: resource objects, component objects, and process objects.

2.6. Operations

For each data object a set of possible operations is defined together with their respective input and output data.

2.6.1. Authorisation

For each operation authorisation requirements and operation behaviour is specified.

Wherever "Object Authorisation" is mentioned, it means that an operation MAY accept or require additional authorisation data related to the object beyond default client-level authorisation, or that an operation MAY result in different processing or response if such authorisation is provided.

2.6.2. Uniform interface

For the typical set of Create, Read, Update and Delete operations the following set of input and output data model is specified on top of additional transient input data, unless an operation for the specific object tells otherwise.

2.6.2.1. Create

- Input: Object (create-only and read-write properties)
- Output: Object (read-write and read-only properties)

2.6.2.2. Read

- Input: Object identifier
- Output: Object (read-write and read-only properties)

The output Object MAY vary depending on the identity of the querying client, use of Object Authorisation information, and server policy towards unauthorised clients.

If the querying client is the sponsoring client, all available information MUST be returned.

If the querying client is not the sponsoring client but the client provides valid Object Authorisation information, all available information SHOULD be returned, however some optional elements MAY be reserved to the sponsoring client only.

If the querying client is not the sponsoring client and the client does not provide valid Object Authorisation information, server policy determines which OPTIONAL elements are returned, if any, or whether the entire request is rejected.

2.6.2.3. Update

- Input: Object identifier, Object changes (read-write properties)
- Output: Object (read-write and read-only properties)

2.6.2.4. Delete

- Input: Object identifier
- Output: Object (read-write and read-only properties) or nothing

2.6.3. Operations beyond uniform interface

For all other operations both input and output have to be fully specified.

2.6.4. Transfer Operations

Transfer operations manage the change of sponsorship of a provisioned object from one client (the sponsoring client) to another (the gaining client). They are specified once in this section as the transfer model is common across all transferable resource objects. Individual object definitions reference this section and specify any object-specific extensions to the common pattern.

RPP supports two types of transfer:

- Pull Transfer: Initiated by the gaining client. The gaining client MUST provide valid Object Authorisation to initiate the request.
- Push Transfer: Initiated by the sponsoring client, who designates a gaining client in the request.

The transfer process MAY be immediate or follow a multi-step workflow depending on server policy. If the server implements immediate transfers, the Approve and Reject operations need not be supported; the server completes the transfer upon receipt of the Create operation.

The server MAY implement local policies to prevent transfers from stalling and implement a form of automated transfer escalation, approval or cancellation when such a stalled process is recognised.

All transfer operations act on or return the Transfer Process Object and are executed in the context of the Owner Data Object the operation is created upon.

TODO: The server MUST notify the current sponsoring client of a pending transfer request. The notification mechanism is not defined in this document.

TODO: Transfer-specific error conditions (object not eligible for transfer, object pending transfer, object not pending transfer) are not defined in this document.

2.6.5. Restore Operations

Restore operations manage the recovery of an object that has entered the Redemption Grace Period (RGP). They are OPTIONAL and are only available when the RGP feature is supported by the server and MAY be supported only for a subset of Data Object types.

The RGP process MAY involve two distinct steps:

- **Restore Request: (REQUIRED)** Initiates the recovery of an object in the `redemptionPeriod` state, signalling to the registry the intent to restore. This corresponds to the `Create` operation on the Restore Process Object. On success, the object transitions to `pendingRestore`.
- **Restore Report: (OPTIONAL)** Submits a report documenting the circumstances of the deletion and restoration, as required by registry policy. This corresponds to the `Report` operation on the Restore Process Object. On success, the object is returned to its pre-deletion status and all RGP status labels are removed.

Whether a restore report is required after a restore request is a matter of server policy. If the server does not require a restore report, the object returns to its pre-deletion status immediately upon a successful `Create` operation, bypassing the `pendingRestore` state.


The `Create` operation MAY include the restore report inline to complete both steps atomically in a single operation.

All restore operations act on or return the Restore Process Object and are executed in the context of the Owner Data Object the operation is created upon.

2.6.5.1. Redemption Grace Period State Diagram

The following state diagram describes the object lifecycle when the Redemption Grace Period (RGP) feature is supported. It adapts the diagram from [Section 2](#) of [\[RFC3915\]](#) to the RPP data model, using RPP status labels and operations instead of EPP command names.

In the diagram below, RPP status labels are shown in the `status` field of the object. Standard EPP-origin status labels (e.g., `ok`, `pendingDelete`) are used alongside the RGP-specific labels defined in this document. The `<create>` and `<report>` labels refer to the `Create` and `Report` operations on the Restore Process Object, replacing the EPP extended `<update>` command with `op=request` and `op=report` attributes.

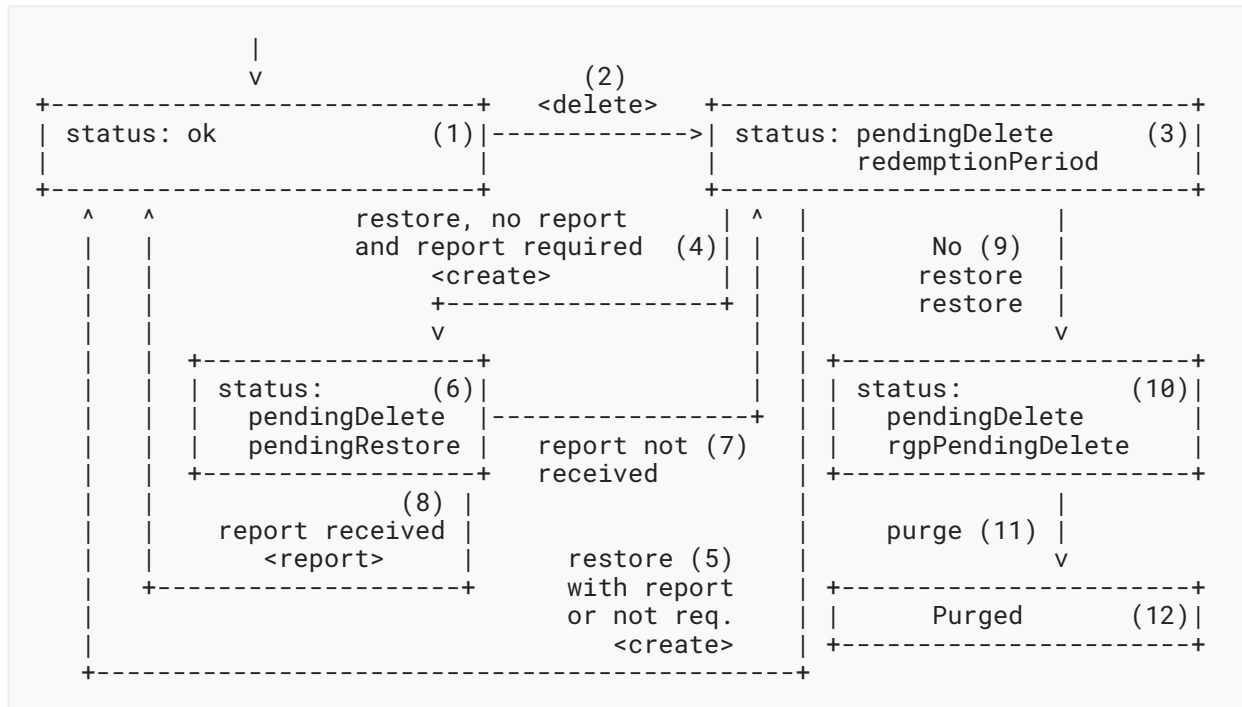

State descriptions:

1. The object is in normal operation (ok or other status allowing a delete operation).
2. A delete operation is received and processed.
3. RGP begins. The object enters pendingDelete + redemptionPeriod state. The object remains here until a restore operation is requested or the redemption period elapses.
4. A restore Create operation is submitted. The registry accepts the request. Go to step 8 if the redemption period elapses before a restore is received (4a).
5. If the server does not require a restore report, the object returns to its pre-deletion status (1) immediately upon a successful Create operation. If the server requires a report but the client includes it inline in the Create operation, the server processes both atomically and the object transitions directly from redemptionPeriod to its pre-deletion status (1), bypassing the pendingRestore state.
6. The object enters pendingDelete + pendingRestore state. The registry awaits a restore report from the sponsoring client.
7. If no restore report is received within the registry-defined time, the object returns to redemptionPeriod state (step 3).
8. If a restore report is received and accepted, the object returns to its pre-deletion status and all RGP status labels are removed.
9. The redemption period elapses without a restore request being received.
10. The object enters pendingDelete + rgpPendingDelete state and awaits final purge processing.
11. The pending delete period elapses and the object is purged.

12. The object is purged and available for re-registration.

2.6.6. Renew Operations

Renew operations manage the validity period of a provisioned object. They are specified once in this section as the renewal model is common across all renewable resource objects. Individual object definitions reference this section and specify any object-specific extensions to the common pattern.

2.7. EPP Compatibility Profile

RPP is designed to coexist with the Extensible Provisioning Protocol (EPP), often operating in parallel against a common backend provisioning system. While RPP is not inherently constrained by all of EPP's requirements, a specific set of rules is necessary to ensure seamless interoperability in such mixed environments.

To address this, this document defines an "EPP Compatibility Profile". This profile specifies a set of additional constraints on RPP data objects and operations that a server **MUST** adhere to when supporting both RPP and EPP concurrently.

Throughout this document, all constraints that are part of this profile are explicitly marked with a reference to "EPP Compatibility Profile". Implementers of systems in a mixed EPP/RPP environment **MUST** follow these specific constraints in addition to the base RPP requirements.

3. External Data Types

The RPP object model is designed to be extensible and interoperable with existing standards. To reduce redundancy and improve consistency, RPP data objects **MAY** incorporate data types and structures defined in external specifications rather than redefining equivalent types within this specification.

An external data type is any type, structure, or format that is normatively defined in a separate standards document and referenced by this specification. When an external data type is used, RPP implementations **MUST** conform to the semantics, constraints, and encoding rules defined in the originating specification.

3.1. Referencing External Data Types

When this document or any RPP specification references an external data type, the reference **MUST** follow the requirements and guidelines for references described in [RFC2026]. The reference **MUST** include a clear description of the specific type or structure being used. For example, if referencing the JSContact format defined in [RFC9553], the reference should specify that the Card data type is being used. The reference **MUST** use the following format: `External:<specification-identifier>:<type-name>`. For example, `External:RPP-JSContact-Profile:Card` indicates that the Card type from the RPP JSContact Profile specification is being used. The syntax for the reference is defined using ABNF [RFC5234] as follows:


```
identifier = "External:" TYPEID ":" TYPEID  
TYPEID = ALPHA *( ALPHA / DIGIT / "-" / "_" ) ( ALPHA / DIGIT )
```

3.2. Versioning and Compatibility

External data types are versioned by the specification that defines them. The RPP specifications are pinned to a single version of an external type. If a newer version updates the defining specification, the RPP specification **MUST** be updated to indicate explicit support.

3.3. JSContact

This specification references the RPP JSContact Profile for RPP defined in [\[I-D.wullink-rpp-jscontact-profile\]](#) as an external specification for representing contact information. The JSContact Card data type defined in [\[RFC9553\]](#) **MUST** be used for the representation of contact information. When referring to this type the following values **MUST** be used in the Data Type reference identifiers:

specification-identifier: RPP-JSContact-Profile
type-name: Card
Data Type: External:RPP-JSContact-Profile:Card

4. Common Data Types

This section defines new shared data types and structures that are re-used across multiple data object definitions and are based on the existing Primitive Data Types.

4.1. Identifier

Identifiers are character strings with a specified minimum length, a specified maximum length, and a specified format outlined in [Section 2.8](#) of [\[RFC5730\]](#). Identifiers for certain object types **MAY** have additional constraints imposed either by server policy, object specific specifications or both.

4.2. Client Identifier

Client identifiers are character strings with a specified minimum length, a specified maximum length, and a specified format. Client identifiers use the "clIDType" client identifier syntax described in [\[RFC5730\]](#).

TBC: do we need this or is it a relation with an entity/RFC8543 organisation? If registrars are modelled as first class objects (organisations), then clID is nothing else but a reference to this organisation, so maybe no need to define syntax separately on identifier level (or in other words it would be defined on this object). R8.1 in the form of -02 RPP requirements includes RFC8543.

4.3. Phone Number

Telephone number syntax is derived from structures defined in [ITU.E164.2005]. Telephone numbers described in this specification are character strings that MUST begin with a plus sign ("+", ASCII value 0x002B), followed by a country code defined in [ITU.E164.2005], followed by a dot (".", ASCII value 0x002E), followed by a sequence of digits representing the telephone number. An optional "x" (ASCII value 0x0078) separator with additional digits representing extension information can be appended to the end of the value.

5. Associations

RPP allows for different types of associations (relationships) between the objects. The association may be added between 2 objects with own independent lifecycle (UML aggregation) or in the relation when one object's existence and lifecycle is bound to the other parent/owner object (UML composition). In both cases, especially if the relation allows for cardinality higher than one on either side, the association may be assigned additional attributes, not being part of an object on either side of relation. In many cases such relation would be attributed with a single text string label, describing a role or a type of relation. Depending on the context this value might be unique, which allows using such label as a key in a dictionary.

The following generic Association Types are defined for RPP:


5.1. Aggregation

Notation: Aggregation[Type]


A relation between two independent objects.

If the cardinality of the target object is more than 1, this represents an ordered array. It MUST be assured that the same unchanged data is always inserted in the same order in order to allow stable reference by position to data elements. In case of data insertions, deletions, or updates the remainder of the data SHALL preserve its order.

Example aggregation having cardinality 1:

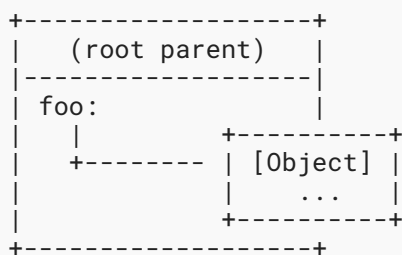

Example aggregation having cardinality >1:

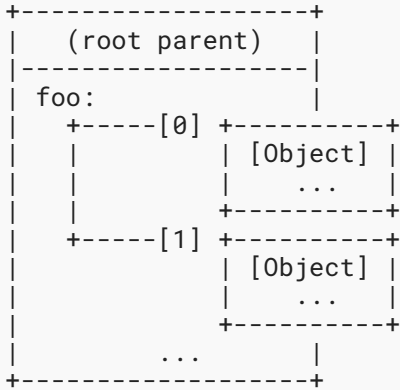


5.2. Composition

Notation: Composition[Type] or Type


A relation between an independent parent object and 1 or more dependent child object(s).

If the cardinality of the target object is more than 1, this represents an ordered array. It MUST be assured that the same unchanged data is always inserted in the same order in order to allow stable reference by position to data elements. In case of data insertions, deletions, or updates the remainder of the data SHALL preserve its order.

Example composition having cardinality 1:



Example composition having cardinality >1:




5.3. Labelled Aggregation

Notation: LabelledAggregation[Type]

A relation between two independent objects with a single text string attribute. Multiple associations with the same label are allowed and represent an unordered array.

A type defining such association MUST define Label Description with semantics of the label and Label Constraints with constraints related to the label.

Example labelled aggregation:

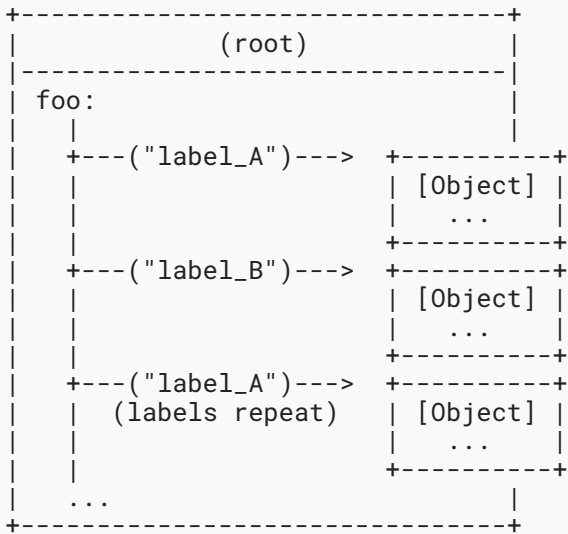


5.4. Dictionary Aggregation

Notation: DictionaryAggregation[Type]

A relation between two independent objects with a single text string attribute. Association labels **MUST** be unique, allowing them to be used as dictionary keys.

A type defining such association **MUST** define Label Description with semantics of the label and Label Constraints with constraints related to the label.

Example Dictionary Aggregation:

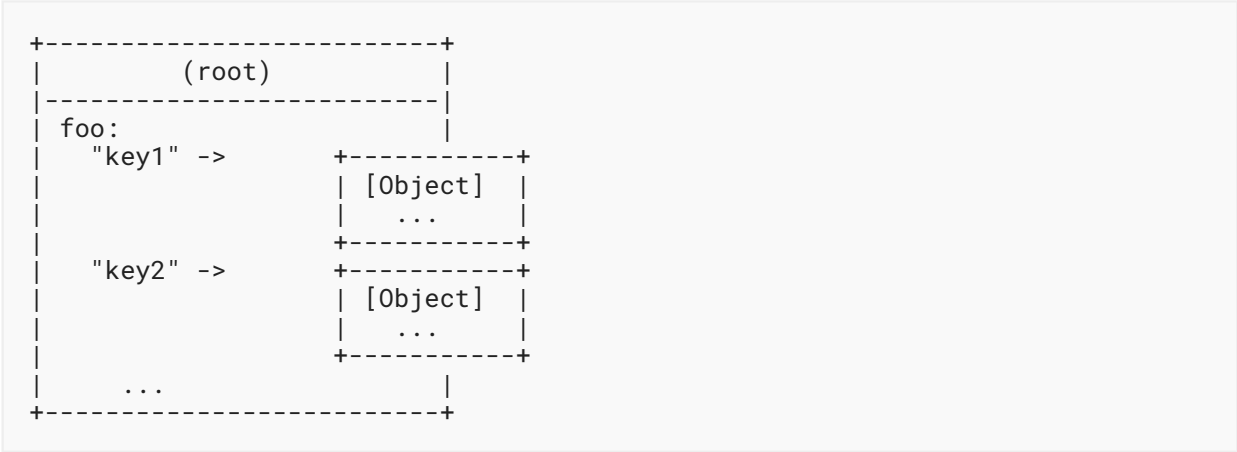


5.5. Labelled Composition

Notation: LabelledComposition[Type]

A relation between an independent parent object and a dependent child object with a single text string attribute. Multiple associations with the same label are allowed.

A type defining such association **MUST** define Label Description with semantics of the label and Label Constraints with constraints related to the label.

Example Labelled Composition:

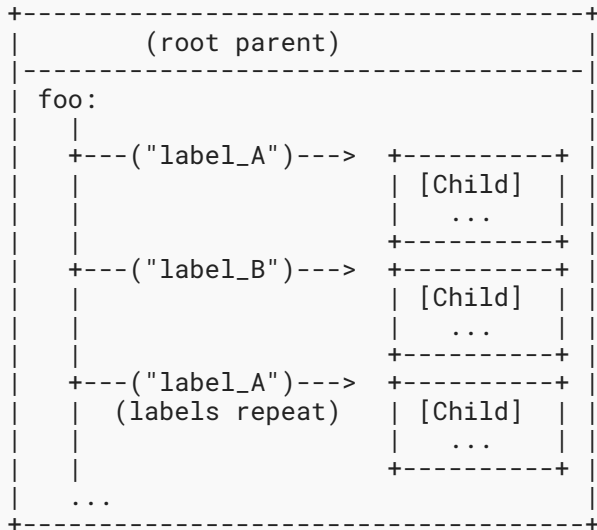


5.6. Dictionary Composition

Notation: DictionaryComposition[Type]

A relation between an independent parent object and a dependent child object with a single text string attribute. Only a single association with the same label is allowed, allowing it to be used as a dictionary key.

A type defining such association MUST define Label Description with semantics of the label and Label Constraints with constraints related to the label.

Example Dictionary Composition:

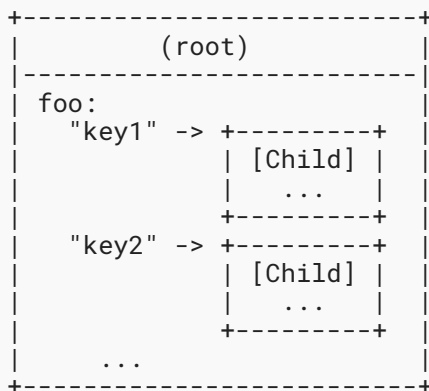

6. Component Objects

This section defines the Component Objects used in this document.

6.1. Period Object

- Name: Period Object
- Identifier: period
- Description: Represents a duration of time.
- Data Elements:
 - Value
 - Identifier: value
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: Integer
 - Description: The numeric value of the period.
 - Constraints: The value MUST be from 1 to 99, inclusive.
 - Unit
 - Identifier: unit
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: String
 - Description: The unit of the period.
 - Constraints: The value MUST be one of: "y" (years) or "m" (months).

6.2. Provisioning Metadata Object

- Name: Provisioning Metadata Object
- Identifier: provMetadata
- Description: Contains standard metadata about the lifecycle and ownership of a provisioned object. This metadata is common across all resource objects in the registry system.
- Data Elements:
 - Repository ID
 - Identifier: repositoryId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Identifier
 - Description: A server-assigned unique identifier for the object.
 - Constraints: In EPP Compatibility Profile this data element MUST be provided.
 - Sponsoring Client ID
 - Identifier: spClientId
 - Cardinality: 1
 - Mutability: read-only

- Data Type: Client Identifier
- Description: The identifier of the client that is the current sponsor of the object.
- Constraints: (None)
- Creating Client ID
 - Identifier: crClientId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Client Identifier
 - Description: The identifier of the client that created the object.
 - Constraints: (None)
- Creation Date
 - Identifier: crDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time of object creation.
 - Constraints: The value is set by the server and cannot be specified by the client.
- Updating Client ID
 - Identifier: upClientId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Client Identifier
 - Description: The identifier of the client that last updated the object.
 - Constraints: This element MUST NOT be present if the object has never been modified.
- Update Date
 - Identifier: upDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time of the most recent object modification.
 - Constraints: This element MUST NOT be present if the object has never been modified.
- Transfer Date
 - Identifier: trDate
 - Cardinality: 0-1
 - Mutability: read-only

- Data Type: Timestamp
- Description: The date and time of the most recent successful object transfer.
- Constraints: This element **MUST NOT** be provided if the object has never been transferred.

6.3. Status Object

- Name: Status Object
- Identifier: status
- Description: Represents one of the status values associated with a provisioning object
- Data Elements:
 - Label
 - Identifier: label
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: String
 - Description: machine-readable enum label of a status
 - Constraints:
 - Exact list of allowed status labels depends on the provisioning object type. This enumeration can be expanded by extensions.
 - The status labels **MUST** use camel case notation and use only ASCII alphabetic characters.
 - Statuses **MAY** be of three categories:
 1. those explicitly set by a server. Those **MUST** have "server" prefix
 2. those explicitly set by a client. Those **MUST** have "client" prefix
 3. those indirectly controlled by provisioning object lifecycle or business logic. Those **MUST NOT** use either "client" or "server" prefix. They **MAY** use another prefix or no prefix at all
 - The following additional status labels are defined for use with the Redemption Grace Period (RGP) feature. When the RGP feature is supported, these labels **MAY** be specified:
 - addPeriod: The object is within the add grace period following initial registration. If the object is deleted during this period, the registry **MAY** provide a credit to the sponsoring client.
 - autoRenewPeriod: The object is within the auto-renew grace period following automatic renewal by the registry. If the object is deleted during this period, the registry **MAY** provide a credit to the sponsoring client.
 - renewPeriod: The object is within the renew grace period following an explicit renewal. If the object is deleted during this period, the registry **MAY** provide a credit to the sponsoring client.

- **transferPeriod**: The object is within the transfer grace period following a successful transfer. If the object is deleted by the new sponsoring client during this period, the registry MAY provide a credit.
- **redemptionPeriod**: A delete operation has been received and processed for the object, but the object has not yet been purged. A restore operation MAY be requested to abort the deletion. This status value MUST only appear alongside the standard **pendingDelete** status.
- **pendingRestore**: A restore request has been accepted and the registry is waiting for a restore report from the sponsoring client. This status value MUST only appear alongside the standard **pendingDelete** status.
- **rgpPendingDelete**: The redemption period has elapsed without a successful restore. The object has entered the purge processing state. This status value MUST only appear alongside the standard **pendingDelete** status. This label is used to distinguish the RGP-specific pending-delete sub-state from the broader EPP **pendingDelete** status.

TODO: find a better home for this list (own section + IANA registry). Add standard domain statuses here as well (and solve the issue of statuses not applicable to other object types like **client/serverHold**).

- Reason

- Identifier: reason
- Cardinality: 0-1
- Mutability: create-only
- Data Type: String
- Description: a human-readable text that describes the rationale for the status applied to the object.
- Constraints: None

- Due

- Identifier: due
- Cardinality: 0-1
- Mutability: read-write
- Data Type: Timestamp
- Description: a timestamp, when this status is going to be removed automatically, or changed to other status. This field can be used to express lifecycle related information.
- Constraints: servers MAY restrict possibility to set or update this value by the client.

TBD: Idea - model status object as Labelled Composition using "Label"? Con: Generic Constraints for Label will be repeated.

6.4. DNS Resource Record Object

- Name: DNS Resource Record Object
- Identifier: dnsRecord
- Description: Represents a single DNS resource record. The structure follows the top-level format of a DNS resource record as described in Section 3.2.1 of [RFC1035], adapted for use in provisioning. The RDATA field is represented as a structured object whose fields depend on the record type, following the RDATA presentation format described by the corresponding RFC defining the record type. This approach is aligned with [I-D.simmen-rpp-dns-data].
- Data Elements:
 - Name
 - Identifier: name
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: String
 - Description: The owner name of the DNS entry. This MAY be the domain itself or a subordinate host name.
 - Constraints:
 - The value MUST be a syntactically valid DNS host name.
 - Absolute FQDNs (with trailing dot) and relative host names are allowed, as well as the "@" symbol representing the domain name itself.
 - Class
 - Identifier: class
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: The DNS resource record class.
 - Constraints:
 - If present, the value MUST be chosen from Section 3.2.4 (CLASS values) of [RFC1035].
 - A client SHOULD omit this element. The server MUST assume "IN" as the default class and MAY decline other values.
 - Type
 - Identifier: type
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: String
 - Description: The DNS resource record type, indicating the format of the RDATA field.

- Constraints:
 - The value MUST be a valid string representation of a resource record type as defined in [RFC1035] or other RFC describing the record type.
 - Allowed values MAY be constrained by server policies. For domain provisioning, the type would typically be constrained to the allowed parent-side entries.
 - Values MUST be converted to lower case.
 - In EPP Compatibility Profile ([RFC5732]), the following record types MUST be supported: ns, a, and aaaa.
 - In EPP Compatibility Profile with DNSSEC Extension [RFC5910], the following record types MUST additionally be supported: ds and dnskey.
- RDATA
 - Identifier: rdata
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: Object
 - Description: The actual payload data of the DNS record. The structure of this object depends on the record type and MUST follow the RDATA presentation format described by the corresponding RFC. Property names MUST be written in camelCase. All property values MUST be represented as Strings encoding the presentation format of the value.
 - Constraints:
 - The fields within RDATA MUST match the expected structure for the given record type.
 - See Section 6.4.1 for required structures in the EPP Compatibility Profile.

6.4.1. RDATA Structures in EPP Profile

This section defines the RDATA field structures required for interoperability in the EPP Compatibility Profile.

In EPP Compatibility Profile ([RFC5732]), the following RDATA structures MUST be supported:

- For NS records ([RFC1035], Section 3.3.11): nsdname (the fully qualified domain name of the name server).
- For A records ([RFC1035], Section 3.4.1): address (the IPv4 address in dotted-decimal notation).
- For AAAA records ([RFC3596], Section 2.2): address (the IPv6 address in text representation as defined in [RFC5952]).

In EPP Compatibility Profile with DNSSEC Extension ([RFC5910]), the following RDATA structures MUST additionally be supported:

- For DS records ([RFC4034], Section 5): keyTag (key tag value), algorithm (algorithm number), digestType (digest algorithm type), and digest (digest value).

- For DNSKEY records ([RFC4034], Section 2): flags (flags field value), protocol (protocol field value), algorithm (algorithm number), and publicKey (encoded public key value).

TBC: Optional keyData inside dsData (RFC 5910 Section 4.1): In the DS Data Interface, a DS record MAY optionally contain a nested keyData element used for server-side validation of the DS hash. The draft doesn't describe this pattern - a client submitting a DS record with accompanying DNSKEY for validation.

6.5. DNS Operational Controls Object

- Name: DNS Operational Controls Object
- Identifier: dnsControls
- Description: Contains operational control parameters that a client MAY use to influence server-side DNS behaviour for a set of DNS records. A server MAY ignore these values, e.g. for policy reasons. This structure is aligned with [I-D.simmen-rpp-dns-data].
- Data Elements:
 - TTL
 - Identifier: ttl
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Dictionary[Integer]
 - Description: Controls the caching behaviour of DNS resource records. The dictionary is keyed by lower-case record type name, with values representing the TTL in seconds for that record type.
 - Constraints:
 - The keys MUST be valid DNS resource record type names in lower case.
 - The values MUST be positive Integers.
 - The allowed value ranges MAY be constrained by server policy.
 - A server MAY ignore client-specified TTL values and apply default or policy-defined values.
 - Maximum Signature Lifetime
 - Identifier: maxSigLifetime
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Dictionary[Integer]
 - Description: Specifies a child's preference for the maximum number of seconds after signature generation when the parent's signature on signed DNS information should expire. The dictionary is keyed by lower-case record type name, with values representing the maximum signature lifetime in seconds for that record type. The value applies to the RRSIG resource record over the signed DNS RRset. See Section 3 of [RFC4034] for information on the RRSIG resource record. This corresponds to the maxSigLife concept from [RFC5910].

- Constraints:
 - The keys **MUST** be valid DNS resource record type names in lower case.
 - The values **MUST** be positive Integers (minimum value of 1).
 - A server **MAY** ignore client-specified values and apply its own default signature expiration policy.

6.6. DNS Data Object

- Name: DNS Data Object
- Identifier: dnsData
- Description: A container for DNS resource records and associated operational controls for a provisioned object. This structure groups DNS records together with control parameters that influence server-side DNS behaviour. The structure is aligned with [\[I-D.simmen-rpp-dns-data\]](#).
- Data Elements:
 - Records
 - Identifier: records
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: Composition[DNS Resource Record Object]
 - Description: An array of DNS resource records associated with the provisioned object.
 - Constraints:
 - Allowed record types **MAY** be constrained by server policy.
 - In EPP Compatibility Profile with DNSSEC Extension [\[RFC5910\]](#), records of type DS and DNSKEY **MUST** be supported in addition to NS, A, and AAAA.
 - A server **MUST** support either DS or DNSKEY or both record types for DNSSEC provisioning. If provided with only DNSKEY, a server **MUST** calculate the DS record. If both record types are provided, a server **MAY** use the DNSKEY to validate the DS record.
 - Controls
 - Identifier: controls
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: DNS Operational Controls Object
 - Description: Operational control parameters for the DNS records.
 - Constraints: (None)

6.7. Authorisation Information Object

- Name: Authorisation Information
- Identifier: authInfo

- Description: Contains information used to authorise operations on a data object. It may hold different kinds of authorisation information.
- Data Elements:
 - Method
 - Identifier: method
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: String
 - Description: The identifier of the RPP authorisation method.
 - Constraints:
 - The value MUST be one of the values registered at IANA as defined in [I-D.draft-wullink-rpp-core].
 - In EPP Compatibility Profile this value MUST be set to authinfo if standard password-based authorisation is used
 - Authorisation Information
 - Identifier: authdata
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: String
 - Description: The value of the authorisation information. It might be as simple as a password string, but also more complex values like public key certificates or tokens encoded as string are possible.
 - Constraints:
 - Authorisation Information object is immutable. If the information changes (for example password is updated) a new instance MUST be created.
 - Depending on the method and server policy Authorisation Information MAY not be available for read or any other operation responding with this data element.

6.8. Disclose Object

TODO: Model Disclose in universal (extendible) way

- Name: Disclose
- Identifier: disclose
- Description: TBD

6.9. Restore Report Object

- Name: Restore Report Object
- Identifier: restoreReport
- Description: Contains the redemption grace period restore report submitted by the sponsoring client as required by the RGP process ([RFC3915]). A restore report documents

the state of the object before and after deletion, provides the reason for restoration, and includes mandatory client statements. This object is OPTIONAL and is only required when the RGP feature is supported and a restore report is being submitted.

- Data Elements:
 - Pre-Delete Data
 - Identifier: preData
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: A copy of the registration data that existed for the object prior to the object being deleted.
 - Constraints: None.
 - Post-Restore Data
 - Identifier: postData
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: A copy of the registration data that exists for the object at the time the restore report is submitted.
 - Constraints: None.
 - Delete Time
 - Identifier: deleteTime
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Timestamp
 - Description: The date and time when the object delete request was sent to the server.
 - Constraints: None.
 - Restore Time
 - Identifier: restoreTime
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Timestamp
 - Description: The date and time when the original restore request operation was sent to the server.
 - Constraints:
 - This element MAY be omitted when the restore report is submitted inline within the restore request in a single-step process.

- In EPP Compatibility Profile this element **MUST** be present as defined in [\[RFC3915\]](#).
- Restore Reason
 - Identifier: restoreReason
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: A brief explanation of the reason for restoring the object.
 - Constraints: None.
- Statements
 - Identifier: statements
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: String
 - Description: Client statements required by the RGP process.
 - Constraints: At least one and at most two statements **MUST** be provided. In EPP Compatibility Profile exactly two statements **MUST** be present as defined in [\[RFC3915\]](#).
- Other
 - Identifier: other
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: Any additional information needed to support the statements provided by the client.
 - Constraints: None.

6.10. Organisation Role Object

- Name: Organisation Role Object
- Identifier: organisationRole
- Description: Represents a role that an organisation has within the registry ecosystem, as defined in [Section 3.2](#) of [\[RFC8543\]](#). An organisation object **MUST** always have at least one associated role. A single organisation **MAY** have multiple roles with different role types.
- Data Elements:
 - Role Status
 - Identifier: status
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: String

- Description: The status of this particular role. A role SHOULD have at least one associated status value.
- Constraints:
 - Allowed values: ok, linked, clientLinkProhibited, serverLinkProhibited.
 - ok is the normal status value for a role with no active prohibitions.
 - linked indicates the role has at least one active association with another object. This value is not explicitly set by the client.
 - clientLinkProhibited and serverLinkProhibited indicate that requests to add new links to the role MUST be rejected.
- Role Identifier
 - Identifier: roleId
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: String
 - Description: A third-party-assigned identifier for the role, such as an IANA ID for registrars.
 - Constraints: (None)

TBC: IANA registry for role types and statuses? must be compat with EPP

6.11. Processes Object

- Name: Processes Object
- Identifier: processes
- Description: A container grouping the Process Objects [Section 7](#) currently or recently initiated on a Data Object. Each data element MUST be named after the identifier of a Process Object and MUST be of type Aggregation of that Process Object. The data elements below are the process types defined in this document.
- Data Elements:
 - Transfer Processes
 - Identifier: transferProcess
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Aggregation[Transfer Process Object]
 - Direct Access: true
 - Description: The transfer processes initiated on the owning Data Object.
 - Constraints: (None)
 - Renew Processes
 - Identifier: renewProcess
 - Cardinality: 0+

- Mutability: read-only
- Data Type: Aggregation[Renew Process Object]
- Direct Access: true
- Description: The renew processes initiated on the owning Data Object.
- Constraints: (None)
- Restore Processes
 - Identifier: restoreProcess
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Aggregation[Restore Process Object]
 - Direct Access: true
 - Description: The restore processes initiated on the owning Data Object.
 - Constraints: (None)
- Create Processes
 - Identifier: createProcess
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Aggregation[Create Process Object]
 - Direct Access: true
 - Description: The create processes initiated on the owning Data Object.
 - Constraints: (None)

7. Process Objects

This section defines the Process Objects used in this document.

Each Process Object carries an OPTIONAL Process ID data element, defined as follows:

- Process ID
 - Identifier: processId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.

7.1. Transfer Process Object

- Name: Transfer Process Object
- Identifier: transferProcess

- Unique Identifier: processId
- Description: Represents a transfer request for a provisioned object. Creating this object initiates a transfer. The object supports approve and reject as additional operations, and delete as the cancel operation. Reading the object returns the current transfer status.
- Data Elements:
 - Process ID
 - Identifier: processId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.
 - Transfer Direction
 - Identifier: transferDir
 - Cardinality: 0-1
 - Mutability: create-only
 - Data Type: String
 - Description: Indicates whether the transfer is a "pull" or "push" transfer. Per policy, servers usually support only one model. If omitted, server policy determines the default.
 - Constraints: The value MUST be one of: "pull" (initiated by the gaining client) or "push" (initiated by the sponsoring client).
 - Gaining Client ID
 - Identifier: gainingClientId
 - Cardinality: 0-1
 - Mutability: create-only
 - Data Type: Client Identifier
 - Description: The identifier of the designated gaining client. This element is REQUIRED for push transfers and MUST NOT be provided for pull transfers.
 - Constraints: (None)
 - Transfer Status
 - Identifier: trStatus
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: String
 - Description: The state of the transfer request.
 - Constraints: The value MUST be one of: "pending", "clientApproved", "clientCancelled", "clientRejected", "serverApproved", "serverCancelled".

- Requesting Client ID
 - Identifier: reqClientId
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Client Identifier
 - Description: The identifier of the client that initiated the transfer request.
 - Constraints: (None)
- Request Date
 - Identifier: requestDate
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time that the transfer was requested.
 - Constraints: (None)
- Acting Client ID
 - Identifier: actClientId
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Client Identifier
 - Description: For a pending pull transfer, the identifier of the sponsoring client that SHOULD act upon the request. For a pending push transfer, the identifier of the designated gaining client that SHOULD act upon the request. For all other statuses, the identifier of the client that took the indicated action.
 - Constraints: (None)
- Action Date
 - Identifier: actionDate
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: For a pending request, the date and time by which a response is required before an automated response action SHOULD be taken by the server. For all other statuses, the date and time when the request was completed.
 - Constraints: (None)

7.1.1. Operations

7.1.1.1. Create (Transfer Request)

- Identifier: transferCreate

The Create operation initiates a transfer by creating a Transfer Process Object associated with the provisioned object. The transfer direction and gaining client (for push transfers) are provided as create-only data elements of the Transfer Process Object.

- Authorisation:
 - Pull transfer:
 - The requesting client (gaining client) MUST provide valid Object Authorisation.
 - Push transfer:
 - Only the sponsoring client is authorised to initiate a push transfer.
- Input:
 - Owner Data Object reference
 - Transfer Process Object (create-only and read-write elements)
- Output: Transfer Process Object

7.1.1.2. Read (Transfer Query)

- Identifier: transferRead

The Read operation allows a client to determine the real-time status of a pending or recently completed transfer request.

- Authorisation:
 - This operation MUST be accessible to both the sponsoring client and the gaining client.
 - Server policy determines whether other clients may query transfer status and what information is returned.
- Input: None
- Output: Transfer Process Object

7.1.1.3. Delete (Transfer Cancel)

- Identifier: transferDelete

The Delete operation allows the initiating client to cancel its own pending transfer request.

- Authorisation:
 - Only the initiating client (the client that originally requested the transfer).
- Input: None
- Output: Transfer Process Object or nothing

7.1.1.4. Approve

- Identifier: transferApprove

The Approve operation allows the appropriate client to accept a pending transfer request.

- Authorisation:
 - Pull transfer:
 - only the sponsoring client
 - Push transfer:
 - only the designated gaining client
- Input: None
- Output: Transfer Process Object

7.1.1.5. Reject

- Identifier: transferReject

The Reject operation allows the appropriate client to decline a pending transfer request.

- Authorisation:
 - Pull transfer:
 - only the sponsoring client
 - Push transfer:
 - only the designated gaining client

The following transient data elements are defined for this operation:

- Reason
 - Identifier: reason
 - Cardinality: 0-1
 - Data Type: String
 - Description: A human-readable text describing the rationale for rejecting the transfer request.
 - Constraints: In EPP Compatibility Profile this data element MUST NOT be used
- Output: Transfer Process Object

7.2. Restore Process Object

- Name: Restore Process Object
- Identifier: restoreProcess
- Unique Identifier: processId
- Description: Represents the current state of a restore request for an object that has entered the Redemption Grace Period (RGP).
- Data Elements:
 - Process ID
 - Identifier: processId

- Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.
- Restore Status
 - Identifier: restoreStatus
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: String
 - Description: The current state of the restore process.
 - Constraints: The value MUST be one of: "pendingRestore", "restored", "rgpPendingDelete"
- Request Date
 - Identifier: requestDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time when the restore request was submitted.
 - Constraints: MUST NOT be present if no restore request has been submitted yet.
- Report Date
 - Identifier: reportDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time when the most recent restore report was accepted by the server.
 - Constraints: MUST NOT be present if no restore report has been accepted yet.
- Report Due Date
 - Identifier: reportDueDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The date and time by which a restore report must be submitted before the object reverts to redemptionPeriod state. Only present when the object is in pendingRestore state.
 - Constraints: MUST NOT be present when restoreStatus is not "pendingRestore".

7.2.1. Operations

7.2.1.1. Create (Restore Request)

- Identifier: create

The Create operation initiates the recovery of an object in the `redemptionPeriod` state by creating a Restore Process Object. The server **MUST** reject this operation if the owning object is not in the `redemptionPeriod` state.

- Input: Restore Process Object (create-only and read-write elements)
- Output: Restore Process Object
- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.

The following transient data elements are defined for this operation:

- Restore Report
 - Identifier: `restoreReport`
 - Cardinality: 0-1
 - Data Type: Restore Report Object
 - Description: An **OPTIONAL** inline restore report. If provided, the server processes the request and the report atomically. If the server does not require a restore report, this element **MUST NOT** be present and the restore is completed immediately. If the server requires a report and this element is absent, the object transitions to `pendingRestore` state awaiting a subsequent Report operation.
 - Constraints:
 - **MUST NOT** be provided if the server does not require a restore report.
 - In EPP Compatibility Profile, corresponds to `op="request"` (without report) or a combined `op="request"` followed immediately by `op="report"` as defined in [\[RFC3915\]](#).

7.2.1.2. Read (Restore Query)

- Identifier: read

The Read operation allows the sponsoring client to retrieve the current state of the RGP process for an object.

- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.
- Input: Object Identifier
- Output: Restore Process Object

In EPP Compatibility Profile this operation is not supported.

7.2.1.3. Report

- Identifier: report

This operation is OPTIONAL, only for servers which support or require submission of a restore report.

The Report operation submits the restore report required by the RGP process for an object in the pendingRestore state. A report MAY be submitted more than once if corrections are required. The server MUST reject this operation if the object is not in the pendingRestore state.

- Input: Object Identifier, Restore Report Object
- Output: Restore Process Object
- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.

The following transient data elements are defined for this operation:

- Restore Report
 - Identifier: restoreReport
 - Cardinality: 1
 - Data Type: Restore Report Object
 - Description: The restore report to be submitted as part of the RGP process.
 - Constraints:
 - In EPP Compatibility Profile, corresponds to op="report" as defined in [\[RFC3915\]](#).

7.3. Renew Process Object

- Name: Renew Process Object
- Identifier: renewProcess
- Unique Identifier: processId
- Description: Represents a renew request for a provisioned object. Creating this object initiates a renewal process that extends the registration period of the object. Reading this object returns the new expiry date if the renewal has been completed.
- Data Elements:
 - Process ID
 - Identifier: processId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.

- Expiry Date
 - Identifier: expiryDate
 - Cardinality: 0-1
 - Mutability: create-only
 - Data Type: Timestamp
 - Description: The current expiry date of the object. The server MUST validate this against the object's current expiryDate to prevent unintended duplicate renewals.
- Renewal Period
 - Identifier: renewalPeriod
 - Cardinality: 0-1
 - Mutability: create-only
 - Data Type: Period Object
 - Description: The duration to be added to the object's registration period. This value is used by the server to calculate the new expiryDate. The default value MAY be defined by server policy. The number of units available MAY be subject to limits imposed by the server.

7.3.1. Operations

7.3.1.1. Create (Renew Request)

- Identifier: renewCreate

The renew operation extends the validity period of an existing object by creating a Renew Process Object.

- Input:
 - Owner Data Object reference
 - Renew Process Object (create-only and read-write elements)
- Output: Full object (read-write and read-only properties), or a minimum set of properties affected by the operation (Expiry Date).
- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.

7.4. Create Process Object

- Name: Create Process Object
- Identifier: createProcess
- Unique Identifier: processId
- Description: Represents the process initiated when a resource creation operation is performed. It carries creation-specific inputs that are consumed during the creation operation and are not stored as persistent attributes of the created resource object.

- Data Elements:
 - Process ID
 - Identifier: processId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.

Beyond the Process ID, the generic Create Process Object defines no additional data elements. Individual object definitions extend it with object-specific creation inputs (such as the Domain Create Process Object [Section 8.4](#), which adds the registration period).

7.4.1. Operations

7.4.1.1. Create

- Identifier: create

The Create operation is invoked implicitly as a side effect of the resource object create operation and is never invoked directly. It carries the creation-specific inputs consumed during the creation of the owning resource object.

- Input: Create Process Object (create-only and read-write elements)
- Output: Create Process Object
- Authorisation:
 - Inherited from the resource object create operation that initiates this process.

7.4.1.2. Read

- Identifier: read

The Read operation retrieves the result or status of the creation, if the server exposes the process resource.

- Input: Object Identifier
- Output: Create Process Object
- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.

8. Domain Name Data Object

8.1. Object Description

- Name: Domain Name Data Object

- Identifier: domainName
- Unique Identifier: name
- Description: A Domain Name data object represents a domain name and contains the data required for its provisioning and management in the registry.

8.2. Data Elements

The following data elements are defined for the Domain Name Data Object.

- Name
 - Identifier: name
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: String
 - Description: The fully qualified name of the domain object.
 - Constraints:
 - The value **MUST** be a fully qualified domain name that conforms to the syntax described in [\[RFC1035\]](#).
 - A server **MAY** restrict allowable domain names to a particular top-level domain, second-level domain, or other domain for which the server is authoritative.
 - The trailing dot required when these names are stored in a DNS zone is implicit and **MUST NOT** be provided when exchanging host and domain names.
- Provisioning Metadata
 - Identifier: provMetadata
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Provisioning Metadata Object
 - Description: Standard metadata about the object's lifecycle and ownership.
 - Constraints: (None)
- Status
 - Identifier: status
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Status Object
 - Description: The current status descriptors associated with the domain.
 - Constraints:
 - Possible combinations of Status Object Labels are specified in [Section 2.3](#) of [\[RFC5731\]](#).

TBC: IANA registry for statuses?

- Registrant
 - Identifier: registrant
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Contact Object
 - Description: The contact object associated with the domain as the registrant.
 - Constraints:
 - The relation MUST correspond to a valid Contact Data Object known to the server.
 - Servers MAY restrict association of a Contact Object of a different sponsoring client.

TBC: leave registrant here or move it to contacts with a type?

- Contacts
 - Identifier: contacts
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: LabelledAggregation[Contact Object]
 - Label Description: The role of the associated contact.
 - Label Constraints:
 - List of supported roles is defined by server policy
 - In the EPP Compatibility Profile, the value MUST be one of: "admin", "billing", or "tech"
 - Description: A collection of other contact objects associated with the domain object.
 - Constraints:
 - Maximum number of associated contacts (per role) MAY be restricted by server policy

TBC: IANA registry for contact role label?

- Nameservers
 - Identifier: nameservers
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: Aggregation[Host Data Object]
 - Description: A collection of nameservers associated with the domain.
 - Constraints: (None)

- DNS Data

- Identifier: dns
- Cardinality: 0-1
- Mutability: read-write
- Data Type: DNS Data Object
- Description: DNS resource records and operational controls related to the domain name. This structure follows the unified DNS data model defined in [\[I-D.simmen-rpp-dns-data\]](#), providing a single container for all DNS-related provisioning data including delegation, DNSSEC, and other record types.
- Constraints:
 - The type of the record entries MAY be constrained by the server policy. Typically the values would be limited to allowed parent-side resource record types.
 - In EPP Compatibility Profile, a server MUST support NS, A, and AAAA record types for delegation, and with DNSSEC Extension [\[RFC5910\]](#) a server MUST additionally support DS and/or DNSKEY record types.
 - The names of DNS entries MUST be the domain name itself or subordinate to the domain name and MUST NOT be below zone cut in case of present delegation.
 - A server MAY forbid use of NS/A/AAAA record types if the server only supports host object model through Nameserver property defining those records.

- Subordinate Hosts

- Identifier: subordinateHosts
- Cardinality: 0+
- Mutability: read-only
- Data Type: Aggregation[Host Data Object]
- Description: A collection of subordinate host objects that exist under this domain.
- Constraints: (None)

- Expiry Date

- Identifier: expiryDate
- Cardinality: 0-1
- Mutability: read-only
- Data Type: Timestamp
- Description: The date and time identifying the end of the domain object's registration period.
- Constraints: The value is set by the server and cannot be specified by the client.

- Authorisation Information

- Identifier: authInfo
- Cardinality: 0-1
- Mutability: read-write

- Data Type: Authorisation Information Object
- Description: Authorisation information associated with the domain object.
- Constraints: (None)
- Processes
 - Identifier: processes
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Processes Object
 - Direct Access: true
 - Description: The Process Objects currently or recently initiated on the domain object.
 - Constraints: (None)

8.3. Operations

8.3.1. Create Operation

- Identifier: create

The Create operation allows a client to provision a new Domain Name resource. The operation accepts as input all create-only and read-write data elements defined for the Domain Name Data Object.

- Authorisation:
 - Generally each client is authorised to create new domain objects becoming a sponsoring client. This can be however constrained by the server policy in many ways, i.e. by applying rate limiting, billing related constraints or compliance locks.

The Create operation implicitly initiates the Domain Create Process Object [Section 8.4](#), which carries the creation-specific inputs that are consumed during creation and not persisted as part of the domain object's state.

8.3.2. Read Operation

- Identifier: read

The Read operation allows a client to retrieve the data elements of a Domain Name resource. The server's response MAY vary depending on client authorisation and server policy.

- Authorisation:
 - Sponsoring client:
 - Full object
 - Other client:
 - Without Object Authorisation:
 - Limited object (non-confidential properties) or operation denied

- With Object Authorisation:
 - Full object, however some properties only authorised to the sponsoring client MAY be redacted according to server policy

The following transient data elements are defined for this operation:

- Hosts Filter
 - Identifier: hostsFilter
 - Cardinality: 0-1
 - Data Type: String
 - Description: Controls which host information is returned with the object.
 - Constraints: The value MUST be one of "all", "del" (delegated), "sub" (subordinate), or "none". The default value is "all".

8.3.3. Update Operation

- Identifier: update

The Update operation allows a client to modify the read-write data elements of an existing Domain Name resource.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

The following transient data elements are defined for this operation:

- Urgent
 - Identifier: urgent
 - Cardinality: 0-1
 - Data Type: Boolean
 - Description: Requests that the server operator process and implement the update with high priority. "High priority" is relative to standard server operator policies determined using an out-of-band mechanism. In EPP Compatibility Profile this corresponds to the "urgent" attribute of the <secDNS:update> element defined in [\[RFC5910\]](#). The default value is false.
 - Constraints:
 - A server that does not support this parameter MUST return an error if it is set to true.
 - A server that supports this parameter but cannot fulfil a specific urgent request MUST return an error.

8.3.4. Delete Operation

- Identifier: delete

The Delete operation allows a client to remove an existing Domain Name resource. The operation targets a specific data object identified by its name.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

The server SHOULD reject a delete request if subordinate host objects are associated with the domain name.

The error response SHOULD indicate the related subordinate host objects.

8.3.5. Renew Operations

The Domain Name Data Object supports the renew operations defined in [Section 2.6.6](#). The renewal of a domain name changes the expiry date of the domain object.

8.3.5.1. Renew Create Operation

- Identifier: renewCreate

The Renew operation allows a client to extend the validity period of an existing Domain Name resource. The operation targets a specific data object identified by its name.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

8.3.6. Transfer Operations

The Domain Name Data Object supports the common transfer operations defined in [Section 2.6.4](#). The transfer of a domain name changes the sponsoring client of the domain object.

Transfer of a domain object MUST implicitly transfer all host objects that are subordinate to the domain object. For example, if domain object "example.com" is transferred and host object "ns1.example.com" exists, the host object MUST be transferred as part of the "example.com" transfer process.

In addition to the common Transfer Process Object elements, the following object-specific data elements are included:

- Expiry Date
 - Identifier: expiryDate
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Timestamp
 - Description: The end of the domain object's registration period if the transfer caused or causes a change in the validity period.

Subordinate host objects MUST be transferred implicitly when the domain object is transferred.

8.3.6.1. Transfer Create Operation

- Identifier: transferCreate

In addition, the following transient data element is defined for this operation:

- Transfer Period
 - Identifier: transferPeriod
 - Cardinality: 0-1
 - Mutability: create-only
 - Data Type: Period Object
 - Description: The number of units to be added to the registration period of the domain object upon successful completion of the transfer. The number of units available MAY be subject to limits imposed by the server.
 - Constraints: (None)

8.3.7. Restore Operations

The Domain Name Data Object supports the restore operations defined in [Section 2.6.5](#). These operations are OPTIONAL and are only available when the RGP feature is supported.

No domain-specific transient data elements extend the common restore operations beyond those defined in [Section 2.6.5](#).

8.4. Domain Create Process Object

- Name: Domain Create Process Object
- Identifier: domainCreateProcess
- Unique Identifier: processId
- Description: The domain-specific Create Process Object [Section 7.4](#). It is implicitly initiated by the Domain Name Data Object create operation and carries the domain creation-specific inputs, namely the requested initial registration period, that are consumed during creation and not persisted as part of the domain object's state.
- Data Elements:
 - Process ID
 - Identifier: processId
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: String
 - Description: A server-assigned identifier of the process instance, unique within the scope of the Owner Data Object.
 - Constraints: The value is set by the server and cannot be specified by the client.
 - Period
 - Identifier: period

- Cardinality: 0-1
- Mutability: create-only
- Data Type: Period Object
- Description: The initial registration period for the domain name. This value is used by the server to calculate the initial expiryDate of the object.
- Constraints: (None)

8.4.1. Operations

8.4.1.1. Create

- Identifier: create

The Create operation is invoked implicitly as a side effect of the Domain Name Data Object create operation and is never invoked directly. It carries the registration period consumed during domain creation.

- Input: Domain Create Process Object (create-only and read-write elements)
- Output: Domain Create Process Object
- Authorisation:
 - Inherited from the Domain Name Data Object create operation that initiates this process.

8.4.1.2. Read

- Identifier: read

The Read operation retrieves the result or status of the domain creation, if the server exposes the process resource.

- Input: Object Identifier
- Output: Domain Create Process Object
- Authorisation:
 - Only the sponsoring client is authorised to perform this operation.

9. Contact Data Object

9.1. Object Description

- Name: Contact Data Object
- Identifier: contact
- Unique Identifier: id
- Description: A Contact Data Object represents the contact information for an individual or organisation associated with other objects.

9.2. Data Elements

The following data elements are defined for the Contact Data Object.

- Handle ID
 - Identifier: id
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: Identifier.
 - Description: External unique identifier of the contact object.
 - Constraints:
 - This value **MUST** be supported to be provided by the client.
 - Servers **MAY** support server-side generation of this value.
- Provisioning Metadata
 - Identifier: provMetadata
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Provisioning Metadata Object
 - Description: Standard metadata about the object's lifecycle and ownership.
 - Constraints: (None)
- Status
 - Identifier: status
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Status Object
 - Description: Status descriptors associated with the contact.
 - Constraints:
 - Possible combinations of Contact Status Labels are specified in [Section 2.2](#) of [\[RFC5733\]](#)
 - The value **MUST** be one of the status tokens defined in the IANA registry for contact statuses.
 - The initial value list **MAY** be as defined in [\[RFC5733\]](#). In this case the values **MUST** have the same semantics.
- Contact Information
 - Identifier: contactInfo
 - Cardinality: 1-2
 - Mutability: read-write

- Data Type: External:RPP-JSContact-Profile:Card
- Description: Contains contact information.
- Authorisation Information
 - Identifier: authInfo
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Authorisation Information
 - Description: Authorisation information associated with the contact object.
 - Constraints: (None)
- Disclose
 - Identifier: disclose
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Disclose Object.
 - Description: Identifies elements that require exceptional server-operator handling to allow or restrict disclosure to third parties.
- Processes
 - Identifier: processes
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Processes Object
 - Direct Access: true
 - Description: The Process Objects currently or recently initiated on the contact object.
 - Constraints: (None)

TBC: IANA registry for statuses?

9.3. Operations

9.3.1. Create Operation

- Identifier: create

The Create operation allows a client to provision a new Contact resource. The operation accepts as input all create-only and read-write data elements defined for the Contact Data Object.

- Authorisation:
 - Generally each client is authorised to create new contact objects becoming a sponsoring client. This can be however constrained by the server policy, e.g. by applying rate limiting or compliance locks.

In EPP Compatibility Profile, the following data elements **MUST** be provided:

- Handle ID (`id`)
- At least one Contact Information entry (`contactInfo`) containing a Name (`name`) and an Address (`addr`) with City (`city`) and Country Code (`cc`)
- E-mail (`email`)
- Authorisation Information (`authInfo`)

9.3.2. Read Operation

- Identifier: read

The Read operation allows a client to retrieve the data elements of a Contact resource. The server's response **MAY** vary depending on client authorisation and server policy.

- Authorisation:
 - Sponsoring client:
 - Full object
 - Other client:
 - Without Object Authorisation:
 - Limited object (non-confidential properties) or operation denied
 - With Object Authorisation:
 - Full object, however some properties only authorised to the sponsoring client **MAY** be redacted according to server policy

Authorisation Information (`authInfo`) **MUST NOT** be provided in the response if the querying client is not the current sponsoring client.

When constructing the response, the server **MUST** respect the disclosure policies defined by the Disclose Object (`disclose`), whether set by the server operator's default data-collection policy or by the sponsoring client for the contact. Data elements marked for non-disclosure **MUST NOT** be included in responses to unauthorised clients.

9.3.3. Update Operation

- Identifier: update

The Update operation allows a client to modify the attributes of an existing Contact resource.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

The following aspects of the contact object **MAY** be modified:

- Status values that are client-manageable (prefixed with "client") **MAY** be added or removed.
- Contact Information, Voice Phone Number, Fax Phone Number, E-mail, Authorisation Information, and Disclose preferences **MAY** be changed.

A client **MUST NOT** add, delete or alter values for statuses managed by the server (prefixed with "server"). A server **MAY** add, delete or alter status values set by a client, subject to server policy.

9.3.4. Delete Operation

- Identifier: delete

The Delete operation allows a client to remove an existing Contact resource. The operation targets a specific data object identified by its Handle ID.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

The server **SHOULD** reject a delete request if the contact object is associated with other known objects (e.g., domain names). An associated contact **SHOULD NOT** be deleted until associations with other known objects have been broken.

The error response **SHOULD** indicate the existing object associations.

9.3.5. Transfer Operations

The Contact Data Object supports the common transfer operations defined in [Section 2.6.4](#). The transfer of a contact changes the sponsoring client of the contact object.

No object-specific transient data elements are defined for contact transfer operations beyond the common transfer data elements.

10. Host Data Object

10.1. Object Description

- Name: Host Data Object
- Identifier: host
- Unique Identifier: hostName
- Description: A Host Data Object represents a name server that provides DNS services for a domain name.

10.2. Data Elements

The following data elements are defined for the Host Data Object.

- Host Name
 - Identifier: hostName
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: String
 - Description: Fully qualified name of a host.

- Constraints: The value MUST be a syntactically valid host name.
- Provisioning Metadata
 - Identifier: provMetadata
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Provisioning Metadata Object
 - Description: Standard metadata about the object's lifecycle and ownership.
 - Constraints: (None)
- Status
 - Identifier: status
 - Cardinality: 0+
 - Mutability: read-only
 - Data Type: Status Object
 - Description: The current status descriptors associated with the host.
 - Constraints: Possible combinations of Host Status Labels are specified in [Section 2.3](#) of [\[RFC5732\]](#)
- DNS Data
 - Identifier: dns
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: DNS Data Object
 - Description: DNS resource records and operational controls related to the host. This structure follows the unified DNS data model defined in [\[I-D.simmen-rpp-dns-data\]](#).
 - Constraints:
 - The names of DNS entries MUST be the host name itself or subordinate to the host name.
 - In EPP Compatibility Profile the record entries MUST be limited to A and AAAA entries for IPv4 and IPv6 glue records respectively.
- Processes
 - Identifier: processes
 - Cardinality: 0-1
 - Mutability: read-only
 - Data Type: Processes Object
 - Direct Access: true
 - Description: The Process Objects currently or recently initiated on the host object.
 - Constraints: (None)

10.3. Operations

10.3.1. Create Operation

- Identifier: create

The Create operation allows a client to provision a new Host Data Object. The operation accepts as input all create-only and read-write data elements defined for the Host Data Object.

- Authorisation:
 - Generally each client is authorised to create new host objects becoming a sponsoring client. This can be however constrained by the server policy, e.g. by applying rate limiting or compliance locks.

If the host name exists in a namespace for which the server is authoritative, then the superordinate domain of the host **MUST** be known to the server before the host object can be created.

In EPP Compatibility Profile, IP addresses are **REQUIRED** only as needed to produce DNS glue records. If the host name exists in a namespace for which the server is authoritative and is subordinate to an existing domain, IP addresses **SHOULD** be provided. If the host name is external to the server's namespace, IP addresses are not required by the DNS and **MAY** be omitted.

10.3.2. Read Operation

- Identifier: read

The Read operation allows a client to retrieve the data elements of a Host Data Object.

- Authorisation:
 - Any client is authorised to retrieve the full object. In EPP Compatibility Profile, host objects do not carry authorisation information and there is no distinction based on client identity as described in [Section 3.1.2](#) of [\[RFC5732\]](#).

10.3.3. Update Operation

- Identifier: update

The Update operation allows a client to modify the attributes of an existing Host Data Object. The operation targets a specific data object identified by its host name.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

Host name changes **MAY** require the addition or removal of IP addresses to be accepted by the server. IP address association **MAY** be subject to server policies for provisioning hosts as name servers.

Host name changes can have an impact on associated objects that refer to the host object. A Host Name change SHOULD NOT require additional updates of associated objects to preserve existing associations, with one exception: changing an external host object that has associations with objects that are sponsored by a different client. Attempts to update such hosts directly MUST fail. The change can be provisioned by creating a new external host with a new name and any needed new attributes, and subsequently updating the other objects sponsored by the client.

10.3.4. Delete Operation

- Identifier: delete

The Delete operation allows a client to remove an existing Host Data Object. The operation targets a specific data object identified by its host name.

- Authorisation:
 - Only sponsoring client is authorised to perform this operation

The server SHOULD reject a delete request if the host object is associated with any other object, such as a domain name object. Deleting a host object without first breaking existing associations can cause DNS resolution failure for domain objects that refer to the deleted host object.

TODO: consider RFC 9874 / BCP 244 for host deletions practices

The error response SHOULD indicate the related associated objects.

10.3.5. Restore Operations

The Host Data Object supports the restore operations defined in [Section 2.6.5](#). These operations are OPTIONAL and are only available when the RGP feature for Host Data Object is supported by the server.

No host-specific transient data elements extend the common restore operations beyond those defined in [Section 2.6.5](#).

11. Organisation Data Object

11.1. Object Description

- Name: Organisation Data Object
- Identifier: organisation
- Unique Identifier: id
- Description: An Organisation Data Object represents an entity, such as a registrar or reseller that is involved in the domain registration process. This object is based on the EPP Organisation Mapping defined in [[RFC8543](#)].

11.2. Data Elements

The following data elements are defined for the Organisation Data Object.

- Organisation ID
 - Identifier: id
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: Identifier
 - Description: A server-unique identifier for the organisation object.
 - Constraints:
 - This value **MUST** be supported to be provided by the client.
 - Servers **MAY** support server-side generation of this value.
- Provisioning Metadata
 - Identifier: provMetadata
 - Cardinality: 1
 - Mutability: read-only
 - Data Type: Provisioning Metadata Object
 - Description: Standard metadata about the object's lifecycle and ownership.
 - Constraints: (None)
- Status
 - Identifier: status
 - Cardinality: 1+
 - Mutability: read-write
 - Data Type: Status Object
 - Description: The current operational status descriptors associated with the organisation. An organisation object **MUST** always have at least one associated status value.
 - Constraints:
 - Status values that can be added or removed by a client are prefixed with "client". Corresponding server-managed status values are prefixed with "server".
 - Possible values: ok, hold, terminated, linked, clientLinkProhibited, serverLinkProhibited, clientUpdateProhibited, serverUpdateProhibited, clientDeleteProhibited, serverDeleteProhibited, pendingCreate, pendingUpdate, pendingDelete.
 - pendingCreate, ok, hold, and terminated are mutually exclusive.
 - ok **MAY** only be combined with linked.
- Roles
 - Identifier: roles

- Cardinality: 1+
- Mutability: read-write
- Data Type: DictionaryComposition[Organisation Role Object]
 - Label Description: type of role
 - Label Constraints: The value MUST be one of the role types registered in the IANA "EPP Organisation Role Values" registry as defined in [Section 7.3](#) of [\[RFC8543\]](#). Initial values include registrar, reseller, privacyproxy, and dns-operator.
- Description: One or more roles describing the relationship the organisation has within the registry ecosystem. An organisation object MUST always have at least one associated role.
- Constraints:
 - An organisation MAY have multiple roles with different role types.
 - Role types are registered in the IANA "EPP Organisation Role Values" registry as defined in [Section 7.3](#) of [\[RFC8543\]](#). Initial values include registrar, reseller, privacyproxy, and dns-operator.
- Parent Organisation ID
 - Identifier: parent
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: Organisation Data Object
 - Description: The parent organisation in a hierarchical organisation structure (e.g., a reseller's parent registrar).
 - Constraints:
 - Loops MUST be prohibited. If organisation A has organisation B as its parent, organisation B MUST NOT have organisation A as its parent, directly or transitively.
- Contact Information
 - Identifier: contactInfo
 - Cardinality: 0-1
 - Mutability: read-write
 - Data Type: External:RPP-JSContact-Profile:Card
 - Description: Contact information for the organisation.
- Contacts
 - Identifier: contacts
 - Cardinality: 0+
 - Mutability: read-write
 - Data Type: LabelledAggregation[Contact Object]
 - Label Description: type of contact

- Label Constraints: The value MUST be one of the contact types registered in the IANA "EPP Organisation Contact Types" registry as defined in [Section 7.4 of \[RFC8543\]](#). Initial values include admin, tech, billing, abuse, and custom.
- Description: Identifiers of contact objects associated with the organisation.
- Constraints:
 - Contact object identifiers MUST be known to the server before the contact can be associated.

TODO: how handle the "custom" contact type?

- Users

- Identifier: users
- Cardinality: 0+
- Mutability: read-write
- Data Type: LabelledAggregation[User Object]
 - Label Description: RBAC role of the user
 - Label Constraints: The value MUST be one of the role types registered in the IANA "RPP User Role Values" registry.
- Direct Access: true
- Description: One or more RBAC roles assigned to the user.
- Constraints:
 - Each role value MUST be a non-empty string.
 - Allowed role values MAY be constrained by server policy.

- Processes

- Identifier: processes
- Cardinality: 0-1
- Mutability: read-only
- Data Type: Processes Object
- Direct Access: true
- Description: The Process Objects currently or recently initiated on the organisation object.
- Constraints: (None)

TODO: define an IANA registry for user roles?

11.3. Operations

11.3.1. Create Operation

- Identifier: create

The Create operation allows a client to provision a new Organisation Data Object. The operation accepts as input all create-only and read-write data elements defined for the Organisation Data Object.

- Authorisation:
 - Generally only registry clients are authorised to create new organisation objects.

An organisation object **MUST** include at least one role on creation. The server **MAY** defer completing the action and return a pendingCreate status if human or third-party review is required.

11.3.2. Read Operation

- Identifier: read

The Read operation allows a client to retrieve the data elements of an Organisation Data Object.

- Authorisation:
 - Any client is authorised to retrieve organisation object information. The server **MAY** restrict the information returned based on client identity and server policy.

11.3.3. Update Operation

- Identifier: update

The Update operation allows a client to modify the attributes of an existing Organisation Data Object.

- Authorisation:
 - Generally only registry clients are authorised to update organisation objects.

The following aspects of the organisation object **MAY** be modified:

- Contacts **MAY** be added or removed.
- Roles **MAY** be added or removed.
- Status values that are client-manageable (prefixed with "client") **MAY** be added or removed.
- Parent Organisation ID and Contact Information **MAY** be changed.
- Users **MAY** be added or removed.

A client **MUST NOT** add, delete, or alter values for statuses managed by the server (prefixed with "server"). A server **MAY** add, delete, or alter status values set by a client, subject to server policy.

11.3.4. Delete Operation

- Identifier: delete

The Delete operation allows a client to remove an existing Organisation Data Object. The operation targets a specific data object identified by its Organisation ID.

- Authorisation:
 - Generally only registry clients are authorised to delete organisation objects.

An organisation object **MUST NOT** be deleted if it is associated with other known objects (e.g., domain names, contacts, or child organisations). The server **MUST** reject such a delete request and notify the client that object relationships exist.

The error response **SHOULD** indicate the related associated objects.

12. User Object

12.1. Object Description

- Name: User Data Object
- Identifier: user
- Unique Identifier: id
- Description: Represents a user linked to an Organisation Object. Each user carries a set of RBAC roles that define the user's permissions within the context of the owning Organisation Object. The lifecycle of a User Object is bound to its Organisation Object.

12.2. Data Elements

The following data elements are defined for the User Data Object.

- User Identifier
 - Identifier: id
 - Cardinality: 1
 - Mutability: create-only
 - Data Type: Identifier
 - Description: A unique identifier for the user
 - Constraints: **MUST** be globally unique in the server scope
- Details
 - Identifier: details
 - Cardinality: 1
 - Mutability: read-write
 - Data Type: External:RPP-JSContact-Profile:Card
 - Description: The details of the user, such as name, email, and phone number
 - Constraints: -

- Description

- Identifier: description
- Cardinality: 0-1
- Mutability: read-write
- Data Type: String
- Description: A description of the user
- Constraints: -

- Status

- Identifier: status
- Cardinality: 1
- Mutability: read-write
- Data Type: String
 - Constraints: The value **MUST** be one of the status tokens defined in the IANA registry for user statuses.
 - Constraints: Possible values include `active`, `suspended`, `deactivated`, and `pending`.
- Description: The status of the user
- Constraints: -

- Organisation ID

- Identifier: organisationId
- Cardinality: 1
- Mutability: read-only
- Data Type: Organisation Data Object Reference
- Description: A reference to the owner organisation object.
- Constraints: -

- Processes

- Identifier: processes
- Cardinality: 0-1
- Mutability: read-only
- Data Type: Processes Object
- Direct Access: true
- Description: The Process Objects currently or recently initiated on the user object.
- Constraints: (None)

TODO: what other data elements should be included for the User Data Object?

12.3. Operations

12.3.1. Create Operation

- Identifier: create

The Create operation creates a new user, which is associated with an existing Organisation Object. The operation accepts as input all create-only and read-write data elements of the User Object.

- Authorisation:
 - Client can only create users in the context of the organisation linked to the client, and only if the client has the necessary permissions to create users in that organisation.

12.3.2. Read Operation

- Identifier: read

The Read operation retrieves the data of a specific User Object.

- Authorisation:
 - Client can only read users in the context of the organisation linked to the client, and only if the client has the necessary permissions to read users in that organisation.

12.3.3. Update Operation

- Identifier: update

The Update operation modifies the read-write data elements.

- Authorisation:
 - Client can only update users in the context of the organisation linked to the client, and only if the client has the necessary permissions to update users in that organisation.

12.3.4. Delete Operation

- Identifier: delete

The Delete operation removes a specific User Object.

- Authorisation:
 - Client can only delete users in the context of the organisation linked to the client, and only if the client has the necessary permissions to delete users in that organisation.

The server MUST reject this operation if the User is associated with an Organisation Object.

13. IANA Considerations

13.1. RPP Data Object Registry

This document establishes the "RESTful Provisioning Protocol (RPP) Data Object Registry". This registry serves as a catalogue of all data objects, component objects, data elements, and operations used within RPP.

13.1.1. Registration Policy

The policy for adding new objects, data elements, or operations to this registry is "Specification Required" [[RFC8126](#)].

Standardised RPP extensions that introduce new data objects, add data elements to existing objects, or define new operations or operation parameters MUST register these additions in this registry. Each such registration MUST reference the specification that defines the extension.

Private (non-standardised) extensions are not required to register in this registry.

13.1.2. Registry Structure

The registry is organised as a collection of Object definitions. Each Object definition MUST include:

- A header containing the Object Identifier, Object Name, Object Type (Resource, Process or Component), a brief description, and a reference to its defining specification.
- A "Data Elements" table listing all persisted data elements associated with the object. Each entry MUST specify the element's Identifier, Name, Cardinality, Mutability, Data Type, description, and a reference to the specification that defines it.
- An "Operations" section (applicable only for Object Types Resource or Process). For each operation, the registry MUST provide:
 - The Operation's Name, a description, and a reference to the specification that defines it.
 - A "Parameters" table listing all data elements that are provided as input to the operation but are not persisted as part of the object's state. Each entry MUST specify the parameter's Identifier, Name, Cardinality, Data Type, description, and a reference to the specification that defines it.

Extensions MAY add new data elements, operations, or operation parameters to existing Object definitions in the registry. Each such addition MUST reference the extension specification that introduces it, allowing implementations to distinguish core protocol elements from extension-defined elements.

13.1.3. Initial Registrations

The initial contents of the RPP Data Object Registry are defined below.

Object: period

Object Name: Period Object

Object Type: Component

Description: Represents a duration of time.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
value	Value	1	read-write	Integer	The numeric value of the period.
unit	Unit	1	read-write	String	The unit of the period.

Table 1

Object: dnsRecord

Object Name: DNS Resource Record Object

Object Type: Component

Description: Represents a single DNS resource record.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
name	Name	1	read-write	String	The owner name of the DNS entry.
class	Class	0-1	read-write	String	The DNS resource record class.
type	Type	1	read-write	String	The DNS resource record type, indicating the format of the RDATA field.
rdata	RDATA	1	read-write	Object	The actual payload data of the DNS record. Structure depends on the record type.

Table 2

Object: dnsControls

Object Name: DNS Operational Controls Object

Object Type: Component

Description: Contains operational control parameters that a client MAY use to influence server-side DNS behaviour for a set of DNS records.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
ttl	TTL	0-1	read-write	Dictionary [Integer]	Controls the caching behaviour of DNS resource records, keyed by lower-case record type name.
maxSigLifetime	Maximum Signature Lifetime	0-1	read-write	Dictionary [Integer]	Maximum number of seconds after signature generation when the parent's signature on signed DNS data should expire, keyed by lower-case record type name.

Table 3

Object: dnsData

Object Name: DNS Data Object

Object Type: Component

Description: A container for DNS resource records and associated operational controls for a provisioned object.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
records	Records	0+	read-write	Composition [DNS Resource Record Object]	An array of DNS resource records associated with the provisioned object.
controls	Controls	0-1	read-write	DNS Operational Controls Object	Operational control parameters for the DNS records.

Table 4

Object: authInfo

Object Name: Authorisation Information

Object Type: Component

Description: Contains authorisation credentials for an operation.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
method	Method	1	create-only	String	The identifier of the RPP authorisation method.
authdata	Authorisation Information	1	create-only	String	The value of the authorisation information. It might be as simple as a password string, but also more complex values like public key certificates or tokens encoded as string are possible.

Table 5

Object: status

Object Name: Status Object

Object Type: Component

Description: Represents one of the status values associated with the provisioning object.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
label	Label	1	create-only	String	machine-readable enum label of a status
reason	Reason	0-1	create-only	String	a human-readable text that describes the rationale for the status applied to the object.
due	Due	0-1	read-write	Timestamp	a timestamp, when this status is going to be removed automatically, or changed to other status. This field can be used to express lifecycle related information

Table 6

Object: provMetadata

Object Name: Provisioning Metadata Object

Object Type: Component

Description: Contains standard metadata about the lifecycle and ownership of a provisioned object.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
repositoryId	Repository ID	0-1	read-only	Identifier	A server-assigned unique identifier for the object.
spClientId	Sponsoring Client ID	1	read-only	Client Identifier	The identifier of the client that is the current sponsor of the object.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
crClientId	Creating Client ID	0-1	read-only	Client Identifier	The identifier of the client that created the object.
crDate	Creation Date	0-1	read-only	Timestamp	The date and time of object creation.
upClientId	Updating Client ID	0-1	read-only	Client Identifier	The identifier of the client that last updated the object.
upDate	Update Date	0-1	read-only	Timestamp	The date and time of the most recent object modification.
trDate	Transfer Date	0-1	read-only	Timestamp	The date and time of the most recent successful object transfer.

Table 7

Object: processes

Object Name: Processes Object

Object Type: Component

Description: A container grouping the Process Objects currently or recently initiated on a Data Object, structured as a dictionary keyed by process type where each element holds an ordered array of Process Objects of that type. The set of process-type data elements is extensible; extensions MAY register additional process-type elements.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
transferProcess	Transfer Processes	0+	read-only	Aggregation [Transfer Process Object]	The transfer processes initiated on the owning Data Object.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
renewProcess	Renew Processes	0+	read-only	Aggregation [Renew Process Object]	The renew processes initiated on the owning Data Object.
restoreProcess	Restore Processes	0+	read-only	Aggregation [Restore Process Object]	The restore processes initiated on the owning Data Object.
createProcess	Create Processes	0+	read-only	Aggregation [Create Process Object]	The create processes initiated on the owning Data Object.

Table 8

Object: transferProcess

Object Name: Transfer Process Object

Object Type: Process

Description: Represents a transfer request for a provisioned object. Creating this object initiates the transfer. Approve and Reject are additional operations; Delete corresponds to cancel.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
processId	Process ID	0-1	read-only	String	A server-assigned identifier of the process instance, unique within the Owner Data Object.
transferDir	Transfer Direction	0-1	create-only	String	The direction of the transfer ("pull" or "push"). If omitted, server policy determines default.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
gainingClientId	Gaining Client ID	0-1	create-only	Client Identifier	The designated gaining client. REQUIRED for push transfers; MUST NOT be provided for pull.
trStatus	Transfer Status	1	read-only	String	The state of the transfer request.
reqClientId	Requesting Client ID	1	read-only	Client Identifier	The identifier of the client that initiated the transfer request.
requestDate	Request Date	1	read-only	Timestamp	The date and time that the transfer was requested.
actClientId	Acting Client ID	1	read-only	Client Identifier	The identifier of the client that should or did act on the request.
actionDate	Action Date	1	read-only	Timestamp	The response deadline (if pending) or completion date.

Table 9

Operations

Operation: Create

Operation Identifier: transferCreate

Description: Initiates a transfer of a provisioned object by creating a Transfer Process Object.

Parameters: (None)

Operation: Transfer Read

Operation Identifier: transferRead

Description: Queries the status of a transfer of a provisioned object.

Parameters: (None)

Operation: Transfer Delete

Operation Identifier: transferDelete

Description: Cancels a pending transfer of a provisioned object.

Parameters: (None)

Operation: Transfer Approve

Operation Identifier: transferApprove

Description: Approves a pending transfer of a provisioned object.

Parameters: (None)

Operation: Transfer Reject

Operation Identifier: transferReject (on Transfer Process Object)

Description: Rejects a pending transfer of a provisioned object.

Parameters

Identifier	Name	Card.	Data Type	Description
reason	Reason	0-1	String	A human-readable text describing the rationale for rejection.

Table 10

Object: renewProcess

Object Name: Renew Process Object

Object Type: Process

Description: Represents a renewal request for a provisioned object. Creating this object initiates the renewal.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
processId	Process ID	0-1	read-only	String	A server-assigned identifier of the process instance, unique within the Owner Data Object.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
expiryDate	Expiry Date	0-1	read-only	Timestamp	The expiry date of the object after the renewal is completed.

Table 11

Operations

Operation: Create

Operation Identifier: renewCreate

Description: Initiates a renewal of a provisioned object by creating a Renew Process Object.

Parameters: (None)

Object: createProcess

Object Name: Create Process Object

Object Type: Process

Description: Represents the process initiated when a resource creation operation is performed. Carries creation-specific inputs that are consumed during creation and not stored as persistent attributes of the created resource object.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
processId	Process ID	0-1	read-only	String	A server-assigned identifier of the process instance, unique within the Owner Data Object.

Table 12

Operations

Operation: Create

Operation Identifier: create

Description: Invoked implicitly as a side effect of the resource object create operation; never invoked directly. Carries creation-specific inputs consumed during creation of the owning resource object.

Parameters: (None)

Operation: Read

Operation Identifier: read

Description: Retrieves the result or status of the creation, if the server exposes the process resource.

Parameters: (None)

Object: domainCreateProcess

Object Name: Domain Create Process Object

Object Type: Process

Description: The Create Process Object specific to the Domain Name Data Object. Implicitly initiated by the domain create operation; carries the requested initial registration period consumed during creation and not persisted as part of the domain object's state.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
processId	Process ID	0-1	read-only	String	A server-assigned identifier of the process instance, unique within the Owner Data Object.
period	Period	0-1	create-only	Period Object	The initial registration period for the domain name.

Table 13

Operations

Operation: Create

Operation Identifier: create

Description: Invoked implicitly as a side effect of the Domain Name Data Object create operation; never invoked directly. Carries the registration period consumed during domain creation.

Parameters: (None)

Operation: Read

Operation Identifier: read

Description: Retrieves the result or status of the domain creation, if the server exposes the process resource.

Parameters: (None)

Object: disclose

Object Name: Disclose

Object Type: Component

Description: TBD

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
--------------------	--------------	-------	------------	-----------	-------------

Table 14

Object: restoreProcess

Object Name: Restore Process Object

Object Type: Process

Description: Represents the current state of a restore request for an object that has entered the Redemption Grace Period (RGP). Returned as output of all restore operations. This object is OPTIONAL and is only used when the RGP feature is supported.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
processId	Process ID	0-1	read-only	String	A server-assigned identifier of the process instance, unique within the Owner Data Object.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
restoreStatus	Restore Status	1	read-only	String	The current state of the restore process.
requestDate	Request Date	0-1	read-only	Timestamp	The date and time when the restore request was submitted. Absent if no request has been submitted.
reportDate	Report Date	0-1	read-only	Timestamp	The date and time when the most recent restore report was accepted. Absent if no report has been accepted.
reportDueDate	Report Due Date	0-1	read-only	Timestamp	The deadline for submitting a restore report before the object reverts to redemptionPeriod. Present only when status is pendingRestore.

Table 15

Operations

Operation: Restore Create

Operation Identifier: create

Description: Initiates recovery of a domain name in the redemptionPeriod state by creating a Restore Process Object. This operation is OPTIONAL and is only available when the RGP feature is supported.

Parameters

Identifier	Name	Card.	Data Type	Description
restoreReport	Restore Report	0-1	Restore Report Object	An inline restore report.

Table 16

Operation: Restore Read

Operation Identifier: read (on Restore Process Object)

Description: Retrieves the current state of the RGP restore process for a domain name. This operation is OPTIONAL and is only available when the RGP feature is supported.

Parameters: (None)

Operation: Restore Report

Operation Identifier: report

Description: Submits the restore report for a domain name in the pendingRestore state. This operation is OPTIONAL and is only available when the RGP feature is supported and the server requires a restore report.

Parameters

Identifier	Name	Card.	Data Type	Description
restoreReport	Restore Report	1	Restore Report Object	The restore report to be submitted.

Table 17

Object: restoreReport

Object Name: Restore Report Object

Object Type: Component

Description: Contains the redemption grace period restore report submitted by the sponsoring client as required by the RGP process. This object is OPTIONAL and is only used when the RGP feature is supported and a restore report is required by server policy.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
preData	Pre-Delete Data	0-1	read-write	String	A copy of the registration data that existed for the object prior to deletion.
postData	Post-Restore Data	0-1	read-write	String	A copy of the registration data that exists for the object at the time the restore report is submitted.

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
deleteTime	Delete Time	0-1	read-write	Timestamp	The date and time when the object delete request was sent to the server.
restoreTime	Restore Time	0-1	read-write	Timestamp	The date and time when the original restore request operation was sent to the server.
restoreReason	Restore Reason	0-1	read-write	String	A brief explanation of the reason for restoring the object.
statements	Statements	0+	read-write	String	Mandatory client statements required by the RGP process. At least one and at most two statements MUST be provided.
other	Other	0-1	read-write	String	Any additional information needed to support the statements provided by the client.

Table 18

Object: domainName

Object Name: Domain Name Data Object

Object Type: Resource

Description: Represents a domain name and its associated data.

Reference: [This-ID]

Data Elements

Identifier	Name	Card.	Mutability	Data Type	Description
name	Name	1	create-only	String	The fully qualified name of the domain object.
provMetadata	Provisioning Metadata	1	read-only	Provisioning Metadata Object	Standard metadata about object lifecycle and ownership.
status	Status	0+	read-only	Status Object	The current status descriptors for the domain.
registrant	Registrant	0-1	read-write	Contact Object	The registrant contact ID.
contacts	Contacts	0+	read-write	LabelledAggregation [Contact Object]	Associated contact objects.
nameservers	Nameservers	0+	read-write	Aggregation [Host Data Object]	A collection of nameservers associated with the domain.
dns	DNS Data	0-1	read-write	DNS Data Object	DNS resource records and operational controls related to the domain name.
subordinateHosts	Subordinate Hosts	0+	read-only	Aggregation [Host Data Object]	Subordinate host names.

Identifier	Name	Card.	Mutability	Data Type	Description
expiryDate	Expiry Date	0-1	read-only	Timestamp	Expiry timestamp.
authInfo	Authorisation Information	0-1	read-write	Authorisation Information Object	Authorisation information for the object.
processes	Processes	0-1	read-only	Processes Object	Process Objects initiated on the domain object.

Table 19

Operations

Operation: Create

Operation Identifier: create

Description: Provisions a new Domain Name resource.

Parameters: (None)

Operation: Read

Operation Identifier: read

Description: Retrieves the data elements of a Domain Name resource.

Parameters

Identifier	Name	Card.	Data Type	Description
hostsFilter	Hosts Filter	0-1	String	Controls which host information is returned.

Table 20

Operation: Update

Description: Modifies the read-write data elements of a Domain Name resource.

Parameters

Identifier	Name	Card.	Data Type	Description
urgent	Urgent	0-1	Boolean	Requests high-priority processing of the update by the server.

Table 21

Operation: Delete

Operation Identifier: delete

Description: Removes an existing Domain Name resource.

Parameters: (None)

Operation: Renew

Operation Identifier: renew

Description: Extends the validity period of a Domain Name resource.

Parameters

Identifier	Name	Card.	Data Type	Description
currentExpiryDate	Current Expiry Date	1	Timestamp	The expected current expiry date, for validation.
renewalPeriod	Renewal Period	0-1	Period Object	The duration to add to the registration period.

Table 22

Operation: Transfer Create Operation

Operation Identifier: transferCreate

Description:

Parameters

Identifier	Name	Card.	Data Type	Description
transferPeriod	Transfer Period	0-1	Period Object	The duration to add to the registration period upon transfer.

Table 23

Object: contact

Object Name: Contact Data Object

Object Type: Resource

Description: A Contact Data Object represents the contact information for an individual or organisation associated with other objects.

Reference: [This-ID]

Data Elements

Identifier	Name	Card.	Mutability	Data Type	Description
id	Handle ID	1	create-only	Identifier.	External unique identifier of the contact object.
provMetadata	Provisioning Metadata	1	read-only	Provisioning Metadata Object	Standard metadata about the object's lifecycle and ownership.
status	Status	0+	read-only	Status Object	Status descriptors associated with the contact.
contactInfo	Contact Information	1-2	read-write	External:RPP-JSContact-Profile:Card	JSContact Card information.
voice	Voice Phone Number	0+	read-write	Phone Number	Voice phone number associated with the contact
fax	Fax Phone Number	0+	read-write	Phone Number	Fax number associated with the contact
email	E-mail	0+	read-write	String.	Email address.
authInfo	Authorisation Information	0-1	read-write	Authorisation Information	Authorisation information associated with the contact object.

Identifier	Name	Card.	Mutability	Data Type	Description
disclose	Disclose	0-1	read-write	Disclose Object.	Identifies elements that require exceptional server-operator handling to allow or restrict disclosure to third parties.
processes	Processes	0-1	read-only	Processes Object	Process Objects initiated on the contact object.

Table 24

Operations

Operation: Create Operation

Operation Identifier: create

Description:

Parameters: (None)

Operation: Read Operation

Operation Identifier: read

Description:

Parameters: (None)

Operation: Update Operation

Operation Identifier: update

Description:

Parameters: (None)

Operation: Delete Operation

Operation Identifier: delete

Description:

Parameters: (None)

Object: host

Object Name: Host Data Object

Object Type: Resource

Description: Represents a name server that provides DNS services for a domain name.

Reference: [This-ID]

Data Elements

Identifier	Name	Card.	Mutability	Data Type	Description
hostName	Host Name	1	read-write	String	Fully qualified name of a host.
provMetadata	Provisioning Metadata	1	read-only	Provisioning Metadata Object	Standard metadata about object lifecycle and ownership.
status	Status	0+	read-only	Status Object	The current status descriptors for the host.
dns	DNS Data	0-1	read-write	DNS Data Object	DNS resource records and operational controls related to the host.
processes	Processes	0-1	read-only	Processes Object	Process Objects initiated on the host object.

Table 25

Operations

Operation: Create

Description: Provisions a new Host Data Object.

Parameters: (None)

Operation: Read

Description: Retrieves the data elements of a Host Data Object.

Parameters: (None)

Operation: Update

Description: Modifies the attributes of a Host Data Object.

Parameters: (None)

Operation: Delete

Description: Removes an existing Host Data Object.

Parameters: (None)

Object: organisationRole

Object Name: Organisation Role Object

Object Type: Component

Description: Represents a role that an organisation has within the registry ecosystem, as defined in [Section 3.2](#) of [\[RFC8543\]](#). An organisation object MUST always have at least one associated role.

Reference: [This-ID]

Data Elements

Element Identifier	Element Name	Card.	Mutability	Data Type	Description
status	Role Status	0+	read-write	String	The status of this role. Allowed values: ok, linked, clientLinkProhibited, serverLinkProhibited.
roleId	Role Identifier	0-1	read-write	String	A third-party-assigned identifier for this role, such as an IANA registrar ID.

Table 26

Object: organisation

Object Name: Organisation Data Object

Object Type: Resource

Description: Represents an entity, such as a registrar, reseller, DNS service operator, or privacy proxy, involved in the domain registration process. Based on the EPP Organisation Mapping defined in [\[RFC8543\]](#).

Reference: [This-ID]

Data Elements

Identifier	Name	Card.	Mutability	Data Type	Description
id	Organisation ID	1	create-only	Identifier	A server-unique identifier for the organisation object.
provMetadata	Provisioning Metadata	1	read-only	Provisioning Metadata Object	Standard metadata about the object's lifecycle and ownership.
status	Status	1+	read-only	Status Object	The current operational status descriptors for the organisation.
roles	Roles	1+	read-write	DictionaryComposition [Organisation Role Object]	One or more roles describing the organisation's relationship within the registry ecosystem.
parent	Parent Organisation ID	0-1	read-write	Identifier	The identifier of the parent organisation in a hierarchical organisation structure.

Identifier	Name	Card.	Mutability	Data Type	Description
contactInfo	Contact Information	0-1	read-write	External:RPP-JSContact-Profile:Card	Contact information.
contacts	Contacts	0+	read-write	LabelledAggregation[Contact Object]	Identifiers of contact objects associated with the organisation.
users	Users	0+	read-write	LabelledAggregation [User Data Object]	Identifiers of user objects associated with the organisation.
processes	Processes	0-1	read-only	Processes Object	Process Objects initiated on the organisation object.

Table 27

Operations

Operation: Create

Operation Identifier: create

Description: Provisions a new Organisation Data Object.

Parameters: (None)

Operation: Read

Operation Identifier: read

Description: Retrieves the data elements of an Organisation Data Object.

Parameters: (None)

Operation: Update

Operation Identifier: update

Description: Modifies the attributes of an existing Organisation Data Object.

Parameters: (None)

Operation: Delete

Operation Identifier: delete

Description: Removes an existing Organisation Data Object.

Parameters: (None)

Object: user

Object Name: User Data Object

Object Type: Resource

Description: Represents a user linked to an Organisation Data Object. Each user carries a set of RBAC roles that define the user's permissions within the context of the owning organisation. The lifecycle of a User Object is bound to its Organisation Object.

Reference: [This-ID]

Data Elements

Identifier	Name	Card.	Mutability	Data Type	Description
id	User Identifier	1	create-only	Identifier	A unique identifier for the user. MUST be globally unique in the server scope.
details	Details	0-1	read-write	External:RPP-JSContact-Profile:Card	The details of the user.
status	Status	0+	read-write	string	The status of the user.
processes	Processes	0-1	read-only	Processes Object	Process Objects initiated on the user object.

Table 28

Operations

Operation: Create

Operation Identifier: create

Description: Creates a new User Object.

Parameters: (None)

Operation: Read

Operation Identifier: read

Description: Retrieves the data elements of a specific User Object.

Parameters: (None)

Operation: Update

Operation Identifier: update

Description: Modifies the read-write data elements (e.g., roles) of a specific User Object.

Parameters: (None)

Operation: Delete

Operation Identifier: delete

Description: Removes a specific User Object.

Parameters: (None)

13.2. RPP User Role Values Registry

This document establishes the "RESTful Provisioning Protocol (RPP) User Role Values Registry". This registry serves as a catalogue of all user role values used within RPP.

Name of the registry: RPP User Role Values
Registry group: RESTful Provisioning Protocol (RPP)
Registration procedure: Expert Review

Fields to be registered:

- name: The name of the user role, for example "RPP example role".
- url: The URL for the user role specification, for example "<https://www.iana.org/assignments/rpp-user-roles/rpp-example-role-1.0>".
- permission: The permission level associated with the user role, for example "read-only", "read-write", or "admin".
- description: A human-readable description of the user role and its intended use.

14. Security Considerations

TODO: write security considerations, if any

15. Changes History

draft-ietf-rpp-data-objects -00 - -01

- Added Organisation, Organisation Role and User Objects, based on RFC8543 (Issue #25)
- Added Renew Process Object and operations (Issue #76)
- reserve property names beginning with @ for representation specifications #89
- add generic Create Process Object and Domain Create Process Object carrying the registration period #89
- add optional processId to all Process Objects #89
- add extensible Processes Object component and processes element to all Data Objects #89
- declare the unique identifier element explicitly in every object preamble #89
- add "Direct Access" flag exposing association data elements as addressable sub-resources #89
- editorial pass: fix spelling, grammar, subject-verb agreement, missing articles, cross-reference wording, and copy-paste object names
- Add External Data Types section and JSContact (Issue #83)

draft-kowalik-rpp-data-objects-04 - draft-ietf-rpp-data-objects-00

- RPP working group adoption

draft-kowalik-rpp-data-objects -03 - -04

- correct "postalInfo" to be DictionaryComposition not DictionaryAggregation
- Added missing IANA tables for Contact, Postal Address and Postal Info. Added missing Operations. Added missing operation identifiers. Fixes #17, #18, #19, #20, #21.

draft-kowalik-rpp-data-objects -02 - -03

- add Object and Dictionary[Value Type] primitive data types
- change "Aggregation/Composition Dictionary" to "Dictionary Aggregation/Composition" (Issue #32)
- describe operations for contacts #15
- describe operations for hosts #16
- add Domain Update operation with urgent transient parameter from [\[RFC5910\]](#)
- add identifiers to all operations
- abstract common provisioning metadata into reusable component object
- define common RGP/restore process and Restore Process Object
- define common transfer operations and Transfer Process Object with support for pull and push transfers #23
- add domain-specific transfer operations with implicit renewal and subordinate host transfer

- add host/domain relationship terminology from RFC 5732
- restructure DNS data model aligned with draft-simmen-rpp-dns-data-01: redefine DNS Resource Record Object, add DNS Operational Controls Object, add DNS Data Object; update Domain, Host, and Nameserver objects to use it
- add DNSSEC support based on [RFC5910]: DS and DNSKEY record types with structured RDATA fields
- add NS, A, and AAAA RDATA structures and record type constraints to EPP compatibility profile for DNS Resource Record Object
- expand extensibility section with standardised/private extension mechanisms, extension points, and operation extensibility
- update IANA registration policy and registry structure to accommodate extension registrations

draft-kowalik-rpp-data-objects -01 - -02

- ontology of allowed basic datatypes #4
- add examples of associations #31

16. References

16.1. Normative References

- [I-D.ietf-rpp-architecture] Kowalik, P. and M. Wullink, "RPP Architecture", Work in Progress, Internet-Draft, draft-ietf-rpp-architecture-01, 27 February 2026, <<https://datatracker.ietf.org/doc/html/draft-ietf-rpp-architecture-01>>.
- [I-D.kowalik-rpp-architecture] Kowalik, P. and M. Wullink, "RPP Architecture", Work in Progress, Internet-Draft, draft-kowalik-rpp-architecture-03, 10 October 2025, <<https://datatracker.ietf.org/doc/html/draft-kowalik-rpp-architecture-03>>.
- [I-D.wullink-rpp-jscontact-profile] Wullink, M., "JSContact Profile for the RESTful Provisioning Protocol (RPP)", Work in Progress, Internet-Draft, draft-wullink-rpp-jscontact-profile, 2026, <<https://datatracker.ietf.org/doc/html/draft-wullink-rpp-jscontact-profile>>.
- [ITU.E164.2005] International Telecommunication Union, "The international public telecommunication numbering plan", ITU-T Recommendation E.164, February 2005.
- [RFC1035] Mockapetris, P., "Domain names - implementation and specification", STD 13, RFC 1035, DOI 10.17487/RFC1035, November 1987, <<https://www.rfc-editor.org/info/rfc1035>>.
- [RFC1738] Berners-Lee, T., Masinter, L., and M. McCahill, "Uniform Resource Locators (URL)", RFC 1738, DOI 10.17487/RFC1738, December 1994, <<https://www.rfc-editor.org/info/rfc1738>>.

-
- [RFC2026] Bradner, S., "The Internet Standards Process -- Revision 3", BCP 9, RFC 2026, DOI 10.17487/RFC2026, October 1996, <<https://www.rfc-editor.org/info/rfc2026>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3339] Klyne, G. and C. Newman, "Date and Time on the Internet: Timestamps", RFC 3339, DOI 10.17487/RFC3339, July 2002, <<https://www.rfc-editor.org/info/rfc3339>>.
- [RFC3915] Hollenbeck, S., "Domain Registry Grace Period Mapping for the Extensible Provisioning Protocol (EPP)", RFC 3915, DOI 10.17487/RFC3915, October 2004, <<https://www.rfc-editor.org/info/rfc3915>>.
- [RFC5234] Crocker, D., Ed. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, DOI 10.17487/RFC5234, January 2008, <<https://www.rfc-editor.org/info/rfc5234>>.
- [RFC5730] Hollenbeck, S., "Extensible Provisioning Protocol (EPP)", STD 69, RFC 5730, DOI 10.17487/RFC5730, August 2009, <<https://www.rfc-editor.org/info/rfc5730>>.
- [RFC5731] Hollenbeck, S., "Extensible Provisioning Protocol (EPP) Domain Name Mapping", STD 69, RFC 5731, DOI 10.17487/RFC5731, August 2009, <<https://www.rfc-editor.org/info/rfc5731>>.
- [RFC5732] Hollenbeck, S., "Extensible Provisioning Protocol (EPP) Host Mapping", STD 69, RFC 5732, DOI 10.17487/RFC5732, August 2009, <<https://www.rfc-editor.org/info/rfc5732>>.
- [RFC5733] Hollenbeck, S., "Extensible Provisioning Protocol (EPP) Contact Mapping", STD 69, RFC 5733, DOI 10.17487/RFC5733, August 2009, <<https://www.rfc-editor.org/info/rfc5733>>.
- [RFC5952] Kawamura, S. and M. Kawashima, "A Recommendation for IPv6 Address Text Representation", RFC 5952, DOI 10.17487/RFC5952, August 2010, <<https://www.rfc-editor.org/info/rfc5952>>.
- [RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", BCP 26, RFC 8126, DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8543] Zhou, L., Kong, N., Yao, J., Gould, J., and G. Zhou, "Extensible Provisioning Protocol (EPP) Organization Mapping", RFC 8543, DOI 10.17487/RFC8543, March 2019, <<https://www.rfc-editor.org/info/rfc8543>>.
-

- [RFC9553] Stepanek, R. and M. Loffredo, "JSContact: A JSON Representation of Contact Data", RFC 9553, DOI 10.17487/RFC9553, May 2024, <<https://www.rfc-editor.org/info/rfc9553>>.

16.2. Informative References

- [I-D.simmen-rpp-dns-data] Simmen, C. and P. Kowalik, "DNS data representation for use in RESTful Provisioning Protocol (RPP)", Work in Progress, Internet-Draft, draft-simmen-rpp-dns-data-01, 20 October 2025, <<https://datatracker.ietf.org/doc/html/draft-simmen-rpp-dns-data-01>>.
- [RFC3596] Thomson, S., Huitema, C., Ksinant, V., and M. Souissi, "DNS Extensions to Support IP Version 6", STD 88, RFC 3596, DOI 10.17487/RFC3596, October 2003, <<https://www.rfc-editor.org/info/rfc3596>>.
- [RFC4034] Arends, R., Austein, R., Larson, M., Massey, D., and S. Rose, "Resource Records for the DNS Security Extensions", RFC 4034, DOI 10.17487/RFC4034, March 2005, <<https://www.rfc-editor.org/info/rfc4034>>.
- [RFC5910] Gould, J. and S. Hollenbeck, "Domain Name System (DNS) Security Extensions Mapping for the Extensible Provisioning Protocol (EPP)", RFC 5910, DOI 10.17487/RFC5910, May 2010, <<https://www.rfc-editor.org/info/rfc5910>>.

Authors' Addresses

Pawel Kowalik

DENIC

Email: pawel.kowalik@denic.de

URI: <https://denic.de/>

Maarten Wullink

SIDN Labs

Email: maarten.wullink@sidn.nl

URI: <https://sidn.nl/>