



A P I S p e c i f i c a t i o n

Royal Mail Group

Royal Mail Collection Order Handler V1 REST API Technical User Guide

This API specification details the requirements for integrating with the Royal Mail Collection Order Handler V1 REST API. It specifically covers how Collection Order Handler V1 REST API can be used by business customers to check subscription for Royal mail products and to get available slots to book a collection and provides the technical information to build this integration.

19th Mar 2021

Version 0.3

Contents

1	Document Control.....	4
1.1	Terms and Abbreviations	4
1.2	Version History	4
2	Overview	5
3	Purpose	6
4	Introduction to Collection Order Handler V1 API	7
4.1	Overview.....	7
4.2	Interface Components	7
5	Integrating with Collection Order Handler V1 API	8
5.1	On-boarding Process.....	8
5.2	Terms & Conditions.....	9
5.3	API Access.....	9
5.4	API Versioning.....	9
6	Collection Order Handler Services	11
6.1	Business Services	11
6.2	HTTP Header Information	11
6.2.1	Description	11
6.2.2	Request Headers.....	11
6.2.3	Header Request Example Data	12
6.2.4	Response Headers	12
6.2.5	Header Response Example Data.....	12
6.3	Validate Subscription Operation	13
6.3.1	Description	13
6.3.2	Request Message	13
6.3.3	Response Message.....	13
6.3.4	Validate Subscription Example Data	14
6.4	Get Available Slots Operation	16
6.4.1	Description	16
6.4.2	Request Message	16
6.4.3	Response Message.....	16
6.4.4	Get Available Slots Example Data	16

7	Error Handling.....	18
7.1	Overview.....	18
7.2	Business Errors.....	19
7.2.1	Example Data.....	20
7.3	Technical Errors / Exceptions	21
7.3.1	Example Data.....	22
8	Non-Functional Characteristics	22
8.1	Availability	22
8.1.1	Service Hours	22
8.1.2	Maintenance Windows	22
8.1.3	Unavailability	22
8.2	Performance	23
8.3	Security.....	23
9	Frequently Asked Questions.....	24
9.1	Latest versions of Swagger Definition.....	24
9.2	Sample Code	24
9.3	API Programming	24
9.4	Business Account	24
9.5	Application Compatibility	24

1 Document Control

1.1 Terms and Abbreviations

Term	Meaning
API	Application Program Interface
HTTP	Hypertext Transfer Protocol
HTTPS	Hypertext Transfer Protocol over TLS
IP	Internet Protocol
REST	Representational State Transfer
Swagger	Specification for defining RESTful web services
TLS	Transport Layer Security
URL	Uniform Resource Locator
XML	Extensible Markup Language
DPS	Delivery Point Suffix

Table 1 – Terms and Abbreviations

1.2 Version History

Version	Date	Author	Notes
0.1	24/08/2020	RMG	Initial draft.
0.2	15/09/2020	RMG	Updated review comments from Bindhu
0.3	19/03/2021	RMG	Added optional header request header X-RMG-Idempotency-Key to Get slots operation

Table 2 – Document Version History

2 Overview

The Royal Mail Collection Order Handler API exposes a REST service that allows to check subscription for Royal mail products and to get available slots to book a collection.

There are no costs to customers for using the Royal Mail Collection Order Handler API V1 services, however customers' development costs must be covered by the customer developing the solution. Royal Mail will not accept any responsibility for these development, implementation and testing costs.

Customers should address initial enquiries regarding development of systems for these purposes to their account handler.

3 Purpose

This document is to provide Royal Mail customers with guidelines and detailed specifications for integrating with the Collection Order Handler V1 RESTful web service.

The document details:

- The specification for the web service interface that enables consumers to perform validation before booking a consumer collection.
- This API exposes the following capability:
 - ✓ To check subscription for Royal Mail Products.
 - ✓ Get available slots to book and amend a collection.
- Description of errors the API can return.
- Non-functional characteristics of the API including response times, service availability and security considerations.

This document is primarily intended to be read by developers and other technical roles involved with integrating customer systems with the Collection Order Handler V1 API. This document should be read in conjunction with the following artefacts which are available from the 'Royal Mail Collection Order Handler V1 (REST)' page on the [Royal Mail API \(Developer\) Portal](#):

- Collection Order Handler V1 REST API Swagger Definition (Click on 'Open API' link to download).

4 Introduction to Collection Order Handler V1 API

4.1 Overview

The Royal Mail Collection Order Handler API exposes a REST service that allows the Royal Mail customer to check subscription for Royal Mail products and get available slots to book and amend a collection.

1. The Subscription API enables the customer to check the
 - a. Product eligibility
 - b. Account subscription

Note: Determination of the product family is not available for 2D but only for 1D barcodes. productFamilyName is a mandatory parameter in the request for 2D barcodes.

2. The GetSlots API enables the customer to retrieve the available dates for collection for the requested capacity

4.2 Interface Components

Please see Figure 1 below for a graphical representation of the interface between Royal Mail and customers for Collection Order Handler V1 API. This document covers what information is to be exchanged, how this information is structured and the means by which it is transferred.

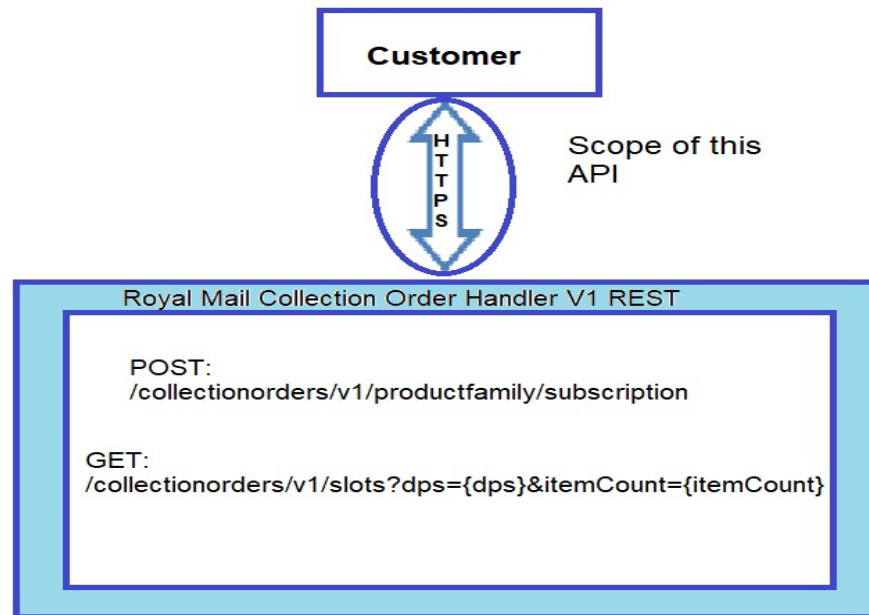


Figure 1 – Royal mail Collection Order Handler V1 API

5 Integrating with Collection Order Handler V1 API

5.1 On-boarding Process

The high-level process associated with integrating Collection Order Handler V1 API is represented and described in the diagram below.

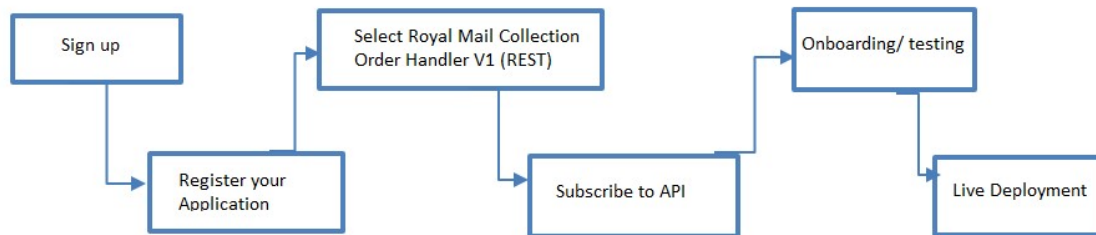


Figure 2 – Process for Integrating with the API

Access to the service is managed through RMG’s API Management system.

New users of the system will need to:

1. Sign up for an account and accept the terms and conditions on the [Royal Mail API \(Developer\) Portal](#).
2. Register the ‘application’ which will be calling the API. When the application is registered, it will be assigned a unique system-generated Client ID and Client Secret which is needed to securely access the API. It is important that these credentials are noted and securely stored.
3. Use Client Id with Client Secret to access the API and subscribe the login API with the same application.
4. Request to subscribe to the API. This will result in an e-mail being automatically generated and sent to the Royal Mail Customer Solutions team.
5. Once approved, testing can be performed against the API at controlled transaction rate.
6. Once all required testing/integration has completed, access to the Live API will be provided at a mutually agreed date/time.

Existing users who already have an account with Royal Mail’s API Management system will need to perform step 2 onwards if the application accessing the API is different to any currently registered applications. If the application accessing the API is already registered, existing customers will need to perform step 3 onwards.

You will be provided with a contact in Royal Mail who will take you through the on-boarding process.

5.2 Terms & Conditions

You must accept the Royal Mail Terms and Conditions when creating your customer account. These cover the ways in which the service may be used and any integration activities must abide by these.

Of particular note to developers:

- The API is available 24x7 although must not be used for performance testing.
- The API imposes a cap on the number of transactions per second for each customer. Excessive volumes of traffic over the configured throttling limit will result in transactions being rejected.
- Royal Mail expects customers to use the service in a responsible way; this includes refraining from continuously polling the API for updates.
- Regular checks will be performed by Royal Mail to ensure that customers are using the API in a responsible way.

5.3 API Access

Access to the Collection Order Handler V1 API is via the following URL:

GET:

<https://api.royalmail.net/collectionorders/v1/slots?dps={dps}&itemCount={itemCount}>

POST: <https://api.royalmail.net/collectionorders/v1/productfamily/subscription>

The API only supports HTTP GET, POST requests against above paths.

Please note:

- Response formats supported: application/json
- See section 6 for all operations and parameters which are supported by this API.
- If anything is appended to the path and which is unsupported (e.g. /slots/something), then a HTTP 404 Not Found response will be returned.
- The Client must be provided in the HTTP header of all API requests otherwise access to the API will be rejected and a HTTP 401 (Unauthorised) will be returned. The Client ID is obtained by registering an application on the [Royal Mail API \(Developer\) Portal](#).
- Please see Error Handling section for a full list of technical and business error codes which are returned by this API.

You must complete all required test activities prior to being permitted access to the live API by the Royal Mail Customer Solutions Team.

5.4 API Versioning

Royal Mail is continuously working to improve its technology, and as part of this process updates to the services provided may on occasion necessitate a new API version. Royal Mail

will look to maintain three versions of the API; as new versions are introduced; previous versions move down the stack until they are ultimately removed completely:

- Latest version
- Previous version
- Deprecated version

Customers will always be encouraged to integrate against the latest version as this will give them the longest stable period without the need to change, but if they have already begun integration activities when a new version is released then they will be able to integrate against the previous version. Customers should not integrate against the deprecated version.

6 Collection Order Handler Services

6.1 Business Services

The Collection Order Handler V1 API is a service offered to check subscription for Royal mail products and get available slots to book a collection.

Business Service	API Operations	Description	Technology	Conversation Style
Validate Subscription	POST: /collectionorders/v1/productfamily/subscription	Validate subscription to book the order collection	JSON over HTTPS (REST)	Synchronous Request / Response
Get Available Slots	GET: /collectionorders/v1/slots?dps={dps}&itemCount={itemCount}	Get the available slots to book a collection order	JSON over HTTPS (REST)	Synchronous Request / Response

Table 3 – Business Services

6.2 HTTP Header Information

6.2.1 Description

The purpose of the HTTP header is to support security and logging functionally within the Royal Mail systems and it is mandatory that it is provided in the request message.

6.2.2 Request Headers

All service requests to this API will be authorised in accordance with the Client ID and Secret passed in the HTTP headers. Please see table below for the elements which need to be populated in the HTTP header.

Parameter	Optional	Description
X-IBM-Client-Id	No	Similar to a client username. Required to access the API.
X-IBM-Client-Secret	Yes	Similar to a client password. Required to access the API.
X-RMG-Date-Time	No	This should be populated with the date time in ISO 8601 format
Authorization	Yes	Bearer {Security Token}
Accept	No	Content-Types that are acceptable for the response. Eg. application/json
X-RMG-Idempotency-Key	Yes	Optional header for GetSlots operation. Identifier that makes the GET request idempotent.

Table 4 – HTTP Header Information in the API Request**6.2.3 Header Request Example Data**

Example Request Data for the HTTP Header:

Parameter	Value
X-IBM-Client-Id	f0e***51-2041-4df2-b31d
X-IBM-Client-Secret	**0e***51-2041-4df2-b31d
X-RMG-Date-Time	2016-10-20T10:04:00+01:00
Authorization	Bearer f9**0745-000**-43f3-bfe3-8ecf****e5
Accept	Application/json
X-RMG-Idempotency-Key	ANON:www.w3.org:j6oAOxCWZh/CD723LGeXlf-01:34

Table 5 – Example HTTP Header Information for API Request**6.2.4 Response Headers**

Please see table below for the elements which are populated in the HTTP response header.

Parameter	Optional	Description
HTTP/1.1	No	HTTP status code and reason phrase
X-Backside-Transport	No	OK OK on success or FAIL, FAIL on failure
Connection	No	Controls whether the network connection stays open after the current transaction finishes.
Content-Length	No	Indicates the content length
Content-Type	No	Indicates the media type of the resource.
Date	No	Contains the date and time at which the message was originated.
X-Global-Transaction-ID	No	Global transaction id
Access-Control-Expose-Headers	No	Indicates which headers can be exposed as part of the response by listing their names.
Access-Control-Allow-Origin	No	Indicates whether the response can be shared.
Access-Control-Allow-Methods	No	This response header specifies the method or methods allowed when accessing the resource.
X-RateLimit-Limit	No	Request limit per day / per 5 minutes
X-RateLimit-Remaining	No	The number of requests left for the time window

Table 6 – HTTP Header Information in the API Response**6.2.5 Header Response Example Data**

Example Response Data for the HTTP Header:

Parameter	Value
HTTP/1.1	200 Ok
X-Backside-Transport	OK OK
Connection	Keep-Alive
Content-Length	3567
Content-Type	application/json
Date	14 Feb 2020 14:33:16 GMT
X-Global-Transaction-ID	5s****fd8*****afacae13d469
Access-Control-Expose-Headers	APIm-Debug-Trans-Id
Access-Control-Allow-Origin	*.royalmail.com
Access-Control-Allow-Methods	POST
X-RateLimit-Limit	rate-limit-1,220;
X-RateLimit-Remaining	name=rate-limit-1,219;

Table 7 – Example HTTP Header Information for API Response

6.3 Validate Subscription Operation

6.3.1 Description

The behaviour of this operation is to check customer subscriptions for Royal Mail Products.

6.3.2 Request Message

URL Path: **POST:** <https://api.royalmail.net/collectionorders/v1/productfamily/subscription>

Please refer to section 6.2 for the request and response header information.

Parameter Name	Optional	Type	Description
productFamily	No	Object	Request body to check subscription. For more details please check the example below

Table 8 – Request message to Validate Subscription operation

6.3.3 Response Message

The body of the response message can contain a success response message or error message as described in the Error Handling section. A successful business response will be returned as a standard HTTP response code of 200 (OK).

Parameter Name	Optional	Type	Description
Response Body	No	Object	Response for Validate subscription. For more details please check the example below

Table 9 – Response message for Validate Subscription operation

6.3.4 Validate Subscription Example Data

Full JSON example responses are provided on the [Royal Mail API \(Developer\) Portal](#).

Example Request Data

```
POST https://api.royalmail.net/collectionorders/v1/productfamily/subscription HTTP/1.1
Accept-Encoding: gzip,deflate
Authorization: Bearer ey*****iJ9.eyJ*****8fQ.pdK*****8jIE
Accept: application/json
X-RMG-Date-Time: 2016-10-20T10:04:00+01:00
X-IBM-Client-Id: 2****f-5**c-4**8-8**0-fc7a*****7a2
X-IBM-Client-Secret: kY*****M7kJ
Host: api.royalmail.net
Connection: Keep-Alive
User-Agent: Apache-HttpClient/4.1.1 (java 1.5)
{
  "productFamily": [
    {
      "barcode": "WL902730200GB",
      "productFamilyName": "Special Delivery",
      "accountNumber": "0983764876"
    }
  ]
}
```

Example Response Data

```
HTTP/1.1 200 OK
X-Backside-Transport: OK OK
Connection: Keep-Alive
Content-Length: 4563
Content-Type: application/json
Date: Mon, 24 Aug 2020 06:36:31 GMT
X-Global-Transaction-ID: 5521cfd85f435fef1345a631
Access-Control-Expose-Headers: APIm-Debug-Trans-Id, X-RateLimit-Limit, X-RateLimit-Remaining, X-RateLimit-Reset, X-Global-Transaction-ID
Access-Control-Allow-Origin: *
Access-Control-Allow-Methods: POST
X-RateLimit-Limit: name=rate-limit-1,120;
X-RateLimit-Remaining: name=rate-limit-1,119;
{
  "productFamily": [{
    "productFamilyName": "Special Delivery",
    "status": "200",
    "subscription": [{
      "name": "isEligibleForCC",
      "value": true
    }],
    {
      "name": "isEligibleForSafeplace",
```

```

        "value": true
    },
    ],
    "account": {
        "accountNumber": "0983764876",
        "subscription": [{
            "name": "isEligibleForSafeplace",
            "value": true
        }],
        "agreementLine": {
            "isContractAvailableForCCProduct": true,
            "productCode": "TRN",
            "contractCode": "TRN9876543",
            "agreementLineId": "TRN9876543"
        }
    }
},
{
    "productFamilyName": "Tracked 24",
    "status": "200",
    "subscription": [{
        "name": "isEligibleForCC",
        "value": true
    },
    {
        "name": "isEligibleForSafeplace",
        "value": true
    }
    ]
},
{
    "productFamilyName": "Tracked 48",
    "status": "200",
    "subscription": [{
        "name": "isEligibleForCC",
        "value": true
    },
    {
        "name": "isEligibleForSafeplace",
        "value": true
    }
    ],
    "account": {
        "accountNumber": "0368194003",
        "subscription": [{
            "name": "isEligibleForSafeplace",
            "value": true
        }],
        "agreementLine": {
            "isContractAvailableForCCProduct": false
        }
    }
}

```

```

    }
  }
}

```

6.4 Get Available Slots Operation

6.4.1 Description

The behaviour of this operation is to get available slots for a given DPS.

6.4.2 Request Message

URL Path: GET:

<https://api.royalmail.net/collectionorders/v1/slots?dps={dps}&itemCount={itemCount}>

Please refer to section 6.2 for the request and response header information.

Parameter Name	Optional	Type	Description
dps	No	String	Delivery Point Suffix details for collection
itemCount	No	String	Item/items count for collection

Table 8 – Request message for Get Available Slots operation

6.4.3 Response Message

The body of the response message can contain a success response message or error message as described in the Error Handling section. A successful business response will be returned as a standard HTTP response code of 200 (Ok).

Parameter Name	Optional	Type	Description
Response Body	No	Object	Response for Get Available Slots. For more details check the example below

Table 9 – Response message for Get Available Slots operation

6.4.4 Get Available Slots Example Data

Full JSON example responses are provided on the [Royal Mail API \(Developer\) Portal](#).

Example Request Data

```

GET https://api.royalmail.net/collectionorders/v1/slots?dps={dps}&itemCount={itemCount} HTTP/1.1
Accept-Encoding: gzip,deflate
Authorization: Bearer ey*****ijp.ecg*****uih.ed*****ij
Accept: Application/ json
X-RMG-Date-Time: 2016-10-20T10:04:00+01:00
X-IBM-Client-ID: 00****a1-5**9-4**1-9**4-6fc3*****500
X-IBM-Client-Secret: hU2gW8hJ1*****8bY0sX2qA*****oW
X-RMG-Idempotency-Key: ANON:www.w3.org:j6oAOxCWZh/CD723LGeXlf-01:34Host: api.royalmail.net

```


Connection: Keep-Alive
User-Agent: Apache-HttpClient/4.1.1 (java 1.5)

Example Response Data

GET response:

```
HTTP/1.1 200 OK
X-Backside-Transport: OK OK
Connection: Keep-Alive
Content-Length: 3556
Content-Type: application/json
Date: Mon, 24 Aug 2020 06:29:06 GMT
X-Global-Transaction-ID: 5521cfd85f435e310fe65945
Access-Control-Expose-Headers: APIm-Debug-Trans-Id, X-RateLimit-Limit, X-RateLimit-Remaining, X-RateLimit-Reset, X-Global-Transaction-ID
Access-Control-Allow-Origin: *
Access-Control-Allow-Methods: GET
X-RateLimit-Limit: name=rate-limit-1,120;
X-RateLimit-Remaining: name=rate-limit-1,119;
{
  "taskSlots":{
    "slotDetails":{
      "dps":"SL64DU1Z",
      "routeBarcodeId":"1234567890",
      "deliveryOfficeId":962680198,
      "itemCount":3,
      "tokenId":"123489020101234",
      "tokenIdExpiryTime":"2020-01-24T06:00:00Z"
    },
    "datewiseSlots":[
      {
        "slotDate":"2020-01-26",
        "estimationData":{
          "startOfWindow":"10:50",
          "lengthOfWindow":240,
          "EDWVisibility":1
        }
      },
      {
        "slotDate":"2020-01-27",
        "estimationData":{
          "startOfWindow":"10:50",
          "lengthOfWindow":240,
          "EDWVisibility":1
        }
      },
      {
        "slotDate":"2020-01-28",
        "estimationData":{
          "startOfWindow":"10:40",
          "lengthOfWindow":240,
          "EDWVisibility":1
        }
      }
    ]
  }
}
```

```

"slotDate":"2020-01-29",
"estimationData":{
  "startOfWindow":"10:50",
  "lengthOfWindow":240,
  "EDWVisibility":1
}
}
]
}
}

```

7 Error Handling

7.1 Overview

There are two types of errors produced by the Collection Order Handler V1 API, namely:

- **Business Errors** (e.g. DPS invalid etc.)
- **Technical Errors / Exceptions** (e.g. service unavailable etc.). There are two types of technical errors:
 1. **API Gateway Errors.** Returned when the API request is rejected by the API Gateway before any business processing takes place. E.g. rate limit exceeded.
 2. **Application Errors.** Returned when API requests are accepted for business processing but processing cannot be completed due to a technical error. E.g. internal server error.

Both sets of errors should be appropriately handled by your system and technical details of the error should not be displayed directly to consumers. Please refer to the tables below for the generic structure of all core error messages returned by Collection Order Handler V1 API.

The tables below show the fields for API Gateway and non-API Gateway type error responses.

API Gateway Error

Field	Optional	Type	Description
httpCode	No	String	HTTP error code
httpMessage	No	String	HTTP error code description
moreInformation	Yes	String	Information relating to the error condition

Table 12 – API Gateway Error Response Structure

Non-API Gateway Error (Business & Application)

Field	Optional	Type	Description
errors	Yes	Array	Array containing error information
errors.code	Yes	String	Code associated with the error condition Yes
errors.description	Yes	String	Description of the error condition
errors.cause	Yes	String	Cause of the error (if known)
errors.resolution	Yes	String	Description of the resolution and action required to correct the error

Table 13 – Non-API Gateway Error Response Structure

The following sections describe the content of the business and technical errors returned by Collection Order Handler V1 API with their respective HTTP status code response.

7.2 Business Errors

All errors associated with processing the API requests are returned using the error structure defined in section 7.1.

For missing or empty mandatory field's scenario:

HTTP Status Code	code	description	Cause	resolution
400	E1398	[Field] is required and must not be empty	Missing or empty mandatory field	Check mandatory field(s) and resubmit
400	E1671	Delivery postcode [dpsld] value is not available	Invalid delivery postcode provided	Please check and resubmit
400	E1683	API with input values provided is not supported	Value of 'subscription' cannot be 'false' in current version of this API	Please correct the value of input parameter 'subscription'
400	E1663	API with input values provided is not supported	Value of 'rangeInfo' cannot be 'false' with current version of API	Please correct the 'rangeInfo' value
400	E1672	Mandatory parameters are not provided in request	All parameters required to execute this method is not provided in the request	Please provide all required parameters and try again
400	E1664	Barcode [BarcodeId] is	The Barcode [BarcodeId] is missing in input	Please provide a Barcode [BarcodeId]

		missing as an input parameter		
400	E1682	Product family provided in input is not found in the system	Product family provided in input is not in the system	Check product family and resubmit
400	E1662	Barcode range is not available		
400	E1681	Mandatory parameters are missing for validating the product Family.	The mandatory parameter is missing or blank	Please provide all mandatory parameters
424	E1715	The request failed because it depended on another request and that action failed	The requested action depended on another action and that action failed	Please try again later
500	E0007	Authorisation failure	Incorrect, invalid or missing security credentials provided in API request	Please re-submit your API request with the correct security credentials

Table 14 – API Business Errors

7.2.1 Example Data

Please see below for an example of a business error which is returned which results in an E1329 error being returned. Full JSON example responses are provided on the [Royal Mail API \(Developer\) Portal](#).

```

HTTP/1.1 400
Content-Type: application/json

{
  "httpCode": "400",
  "httpMessage": "Bad Request",
  "errors": [
    {
      "code": "E1398",
      "description": "[Field] is required and must not be empty",
      "cause": "Missing or empty mandatory field",
      "resolution": "Check mandatory field(s) and resubmit"
    }
  ]
}
```

7.3 Technical Errors / Exceptions

The following technical exceptions/error scenarios will be caught and handled as described in the tables below.

The tables below show API Gateway and Application technical errors. Only the most common API Gateway error descriptions are shown, with the HTTP status return code considered adequate for other cases and hence other response codes and descriptions are not listed here.

API Gateway Errors

HTTP Status Code	httpCode	httpMessage	moreInformation
401	401	Unauthorized	Invalid client id or secret
404	404	Not Found	API not found for requested URI
405	405	Method Not Allowed	The method is not allowed for the requested URL
429	429	Too Many Requests	The rate limit has been exceeded for the plan or operation being used.

Table 15 – API Gateway Technical Errors

Application Errors

HTTP Status Code	code	description	cause	resolution
500	E0000	Internal exception occurred	An internal error was identified while attempting to process your API request	Please try again later
503	E0001	Service unavailable	An internal error was identified while attempting to process your API request	Please try again later

Table 16 – Application Technical Errors

For all other technical issues please contact a Royal Mail Support representative by visiting the [Royal Mail API \(Developer\) Portal Support](#) pages.

7.3.1 Example Data

Please see below for examples of both API Gateway and Non-Gateway technical errors which are returned in the event that the rate limit for API calls has been exceeded or if an internal error is encountered whilst processing the request. Full JSON example responses are provided on the [Royal Mail API \(Developer\) Portal](#).

API Gateway Error

```
HTTP/1.1 429
Content-Type: application/json

{
  "httpCode": "429",
  "httpMessage": "Too Many Requests",
  "moreInformation": "The rate limit has been exceeded for the plan or operation being used."
}
```

Non-API Gateway Error

```
HTTP/1.1 500
Content-Type: application/json

{
  "httpCode": "500",
  "httpMessage": "Internal server Error",
  "errors": [
    {
      "code": "E0000",
      "description": "Internal exception occurred",
      "cause": "An internal error was identified while attempting to process your API request",
      "resolution": "Please try again later"
    }
  ]
}
```

8 Non-Functional Characteristics

8.1 Availability

8.1.1 Service Hours

The Order API is available 24 hours per day x 365 days per year.

8.1.2 Maintenance Windows

Royal Mail Online Services Terms and Conditions define the maintenance for this service.

8.1.3 Unavailability

In the unlikely event of the API being unavailable, customer systems should make provision to handle this appropriately.

If you experience issues with the availability of this API please contact a Royal Mail Support representative by visiting the [Royal Mail API \(Developer\) Portal Support](#) pages.

8.2 Performance

Royal Mail aims to respond to calls in less than 5 seconds on average when invoked from the edge of Royal Mail's UK data centre.

8.3 Security

The REST API will only accept requests and return responses over HTTPS. All service requests via the API Management solution will be authorised in accordance with the below security parameters passed in the HTTP headers. This will ensure that any external service requests are authorised and authenticated in line with RMG Security Policies and Standards.

1. Client Id and client secret
2. Client Id and Authorization (Oauth)

9 Frequently Asked Questions

Please see the [FAQ page](#) on the [Royal Mail API \(Developer\) Portal](#) for a general list of frequently asked questions with responses.

All FAQs specific to the API described in this document are listed below.

9.1 Latest versions of Swagger Definition

Question: Where can I find the latest version of the Collection Order Handler V1 API Swagger definition?

Answer: The latest version of the Swagger definition can be found on the 'Royal Mail Collection Order Handler V1 (REST)' page on the [Royal Mail API \(Developer\) Portal](#). The 'Open API' link can be used to download the swagger.

9.2 Sample Code

Question: Do Royal Mail provide any sample code for the Collection Order Handler V1 API to help accelerate my integration?

Answer: Yes, the [Royal Mail API \(Developer\) Portal](#) provides sample code for a number of programming languages including cURL, PHP, Ruby, Python, Java, Node, Go, Swift etc. Please navigate to the 'API Library' and select 'Royal Mail Collection Order Handler V1 REST API'. A variety of programming languages will be provided on the right hand-side of the page.

9.3 API Programming

Question: Can Royal Mail complete the API programming for me?

Answer: Royal Mail only provides user guides to enable an understanding of the API and therefore cannot complete any programming or system development for your business.

9.4 Business Account

Question: I don't have a business account with Royal Mail. Can I use the Collection Order Handler V1 API?

Answer: No – Collection Order Handler V1 API is only available to Royal Mail account holders.

9.5 Application Compatibility

Question: What Software Development Kits or tools have been proven to work with the Collection Order Handler Collection Order Handler V1 API: SoapUI.

Royal Mail, the cruciform, the colour red and all ® are registered trademarks and all ™ are trademarks of Royal Mail Group Ltd. Royal Mail Collection Order Handler V1 (REST) API Technical User Guide Mar 2021 © Royal Mail Group Ltd 2021. All rights reserved.

