


ALB + NLB Architecture :


1. Launch EC2 Instances
 - 3 → Home servers
 - 2 → Mobile servers
 - 2 → Laptop servers

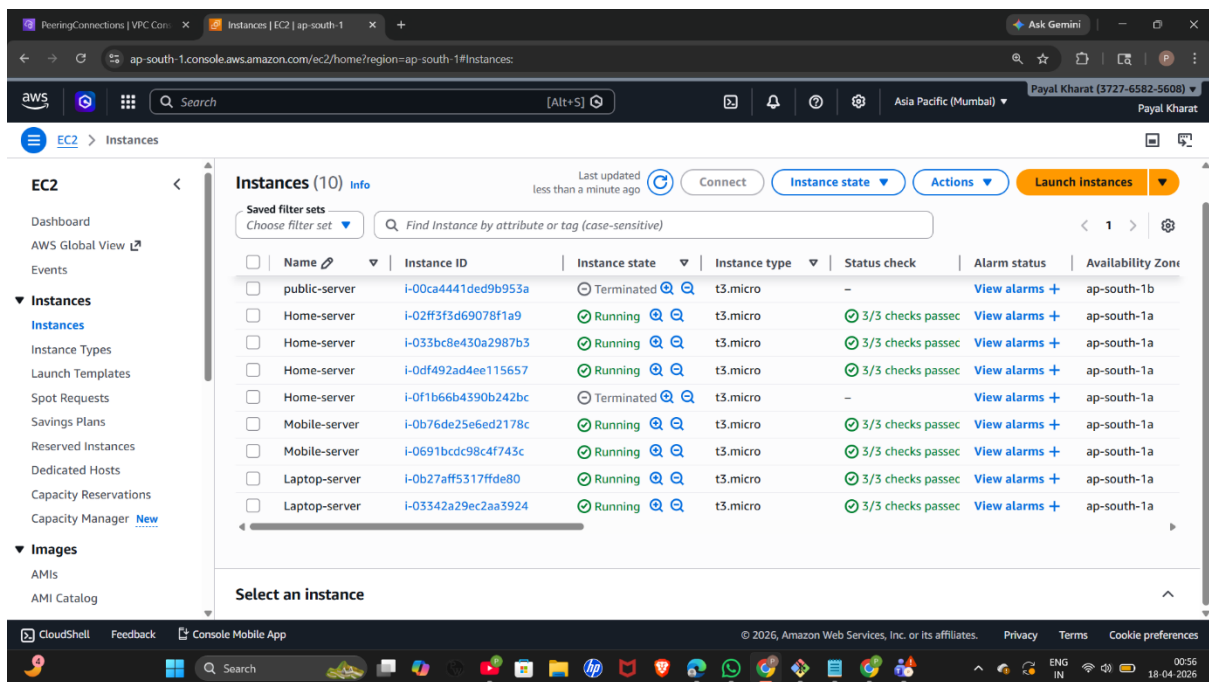


2. Create Target Groups (for ALB)


- Home Target Group
- Mobile Target Group
- Laptop Target Group

Select Target Type as Instance.

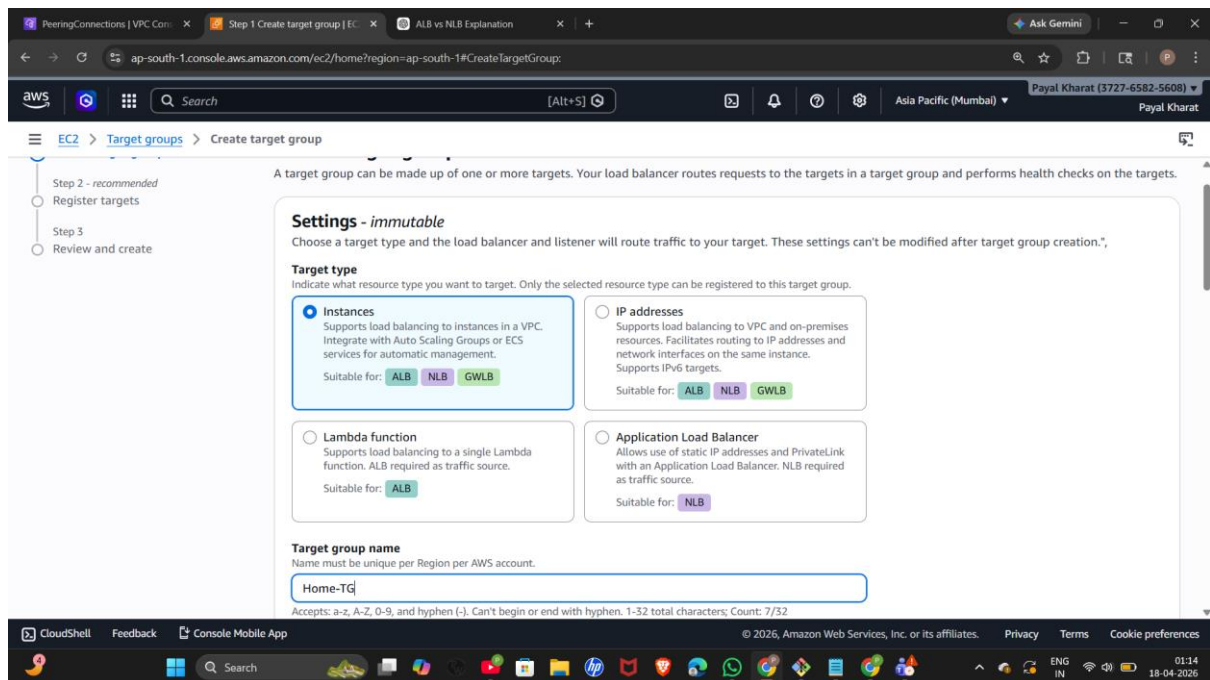


Select Protocol as HTTP.

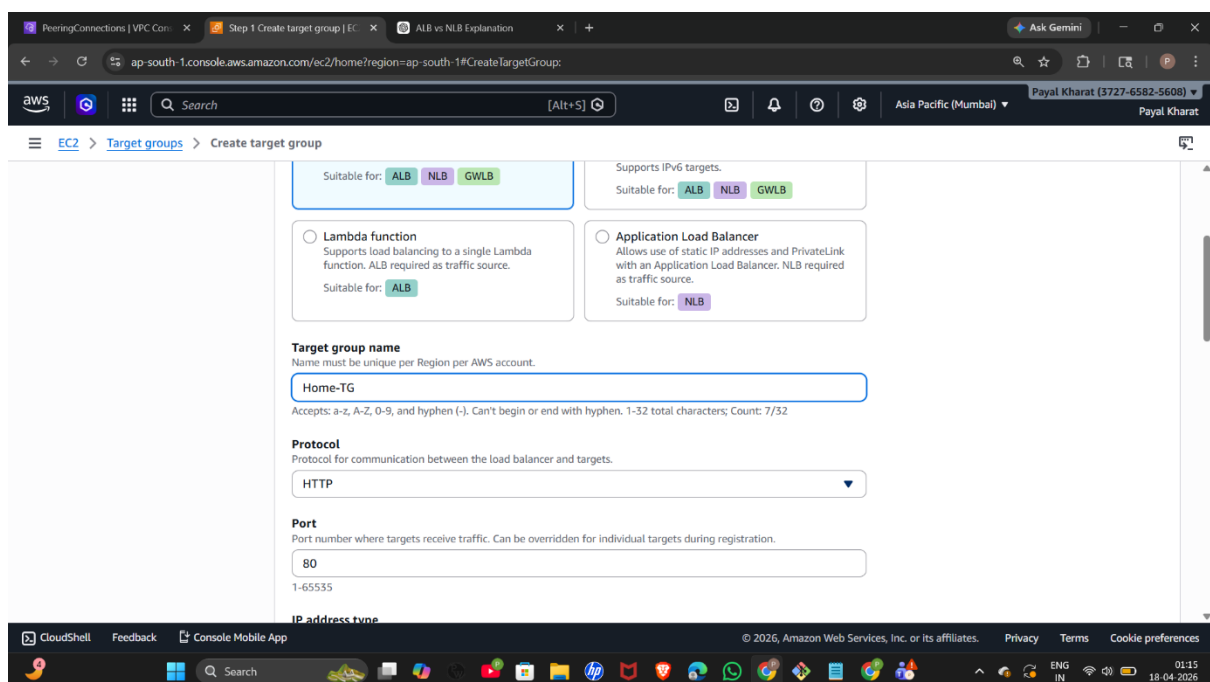


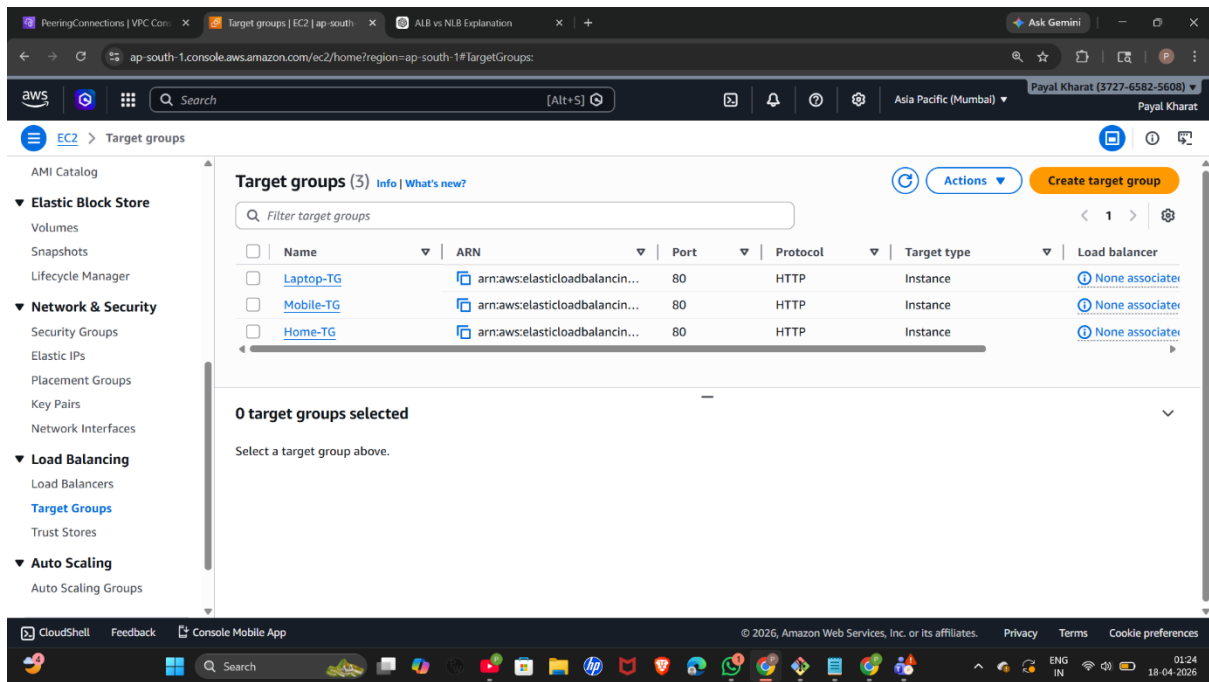

3.Create Application Load Balancer (ALB)

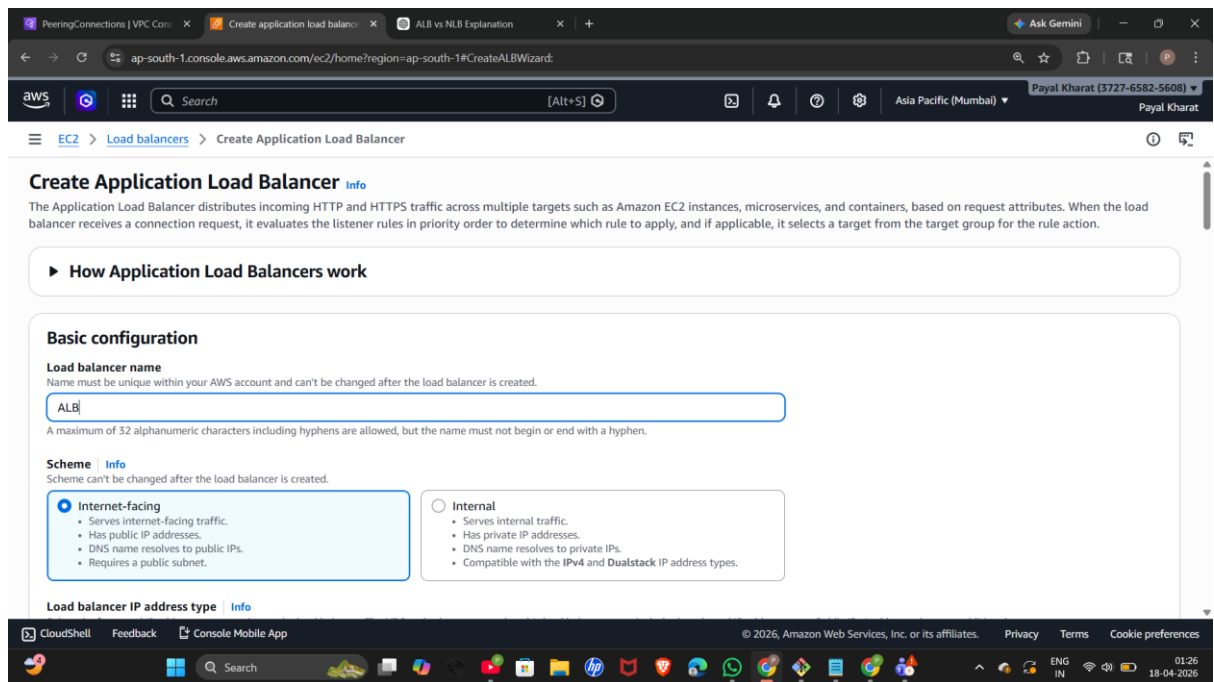


Configure Path-Based Routing

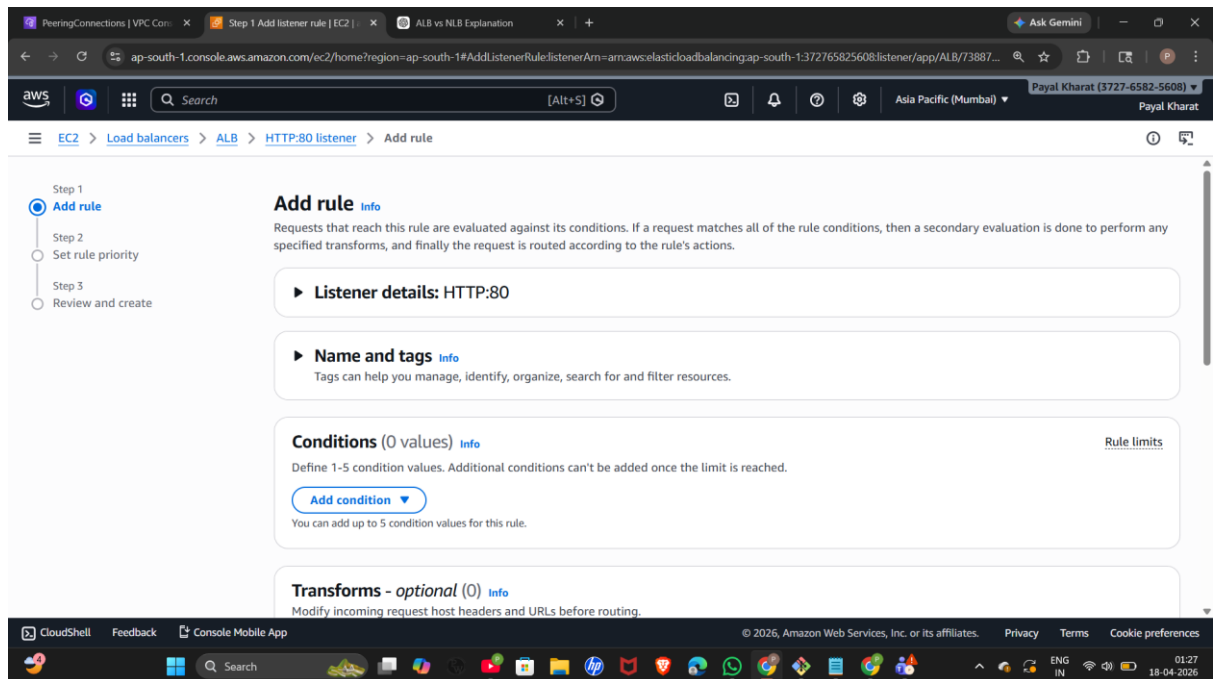


ALB → Listeners → View/Edit Rules


IF Path = /mobile*

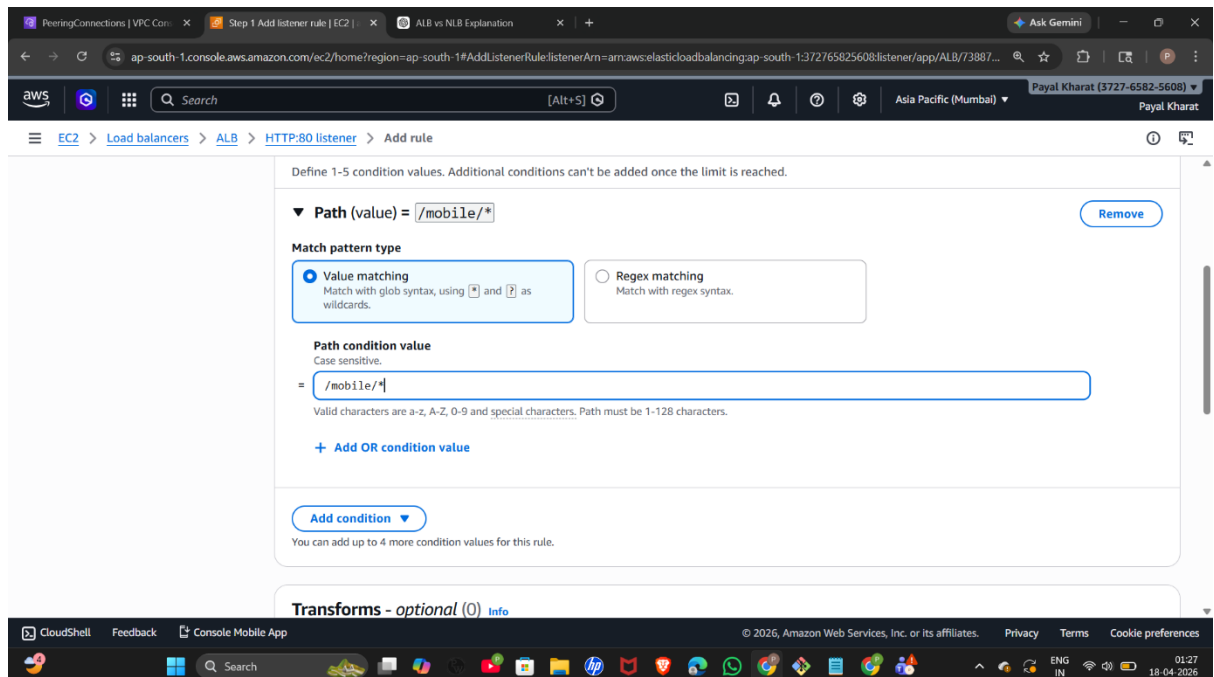

For Laptop-

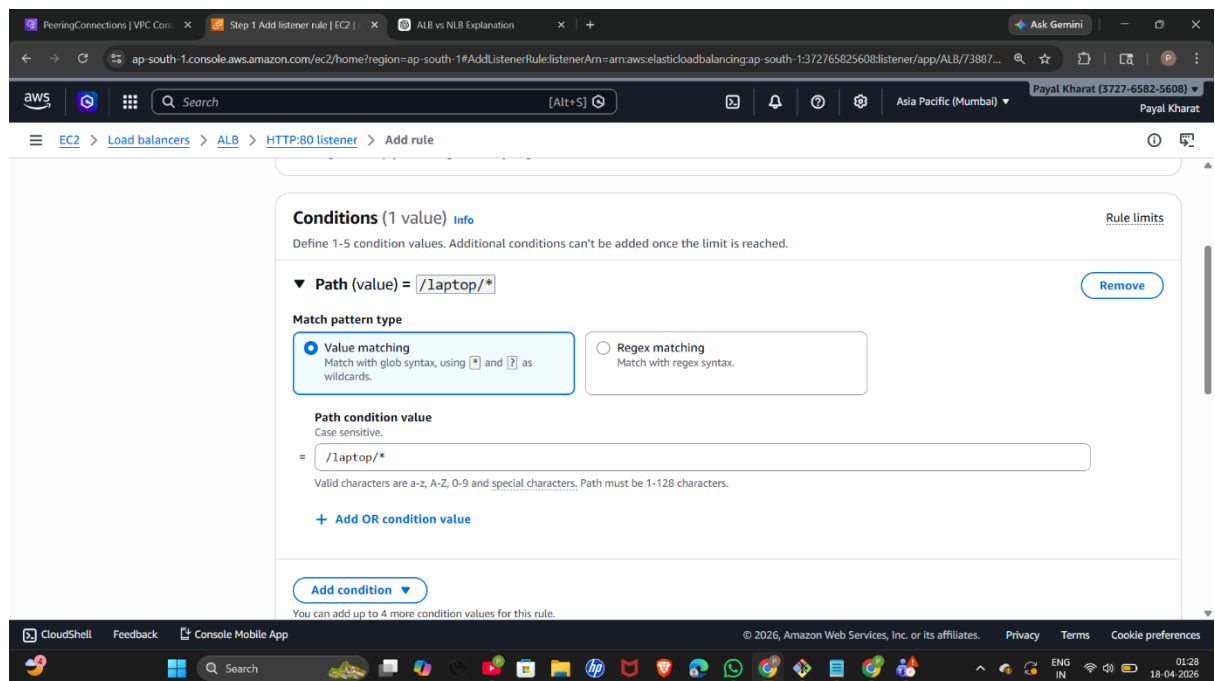

ALB is created.

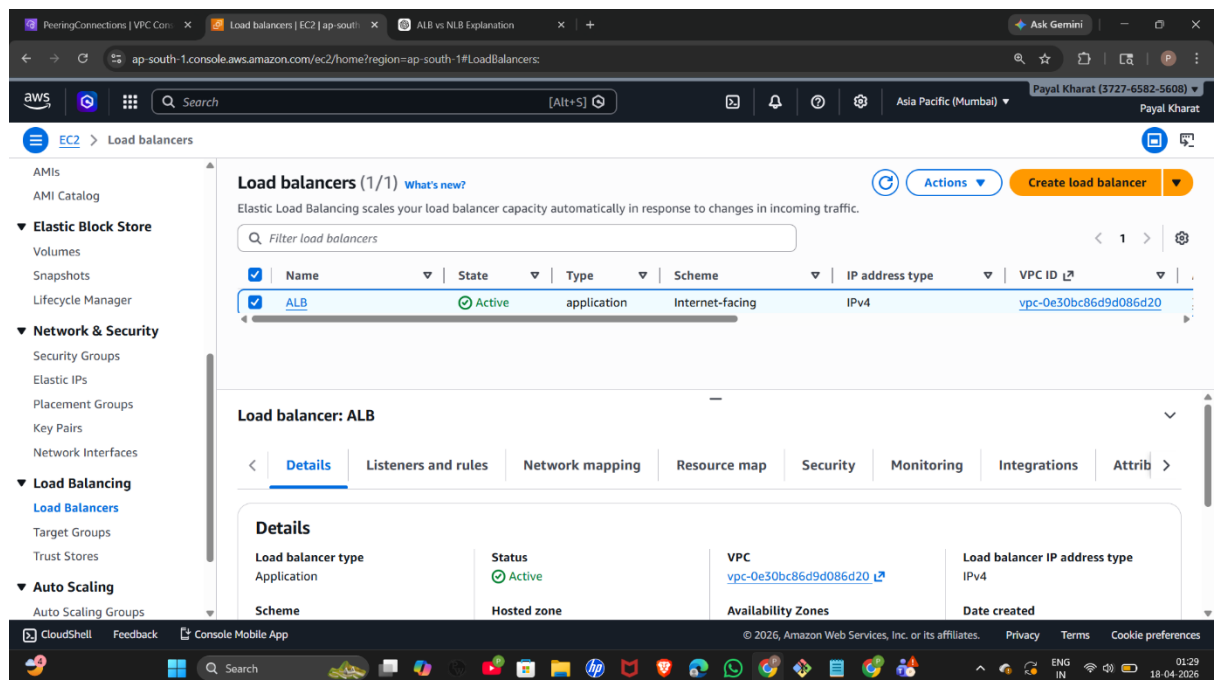

4. Test ALB

http://<ALB-DNS>/
http://<ALB-DNS>/mobile
http://<ALB-DNS>/laptop

5. Create Target Group for NLB (for NLB → ALB)

IMP-Select Target Type as : **Application Load Balancer**

Step 1 **Create target group**

Step 2 - recommended
Register targets

Step 3
Review and create

Create target group

A target group can be made up of one or more targets. Your load balancer routes requests to the targets in a target group and performs health checks on the targets.

Settings - immutable
Choose a target type and the load balancer and listener will route traffic to your target. These settings can't be modified after target group creation.

Target type
Indicate what resource type you want to target. Only the selected resource type can be registered to this target group.

- ☐ **Instances**
Supports load balancing to instances in a VPC. Integrate with Auto Scaling Groups or ECS services for automatic management.
Suitable for: ALB NLB GWLB
- ☐ **IP addresses**
Supports load balancing to VPC and on-premises resources. Facilitates routing to IP addresses and network interfaces on the same instance. Supports IPv6 targets.
Suitable for: ALB NLB GWLB
- ☐ **Lambda function**
Supports load balancing to a single Lambda function. ALB required as traffic source.
Suitable for: ALB
- ☒ **Application Load Balancer**
Allows use of static IP addresses and PrivateLink with an Application Load Balancer. NLB required as traffic source.
Suitable for: NLB

Target group name
Maximum length is 63 characters. Allowed characters are alphanumeric and hyphen (-). Cannot start or end with a hyphen (-) or contain two consecutive hyphens (--).

Select ALB which we created earlier.

Step 1
Create target group

Step 2 - recommended
Register targets

Step 3
Review and create

Register targets - recommended

This is an optional step to create a target group. However, to ensure that your load balancer routes traffic to this target group you must register your targets.

Register Application Load Balancer
You can specify a single Application Load Balancer as the target.

☒ Register now ☐ Register later

Port
The Application Load Balancer target will receive traffic on this port and must have a listener on the same port.

☒ Use the target group port 80
☐ Specify an override port


Application Load Balancer
Choose an Application Load Balancer from the list, or create a new one and refresh the list to select it.

ALB [Create Application Load Balancer](#)


[View load balancer](#)


The selected load balancer has a listener on port 80.

Target Group for NLB is created.

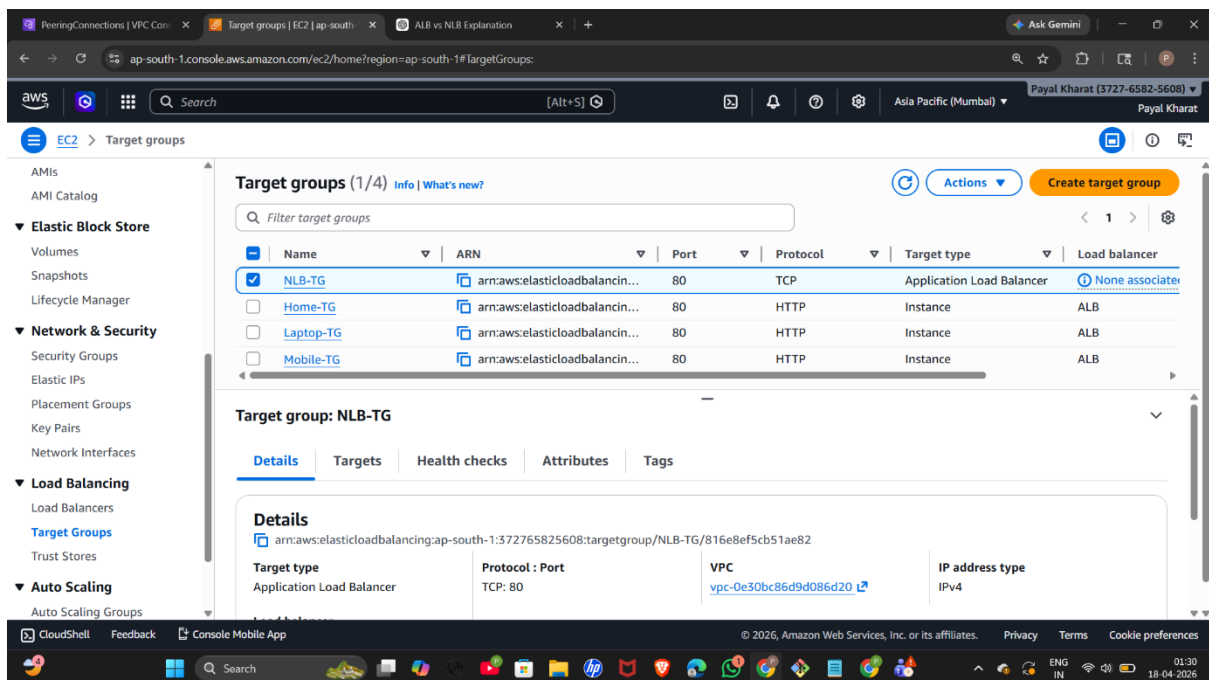


6. Create Network Load Balancer (NLB)

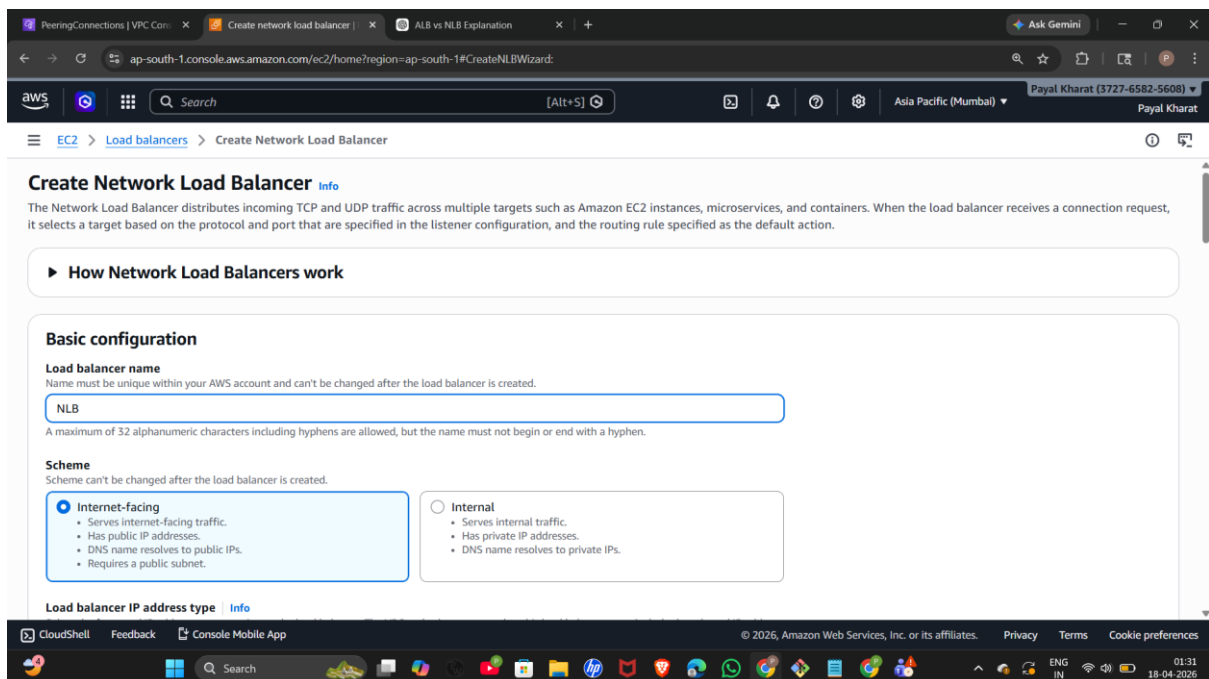


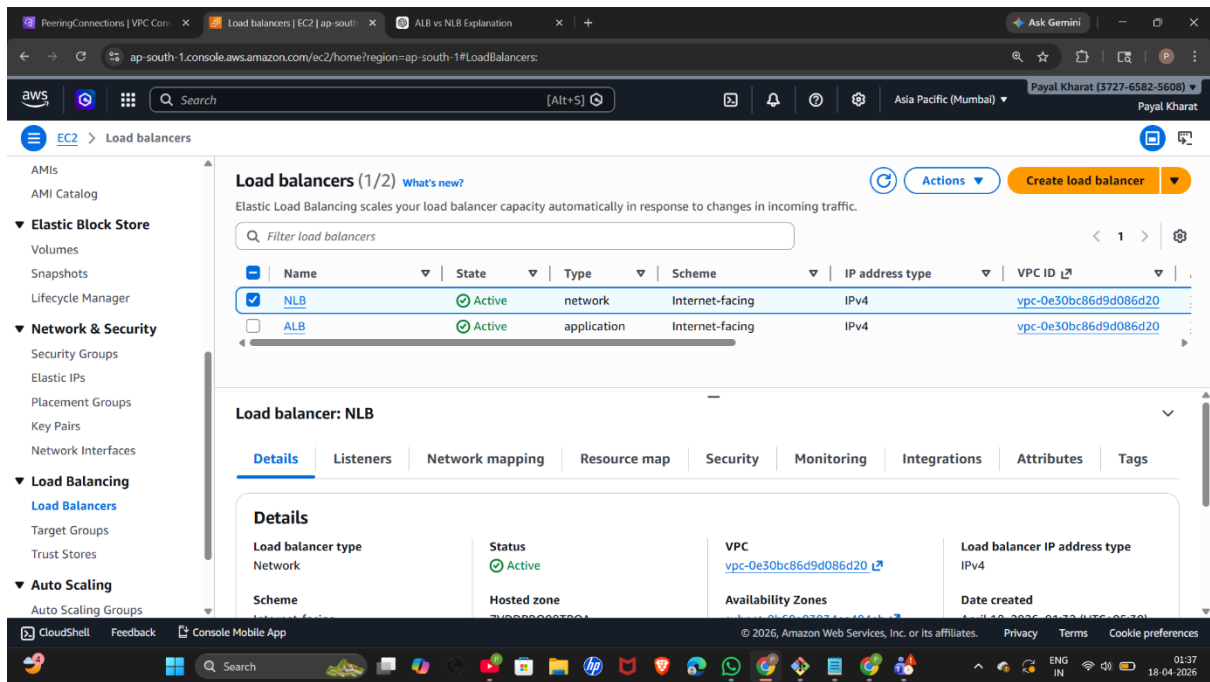


Copy the DNS of NLB and hit it on chrome.

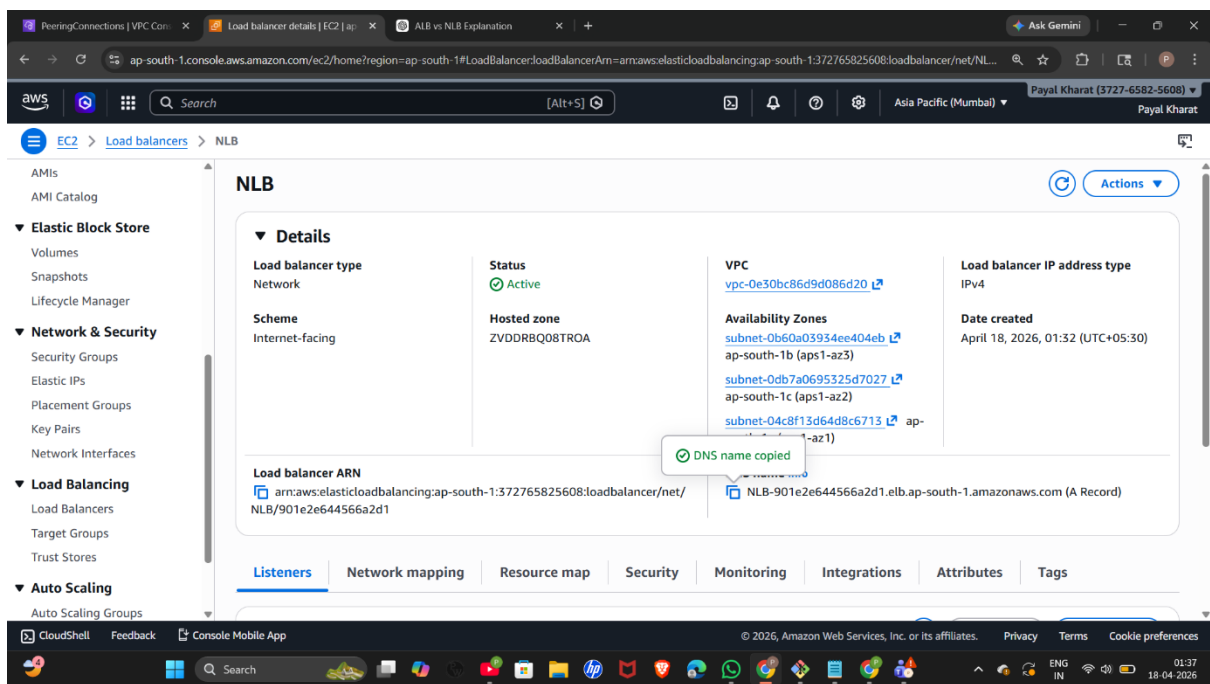

Home Page.

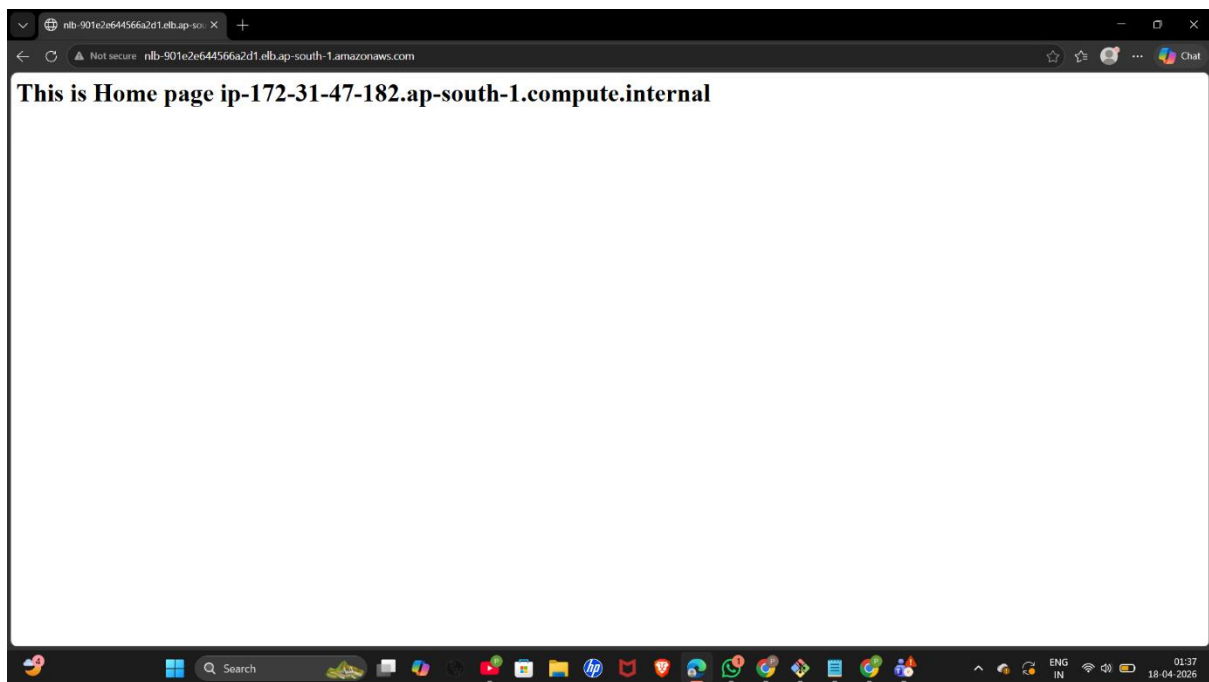

Mobile Page .

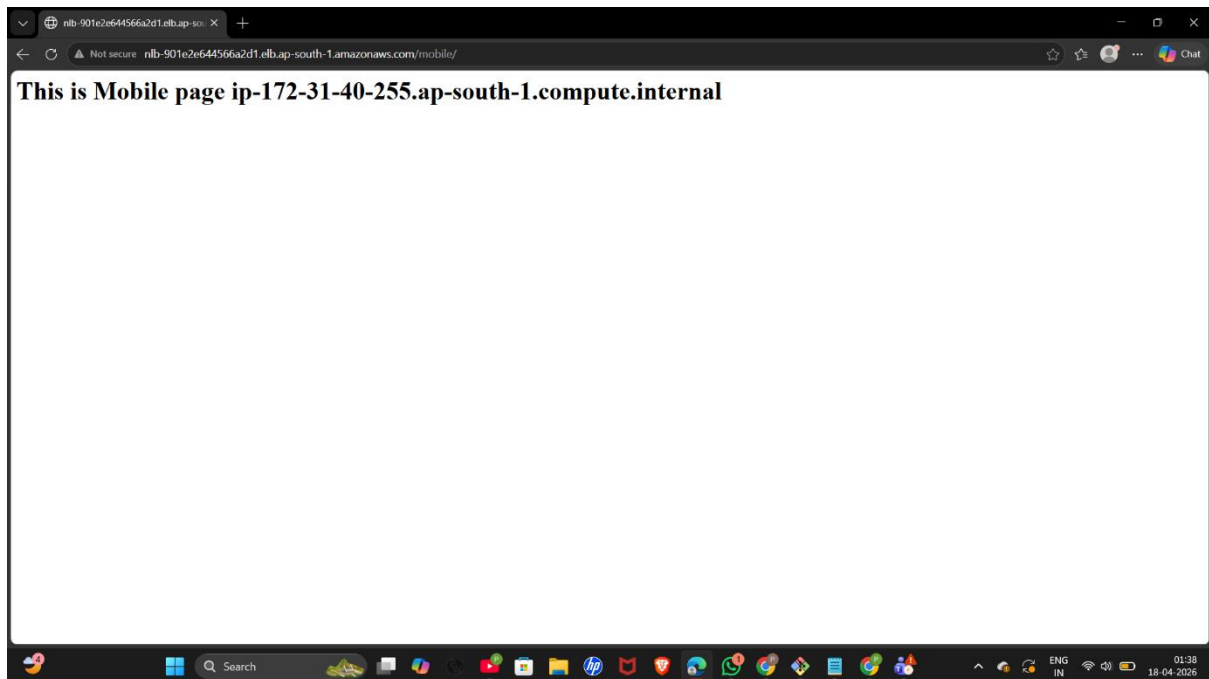

Laptop Page.

