


Git Lab – 01:

Task – 1:

Establish a local repository for your project with a descriptive name. Set up Git configurations by adding a username and email address. Display and modify the Git configurations, and verify if the changes are reflected in the .git/config file post-editing. Showcase the utilization of both Git Local and Global configurations.

Implementation:

1. Created a Repo for project and set up git global configuration.

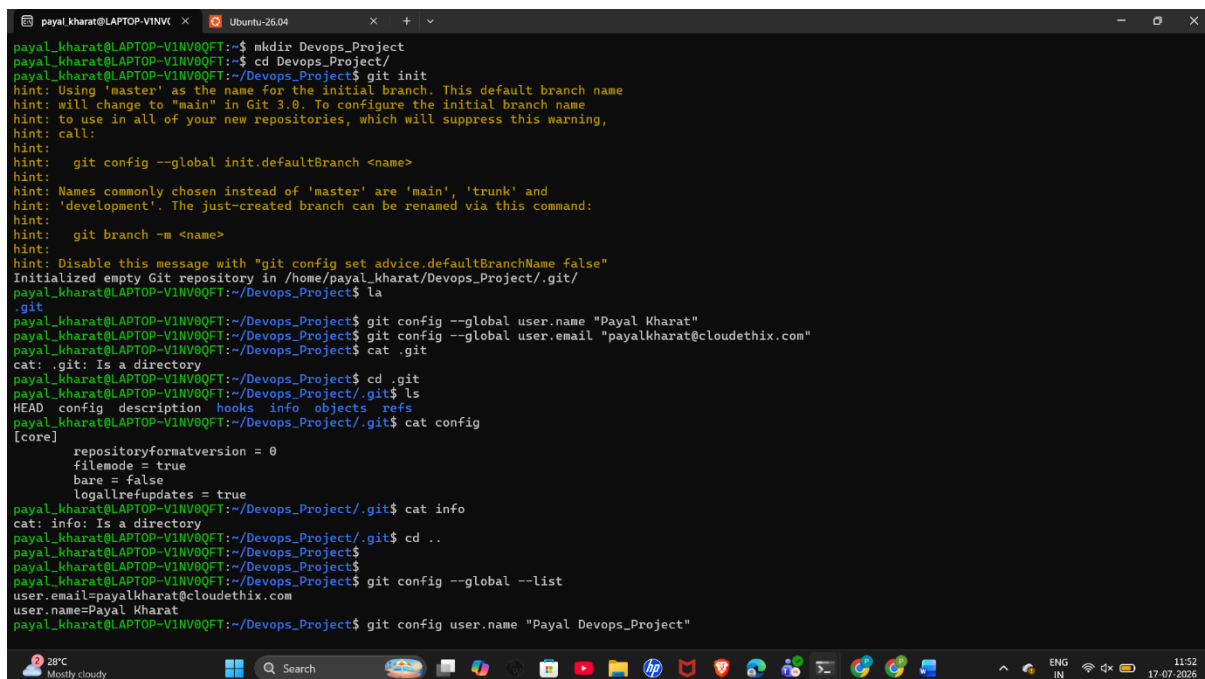

```
payal_kharat@LAPTOP-V1NV0QFT:~$ mkdir Devops_Project
payal_kharat@LAPTOP-V1NV0QFT:~$ cd Devops_Project/
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to 'main' in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/payal_kharat/Devops_Project/.git/
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ ls
.git
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --global user.name "Payal Kharat"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --global user.email "payalkharat@cloudethix.com"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cat .git
cat: .git: Is a directory
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cd .git
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ ls
HEAD  config  description  hooks  info  objects  refs
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cat config
[core]
  repositoryformatversion = 0
  filemode = true
  bare = false
  logallrefupdates = true
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cat info
cat: info: Is a directory
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cd ..
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --global --list
user.email=payalkharat@cloudethix.com
user.name=Payal Kharat
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config user.name "Payal Devops_Project"
```

2. Displayed and modify local git configuration.

```
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --global --list
user.email=payalkharat@cloudethix.com
user.name=Payal Kharat
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config user.name "Payal Devops_Project"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config user.email "devops@gmail.com"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --list
user.email=payalkharat@cloudethix.com
user.name=Payal Kharat
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
user.name=Payal Devops_Project
user.email=devops@gmail.com
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config user.name "Payal Kharat"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config user.email "payalkharat@gmail.com"
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ git config --list
user.email=payalkharat@cloudethix.com
user.name=Payal Kharat
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
user.name=Payal Kharat
user.email=payalkharat@gmail.com
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cd .git
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ ls
HEAD config description hooks info objects refs
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cat config
[core]
    repositoryformatversion = 0
    filemode = true
    bare = false
    logallrefupdates = true
[user]
    name = Payal Kharat
    email = payalkharat@gmail.com
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cd ..
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cd ..
payal_kharat@LAPTOP-V1NV0QFT:~$ ls
CloudEthixDevops  cloudethix_devops_payalkharat  free-for-dev  merge_confilct_demo  stash_demo
```

3. Displayed the Global git configuration.

```
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cd .git
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ ls
HEAD config description hooks info objects refs
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cat config
[core]
    repositoryformatversion = 0
    filemode = true
    bare = false
    logallrefupdates = true
[user]
    name = Payal Kharat
    email = payalkharat@gmail.com
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project/.git$ cd ..
payal_kharat@LAPTOP-V1NV0QFT:~/Devops_Project$ cd ..
payal_kharat@LAPTOP-V1NV0QFT:~$ ls
CloudEthixDevops  cloudethix_devops_payalkharat  free-for-dev  merge_confilct_demo  stash_demo
Devops_Project    cloudethix_git_payal          git_branch_demo  revert_repo
payal_kharat@LAPTOP-V1NV0QFT:~$ ls -a
.      .bashrc      .lessshst      .viminfo      cloudethix_git_payal  revert_repo
..     .cache       .local         CloudEthixDevops  free-for-dev         stash_demo
.      .bash_history .config        .motd_shown    Devops_Project      git_branch_demo
.      .bash_logout .gitconfig     .profile       cloudethix_devops_payalkharat  merge_confilct_demo
payal_kharat@LAPTOP-V1NV0QFT:~$ cat .gitconfig
[user]
    email = payalkharat@cloudethix.com
    name = Payal Kharat
payal_kharat@LAPTOP-V1NV0QFT:~$ |
```

Task – 2:

Set up a local repository for your project with a meaningful name. Explore the default branch in the local Git repository. Sequentially create five files, committing each with informative messages. Share the Git log output through multiple methods once the process is complete.

Implementation:

1. Set up a local repository for project Pandharpur_Project and Explore the default branch in the local Git repository.

```
payal_kharat@LAPTOP-V1NV0QFT:~$ mkdir Pandharpur_project
payal_kharat@LAPTOP-V1NV0QFT:~$ cd Pandharpur_project/
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to 'main' in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/payal_kharat/Pandharpur_project/.git/
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git branch
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)
```

2. Added five files.

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ echo "This is file_1" > file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ ls
file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file1.txt
fatal: pathspec 'file1.txt' did not match any files
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ echo "This is file_2" > file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ echo "This is file_3" > file3.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ echo "This is file_4" > file4.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ echo "This is file_5" > file5.txt
```

3. Commit each file with message:

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git commit -m "file1.txt is added"
[master (root-commit) 90d5ef0] file1.txt is added
1 file changed, 1 insertion(+)
create mode 100644 file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git commit -m "file2.txt is added"
[master be2bb68] file2.txt is added
1 file changed, 1 insertion(+)
create mode 100644 file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file3.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git commit -m "file3 is added"
[master 66eaabd] file3 is added
1 file changed, 1 insertion(+)
create mode 100644 file3.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file4.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git commit -m "file4 is added"
[master d814c2a] file4 is added
1 file changed, 1 insertion(+)
create mode 100644 file4.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git add file5.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git commit -m "file5 is added"
[master 6d5e3ce] file5 is added
1 file changed, 1 insertion(+)
create mode 100644 file5.txt
```

4. Git log output using # git log

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log
commit 6d5e3ce7f9421d2fea0116b716d848e7a2e1400e (HEAD -> master)
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:45:11 2026 +0000

    file5 is added

commit d814c2ab2cdf385c5e5ec89838b1f0eb270cef72
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:44:59 2026 +0000

    file4 is added

commit 66eaabd00227c921b7e170f8b679481087fd5044
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:44:40 2026 +0000

    file3 is added

commit be2bb6823688f61bb24ba0256e6615850de318bd
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:44:18 2026 +0000

    file2.txt is added

commit 9045ef0b6ef663b2a7b82bc9fd6f4dbf92a0eae5
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:43:54 2026 +0000

    file1.txt is added
```

5. Git log output using # git log --oneline

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log --oneline
6d5e3ce (HEAD -> master) file5 is added
d814c2a file4 is added
66eaabd file3 is added
be2bb68 file2.txt is added
9045ef0 file1.txt is added
```

6. Git log output using # git log --oneline --graph # git log --online --decorate

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log --oneline --graph
* 6d5e3ce (HEAD -> master) file5 is added
* d814c2a file4 is added
* 66eaabd file3 is added
* be2bb68 file2.txt is added
* 9045ef0 file1.txt is added
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log --online --decorate
fatal: unrecognized argument: --online
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log --oneline --decorate
6d5e3ce (HEAD -> master) file5 is added
d814c2a file4 is added
66eaabd file3 is added
be2bb68 file2.txt is added
9045ef0 file1.txt is added
```

7. Git log Output using # git log --stat

```
payal_kharat@LAPTOP-V1NV0QFT:~/Pandharpur_project$ git log --stat
commit 6d5e3ce7f9421d2fea0116b716d848e7a2e1400e (HEAD -> master)
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:45:11 2026 +0000

    file5 is added

    file5.txt | 1 +
    1 file changed, 1 insertion(+)

commit d814c2ab2cdf385c5e5ec89838b1f0eb270cef72
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:44:59 2026 +0000

    file4 is added

    file4.txt | 1 +
    1 file changed, 1 insertion(+)

commit 66eaabd00227c921b7e170f8b679481087fd5044
Author: Payal Kharat <payalkharat@cloudethix.com>
Date:   Fri Jul 17 04:44:40 2026 +0000

    file3 is added

    file3.txt | 1 +
    1 file changed, 1 insertion(+)

commit be2bb6823688f61bb24ba0256e6615850de318bd
Author: Payal Kharat <payalkharat@cloudethix.com>
```

Task – 3: Open a GitHub account and initiate a remote Git repository. Examine the default branch in the remote repository. Create and commit the following files one by one with meaningful commit messages:

i. README.md


ii. send_disk_alert.sh

iii. create_users.sh


iv. check_service.sh.

Implementation:


1. initiated a remote Git repository with name server_script.

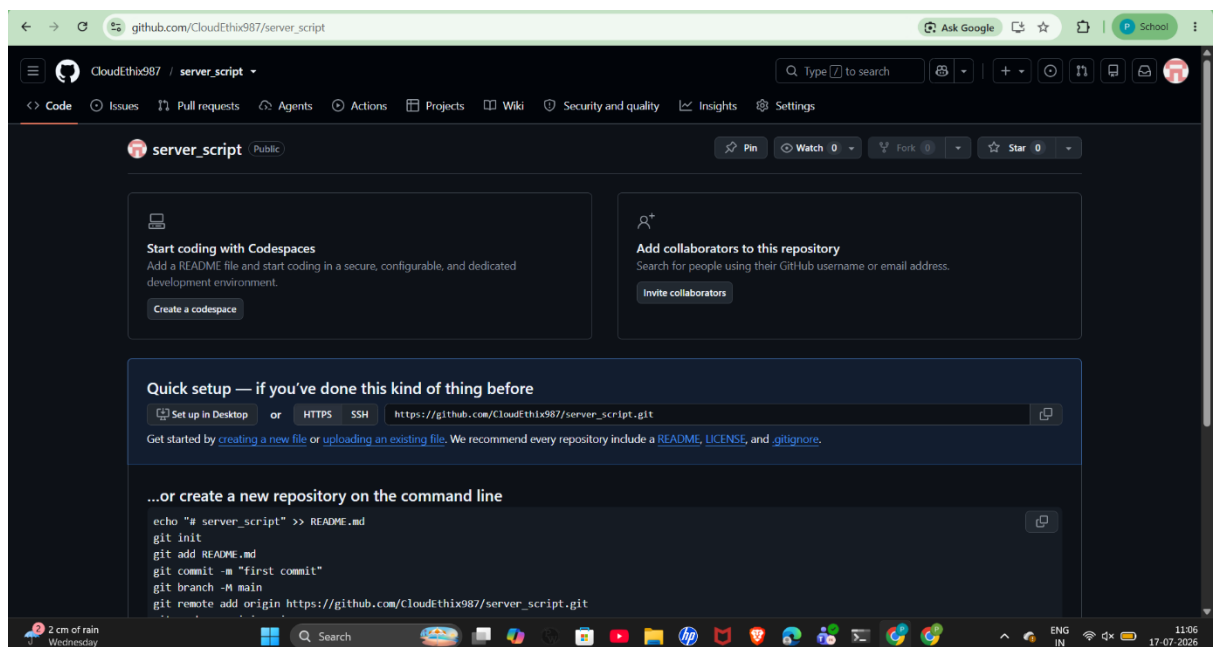


Default branch is main

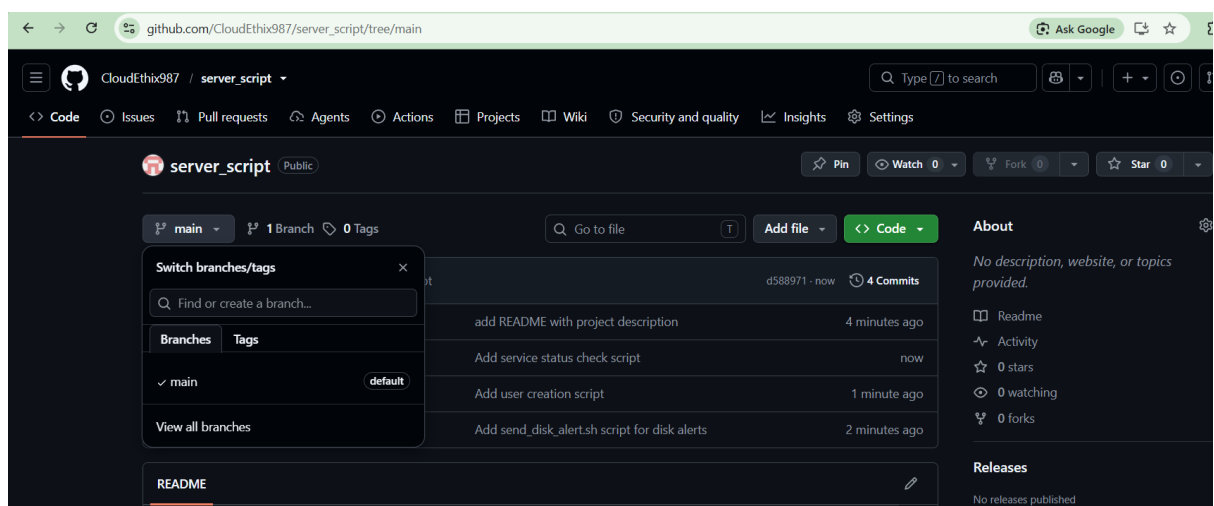

2. Files created and committed.

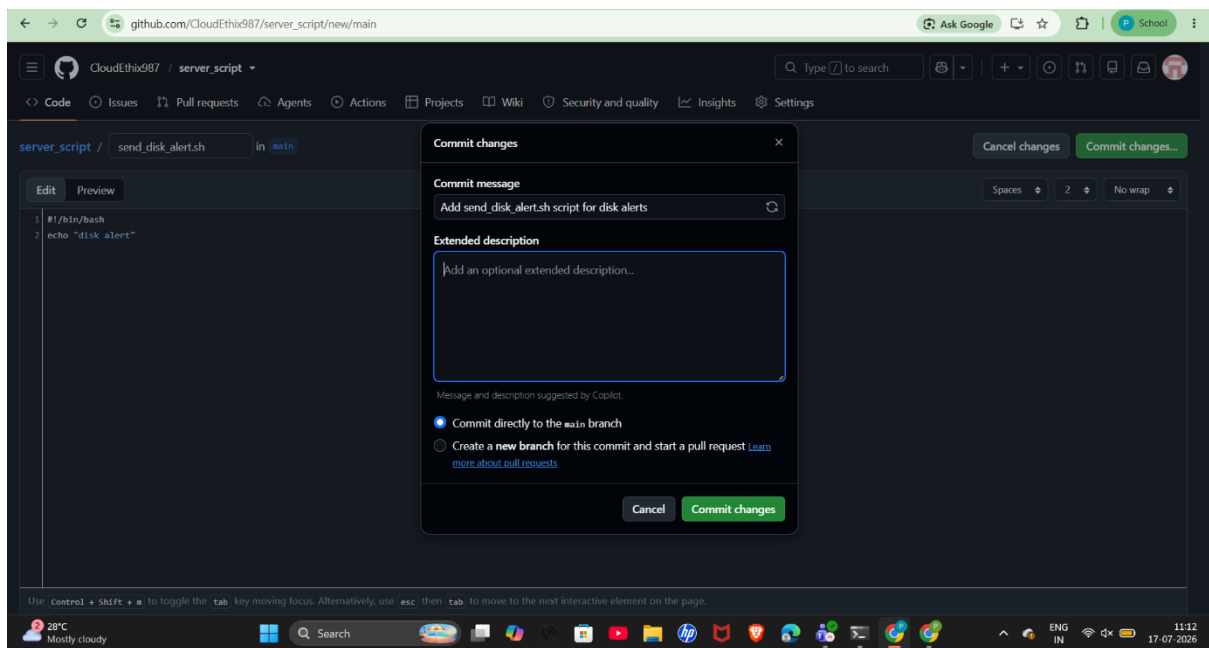

3. All five files created and committed with commit message.

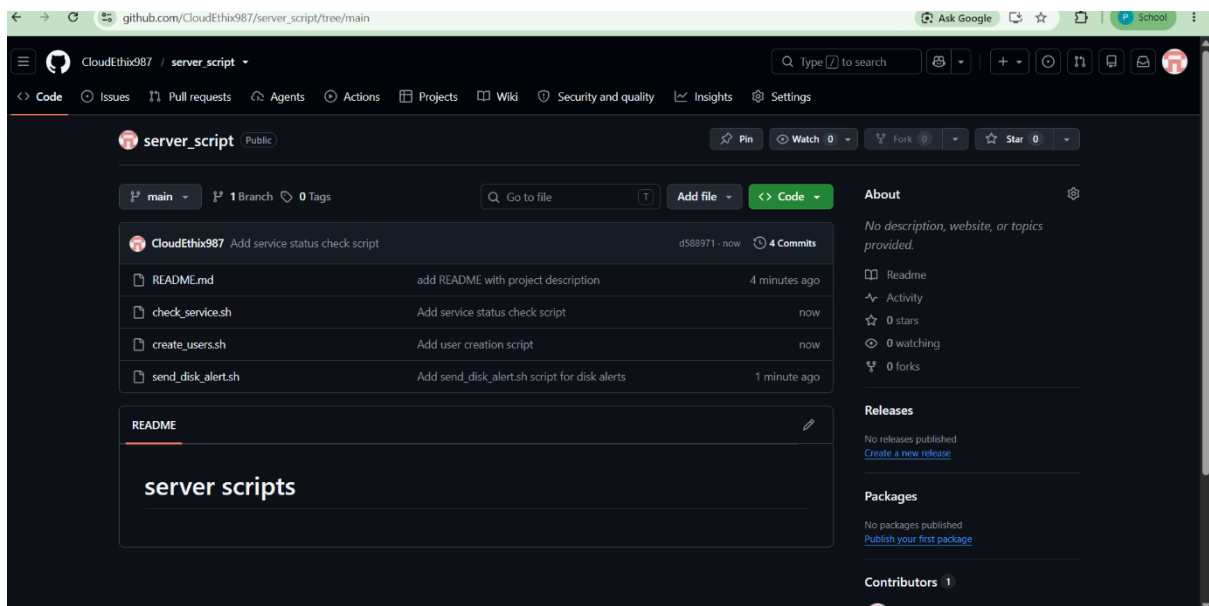

Task – 4:

Establish a local repository for your project with a descriptive name. Illustrate the implementation of a Git-Ignore file by committing multiple files to the local repository.

Implementation:

1. Established a local repository for project with name Student_Website .

```
payal_kharat@LAPTOP-V1NVQFT:~$ mkdir Student_Website
payal_kharat@LAPTOP-V1NVQFT:~$ cd Student_Website/
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/payal_kharat/Student_Website/.git/
```

2. The implementation of a Git-Ignore file with committing files to the local repository.

```
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ touch app.py
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ touch config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ touch README.md
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ rm app.py
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ rm config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ rm README.md
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo # Student Website > README.md
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo print('Hello World') > app.py
-bash: syntax error near unexpected token '('
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo "print('Hello World')" > app.py
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
app.py
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo "# Student Website" > README.md
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
README.md app.py
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo "DB_PASSWORD=12345" > config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
README.md app.py config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ echo "Log data" > app.log
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
README.md app.log app.py config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ touch .gitignore
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ ls
README.md app.log app.py config.env
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ vim .gitignore
payal_kharat@LAPTOP-V1NVQFT:~/Student_Website$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  .gitignore
  README.md
  app.py

nothing added to commit but untracked files present (use "git add" to track)
```

```

payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ touch .gitignore
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ ls
README.md  app.log  app.py  config.env
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ vim .gitignore
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        README.md
        app.py

nothing added to commit but untracked files present (use "git add" to track)
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ git add .
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ git commit -m "initil project setup"
[master (root-commit) d59ce32] initil project setup
 3 files changed, 10 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 README.md
 create mode 100644 app.py
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ git status
On branch master
nothing to commit, working tree clean
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ git status --ignored
On branch master
Ignored files:
  (use "git add -f <file>..." to include in what will be committed)
        app.log
        config.env

nothing to commit, working tree clean
payal_kharat@LAPTOP-V1NV0QFT:~/Student_Website$ |

```

Task – 5:

Create a local repository with a meaningful project name. Demonstrate the utilization of GIT working area, staging area, and commit area. Experiment with committing, deleting, and restoring files from the repository. Additionally, add files to the staging area and restore them from the staging area.

Implementation:

1. Created a local repo with name Git_Demo_Project.

```
payal_kharat@LAPTOP-V1NV0 QFT:~$ mkdir Git_Demo_Project
cd Git_Demo_Project
git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/payal_kharat/Git_Demo_Project/.git/
```

- 2 . Utilization of committing, deleting, and restoring files from the repository.

```
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ echo "Welcome to Git Demo" > file1.txt
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    file1.txt

nothing added to commit but untracked files present (use "git add" to track)
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git add file1.txt
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   file1.txt

payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git commit -m "file one is added"
[master (root-commit) 16978e4] file one is added
 1 file changed, 1 insertion(+)
 create mode 100644 file1.txt
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git status
On branch master
nothing to commit, working tree clean
```

- 3 . Restore file from staging area.

```
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ vim file1.txt
Welcome to Git Demo

start learning with GIT
~
~
~
~

payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ vim file1.txt
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git status
On branch master

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   file1.txt

no changes added to commit (use "git add" and/or "git commit -a")
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git restore file1.txt
payal_kharat@LAPTOP-V1NV0 QFT:~/Git_Demo_Project$ git status
On branch master
nothing to commit, working tree clean
```

4 . Restore file to local after deleting.

```
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ rm file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ ls
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git restore file1.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ ls
file1.txt
```

5 . Restoring file to staging area after committing file .

```
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git add file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   file2.txt

payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git restore --staged file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ ls
file1.txt  file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    file2.txt

nothing added to commit but untracked files present (use "git add" to track)
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git add file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   file2.txt

payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git commit -m "file2.txt is added"
[master 6198f22] file2.txt is added
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file2.txt
payal_kharat@LAPTOP-V1NV0QFT:~/Git_Demo_Project$ git status
On branch master
nothing to commit, working tree clean
```