Scala – From Zero to Testing

https://github.com/ericssmith/neb15

Eric Smith


Goals

Understand library APIs

Write principled code

Organize larger programs

Morning Agenda

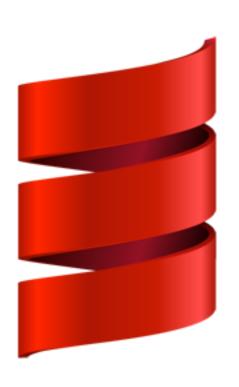

Intro


IntelliJ

Essentials

Collections

Sequencing

Afternoon Agenda

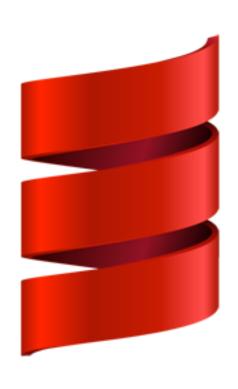

Option


I/O

Java

Testing

Libraries

Scalable language

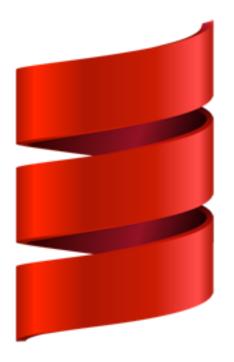

Scalable language



Scaling

Users Features Developers Servers

Concepts

Expressions

Functions as values

Subtyping

Polymorphism

Algebraic types

Pattern matching

Abstract types

Modules

Use the worksheet (REPL)

Code with expressions




... the thing an expression denotes, i.e., its "value", depends only on the values of its sub-expressions

Peter Landin



Think in functions

What is the relation?

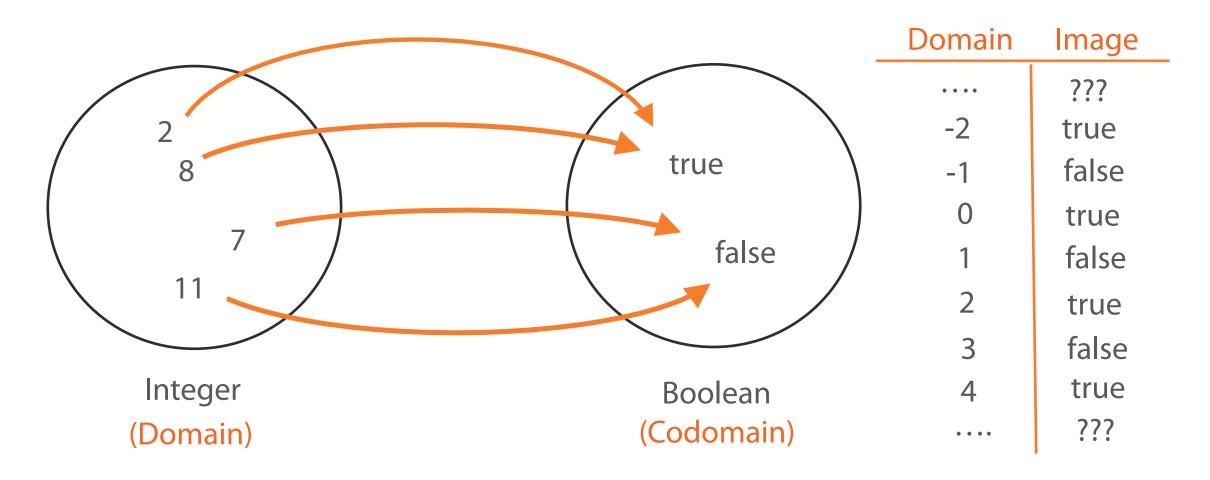

Scala has modules

Modules

Compile faster

Avoid name collisions

Hide things

Use algebraic types

Algebra

Elements of one or more sets

Operations on elements of sets

Rules for relating the operations

Cartesian Product

Combining elements from multiple sets

•

Product | "Product type"

•


Disjoint Union "Sum type"

Union of two or more sets without overlap

Haskell

OCaml

List from cons cells

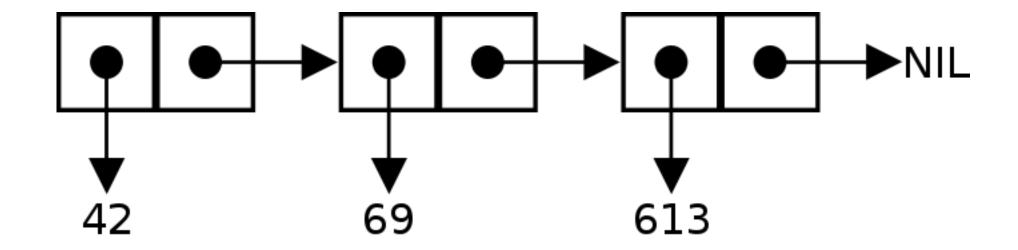


List(42, 69, 613)

42::69::613::NIL

Cons(42, Cons(69, Cons(613, NIL)))

Know the Collections

Scala Libraries

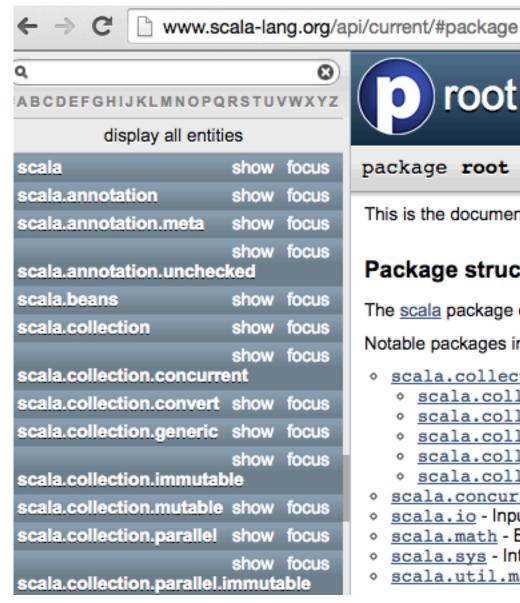



package root

This is the documentation for the Scala standard library.

Package structure

The scala package contains core types like Int, Float, Array or Option which are ac Notable packages include:

- scala.collection and its sub-packages contain Scala's collections framework
 - scala.collection.immutable Immutable, sequential data-structures such a
 - scala.collection.mutable Mutable, sequential data-structures such as Ar:
 - scala.collection.concurrent Mutable, concurrent data-structures such as
 - scala.collection.parallel.immutable Immutable, parallel data-structur
 - scala.collection.parallel.mutable Mutable, parallel data-structures su
- scala.concurrent Primitives for concurrent programming such as Futures and
- scala.io Input and output operations
- scala.math Basic math functions and additional numeric types like BigInt and B:
- scala.sys Interaction with other processes and the operating system
- scala.util.matching Regular expressions

Collections – Performance

	head	tail	apply	update	prepend	append	insert
immutable							
List	С	С	L	L	С	L	-
Stream	С	С	L	L	С	L	-
Vector	eC	eC	eC	eC	eC	eC	-
Stack	С	С	L	L	С	С	L
Queue	aC	aC	L	L	L	С	-
Range	С	С	С	-	-	-	-
String	С	L	С	L	L	L	-

С	The operation takes (fast) constant time.
eC	The operation takes effectively constant time, but this might depend on some assumptions such as maximum length of a vector or distribution of hash keys.
aC	The operation takes amortized constant time. Some invocations of the operation might take longer, but if many operations are performed on average only constant time per operation is taken.
Log	The operation takes time proportional to the logarithm of the collection size.
L	The operation is linear, that is it takes time proportional to the collection size.
-	The operation is not supported.

Use Option

Prefer Option functions over pattern matching


Use Scalaz Disjunction \/

Keep side-effecting code on the outside of the program

Avoid statements and variable assignment

Von Neumann programming languages use variables to imitate the computer's storage cells; control statements elaborate its jump and test instructions; and assignment statements imitate its fetching, storing, and arithmetic.

Manchester "Baby"

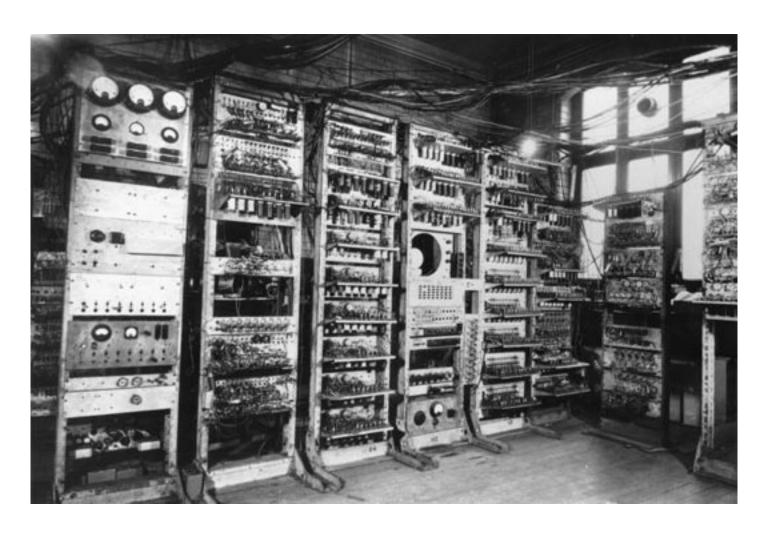

But one day it stopped, and there, shining brightly in the expected place, was the expected answer. It was a moment to remember. This was in June 1948, and nothing was ever the same again.

... the realization came over me with full force that a good part of the remainder of my life was going to be spent in finding errors in my own programs.

Maurice Wilkes