

PART 2

Week 6: The Web

1 HTTP

1.1. Setup

1.2. Exploring HTTP

1.3. Online research

1.4. A server in Java

2 HTML5

Video

2.1. Basic HTML5

2.2. Templates

Week 7: CSS

3 CSS

3.1. Styling Text

3.2. Frameworks

4 CSS grids

4.2. Curriculum exercise

4.3. Trees exercise (responsive layout)

Week 8: Javascript

Week 9: Web Scraping

7 Web Scraping

7.1. Crawling

7.2. BeautifulSoup

Week 10: Practical Encryption

8 Practical Encryption

8.1. OpenSSL

8.2. PGP

Vagrantfile

Mock Exam(Part 2)

Week 6: The Web

1 HTTP

1.1. Setup

1.2. Exploring HTTP

1.3. Online research

The fragment part of a URL.

The URI fragment is the optional part at the end of a URL which starts with a hash (#) character. It lets you refer to a specific part of the document you've accessed.

source: [How to Share Links that Anchor to Any Text on a Webpage](#)

URL: [hash property - Web APIs | MDN](#)

The Accept header sent by the HTTP client.

The Accept request HTTP header indicates which content types, expressed as MIME types, the client is able to understand

source: [Accept - HTTP | MDN](#)

The User-agent header sent by the HTTP client. What does your browser send?

The User-Agent request header is a characteristic string that lets servers and network peers identify the application, operating system, vendor, and/or version of the requesting user agent.

source: [User-Agent - HTTP | MDN](#)

How do you encode a path that contains a space in an URL? Which other characters are "special" and need to be treated this way in paths?

URLs cannot contain spaces. URL encoding normally replaces a space with a plus (+) sign or with %20.


Lots of special characters listed here:

[HTML URL Encoding Reference](#).

Which web server is the University of Bristol using for www.bristol.ac.uk, according to the headers? Read up online on this server and the organisation of the same name that maintains it.

Apache.

<https://httpd.apache.org/>

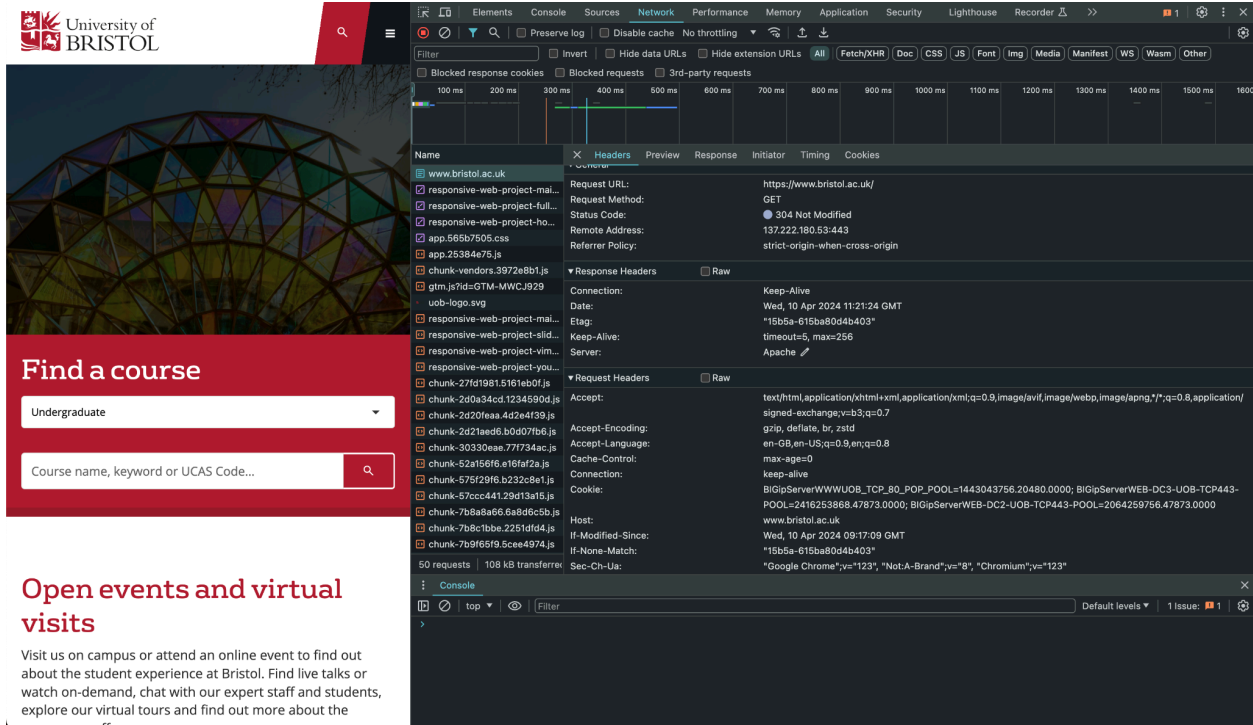

source:

1.4. A server in Java

2 HTML5

Video

What's the difference between an unordered list `` and an ordered list ``?

Example

An unordered HTML list:

- Item
- Item
- Item
- Item

An ordered HTML list:

1. First item
2. Second item
3. Third item
4. Fourth item


2.1. Basic HTML5

2.2. Templates

Week 7: CSS

3 CSS

3.1. Styling Text

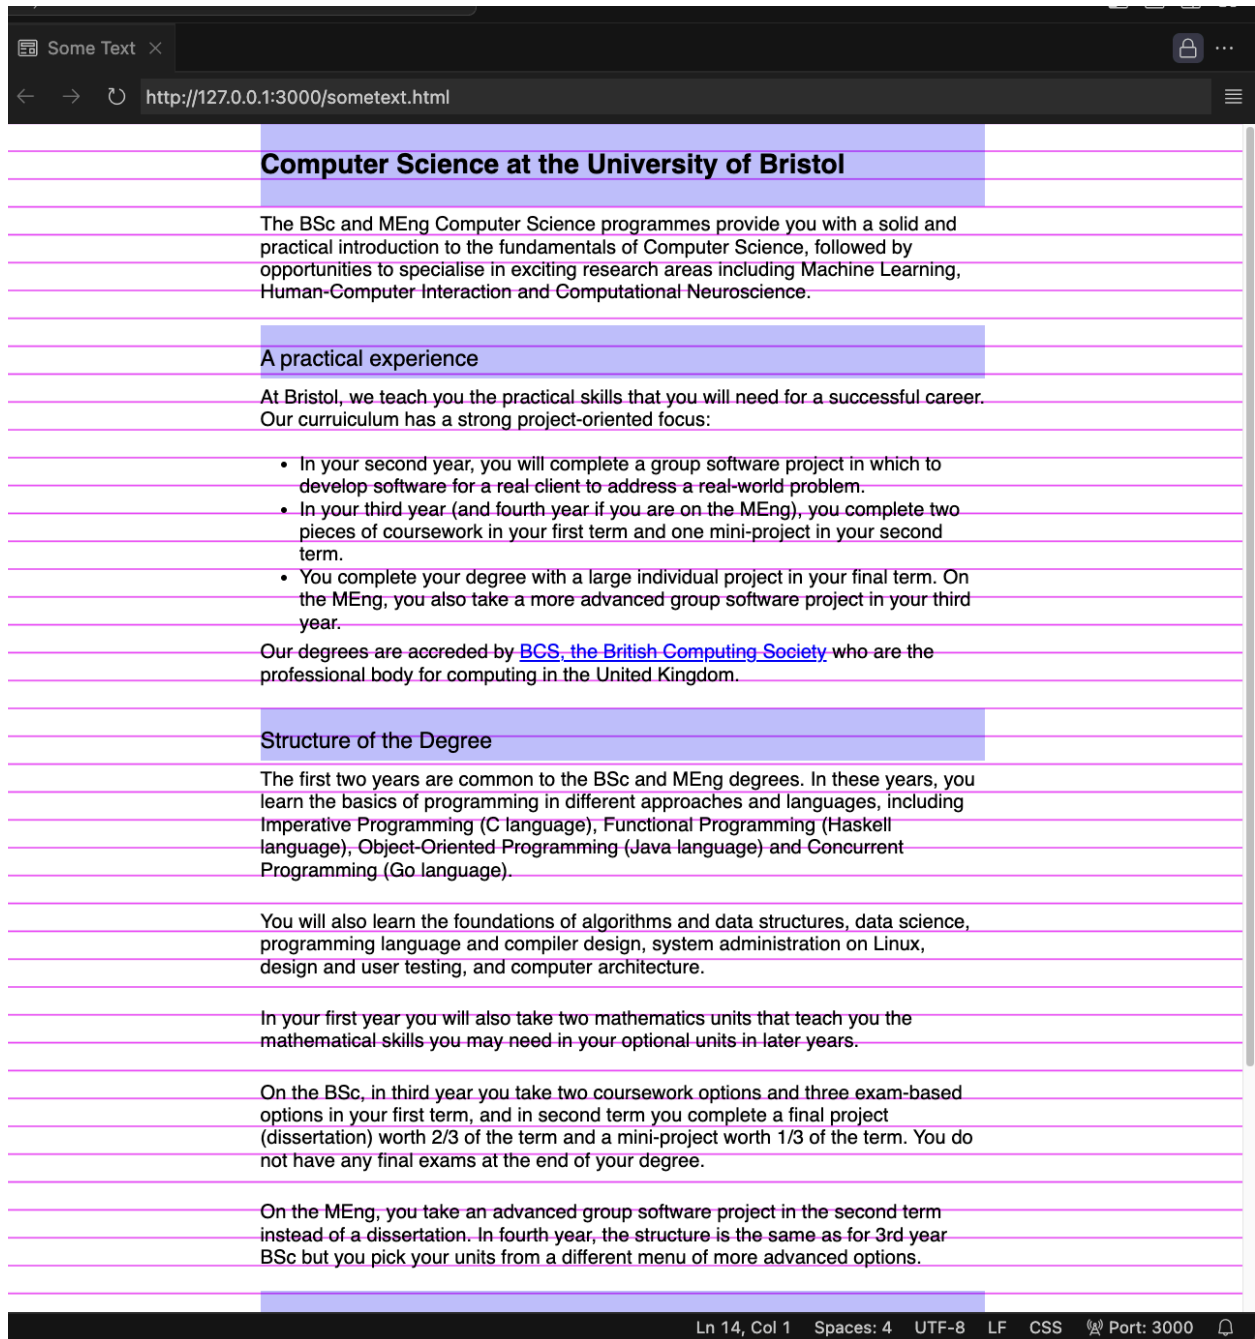

```
body {  
  margin: 0 auto;  
  max-width: 40em;  
  line-height: 125%;  
  font-size: small;  
  font-family: sans-serif;  
  background-image: url("baseline.png");  
}
```

```

}
h1{
    font-size: 150%;
    font-weight: bold;
    background-color: rgba(0, 0, 255, 0.25);
    padding-top: 4%;
    padding-bottom: 4.2%;
}
h2{
    font-size: medium;
    background-color: rgba(0, 0, 255, 0.25);
    padding-top: 3%;
    padding-bottom: 1.2%;
}
p{
    font-size: 14px;
    padding-top: 1%;
    padding-bottom: 3%;
}
ul{
    padding-left: 2em; /* the bullets appear in the padding */
    list-style-type: disc;
    list-style-position: outside;
    font-size: 14px;
}
a{
    color:blue;
}

```

3.2. Frameworks

How does Milligram set the following?

- Size of heading fonts
 - font-size: 3.6rem;
- Form fields take up the full width of the container
 - width: 100%;
- Form labels and fields appear below each other

- Labels are closer to their own field than the field above
 - margin-bottom: .5rem;
- Size and centering of everything in a container on wide enough screens

CSS conference booking page

CSS conference

CSS conference is a place where you can learn all about modern web design with CSS. You will learn all about responsive design, frameworks, tips and tricks and practical examples from the designers of real websites.

Registration Form

Name:

Surname:

E-mail:

```

<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <title>CSS conference</title>
  </head>
  <body>
    <div class="container">
      <h1>CSS conference</h1>
      <p>CSS conference is a place where you can learn all about modern web design with CSS. You will learn all about responsive design, frameworks, tips and tricks and practical examples from the designers of real websites.</p>
      <h2>Registration Form</h2>
      <form method="POST">
        <div>
          <input type="text" id="name" name="name" required>
          <input type="text" id="surname" name="surname" required>
          <input type="text" id="email" name="email" required>
          <input type="submit" value="REGISTER">
        </div>
      </form>
    </div>
  </body>
</html>

```

html body main.container section form input#name

Styles Computed Layout Event Listeners DOM Breakpoints Properties

Filter

```

input[type='email'], input[type='month'], input[type='number'],
input[type='password'], input[type='search'], input[type='tel'],
input[type='text'], input[type='url'], input[type='week'], input:not([type]),
textarea, select {
  -webkit-appearance: none;
  background-color: transparent;
  border: 1px solid #ddd;
  border-radius: .4rem;
  box-shadow: none;
  box-sizing: inherit;
  height: 3.8rem;
  padding: .6rem 1.0rem .7rem;
  width: 50%;
}
fieldset, input, select, textarea {
  margin-bottom: 1.5rem;
}
button, input {

```

milligram.css:512

normalize.css:177

Console What's new

Highlights from the Chrome 123 update

Easter egg

There's an Easter egg somewhere in DevTools, behind a colorful emoji. Can you find it?

Emulate a focused page in Elements >

Styles

Bulma

<https://pastebin.com/QEGVjuR6>

CSS conference

CSS conference is a place where you can learn all about modern web design with CSS. You will learn all about responsive design, frameworks, tips and tricks and practical examples from the designers of real websites.

Registration Form

Name

Surname

Email

Submit

Select something cool

Stuff

Junk

More stuff

4 CSS grids

4.2. Curriculum exercise

Isaac's Solution:

The UoB CS BSc curriculum as a CSS grid

COMS10014 Mathematics A	COMS10015 Computer Architecture	COMS10016 Imperative and Functional Programming		
COMS10013 Mathematics B	COMS10012 Software Tools	COMS10017 Object-Oriented Programming and Algorithms		
COMS20007 Programming Languages and Computation	COMS20008 Computer Systems A	COMS20010 Algorithms 2	COMS20006 Software Engineering Project	
COMS20009 Interaction and Society	COMS20012 Computer Systems B	COMS20011 Data-Driven Computer Science		
COMS3???? Project Unit 1 (assessed in term)	COMS3???? Project Unit 2 (assessed in term)	COMS3???? Unit A (assessed by exam)	COMS3???? Unit B (assessed by exam)	COMS3???? Unit C (assessed by exam)
COMS30045 Individual Project			COMS3???? Mini-Project	

```
main {
  max-width: 1500px;
  margin: 0 auto;
  display: inline-grid;

  grid-template-columns: repeat(12, 1fr);
  gap: 15px;
  grid-template-rows: repeat(12, 1fr);
}

body {
  font-family: sans-serif;
  background-color: rgba(112, 145, 53, 0.1);
}

.unit {
  background-color: rgba(0, 67, 79, 0.2);
  width: auto;
}

.unit b {
  display: block;
  background-color: rgb(0, 67, 79);
  color: white;
  padding: 5px;
}
```

```
}

.cp10 {
  grid-auto-flow: column;
  grid-column: span 2;
}

.cp15 {
  grid-auto-flow: column;
  grid-column: span 3;
}

.cp20 {
  grid-auto-flow: column;
  grid-column: span 4;
}

.cp40 {
  grid-auto-flow: column;
  grid-column: span 8;
}

.y1-tb1 {
  grid-row: 1;
}

.y1-tb2 {
  grid-row: 2;
  margin-bottom: 15px;
}

.y2-tb1 {
  grid-row: 3;
}

.y2-tb2 {
  grid-row: 4;
  margin-bottom: 15px;
}

.y3-tb1 {
  grid-row: 5;
}
```

```

.y3-tb2 {
  grid-row: 6;
  margin-bottom: 15px;
}

.y2-tb4 {
  grid-auto-flow: column;
  grid-column: span 2;
  grid-row: span 2;
  margin-bottom: 15px;
}

.unit b ~ p {
  padding-left: 12px;
  padding-right: 12px;
  align-content: center;
}

```

4.3. Trees exercise (responsive layout)

Isaac's Solution:

```

body {
  font-family: "Open Sans", sans-serif;
  margin: 0;
}

header {
  background-color: #04443c;
  color: white;
  margin: 0;
  padding-left: 10px;
  padding-right: 10px;
}

@media only screen and (max-width: 400px) {

  .container {
    margin-left: 10px;
    margin-right: 10px;
    display: inline-grid;

```

```
    grid-template-columns: repeat(1, 1fr);
    grid-gap: 20px;
}

}

@media only screen and (min-width: 400px) {

.container {
    margin-left: 10px;
    margin-right: 10px;
    display: inline-grid;
    grid-template-columns: repeat(2, 1fr);
    grid-gap: 20px;
}

}

@media only screen and (min-width: 600px) {
    .container {
        margin-left: 10px;
        margin-right: 10px;
        display: inline-grid;
        grid-template-columns: repeat(4, 1fr);
        grid-gap: 20px;
    }
}

.featured {
    grid-column: span 2;
    padding-right: 15;
}

.card {
    margin: 0 auto;
    background-color: #167f5f;
    color: white;
    padding: 10px, 10px, 10px, 10px;
}

.card-image {
    max-width: 100%;
    height: auto;
}
```

```

}

.card span.latin-name {
  display: block;
  font-style: italic;
  padding: 10px;
  padding-bottom: 0;
}

.card span.common-name {
  display: block;
  padding: 10px;
  padding-top: 5px;
  font-weight: bold;
}

```

Week 8: Javascript

Note: this code requires you to replace YOUR_API_KEY with an API key. Otherwise it's a solution to the first part of the exercise. Thanks to Sam for this solution.

```

const IMG_PATH = 'https://image.tmdb.org/t/p/w500'
const SEARCH_API =
`https://api.themoviedb.org/3/search/movie?api_key=YOUR_API_KEY&query=""`
const API_URL_HOME =
'https://api.themoviedb.org/3/discover/movie?api_key=YOUR_API_KEY& \

include_adult=false&include_video=false&language=en-US&page=1&sort_by=popul
arity.desc';

const main = document.getElementById("main");
const form = document.getElementById("form");
const search = document.getElementById("search");

async function getMovies(url) {

  const apiRes = await fetch(url);
  const resJson = await apiRes.json();

```

```

    if (!apiRes.ok) {
        console.error("Error fetching movies: ", apiRes.statusText);
    }
    showMovies(resJson.results);
}

function showMovies(movies) {
    main.innerHTML = ''

    movies.forEach((movie) => {
        const { title, poster_path, vote_average, overview } = movie

        const movieEl = document.createElement('div')
        movieEl.classList.add('movie')

        movieEl.innerHTML = `
            
            <div class="movie-info">
                <h3>${title}</h3>
                <span
class="${getClassByRate(vote_average)}">${vote_average}</span>
                </div>
                <div class="overview">
                    <h3>Overview</h3>
                    ${overview}
                </div>
            `
        main.appendChild(movieEl)
    })
}

function getClassByRate(vote) {
    if (vote >= 8) {
        return ".movie-info blue";
    } else if (vote >= 5) {
        return ".movie-info black"
    } else return ".movie-info orange";
}

// Get initial movies
getMovies(API_URL_HOME);

```

```

form.addEventListener('submit', (e) => {
  e.preventDefault()

  const searchTerm = search.value // we create a var with the search term

  if(searchTerm && searchTerm !== '') { // and if the term exists
    getMovies(SEARCH_API + searchTerm);

    search.value = ''
  } else {
    window.location.reload();
  }
})

```

Week 9: Web Scraping

7 Web Scraping

7.1. Crawling

1. Read man wget to understand what the `-i --force-html` and `--spider` options do. Download a copy of this webpage (the one you are currently reading) and use wget to test all the links on the page. Are there any broken links?

```
wget --spider -r -l 1 --force-html
```

<https://cs-uob.github.io/COMSM0085/exercises/part2/scrape/crawl.html>

-i file

--input-file=file

Read URLs from a local or external file. If `-` is specified as file, URLs are read from the standard input. (Use `./-` to read from a file literally named `-`.)

If this function is used, no URLs need be present on the command line. If there are URLs both on the command line and in an input file, those on the command lines will be the first ones to be retrieved. If `--force-html` is not specified, then file should consist of a series of URLs, one per line.

However, if you specify `--force-html`, the document will be regarded as **html**. In that case you may have problems with relative links, which you can solve either by adding `"<base href="url">"` to the documents or by specifying `--base=url` on the command line.

If the file is an external one, the document will be automatically treated as **html** if the Content-Type matches **text/html**. Furthermore, the file's location will be implicitly used as base href if none was specified.

--force-html

When input is read from a file, force it to be treated as an HTML file. This enables you to retrieve relative links from existing HTML files on your local disk, by adding "<base href=url>" to HTML, or using the **--base** command-line option.

--spider

When invoked with this option, Wget will behave as a Web **spider**, which means that it will not download the pages, just check that they are there. For example, you can use Wget to check your bookmarks:

```
wget --spider --force-html -i bookmarks.html
```

This feature needs much more work for Wget to get close to the functionality of real web **spiders**

2. Tell wget to use a different user agent string in a request to your server running on localhost. Check what the request looks like to your server.

```
wget --user-agent=agent-string localhost:8000/index.html
```



```
darkhttpd — darkhttpd web --port 8000 — 80x24
HTTP/1.1" 200 2022 "http://localhost:8000/panthera_leo.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_pardus.html HTTP
P/1.1" 200 1069 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_fusca.html HTTP
/1.1" 200 1548 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_melas.html HTTP
/1.1" 200 1182 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_nimr.html HTTP/
1.1" 200 1447 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_tulliana.html H
TTP/1.1" 200 1390 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_orientalis.html
HTTP/1.1" 200 1705 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_delacouri.html
HTTP/1.1" 200 1322 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_pardus_kotiya.html HTT
P/1.1" 200 1117 "http://localhost:8000/panthera_pardus.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_tigris_tigris.html HTT
P/1.1" 200 1244 "http://localhost:8000/panthera_tigris.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:14:00:15 +0100] "GET /panthera_tigris_sondaica.html H
TTP/1.1" 200 1005 "http://localhost:8000/panthera_tigris.html" "Wget/1.24.5"
127.0.0.1 - - [05/Apr/2024:15:13:50 +0100] "GET /index.html HTTP/1.1" 200 2141 "
" "agent-string"
```

3. How would `wget -r -l 1 http://example.com` differ from `wget -p http://example.com`? (Hint: think about external resources).

`wget -r -l 1 http://example.com` tells `wget` to recursively download the website, but only to a depth of 1. This means `wget` will download the page at the given URL and any pages directly linked from it, but no further.

`wget -p http://example.com` instructs `wget` to download the webpage at the specified URL, along with all the files that are necessary to properly display the page, such as CSS, JavaScript, and images. This option is used for downloading a single page and its requirements for offline viewing.

The key difference is that `-r -l 1` is for recursive download with a specified depth, which can include pages on the same domain, whereas `-p` is specifically for downloading all the components needed to render a single page properly, including external resources like stylesheets and images hosted on different domains.

4. Look for 'Recursive Accept/Reject options' in the wget manpage. How would you get wget to crawl pages from multiple different domains?

-H

--span-hosts

Enable spanning across hosts when doing recursive retrieving.

5. Look up what **-nc** does. What is clobbering, and why would or wouldn't you want to do it?

-nc or **--no-clobber**.

By default, wget repeatedly download with a new name (example.html.1 etc). With no clobber wget will refuse to download new versions of that file.

Clobbering is something being overwritten on repeated download.

-nc

--no-clobber

If a file is downloaded more than once in the same directory, Wget's behavior depends on a few options, including **-nc**. In certain cases, the local file will be clobbered, or overwritten, upon repeated download. In other cases it will be preserved. When running Wget without **-N**, **-nc**, **-r**, or **-p**, downloading the same file in the same directory will result in the original copy of file being preserved and the second copy being named file.1. If that file is downloaded yet again, the third copy will be named file.2, and so on. (This is also the behavior with **-nd**, even if **-r** or **-p** are in effect.) When **-nc** is specified, this behavior is suppressed, and Wget will refuse to download newer copies of file. Therefore, "no-clobber" is actually a misnomer in this mode---it's not clobbering that's prevented (as the numeric suffixes were already preventing clobbering), but rather the multiple version saving that's prevented.

When running Wget with **-r** or **-p**, but without **-N**, **-nd**, or **-nc**, re-downloading a file will result in the new copy simply overwriting the old. Adding **-nc** will prevent this behavior, instead causing the original version to be preserved and any newer copies on the server to be ignored.

When running Wget with **-N**, with or without **-r** or **-p**, the decision as to whether or not to download a newer copy of a file depends on the local and remote timestamp and size of the file. **-nc** may not be specified at the same time as **-N**.

A combination with **-O/--output-document** is only accepted if the given output file does not exist.

Note that when **-nc** is specified, files with the suffixes **.html** or **.htm** will be loaded from the local disk and parsed as if they had been retrieved from the Web.

7.2. BeautifulSoup

Take a look at some other examples from the [BeautifulSoup documentation](#) in particular regarding the use of the `.find_all()` method.

Use your interpreter to access a list of all the `` elements in the webpage, and figure out how to print out just the text contained within them.

```
>>> for line in soup.find_all('strong'):
...     print(line.get_text())
```

How would you use `.find_all()` to find all `<div>` elements with a particular class value (e.g., `'container'`)? Would your method work if the div had multiple classes?

```
soup.find_all('div', {'class': 'container'})
```

no, for multiple classes we should use something like `soup.select('div.container')`

INITIALLY:

```
1 from bs4 import BeautifulSoup
2 import os
3
4
5 for file in os.listdir('cattax'):
6     if file[-4:] == 'html':
7         soup = BeautifulSoup(open('cattax/'+file,'r'), features='html.parser')
8         print(soup.title.text + " : " + soup.h1.text)
9
```

Modify `scrape.py` so that it also prints out the contents of the `'info'` paragraph in each page (this can be a second print statement). Run the script again to test that it works.

```
1 from bs4 import BeautifulSoup
2 import os
3
4
5 for file in os.listdir('cattax'):
6     if file[-4:] == 'html':
7         soup = BeautifulSoup(open('cattax/'+file,'r'), features='html.parser')
8         print(soup.title.text + " : " + soup.h1.text)
9         info_paragraph = soup.find('p', class_='info')
```

```

10     if info_paragraph:
11         print(info_paragraph.text)
12
~

```

Currently, the script prints something for every page. Modify it so it would only print something out for the leaf nodes -- those pages that don't have a 'container' element of their own.

```

1 from bs4 import BeautifulSoup
2 import os
3
4
5 for file in os.listdir('cattax'):
6     if file[-4:] == 'html':
7         soup = BeautifulSoup(open('cattax/'+file,'r'), features='html.parser')
8         if(soup.find('div', class_='container')):
9             continue
10        print(soup.title.text + " : " + soup.h1.text)
11        info_paragraph = soup.find('p', class_='info')
12        if info_paragraph:
13            print(info_paragraph.text)
14
~

```

Printing things out can be useful, but often we want to store values we scrape for later programmatic work. Rather than printing out information, create and update a Python dict for all leaf nodes where the dictionary keys are the titles of a page and the values are the corresponding content of the 'info' box. Run your script with `python3 -i scrape.py` and it will execute your script and then place you in an interactive session immediately following your script's execution. You can then check that the dictionary's contents are what you expect by interacting with the dict object in your interpreter.~

```

1 from bs4 import BeautifulSoup
2 import os
3
4 d = dict()
5 for file in os.listdir('cattax'):
6     if file[-4:] == 'html':
7         soup = BeautifulSoup(open('cattax/'+file,'r'), features='html.parser')
8         if(soup.find('div', class_='container')):
9             continue
10        info_paragraph = soup.find('p', class_='info')
11        if info_paragraph:

```

```
12     d.update({soup.title.text:info_paragraph})
13
```

~

Week 10: Practical Encryption

8 Practical Encryption

8.1. OpenSSL

What is the difference between your unencrypted file and the encrypted one? Try and read an encrypted file.

The file size is larger, and the text is unreadable due to weird characters:

```
Salted__G9CwC03>?:&
```

```
-rw-r--r-- 1 vagrant vagrant 32 Apr 28 10:16 mytext.enc
-rw-r--r-- 1 vagrant vagrant  6 Apr 28 10:16 mytext.txt
```

Alternatively, you can encode the encrypted file with base64.

`openssl base64 -in mytext.txt -out mytext.encxt.enc -a`
(the `-a` flag stands for ASCII).

```
-rw-r--r-- 1 vagrant vagrant 32 Apr 28 10:16 mytext.enc
-rw-r--r-- 1 vagrant vagrant  9 Apr 28 10:20 mytextbase64.enc
-rw-r--r-- 1 vagrant vagrant  6 Apr 28 10:16 mytext.txt
```

This new file is only 9 bytes and looks like this:
aGVsbG8K

Is the file size larger than before? If so, why?

Because it has been encrypted - and contains more letters than before.
(Hashed with salt.)

Utilize the `-d` parameter to decrypt the file, whether it's a binary stream or consists only of ASCII characters

```
openssl enc -base64 -d -in mytext.encxt.enc -out mytext.decoded
```

Using the openssl man pages, figure out how to use genrsa to generate a 1024-bit public-private key pair.

```
man openssl-genrsa
```

```
openssl genrsa -out private_key.pem -numbits 1024
```

This generates a private key – the public key has to be extracted.

The public key is meant to be shared with others. Extract your public key with the OpenSSL tool into a .pem file using the -pubout parameter.

```
openssl rsa -in private_key.pem -pubout -out public_key.pem
```

Next, create an encrypted message using the OpenSSL -encrypt command.

```
openssl rsautl -encrypt -inkey bob_public.pem -pubin -in top_secret.txt  
-out top_secret.enc
```

The crucial thing about this is that you can use a public key of someone else to do encryption of a message.

Then, we generate the RSA private key (keep note of the passphrase). Use OpenSSL with the genrsa command and the -aes256 parameter for a private key with size 2048.

```
openssl genrsa -aes256 -out private_key.pem
```

Next, generate a root certificate with OpenSSL using the req command and parameters -x509 for a digital signature and -sha256 for a hash function. Finally, make it valid for 30 days.

```
man openssl-req  
openssl req -x509 -sha256 -days 30 -out rootCert.pem
```

technically we don't need the 30d parameter because it's the default.

The OpenSSL tool includes many utilities. We can use one of them to verify a secure connection to a server. To do so, we will use the `s_client` utility to establish client-to-server communication. Therefore, we can determine whether a port is open, if the server is configured to support SSL, and when the certificate expires.

```
man openssl-s_client
```

In the terminal, use `s_client` against a webserver with HTTPS.

```
openssl s_client -connect google.com:443
```

443 is the default ssl port

https://docs.pingidentity.com/r/en-us/solution-guides/htg_use_openssl_to_test_ssl_connectivity

What are the differences compared to other tools such as netcat or telnet?

The other tools aren't designed for ssl

Try running the command again with the `-crlf` and `-brief` flags. What is the difference?

`-brief`

Only provide a brief summary of connection parameter instead of the normal verbose output.

`-crlf`

This option translated a line feed from the terminal into CR+LF as required by some servers.

8.2. PGP

```
gpg --encrypt --sign --armor -r other_person@mail.com file_name
```

This command encrypts the message and signs it with your private key to ensure that the message originates from you. Keep in mind that this message will be encrypted using the recipient's public key, making it

unreadable to you (Unless you somehow obtain the recipient's private key!).

Tip: You can modify the command above to generate a message only you can read, using your private key. Think about how.

```
gpg --encrypt --sign --armor -r your_own_email@mail.com file_name
```

- Use the gpg command with the --search parameter to find out, for each key, the associated email address or User ID (username).

```
gpg --keyserver keyserver.ubuntu.com --search-key 413109AF27CBFBF9
```

- Use the gpg command with the --recv-keys parameter if you decide to import a key into your keyring.

```
gpg --keyserver keyserver.ubuntu.com --recv-keys ABCDEF0123456789
```

- Use the gpg command with the --fingerprint option to verify the authenticity of the keys.

```
gpg --keyserver keyserver.ubuntu.com --fingerprint ABCDEF0123456789
```

- Now, can you try searching based on the email addresses?

```
gpg --search bogwonch@bogwonch.net
```

- Can you find Joseph's old expired key?

```
gpg --keyserver keyserver.ubuntu.com --search bogwonch@bogwonch.net
```

Vagrantfile

updated with the stuff for the last lecture, otherwise the same.

```
Vagrant.configure("2") do |config|
  config.vm.box = "generic/debian12"
  config.vm.synced_folder ".", "/vagrant"
  #config.vm.network "forwarded_port", guest: 8080, host: 8080

  config.vm.provision "shell", inline: <<-SHELL
    apt-get update -y
    apt-get install -y git git-man apt-file
    apt install -y gdb
```



```
apt install -y maven
apt install -y openjdk-17-jdk
apt install -y unzip
apt install -y maven
apt install -y openjdk-17-jdk
apt install -y mariadb-{server,client}
apt-get install -y libreadline-dev
apt install -y shellcheck
apt install -y openssl
apt install -y nginx
systemctl start mariadb
apt-get install gnupg
systemctl enable mariadb
mysqladmin -u root -p create mydatabase
mysql -u root -p -e 'source /vagrant/sample-data.sql'
```

SHELL

```
config.vm.provision :shell, privileged: false, inline: <<-SHELL
  git config --global user.name "ali"
  git config --global user.email "jardine64@gmail.com"
  SHELL
config.vm.provision "file", source: "~/.vimrc", destination: "~/.vimrc"
end
```

Mock Exam(Part 2)

QUESTION 1

Type the name of the HTML tag used to create a line break without ending the paragraph. (Type no spaces, nor angled brackets.)

QUESTION 2

Complete the following HTML tag with one word (no spaces or other punctuation)

<a href

so that it creates a link that, when clicked, loads the page `/dogs``.

QUESTION 3

Which of the following HTML fragments will make the words "Piano", "Guitar", and "Trumpet" appear as bullet points?

- ☐

```
<ul>
  <td>Piano</td>
  <td>Guitar</td>
  <td>Trumpet</td>
</ul>
```
- ☐

```
<table>
  <li>Piano</li>
  <li>Guitar</li>
  <li>Trumpet</li>
</table>
```
- ☐

```
<ol type="A">
  <li>Piano</li>
  <li>Guitar</li>
  <li>Trumpet</li>
</ol>
```
- ☒

```
<ul>
  <li>Piano</li>
  <li>Guitar</li>
  <li>Trumpet</li>
</ul>
```

1 points

Save Answer

QUESTION 5

Which of the following is not a property of the CSS Box Model?

- ☐ padding
- ☒ column
- ☐ border
- ☐ margin

1 points

Save Answer

QUESTION 6

Which of the following CSS rules is *not* correct?

- ☐ `tag { property: value }`
- ☒ `$div { property: value }`
- ☐ `#id { property: value }`
- ☐ `.class { property: value }`

1 points

Save Answer

QUESTION 7

Are the following statements about JavaScript variables true or false?

- ☐ true ☐ Variables with block scope are declared using the let keyword.
- ☐ true ☐ The keyword const is used to declare variables that you should not change after they are assigned.
- ☐ false ☐ A variable declared outside a function definition using the let keyword is a global variable.
- ☐ true ☐ A variable declared outside a function definition using the var keyword is a global variable.

QUESTION 8

Type the output logged to the console when the following code is run. (Do not type any spaces.)

```
var x;  
console.log(typeof(x));
```

undefined

1 points

Save Answer

QUESTION 9

Given the following JavaScript object, which of the following expressions *cannot* be used to determine whether the object has the property description?

```
let flowers = {  
  type: "Spring flowers",  
  region: "Europe",  
  examples: [  
    {  
      name: "Monkey Orchid",  
      appears: "April",  
      colour: "lilac",  
      habitat: "Dry, sunny grasslands on hills"  
    },  
    {  
      name: "Common Rock-Rose",  
      appears: "April",  
      colour: "Yellow",  
      habitat: "Forests, dry grasslands, waysides"  
    },  
    {  
      name: "Star of Bethlehem",  
      appears: "May",  
      colour: "White",  
      habitat: "Cultivated land, vines, grass lands"  
    },  
    {  
      name: "Field Poppy",  
      appears: "May",  
      colour: "Red",  
      habitat: "Along walls, hedges, paths"  
    }  
  ]  
}
```

- ☐ flowers.hasOwnProperty("description");
- ☒ flowers.contains(description);
- ☐ if ('description' in flowers) {
 return true;
}
- ☐ if (flowers.description != undefined) {
 return true;
}

QUESTION 10

The following is *not* a valid JSON object.

```
{  
  name = David,  
  prizes_won = 3  
}
```

What needs to change to make it valid? Mark the following as true or false.

- ☐ true ☐ The keys (name, prizes_won) need to be double-quoted.
- ☐ true ☐ The string value David needs to be double-quoted.
- ☐ false ☐ The numeric value 3 needs to be double-quoted.
- ☐ true ☐ The equals sign needs to be replaced by a different character.

1 points

Save Answer