

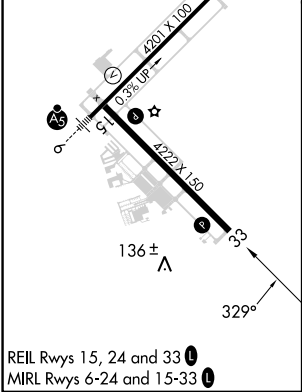
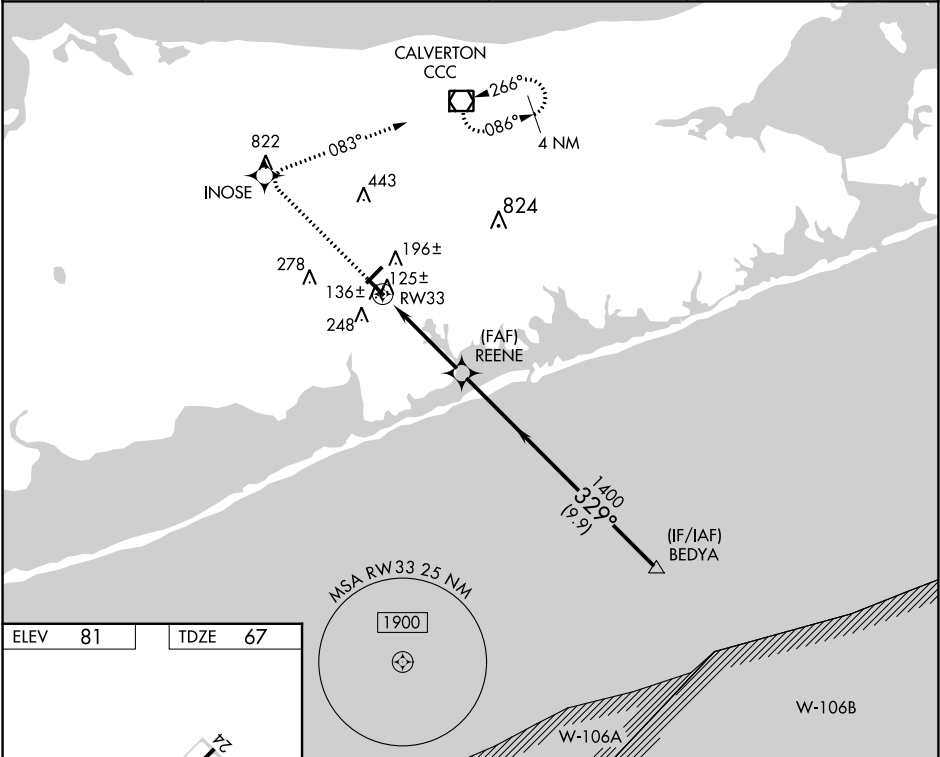
WAAS CH 40412 W33A	APP CRS 329°	Rwy Idg 4222 TDZE 67 Apt Elev 81
--	------------------------	---





RNAV (GPS) RWY 33

BROOKHAVEN (HWV)

<div><div>▼</div><div>Baro-VNAV NA when using Islip altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Islip altimeter setting and increase all DA 28 feet and all MDA 40 feet, and increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA when using Islip altimeter setting.</div></div>	<div>MISSED APPROACH: Climb to 2000 direct INOSE and right turn via track 083° to CCC VOR/DME and hold.</div>
---	---

ASOS 119.625	NEW YORK APP CON 120.05 343.75	CLNC DEL 133.2	UNICOM 122.8 (CTAF) 0
------------------------	--	--------------------------	---------------------------------



2000	INOSE	CCC	BEDYA			
↑	✱	tr 083° 	4000			
*LNAV only		REENE	329°		Procedure Turn NA	
 RW33			1400		GP 3.00° TCH 46	
1.2 NM		2.8 NM	9.9 NM			
CATEGORY	A	B	C	D		
LPV DA	346-1	279 (300-1)	NA			
LNAV/VNAV DA	449-1¼	382 (400-1¼)	NA			
LNAV MDA	500-1	433 (500-1)	NA			
 CIRCLING	560-1	479 (500-1)	NA			