

| | | |
|--|------------------------|---|
| WAAS CH 99541 W07A | APP CRS 067° | Rwy Idg TDZE 5249 Apt Elev 5278 |
|--|------------------------|---|

RNAV (GPS) RWY 7

RANGELY (4VØ)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). Circling Rwy 25 NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 5700 then climbing right turn to 10800 direct ELIZZ and hold.

Missed approach requires a minimum climb of 425 feet per NM to 8200 feet.

| | | |
|----------------------------|-------------------------------------|--|
| AWOS-3PT 119.025 | DENVER CENTER 134.5 327.8 | UNICOM 122.8 (CTAF) Ø |
|----------------------------|-------------------------------------|--|

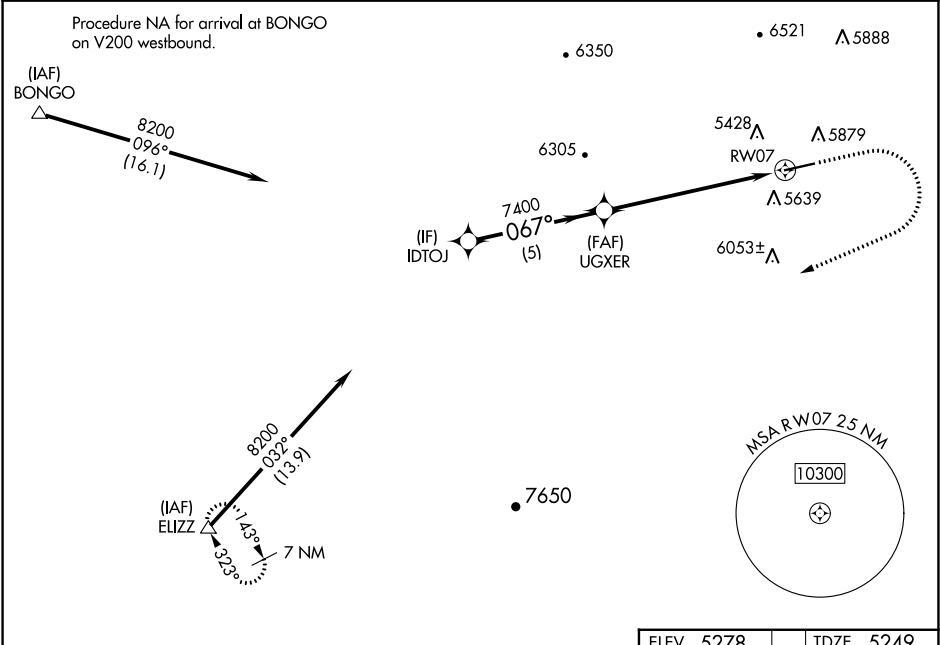

| | | | | | |
|---------------|---------------------------|---------------------------|-------------------------|-----------|--|
| IDTOJ | | UGXER | | RWY 07 | |
| 8200 | | 7400 | | 5278 | |
| GP 3.00° | | *5.9 NM to RWY 07 | | ELEV 5278 | |
| TCH 40 | | * LNAV only. | | TDZE 5249 | |
| 5 NM | | 0.8 NM | | 5.9 NM | |
| CATEGORY | A | B | C | D | |
| LPV DA# | 5599-1 350 (400-1) | | | NA | |
| LPV DA | 6013-2½ 764 (800-2½) | | | NA | |
| LNAV/ VNAV DA | 6041-2½ 792 (800-2½) | | | NA | |
| LNAV MDA | 7180-1¼ 1931 (2000-1¼) | 7180-1½ 1931 (2000-1½) | 7180-3 1931 (2000-3) | NA | |
| CIRCLING | 7180-1¼ 1902 (2000-1¼) | 7180-1½ 1902 (2000-1½) | 7180-3 1902 (2000-3) | NA | |

5700

10800

ELIZZ

067° to RWY 07

6409 X 75

0.6% UP

MIRL Rwy 7-25

REIL Rwy 7 and 25