



THE TANDEM

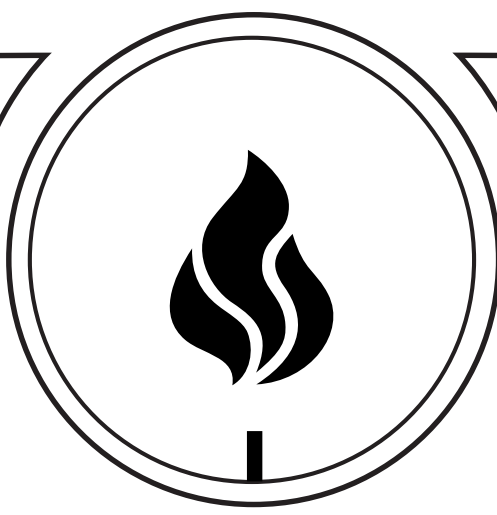

ASHES TRIP

A TRIPPERS' CLASSIC with TUMBLEHOME
an asymmetric hull with modest rocker
for LONG DAYS on the WATER and LONGER TRIPS

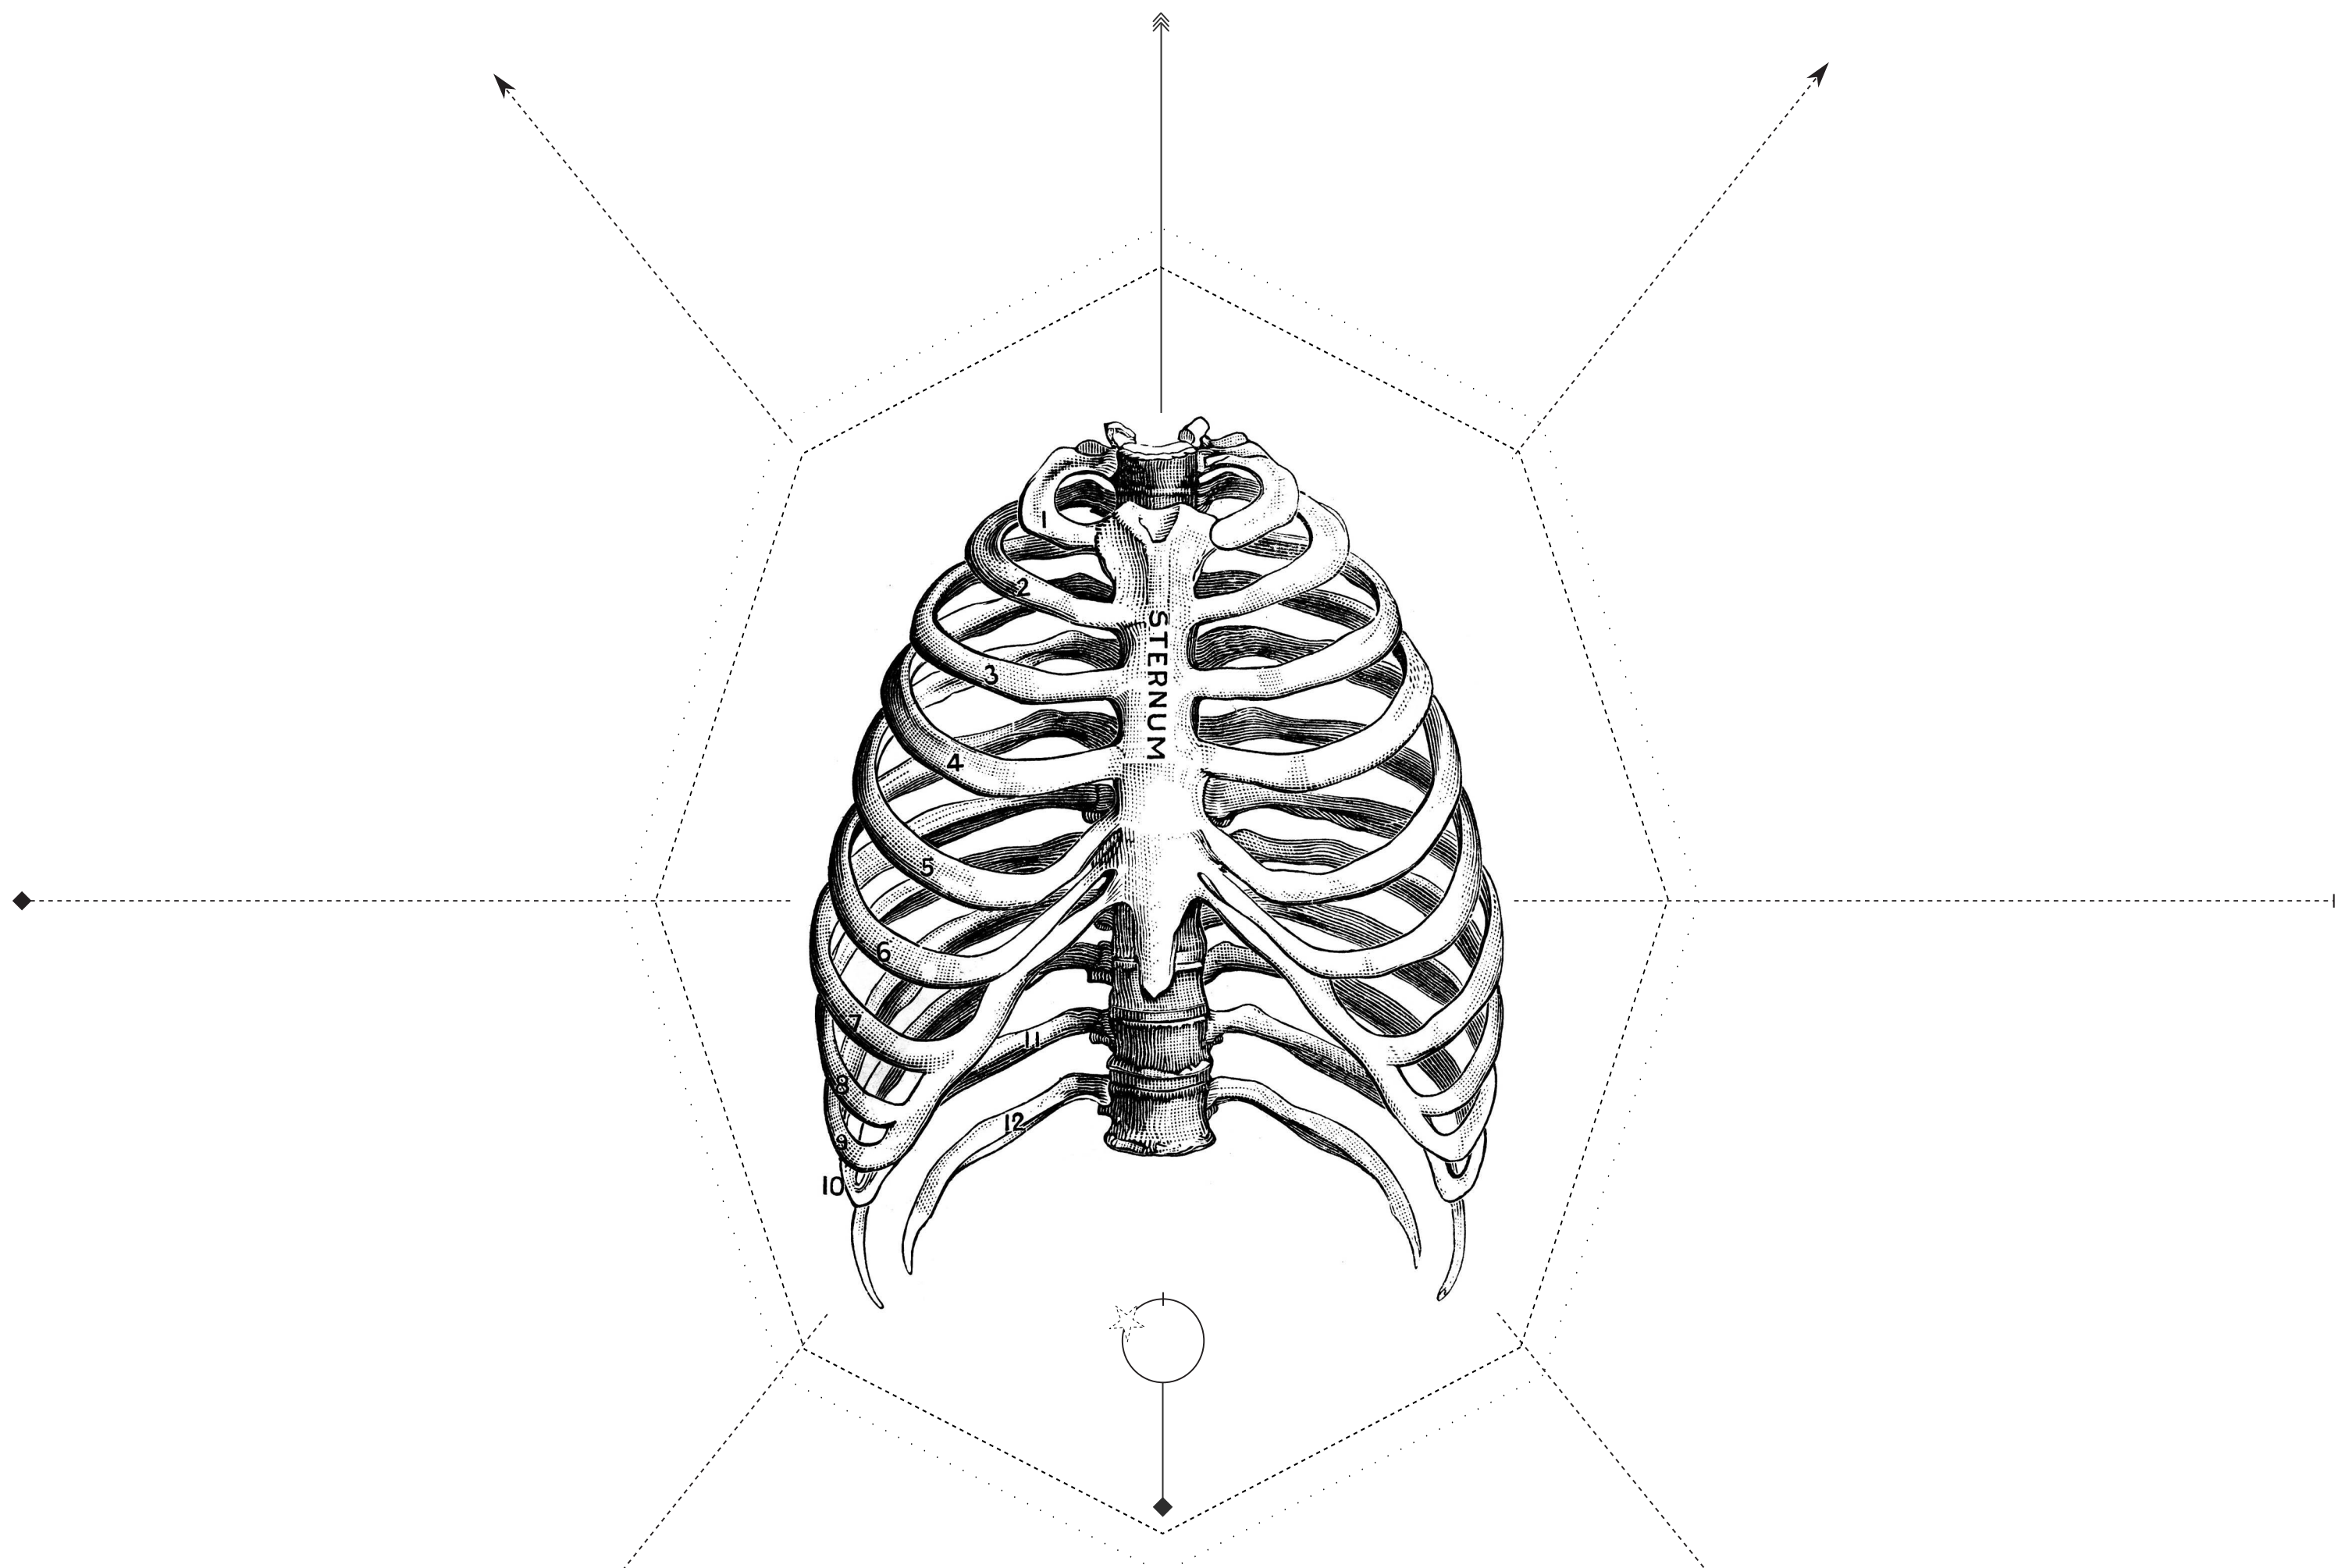

The Bellman himself they all praised to the skies—
Such a carriage, such ease and such grace!
Such solemnity, too! One could see he was wise,
The moment one looked in his face!

He had bought a large map representing the sea,
Without the least vestige of land:
And the crew were much pleased when they found it to be
A map they could all understand.


"What's the good of Mercator's North Poles and Equators,
Tropics, Zones, and Meridian Lines?"
So the Bellman would cry; and the crew would reply
"They are merely conventional signs!"

"Other maps are such shapes, with their islands and capes!
But we've got our brave Captain to thank
(So the crew would protest) 'that he's bought us the best—
A perfect and absolute blank!"




Designed by Trevor Paetkau for
ASHES STILL WATER BOATS
Sao Paulo, SP - c2018

THE TANDEM

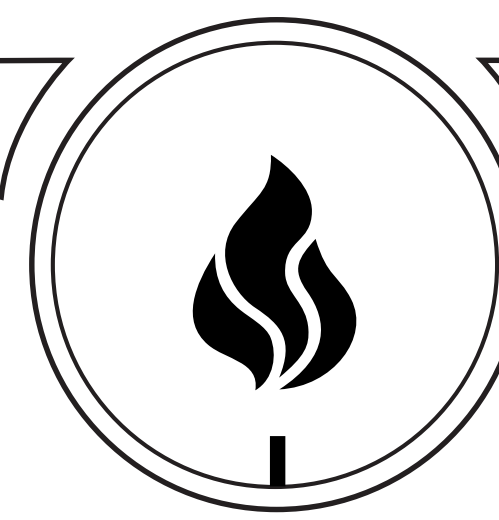

ASHES TRIP


A TRIPPERS' CLASSIC with TUMBLEHOME
an asymmetric hull with modest rocker
for LONG DAYS on the WATER and LONGER TRIPS

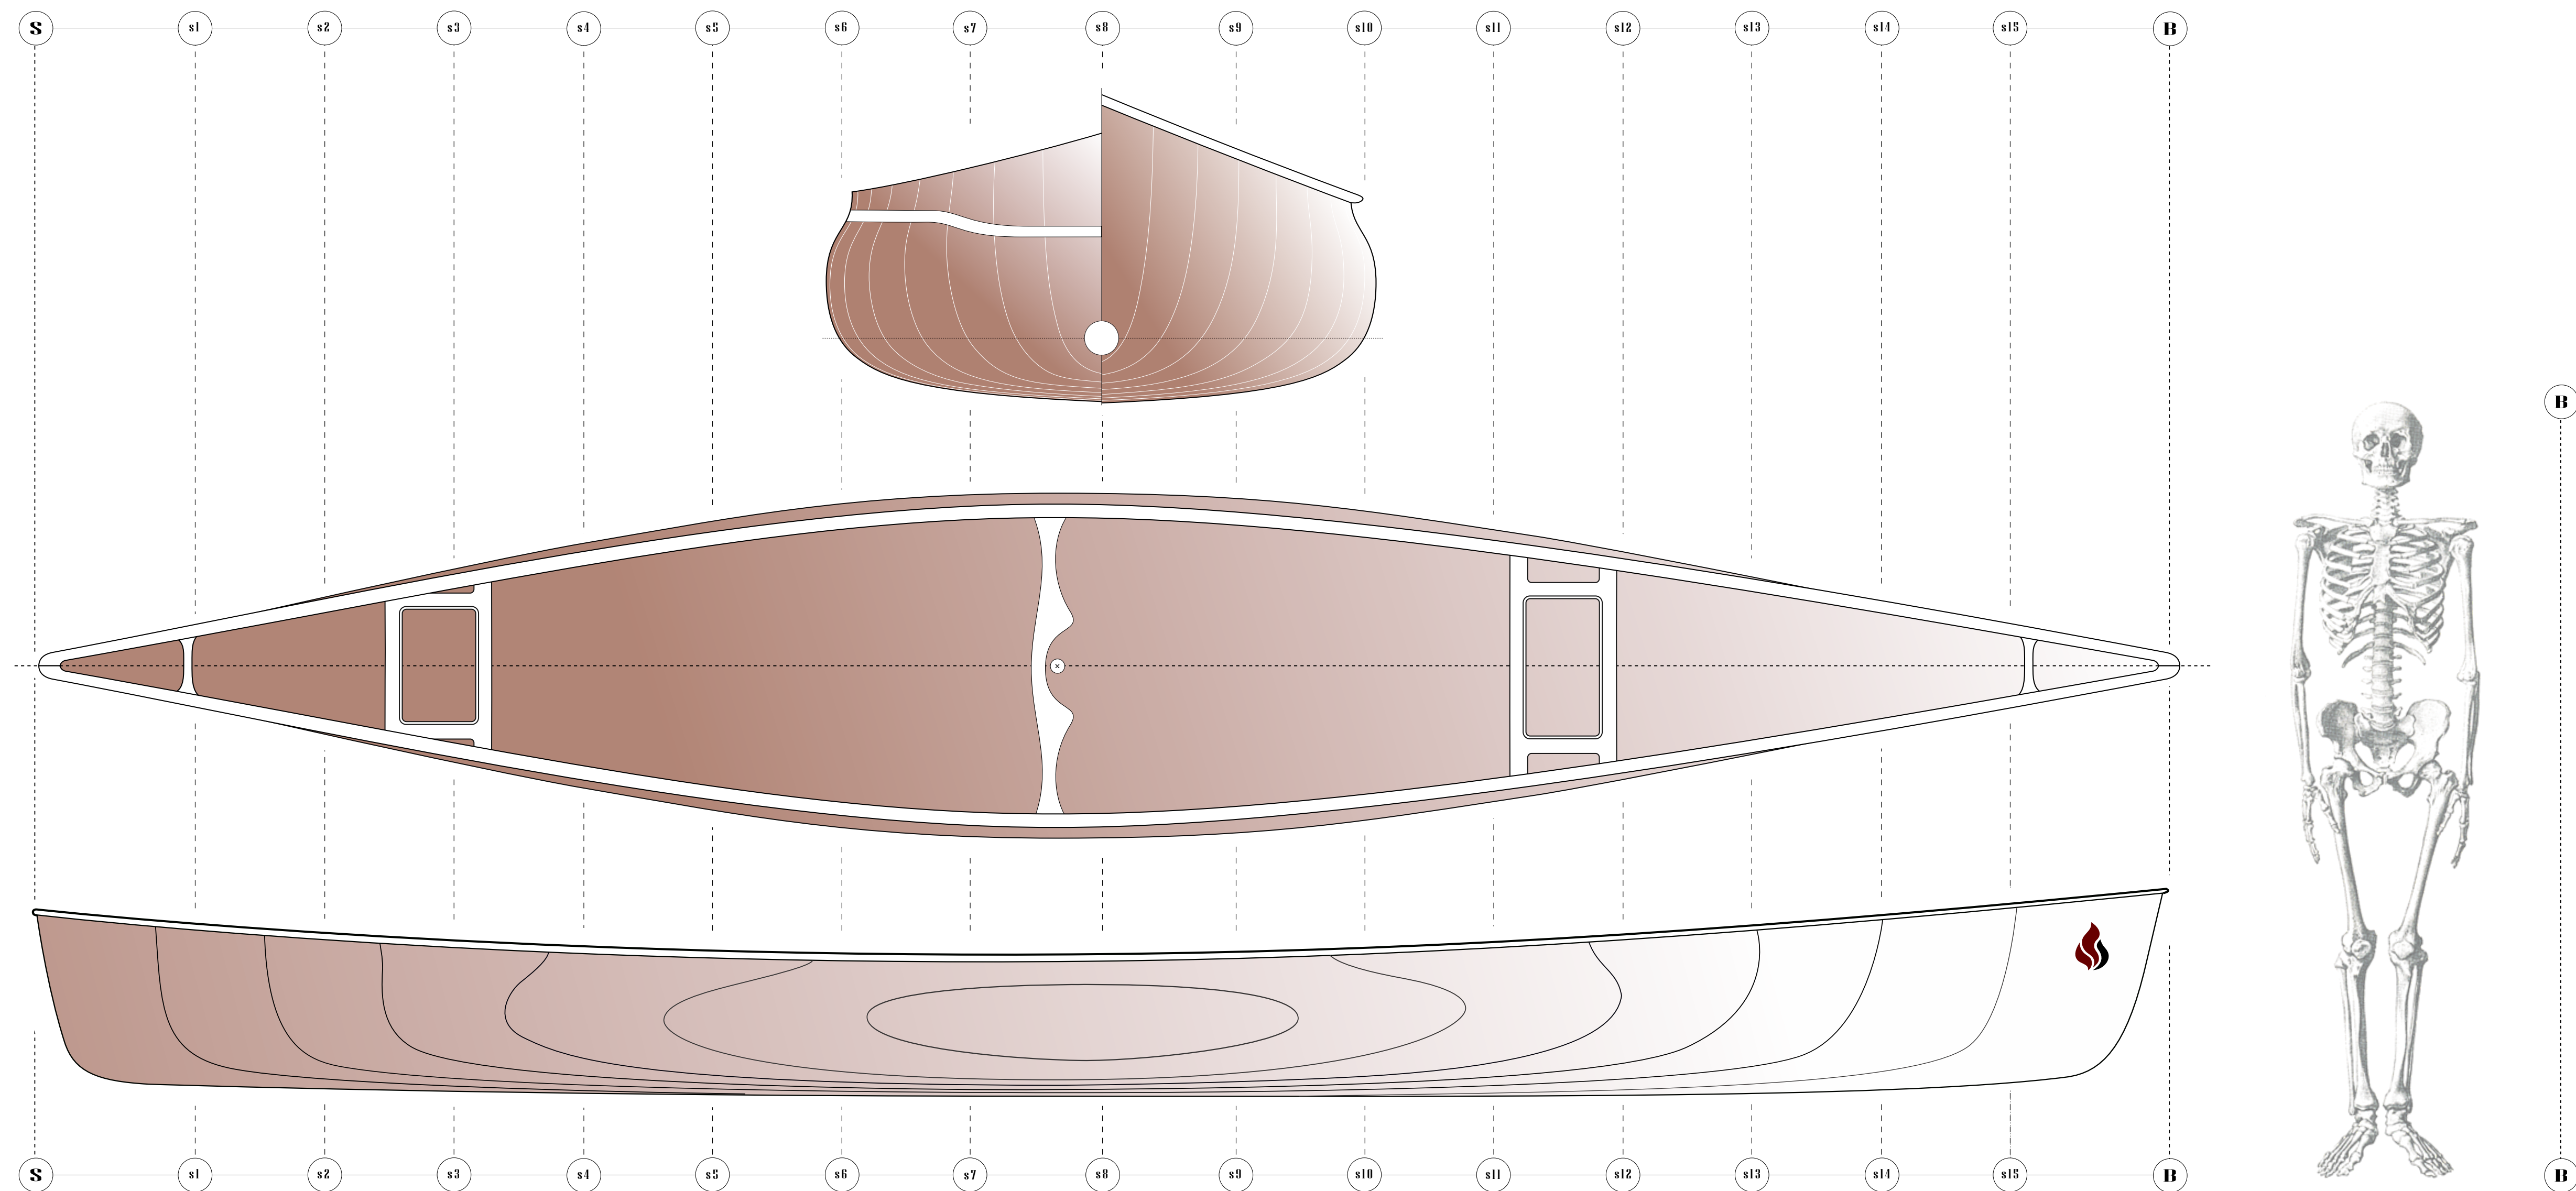

17 feet by 33 inches
capacity 200 to 500 pounds

Designed by Trevor Paetkau for
ASHES STILL WATER BOATS
Straford ON - 2017


THE TANDEM

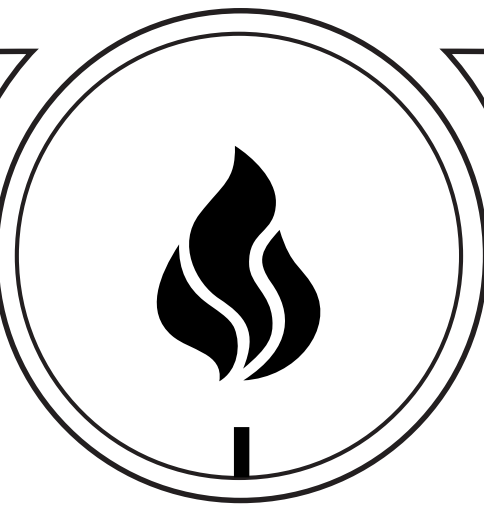

ASHES TRIP

1/4" inside hull height

Datum - 0"

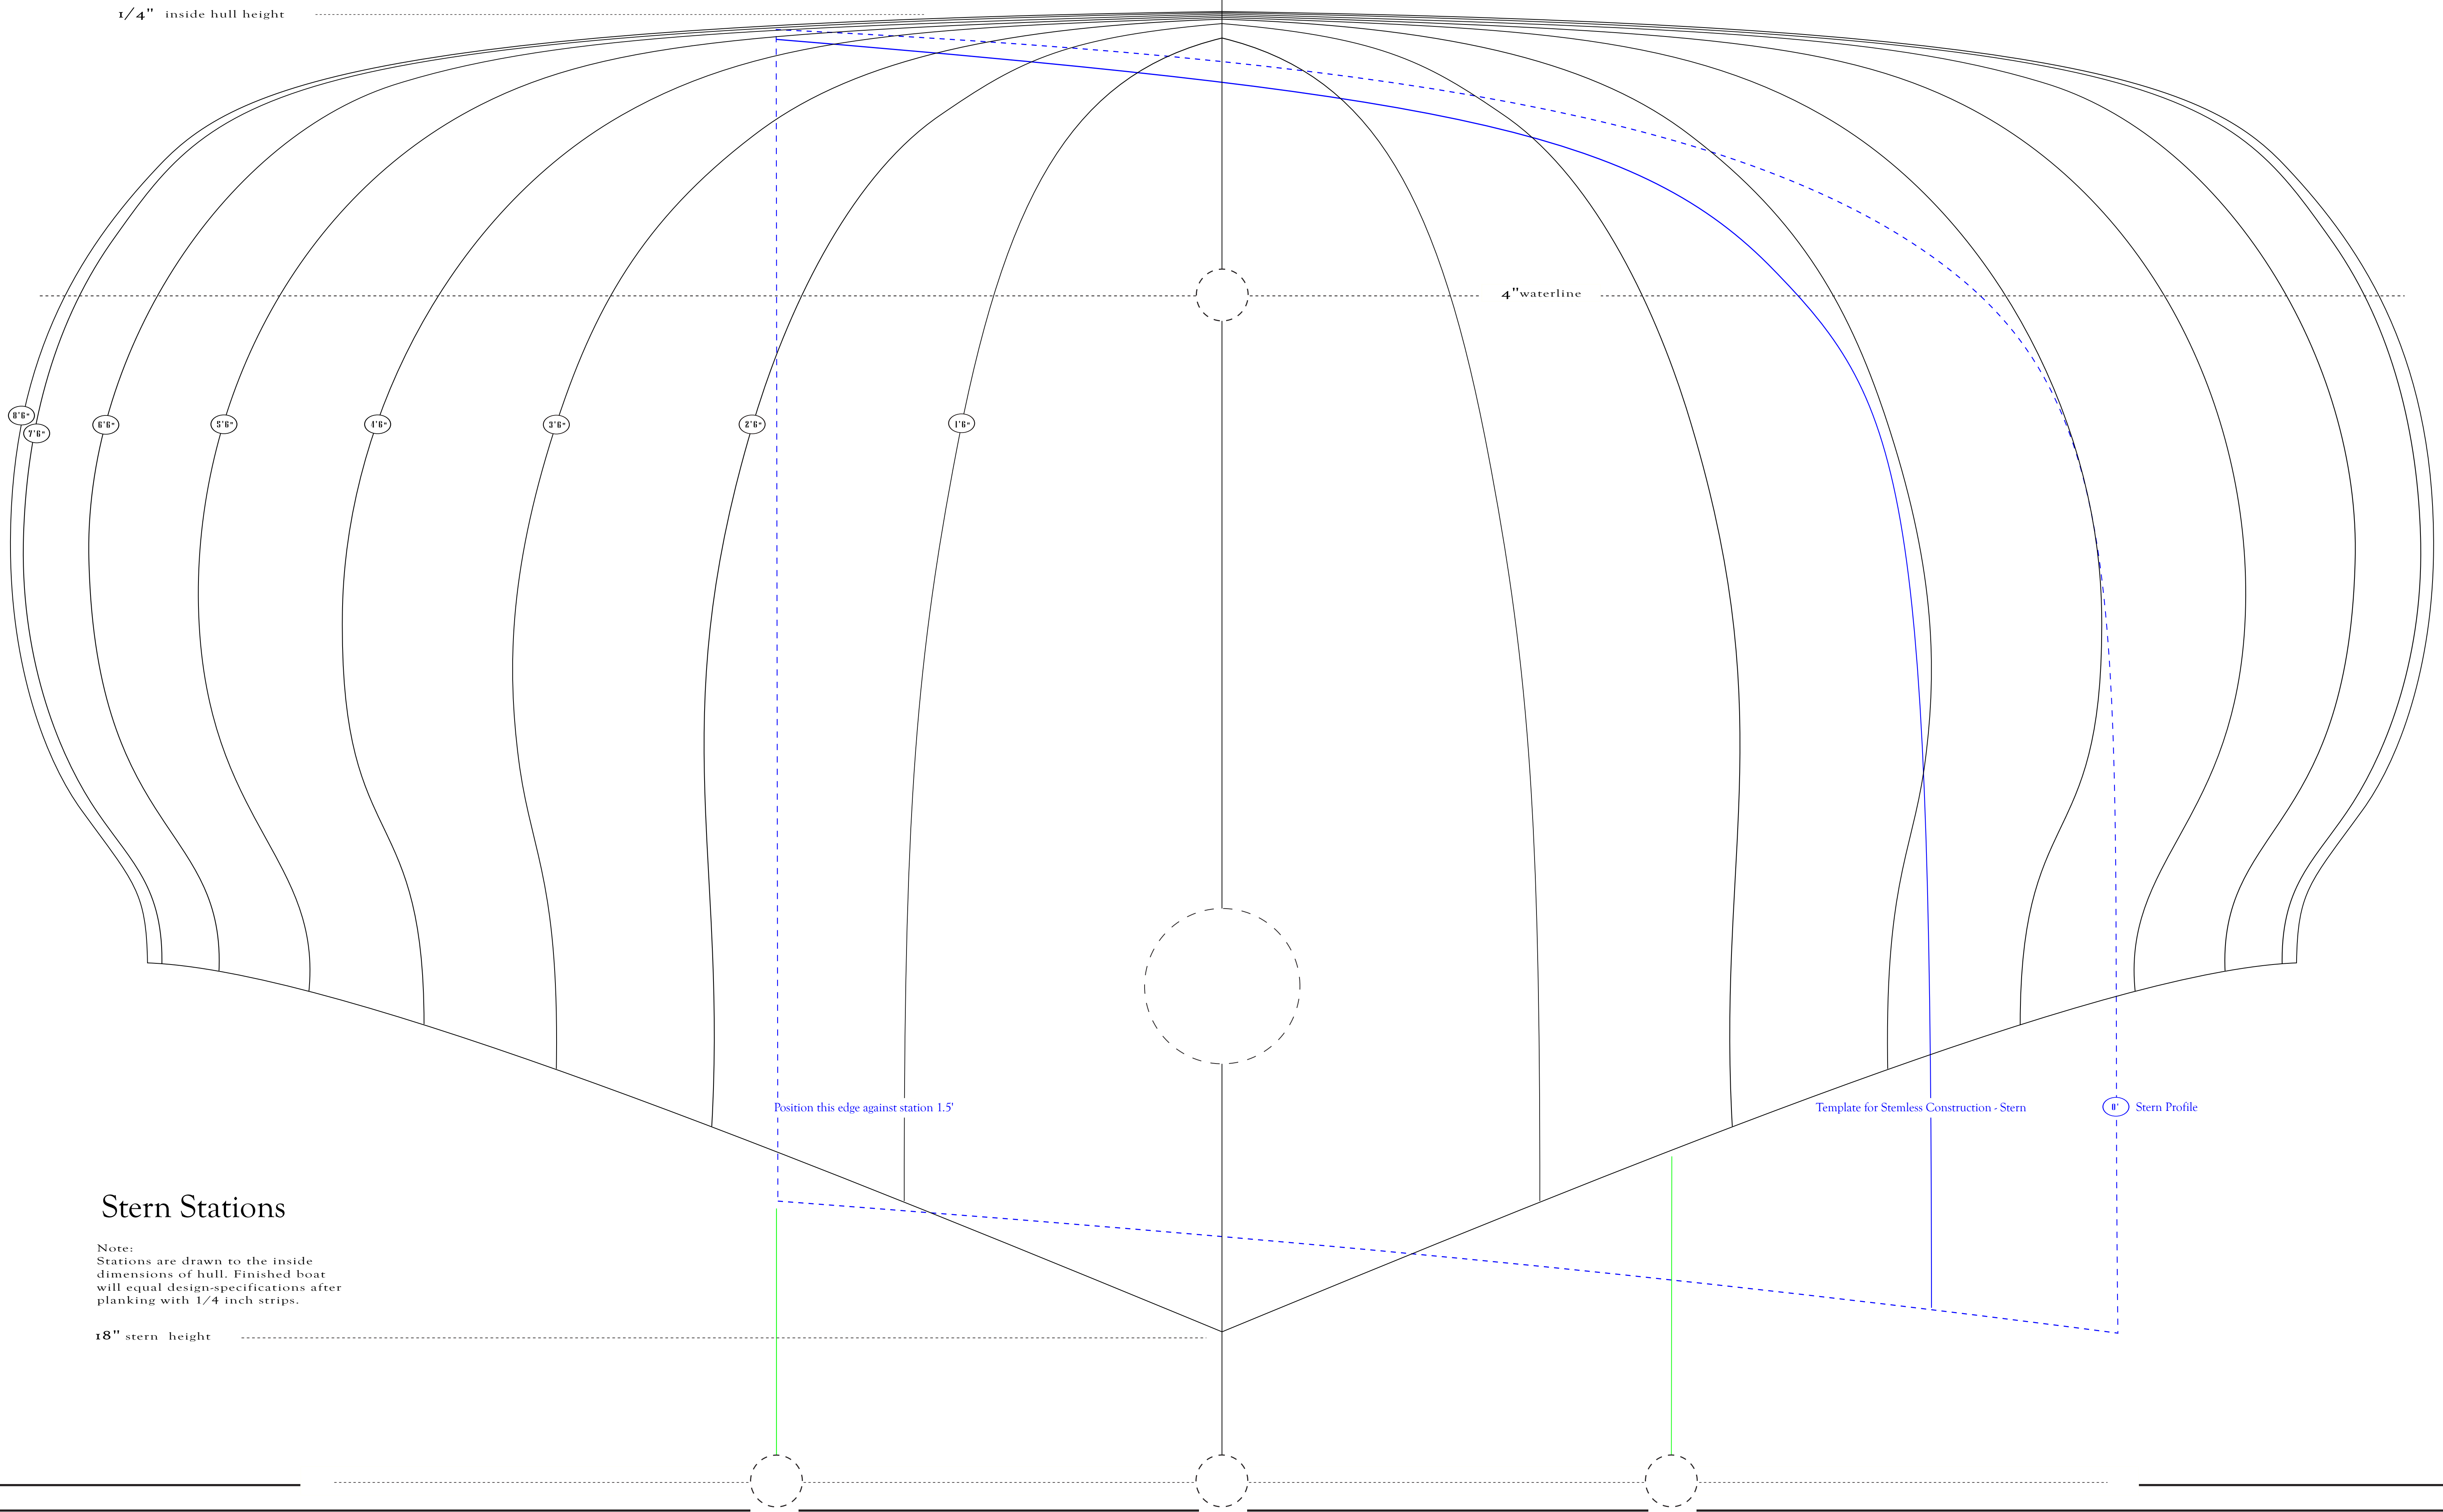

Stern Stations

Note:
Stations are drawn to the inside dimensions of hull. Finished boat will equal design-specifications after planking with 1/4 inch strips.

18" stern height

1/4" inside hull height

4" waterline


Template for Stemless Construction - Bow

Position this edge against station 15.5'

Note:
Stations are drawn to the inside
dimensions of hull. Finished boat
will equal design-specifications after
planking with 1/4 inch strips.



20" bow height

THE TANDEM

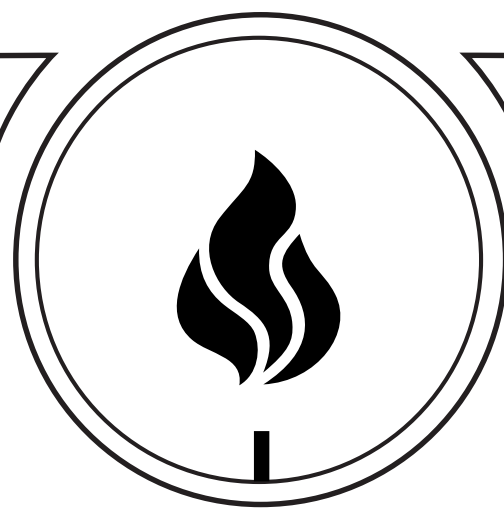

ASHES TRIP

CONSTRUCTION DETAILS

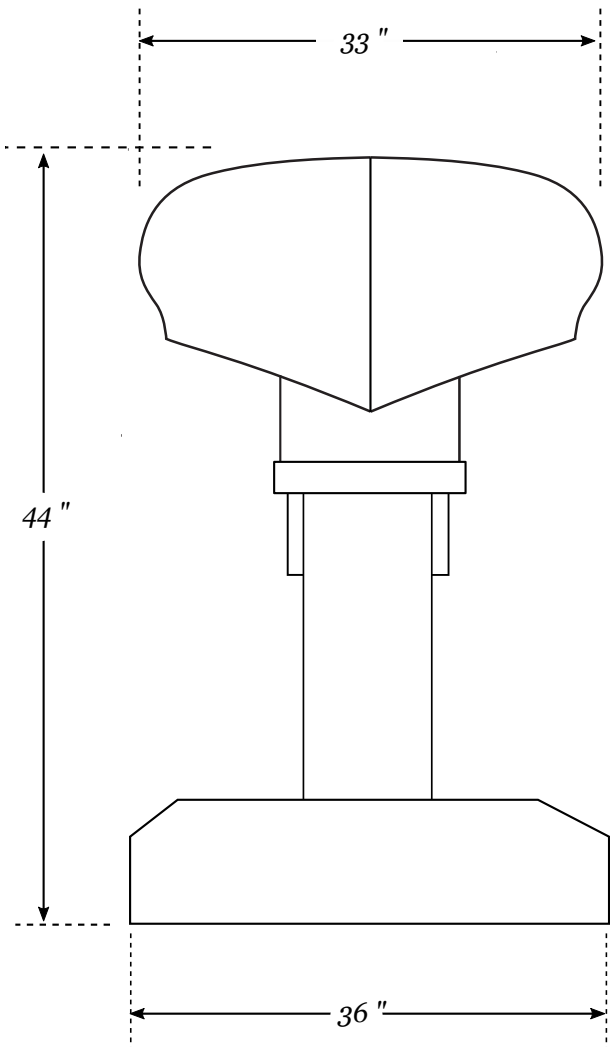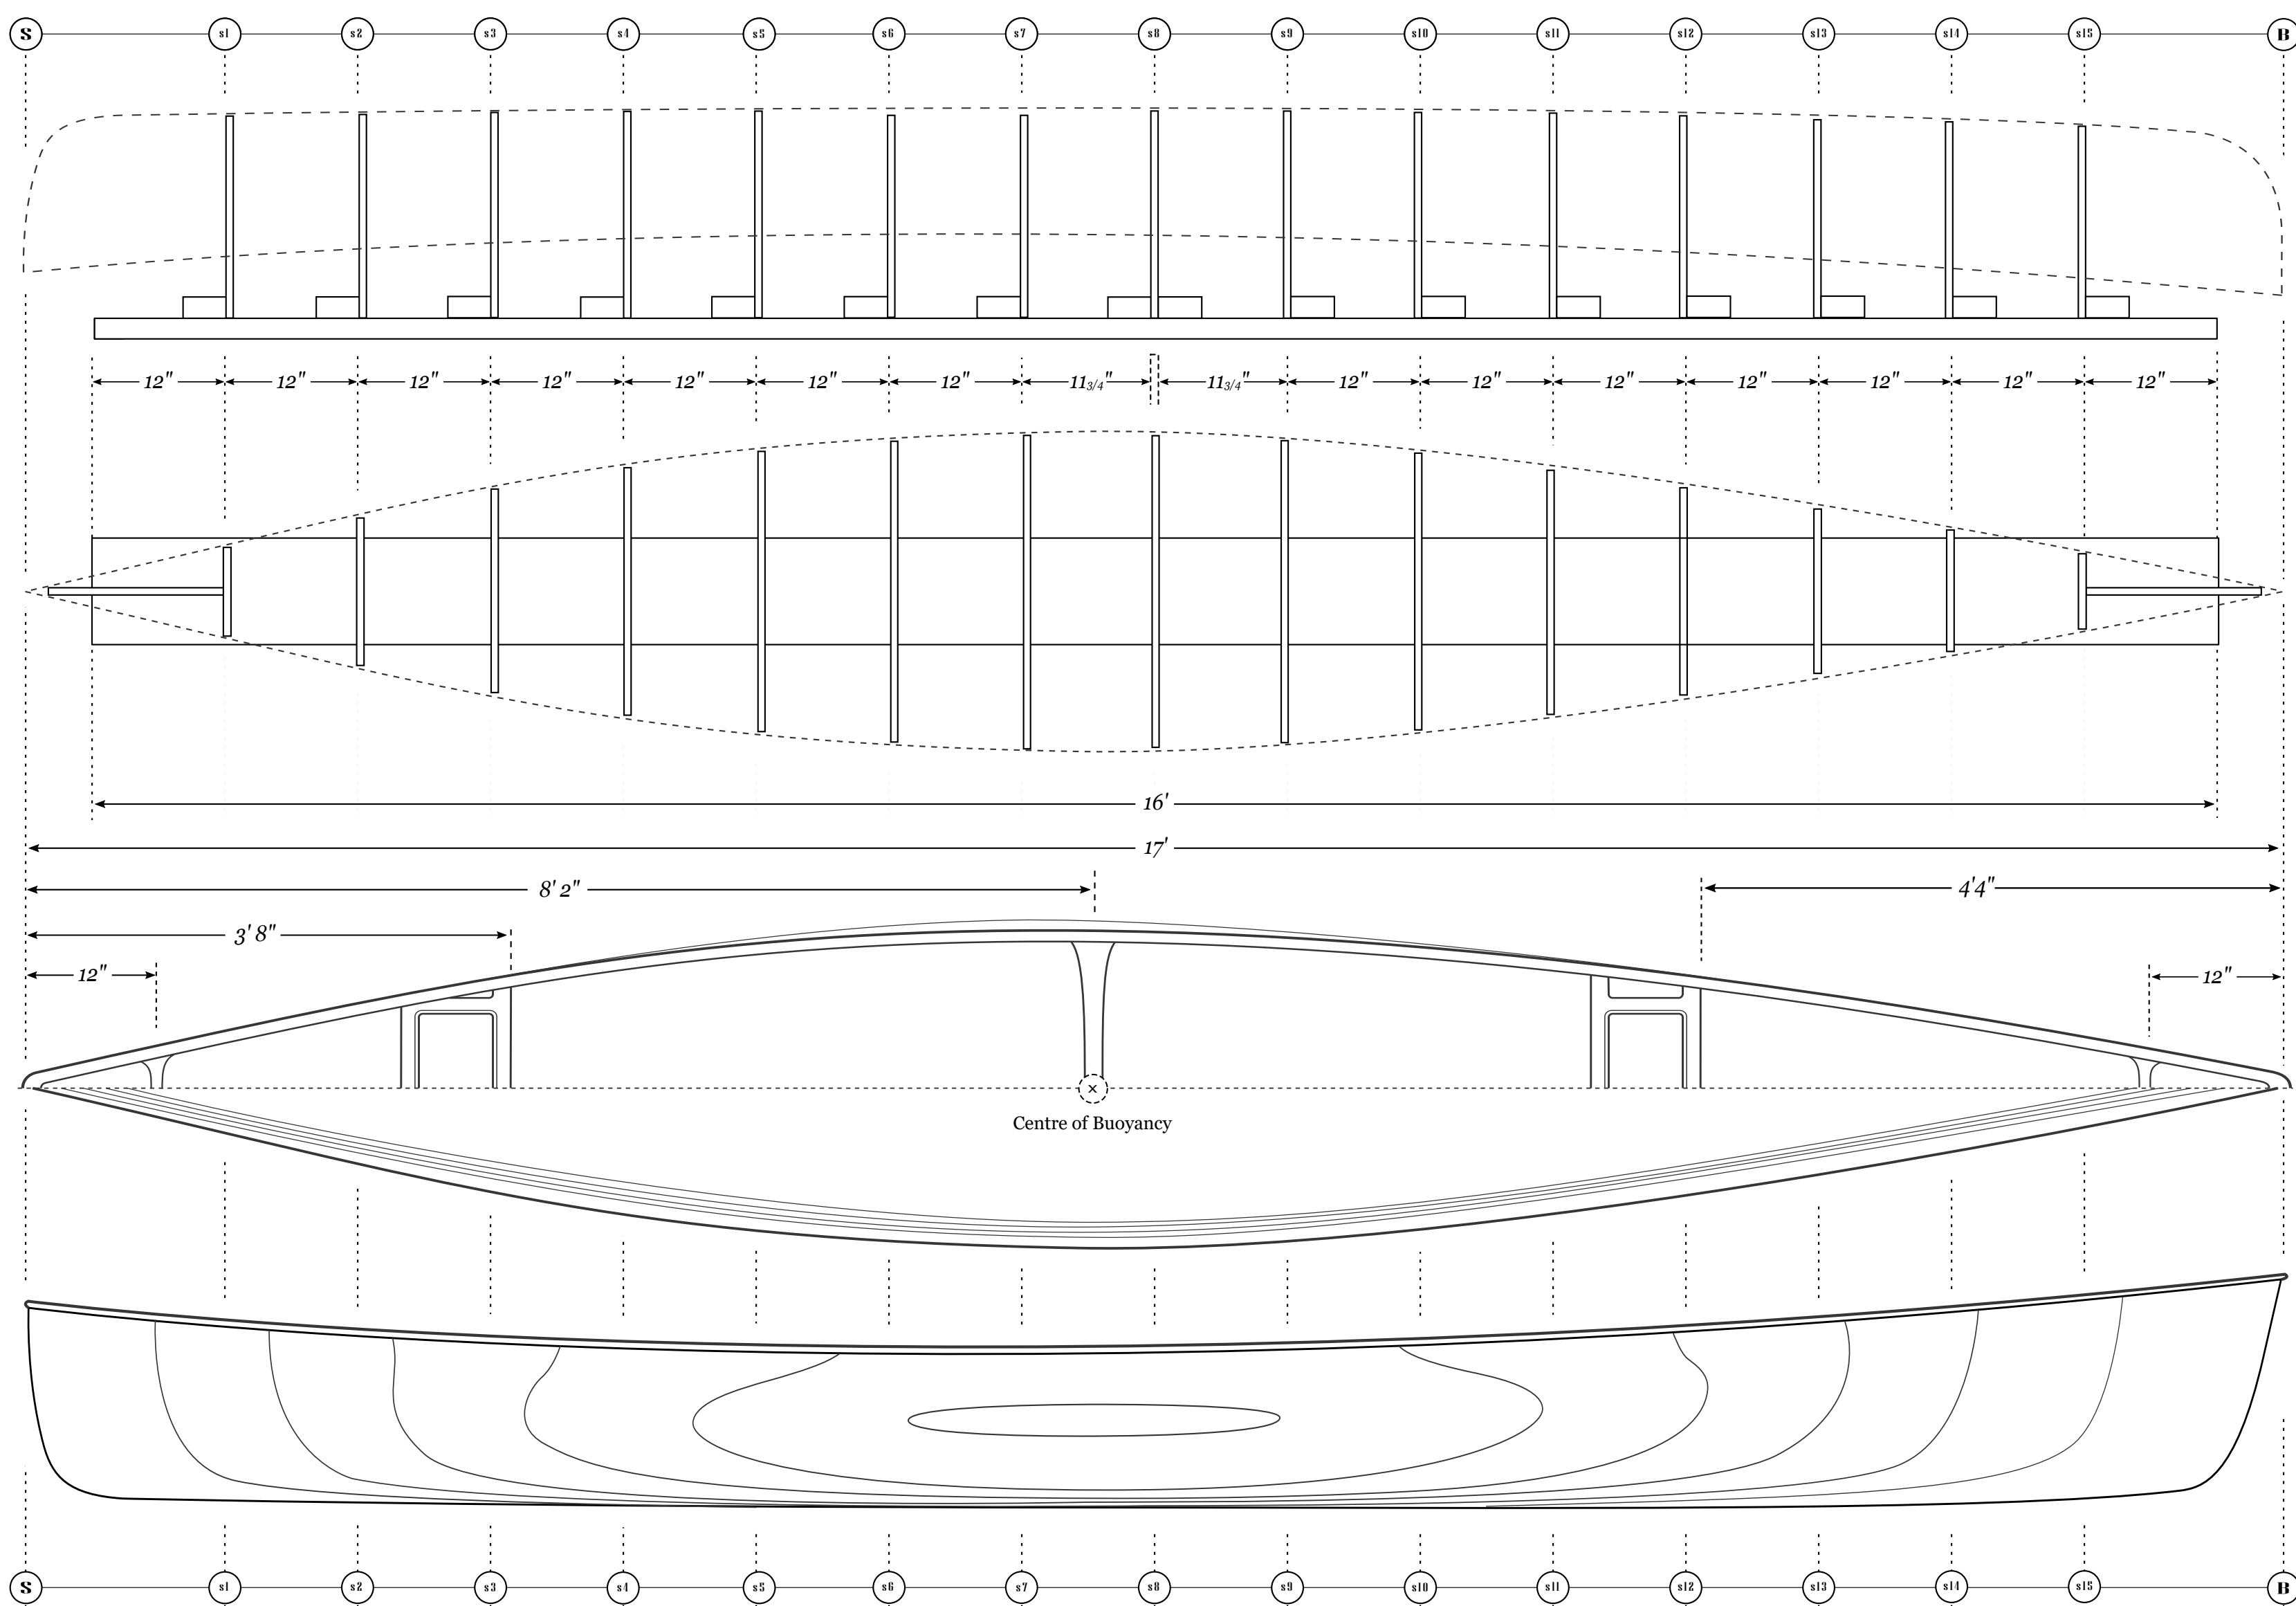

MATERIALS LIST

HULL
cedar, basswood or builders choice
18' x 3/4" x 1/4" - 70 pieces
or 36 board feet

SEAT, THWART, HANDLES
ash, cherry or builders choice
1 1/4" x 2 1/4" x 36" - 4 pieces

GUNNELS & KEEL
ash, cherry or builder's choice
2/4" x 3/4" x 18' - 5 pieces

CLOTH
60" x 6 oz fiberglass cloth - 16 yards

RESIN & HARDENER
marine grade epoxy - 2.5 gallons

HYDROSTATICS

Length over All : 17.00 ft
Length on Waterline : 16.50 ft

Beam over All : 33 in
Beam on Waterline : 31 in
Beam at Gunnels : 30 in

Height at Bow : 20.0 in
Height at Midships : 13.0 in
Height at Stern : 18.0 in

Rocker Bow : 2.0 in
Rocker Stern : 1.0 in

Displacement at 3.0" : 260 lbs
Displacement at 3.5" : 320 lbs
Displacement at 4.0" : 380 lbs
Displacement at 4.5" : 440 lbs
Displacement at 5.0" : 510 lbs

Maximum load (6.0") : 640 lbs

Wetted surface area : 29.70 ft^2
Total Surface area : 50.13 ft^2

Longitudinal center of buoyancy (from stern): 8.2 ft
Longitudinal center of effort (from stern) : 8.15 ft
Lateral wind area above waterline : 22.37 ft^2
Distance from bow to wind area CoG : 9.03 ft

Block coefficient : 0.4503
Prismatic coefficient : 0.5479

