

```
pip install seaborn
```

```
Requirement already satisfied: seaborn in /usr/local/lib/python3.12/dist-packages (0.13.2)
Requirement already satisfied: numpy!=1.24.0,>=1.20 in /usr/local/lib/python3.12/dist-packages (from seaborn) (2.0.2)
Requirement already satisfied: pandas>=1.2 in /usr/local/lib/python3.12/dist-packages (from seaborn) (2.2.2)
Requirement already satisfied: matplotlib!=3.6.1,>=3.4 in /usr/local/lib/python3.12/dist-packages (from seaborn) (3.10.0)
Requirement already satisfied: contourpy>=1.0.1 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (1.3.0)
Requirement already satisfied: cycler>=0.10 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (0.12.1)
Requirement already satisfied: fonttools>=4.22.0 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (4.53.0)
Requirement already satisfied: kiwisolver>=1.3.1 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (1.4.7)
Requirement already satisfied: packaging>=20.0 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (24.1)
Requirement already satisfied: pillow>=8 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (10.4.0)
Requirement already satisfied: pyparsing>=2.3.1 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (3.1.4)
Requirement already satisfied: python-dateutil>=2.7 in /usr/local/lib/python3.12/dist-packages (from matplotlib!=3.6.1,>=3.4->seaborn) (2.9.0)
Requirement already satisfied: pytz>=2020.1 in /usr/local/lib/python3.12/dist-packages (from pandas>=1.2->seaborn) (2024.2)
Requirement already satisfied: tzdata>=2022.7 in /usr/local/lib/python3.12/dist-packages (from pandas>=1.2->seaborn) (2024.2)
Requirement already satisfied: six>=1.5 in /usr/local/lib/python3.12/dist-packages (from python-dateutil>=2.7->matplotlib) (1.16.0)
```

```
import pandas as pd
import numpy as np

import matplotlib.pyplot as plt
import seaborn as sns

dataset = sns.load_dataset('titanic')

dataset.head()
```

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who	adult_male	deck	embark_town	alive	alone
0	0	3	male	22.0	1	0	7.2500	S	Third	man	True	NaN	Southampton	no	False
1	1	1	female	38.0	1	0	71.2833	C	First	woman	False	C	Cherbourg	yes	False
2	1	3	female	26.0	0	0	7.9250	S	Third	woman	False	NaN	Southampton	yes	True
3	1	1	female	35.0	1	0	53.1000	S	First	woman	False	C	Southampton	yes	False
4	0	3	male	35.0	0	0	8.0500	S	Third	man	True	NaN	Southampton	no	True

Next steps:

Generate code with dataset

New interactive sheet

```
sns.distplot(dataset['fare'])
```


```
/tmp/ipykernel_9056/1694218074.py:1: UserWarning:
```

```
`distplot` is a deprecated function and will be removed in seaborn v0.14.0.
```

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>

```
sns.distplot(dataset['fare'])
<Axes: xlabel='fare', ylabel='Density'>
```

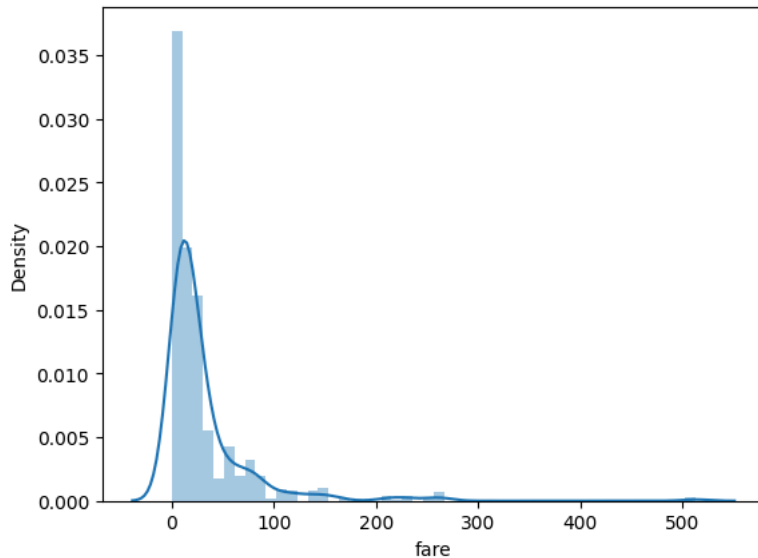

```
sns.distplot(dataset['fare'], kde=False)
```


```
/tmp/ipykernel_9056/1623915515.py:1: UserWarning:
```

```
`distplot` is a deprecated function and will be removed in seaborn v0.14.0.
```

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).


For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>

```
sns.distplot(dataset['fare'], kde=False)
<Axes: xlabel='fare'>
```

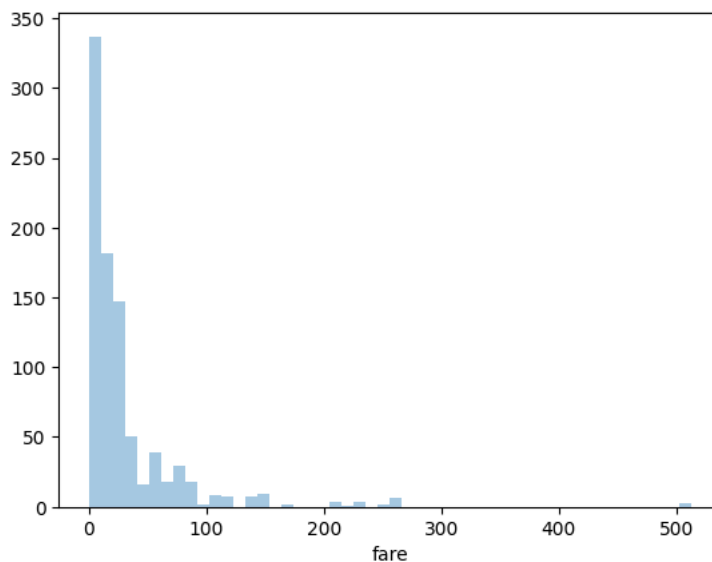


```
sns.jointplot(x='age', y='fare', data=dataset)
```

```
<seaborn.axisgrid.JointGrid at 0x7f85a6ba6ff0>
```

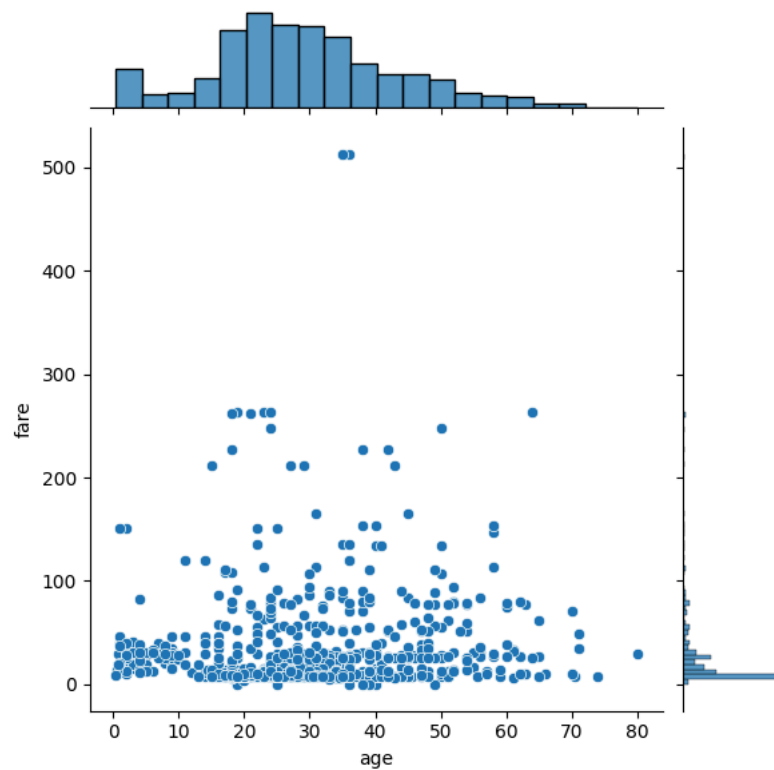


```
sns.rugplot(dataset['fare'])
```

```
<Axes: xlabel='fare'>
```

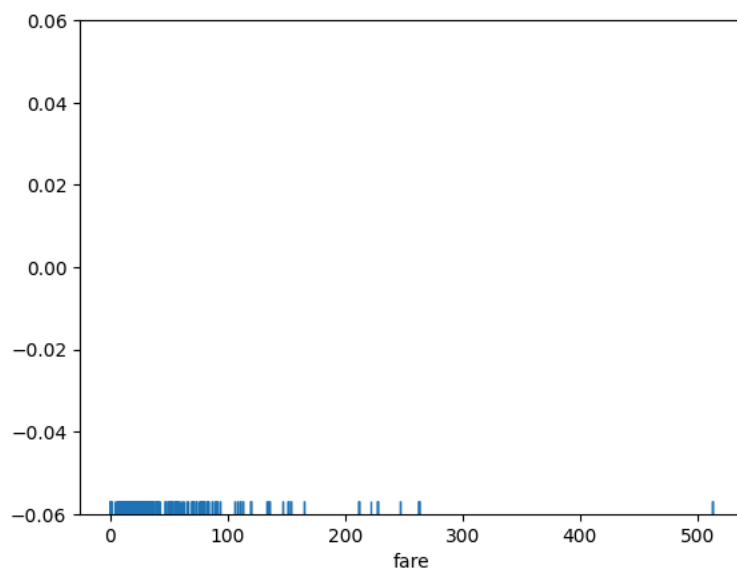


```
sns.barplot(x='sex', y='age', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='age'>
```

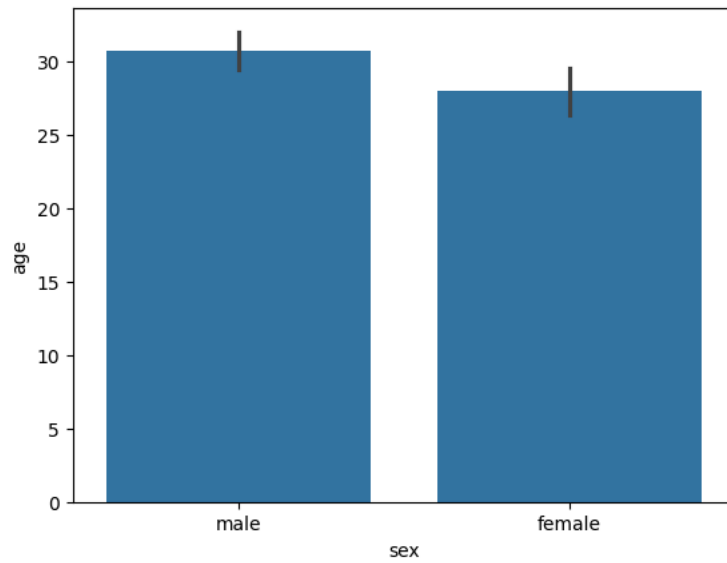


```
sns.countplot(x='sex', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='count'>
```

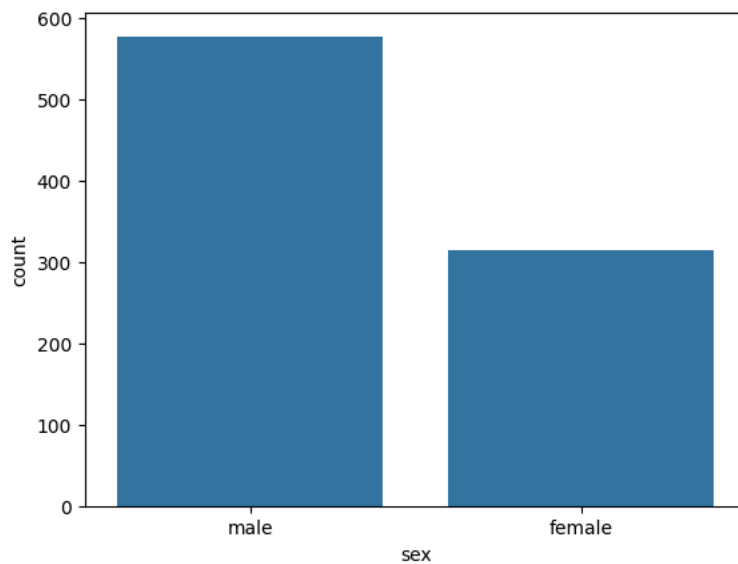


```
sns.boxplot(x='sex', y='age', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='age'>
```

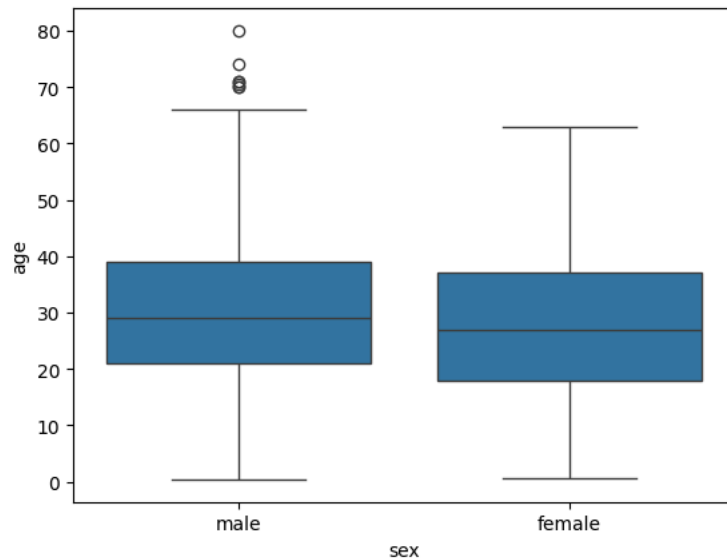


```
sns.boxplot(x='sex', y='age', data=dataset, hue="survived")
```

```
<Axes: xlabel='sex', ylabel='age'>
```

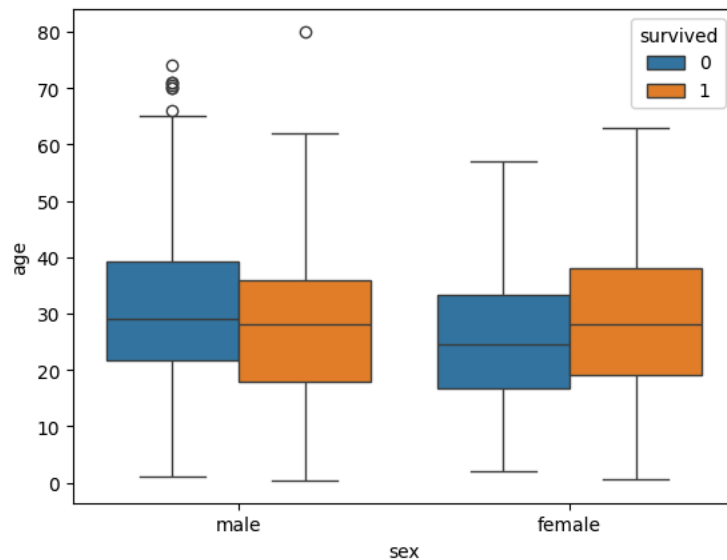


```
sns.violinplot(x='sex', y='age', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='age'>
```

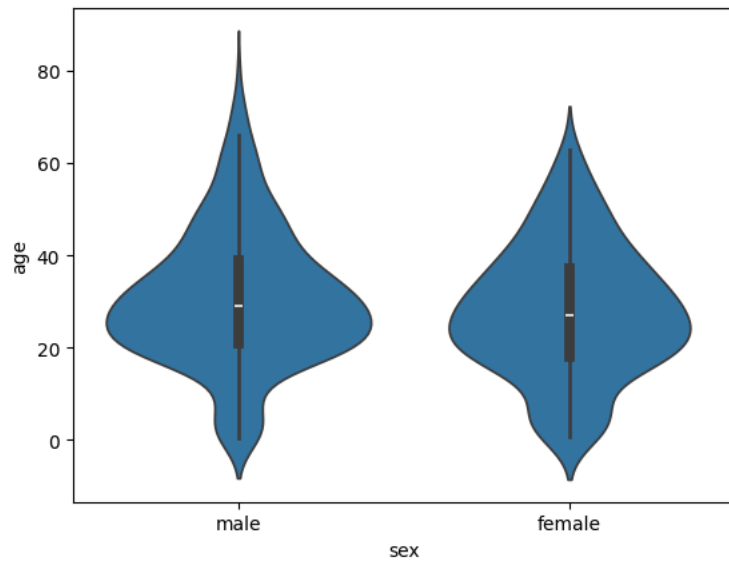

```
sns.stripplot(x='sex', y='age', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='age'>
```

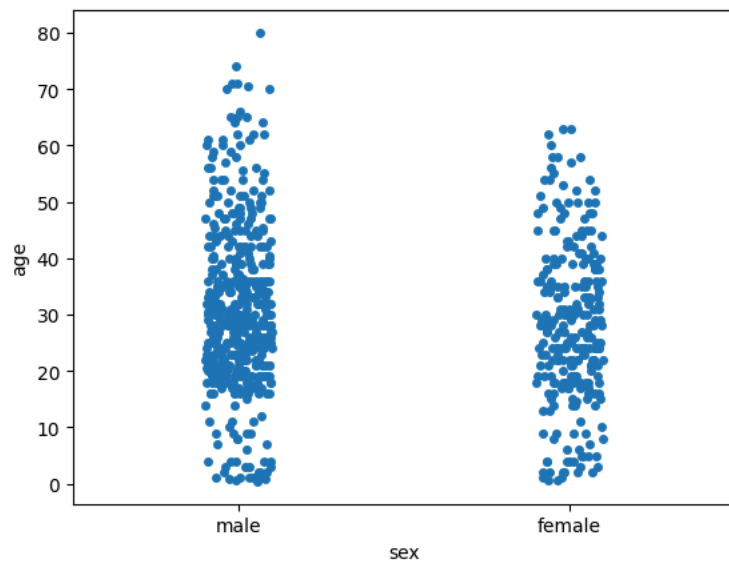

```
sns.swarmplot(x='sex', y='age', data=dataset)
```

```
<Axes: xlabel='sex', ylabel='age'>
```

```
sns.violinplot(x='sex', y='age', data=dataset)  
sns.swarmplot(x='sex', y='age', data=dataset, color='black')
```

```
<Axes: xlabel='sex', ylabel='age'>
```

```
/usr/local/lib/python3.12/dist-packages/seaborn/categorical.py:3399: UserWarning: 5.7% of the points cannot be placed  
warnings.warn(msg, UserWarning)
```

