

ESC101: Introduction to Computing

Conditional Expressions

A Program

```
#include <stdio.h>

int main()
{
    float mi, km; // decl without initialization

    scanf("%f", &mi); // get miles from user
    km = mi * 1.609; // compute and store km

    printf("%.3f miles = %.3f kms.\n",
           mi, km); // show the answer.
    return 0;
}
```

Conditional Expressions



- ◆ An expression that evaluates to either true or false.
 - Often known as Boolean expression.
- ◆ C does not have a separate Boolean data type
 - Value **0** is treated as **false**.
 - **Non-zero** values are treated as **true**.

Conditional Expressions

- ◆ If an expression evaluates to **true**, we get a value **1**
 - Think of **1** as *default true* value
- ◆ If an expression evaluates to **false**, we get a value **0**

True



False



Relational Operators



◆ Compare two quantities

Operator	Function
>	Strictly greater than
>=	Greater than or equal to
<	Strictly less than
<=	Less than or equal to
==	Equal to
!=	Not equal to

◆ Work on **int, char, float, double...**

Examples

Rel. Expr.	Result	Remark
$3 > 2$	1	
$3 > 3$	0	
'z' > 'a'	1	ASCII values used for char
$2 == 3$	0	
'A' <= 65	1	'A' has ASCII value 65
'A' == 'a'	0	Different ASCII values
$('a' - 32) == 'A'$	1	
$5 != 10$	1	
$1.0 == 1$	AVOID	May give unexpected result due

Avoid mixing **int** and **float** values while comparing.
Comparison with **floats** is not exact!



Is a number even or odd

```
# include <stdio.h>
int main() {
    int n;
    int cond;
    scanf("%d", &n) ;
    cond = _____;
    printf("The result is %d\n", cond);
    return 0;
}
```

Is a number even or odd

```
# include <stdio.h>
int main() {
    int n;
    int cond;
    scanf("%d", &n);
    cond = n%2 == 0;
    printf("The result is %d\n", cond);
    return 0;
}
```


Precedence and Associativity (Refined)

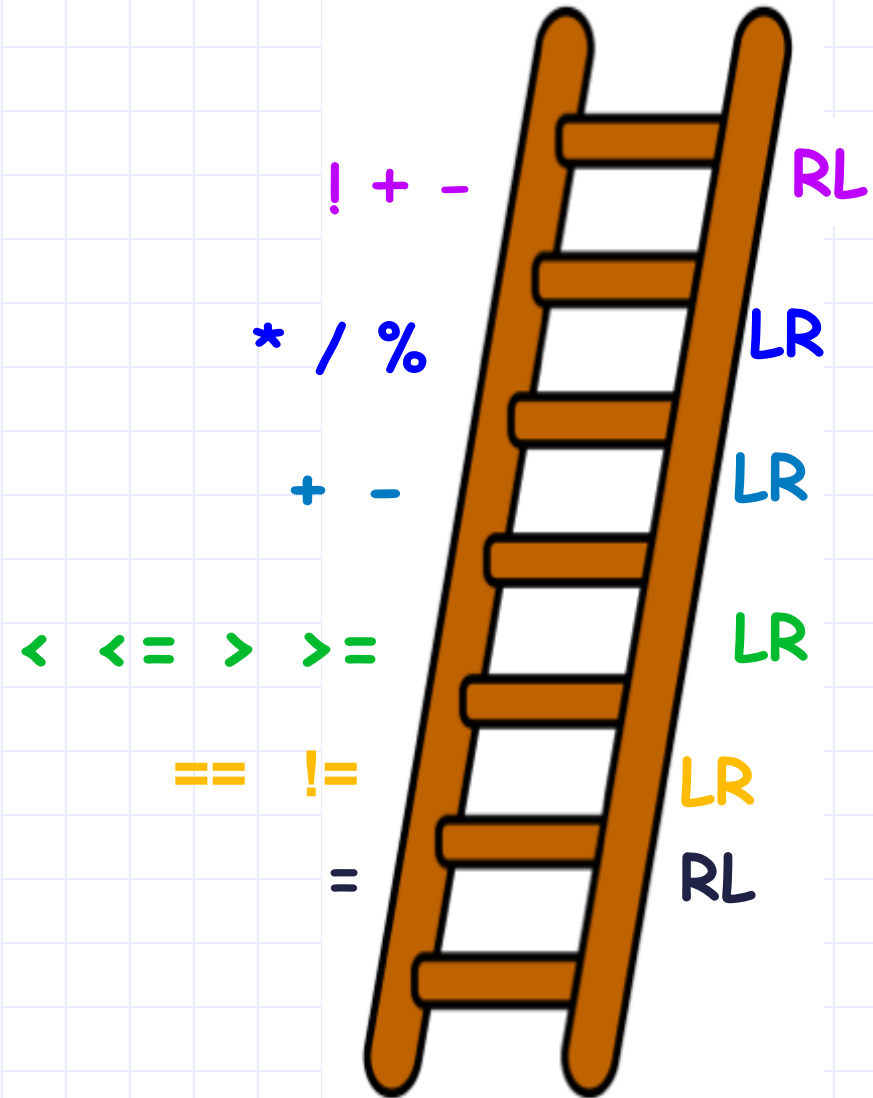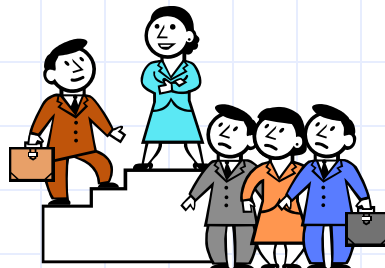

Conditional Statements



In daily routine

- If it is very cold, I will skip class.
- If there is a quiz tomorrow, I will first study and then sleep. Otherwise I will sleep now.
- If I have 500 Rs, I will order pizza. If I have 20 Rs, I will eat Maggi. If I have 5 Rs, I will eat biscuits. If I do not have any money, I will eat in hostel mess.

Conditional statements in C

◆ Three types of conditional statements in C

- **if** (condition) *action*
else *some-other-action*
- **if** (condition) *action*
- **switch-case**

◆ Each action is a sequence of one or more statements

Statements and Blocks

- ◆ An expression such as `x=0` or `printf(...)` becomes a statement when it is followed by a semi-colon, as in

`x = 0;`

`printf(...);`

`5+2;`

- ◆ Braces `{` and `}` are used to group variable declarations and statements together into a compound statement or a block

- Syntactically equivalent to a single statement.
- Can use it anywhere a single statement can be used

Statements and Blocks

```
{  
    int x; float y; /* 2 statements */  
    x = 10;  
    printf("x = %d\n", x);  
}
```

A single block

if-else statement

◆ Read two integers and print the min.

```
# include <stdio.h>
int main() {
    int x, y;
    scanf("%d%d", &x,&y);
    if (x < y) {
        printf("%d", x);
    } else {
        printf("%d", y);
    }
    return 0;
}
```

1. Check if x is less than y.
2. If so, print x
3. Otherwise, print y.

Tracing Execution of if-else

```
# include <stdio.h>
```

```
int main() {
```

```
    int x; int y;
```

```
    scanf("%d%d", &x,&y);
```

```
    if (x < y) {
```

```
        printf("%d\n",x);
```

```
    }
```

```
    else { printf("%d\n",y);}
```

```
    return 0;
```

```
}
```

6 < 10 so the if-branch is taken

Run the program

Input

6 10

x

y

6

10

Output

6

Is a number even or odd

- Find the correct conditional expression

```
# include <stdio.h>
int main() {
    int n;
    scanf("%d", &n);
    if( _____ )
        printf("%d is even\n", n);
    else
        printf("%d is odd\n", n);
    return 0;
}
```


Is a number even or odd

```
# include <stdio.h>
int main() {
    int n;
    scanf("%d", &n) ;
    if( n%2 == 0)
        printf("%d is even\n", n) ;
    else
        printf("%d is odd\n", n) ;
    return 0;
}
```

Is a number even or odd

```
# include <stdio.h>
int main() {
    int n;
    scanf("%d", &n);
    if( n%2 != 0)
        printf("%d is odd\n", n);
    else
        printf("%d is even\n", n);
    return 0;
}
```

ESC101: Introduction to Computing

Logical Expressions

Logical Operators

Logical Op	Function	Allowed Types
&&	Logical AND	char, int, float, double
	Logical OR	char, int, float, double
!	Logical NOT	char, int, float, double

Remember

- value 0 represents false.
- any other value represents true.

Truth Tables

E1	E2	E1 && E2	E1 E2
0	0	0	0
0	Non-0	0	1
Non-0	0	0	1
Non-0	Non-0	1	1

E	!E
0	1
Non-0	0

Examples

Expr	Result	Remark
2 && 3	1	
2 0	1	
'A' && 0	0	
'A' && '0'	1	ASCII value of '0'≠0
'A' && 'b'	1	
! 0.0	1	0.0 == 0 is guaranteed
! 10.05	0	Any real ≠ 0.0
(2<5) && (6>5)	1	Compound expr

Examples

- ◆ You can create very complex expressions, involving arithmetic, logical and relational operators, constants, variables, function calls.

Example:

```
(x + 7 > 93) && !(y + 3 % z) || (abs(sqrt(w) - g) < epsilon);
```

Example

◆ Problem: Input **3** positive integers. Print the **count** of inputs that are even and odd.

- Do not use if-then-else

INPUT

10

5

3

```
int a; int b; int c;
```

```
int cEven; // count of even inputs
```

```
scanf("%d%d%d", &a,&b,&c); // input a,b,c
```

```
// (x%2 == 0) evaluates to 1 if x is Even,
```

```
//
```

```
0 if x is Odd
```

```
printf("Even=%d\nOdd=%d", cEven, 3-cEven);
```


Example

◆ Problem: Input **3** positive integers. Print the **count** of inputs that are even and odd.

- Do not use if-then-else

INPUT

10

5

3

OUTPUT

Even=1

Odd=2

```
int a; int b; int c;
```

```
int cEven; // count of even inputs
```

```
scanf("%d%d%d", &a,&b,&c); // input a,b,c
```

```
// (x%2 == 0) evaluates to 1 if x is Even,
```

```
//
```

```
0 if x is Odd
```

```
cEven = (a%2 == 0) + (b%2 == 0) + (c%2 == 0);
```

```
printf("Even=%d\nOdd=%d", cEven, 3-cEven);
```

Question

◆ What is the value of expression:

$0 \leq 10 \leq 4$

- a) Compile time error
- b) Run time crash
- c) False (0)
- d) True (1)

True



False




Evaluation

`0 <= 10 <= 4`

`(0 <= 10) <= 4`

`1 <= 4`

`1 /* True */`

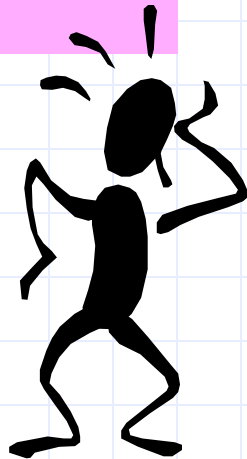

Probably not what you intended. The intended expression is:

`0 <= 10 && 10 <= 4`



`(0 <= 10) && (10 <= 4)`

`(1) && (10 <= 4)`

`1 && (0)`

`0 /*False*/`

Precedence and Associativity (Refined)

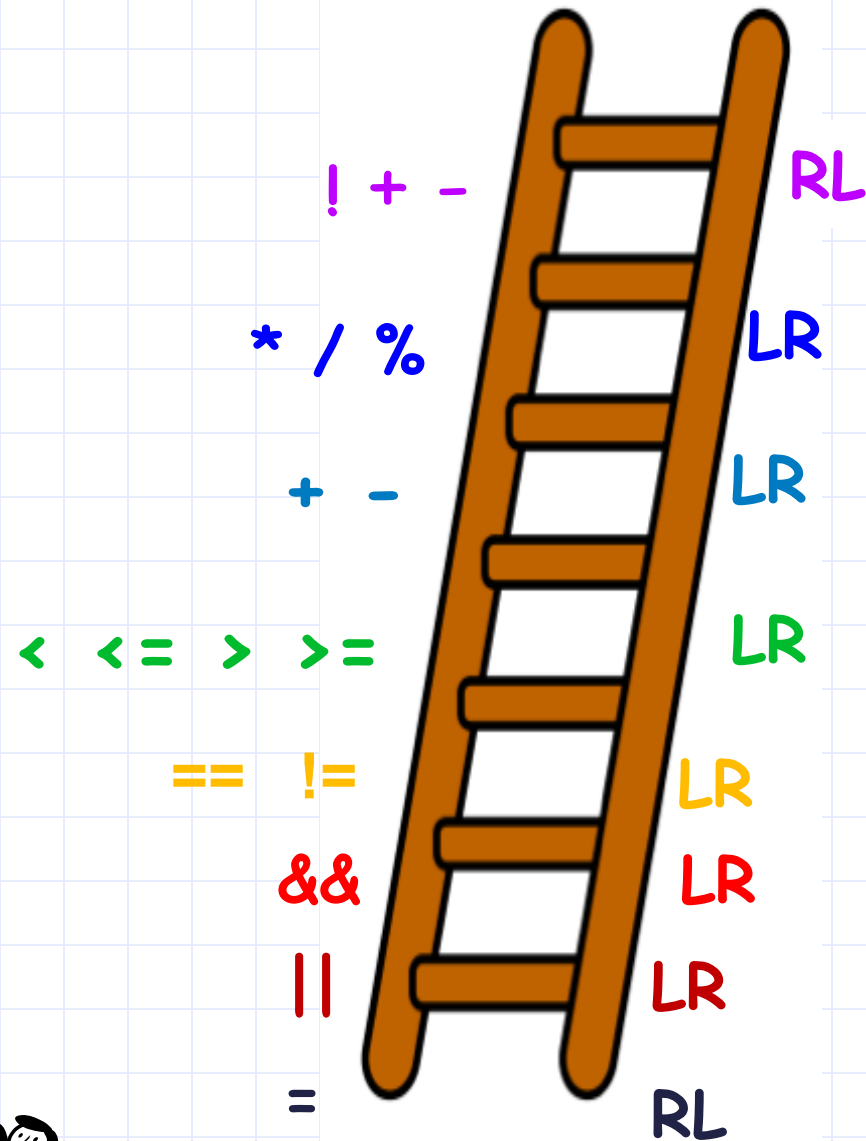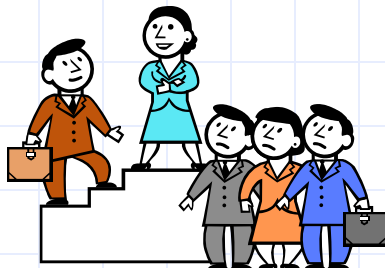

Is input character a valid alphabet

```
# include <stdio.h>
int main() {
    char c;
    scanf ("%c", &c);
    if( _____ )
        printf ("%c is a valid alphabet\n", c);
    else
        printf ("%c with value %d is not a
        valid alphabet\n", c, c);
    return 0;
}
```

Is input character a valid alphabet

```
# include <stdio.h>
int main() {
    char c;
    scanf ("%c", &c);
    if(    (c >= 'a'  && c <= 'z') ||
          (c >= 'A'  && c <= 'Z') )
        printf("%c is a valid alphabet\n", c);
    else
        printf("%c with value %d is not a
        valid alphabet\n", c, c);
    return 0;
}
```

Next class

◆ Compound if statements