


Step 1: Open sh.exe from bin folder located in parent folder.

Step 2: Change the directory to where your batch script resides with **cd** command

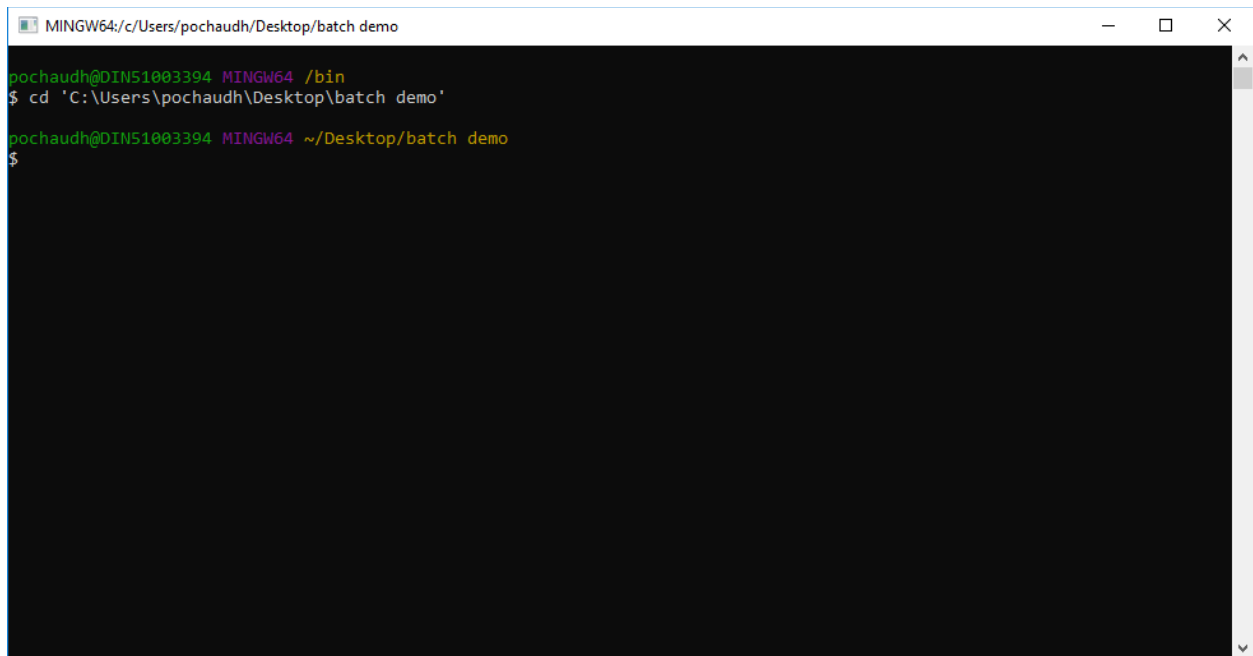

```
MINGW64:/c/Users/pochaudh/Desktop/batch demo
pochaudh@DINS1003394 MINGW64 /bin
$ cd 'C:\Users\pochaudh\Desktop\batch demo'
pochaudh@DINS1003394 MINGW64 ~/Desktop/batch demo
$
```


Step 3: There are two ways to execute batch script in Linux shell

a. `./filename.bat`

Write the file name with .bat extension and ./ before the name of file.

b. `cmd "/c filename.bat "`

The above command will also execute batch file.

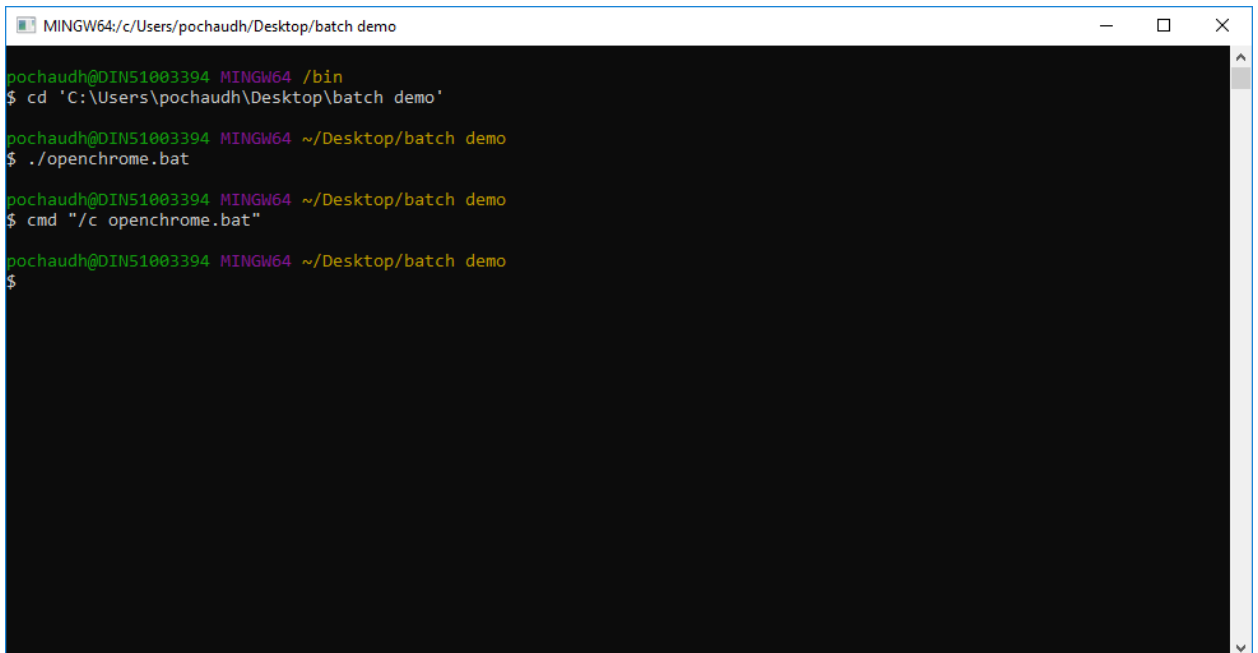

```
MINGW64:/c/Users/pochaudh/Desktop/batch demo
pochaudh@DINS1003394 MINGW64 /bin
$ cd 'C:\Users\pochaudh\Desktop\batch demo'
pochaudh@DINS1003394 MINGW64 ~/Desktop/batch demo
$ ./openchrome.bat
pochaudh@DINS1003394 MINGW64 ~/Desktop/batch demo
$ cmd "/c openchrome.bat"
pochaudh@DINS1003394 MINGW64 ~/Desktop/batch demo
$
```