

# Data Visualization

Patrick Mathias  
Lesson 3  
DLMP Fall 2021

## Goals

1. Appreciate the importance of visualization for understanding data
2. Learn how to use ggplot2 to visualize data

## Objectives

1. Create a basic visualization using a simple **template**
2. Define “**aesthetic mapping**” and explain how aesthetic mappings relate variables of a data frame to features of graphic markings on a plot
3. Write the code to specify a type of plot and fine tune its appearance using “**geom**” functions
4. Explain how to add **layers** to a ggplot object to create complex and highly customized visualizations

# covid\_testing

grid covid\_testing x

Filter

	mrn	first_name	last_name	gender	pan_day	test_id	clinic_name	result	
1	5001412	jhezane	westerling	female		4	covid	inpatient ward a	negative
2	5000533	penny	targaryen	female		7	covid	clinical lab	negative
3	5009134	grunt	rivers	male		7	covid	clinical lab	negative
4	5008518	melisandre	swyft	female		8	covid	clinical lab	negative
5	5008967	rolley	karstark	male		8	covid	emergency dept	negative
6	5011048	megga	karstark	female		8	covid	oncology day hosp	negative
7	5000663	ithoke	targaryen	male		9	covid	clinical lab	negative
8	5002158	ravella	frey	female		9	covid	emergency dept	negative
9	5003794	styr	tyrell	male		9	covid	clinical lab	negative
10	5004706	wynafryd	seaworth	male		9	covid	clinical lab	negative
11	5008115	patrek	frey	male		9	covid	clinical lab	negative
12	5009309	maege	sand	female		9	covid	medical center	negative
13	5008943	myria	rivers	female		9	covid	picu	negative

Showing 1 to 14 of 15,524 entries, 17 total columns


# Your Turn 1

Consider the `covid_testing` data frame.

What do you think plot would look like in which:

- the x-axis represents `pan_day` (day of the pandemic), and
- the y-axis represents the number of tests that were performed on that day?

# Your Turn 2

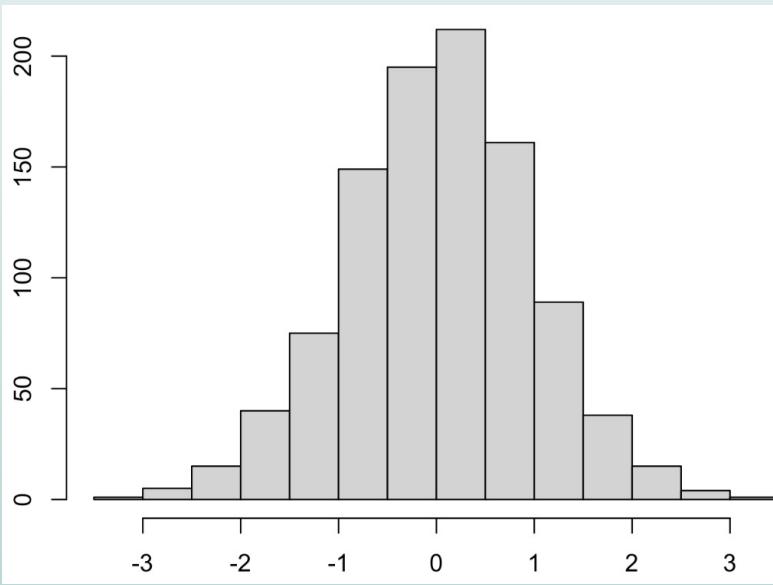


What is the name of this kind of plot?  
Type the answer into the chat!

# Your Turn 3

Type the following code in the RStudio console to make a graph.

Pay attention to the spelling, capitalization, and parentheses!

```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day))
```

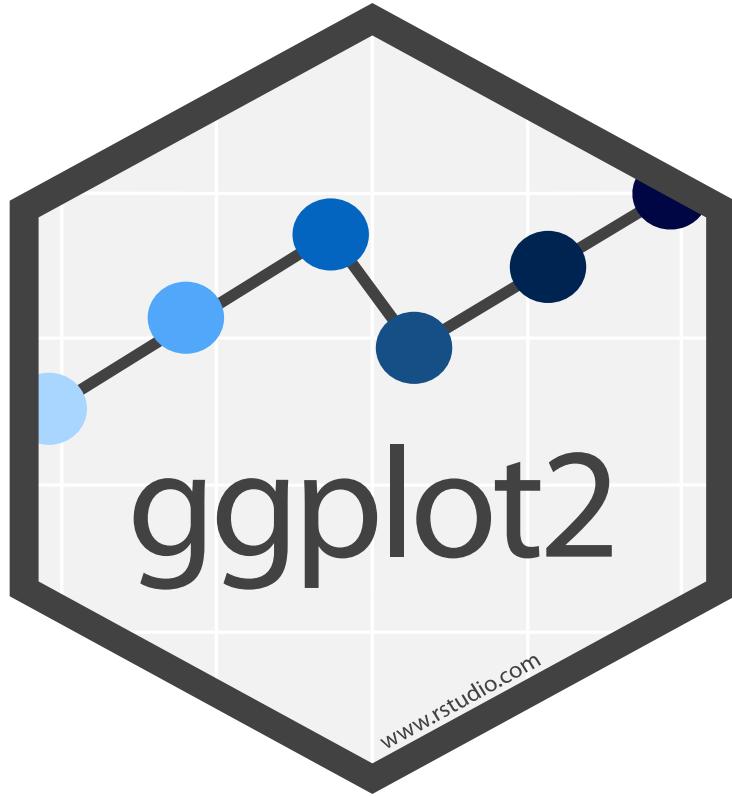

# ggplot()

Always start  
with ggplot()

data frame

+ sign  
before new line

```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day))
```

type of plot

mappings inside  
aes() function

x axis  
mapping

# To make **any** kind of graph:

1. Pick a “tidy”  
**data frame**

```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings))
```

2. Pick a “**geom**”  
function


3. Write aesthetic  
**mappings**

1. Pick a “tidy”  
**data frame**

```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings))
```

# 1. Pick a “Tidy” Data Frame

AGE	HUP_MRN	SEX	RESULT
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4

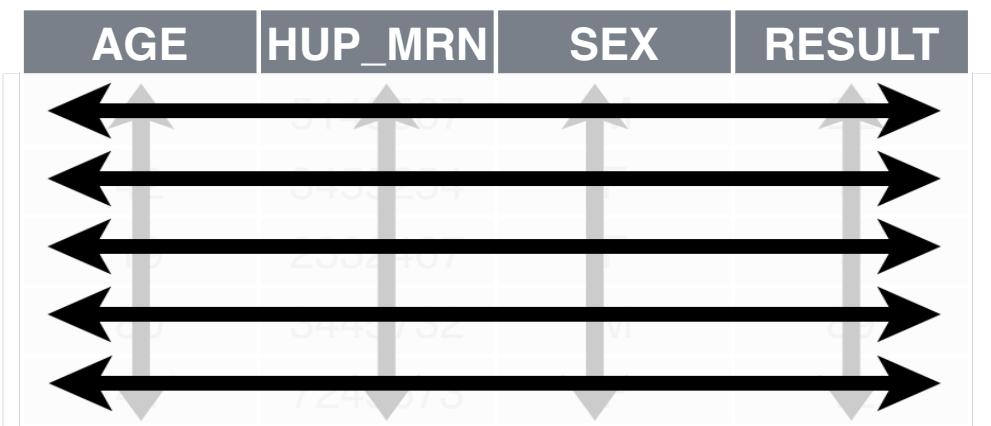

A data set is **tidy** if:


1. Each **variable** is in its own **column**
2. Each **observation** is in its own **row**
3. Each **value** is in its own **cell**

1. Pick a “tidy”  
**data frame**


```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings))
```

2. Pick a “geom”  
function


## 2. Pick a “Geom” Function




`geom_histogram()`




`geom_dotplot()`




`geom_bar()`



`geom_boxplot()`



`geom_point()`



`geom_line()`

1. Pick a “tidy”  
**data frame**

```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings))
```

2. Pick a “geom”  
function

3. Write aesthetic  
**mappings**


### 3. Write Aesthetic Mappings

```
aes(x = a, y = b, color = c)
```

Data frame


a	b	c
1	3	M
2	1	F
3	3	F
2	2	M

Graph

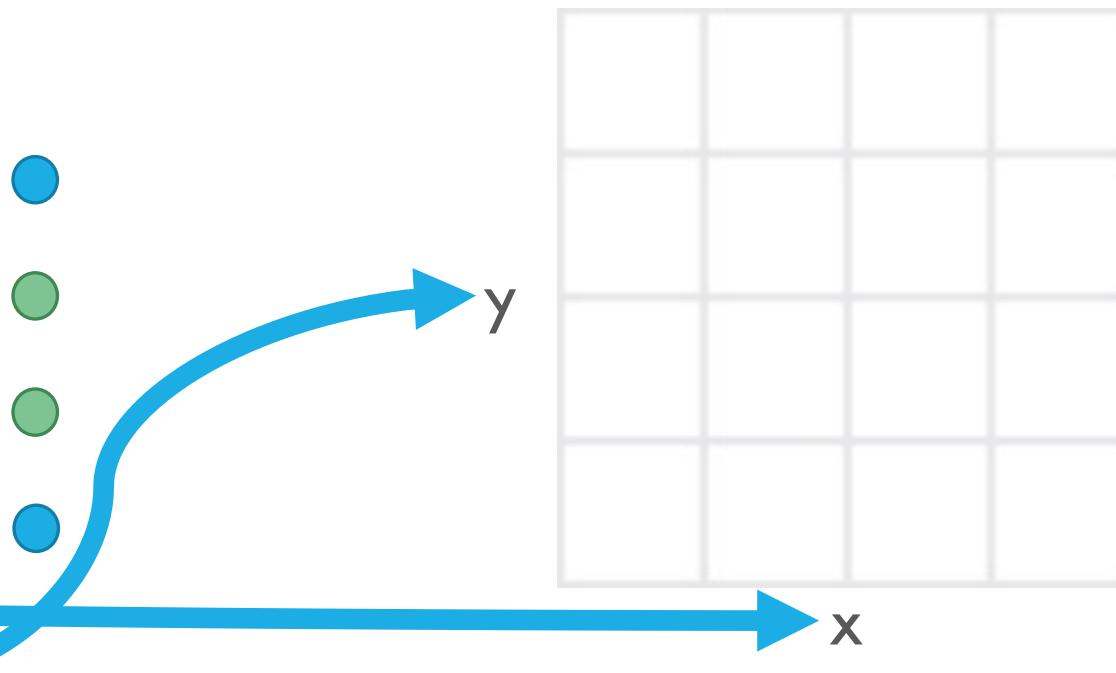

# Aesthetics

position

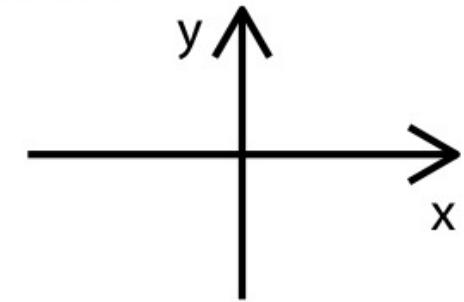

shape



size




color



line width



line type

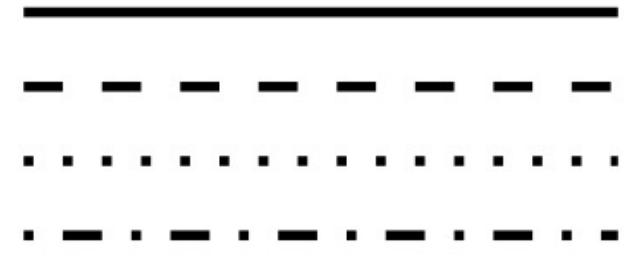

# To make **any** kind of graph:

1. Choose a “tidy”  
**data frame**

```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings))
```

2. Pick a “**geom**”  
function

3. Write aesthetic  
**mappings**




# Your Turn 4

Open 03 - Visualize.Rmd. Work through the exercises of the section titled “Your Turn 4”.


**Stop when it says “Stop Here”.**


**Click “yes” when you’re done!**

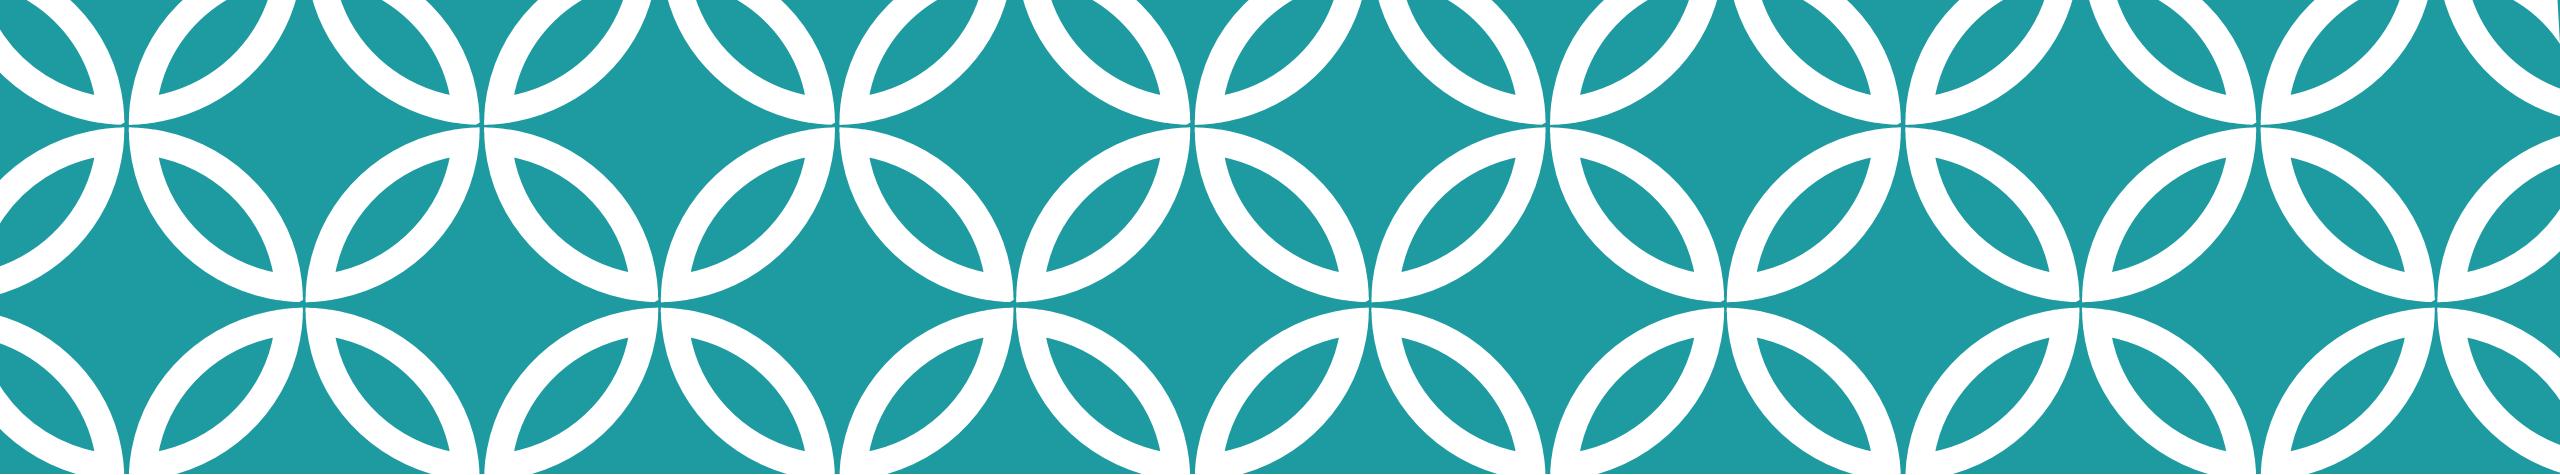

# **Setting** vs **Mapping** Aesthetics


# How would you make this plot?

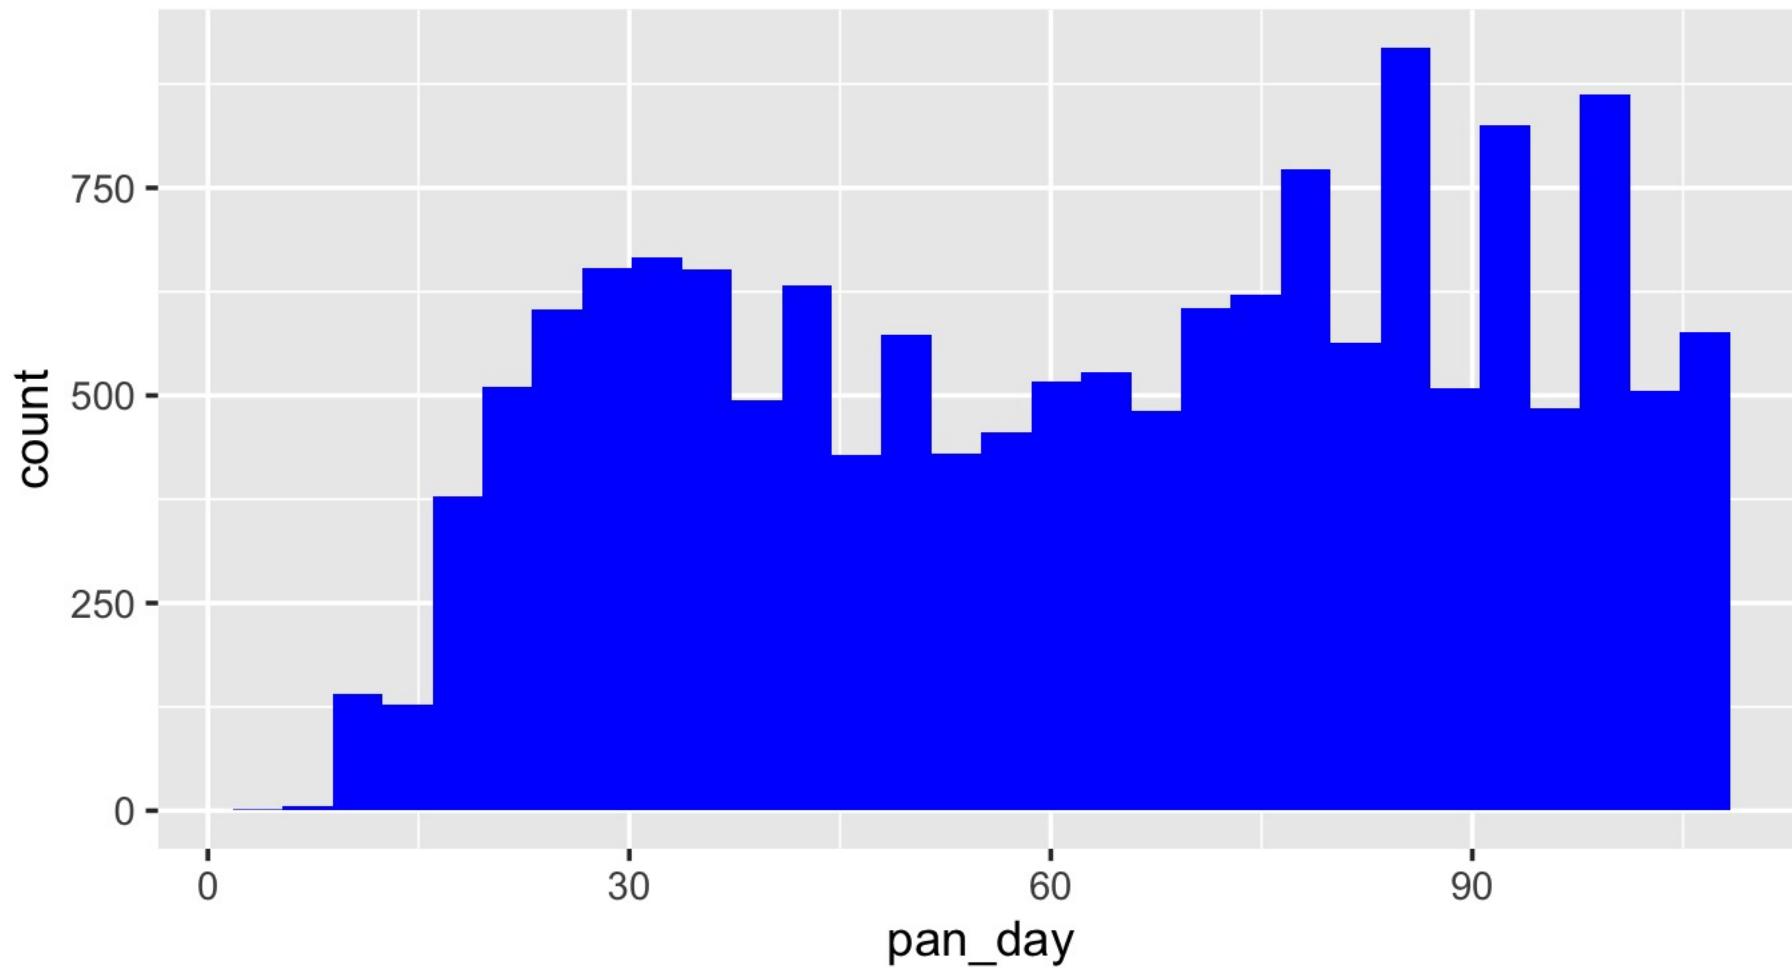

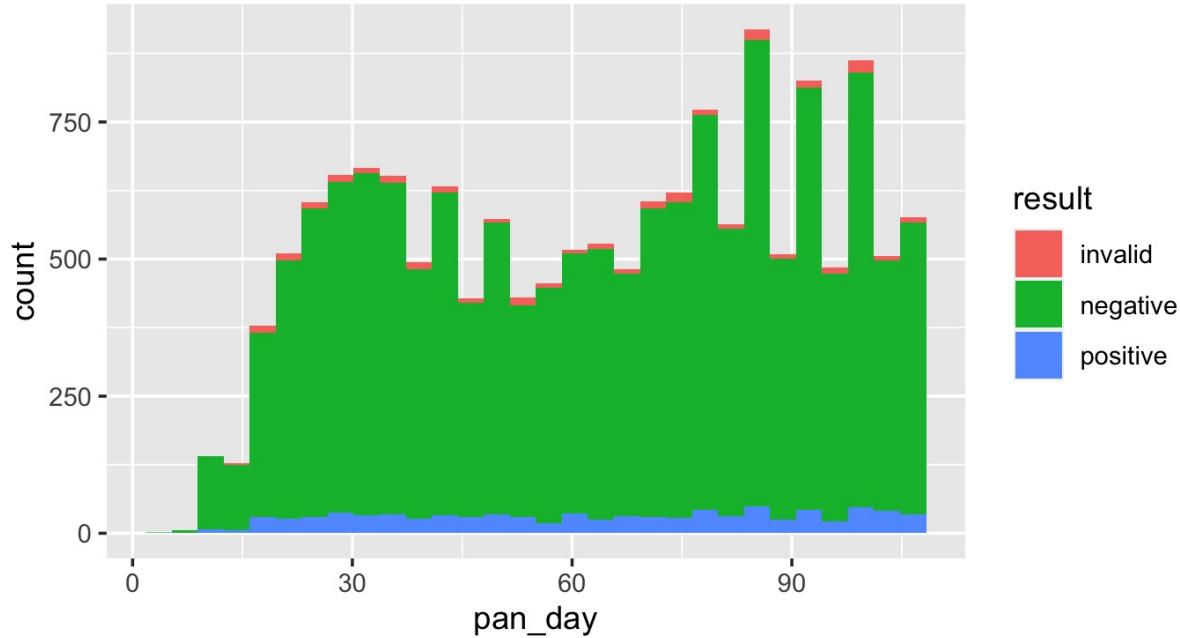

Inside of aes():  
map an aesthetic  
to a variable


```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day, fill = result))
```

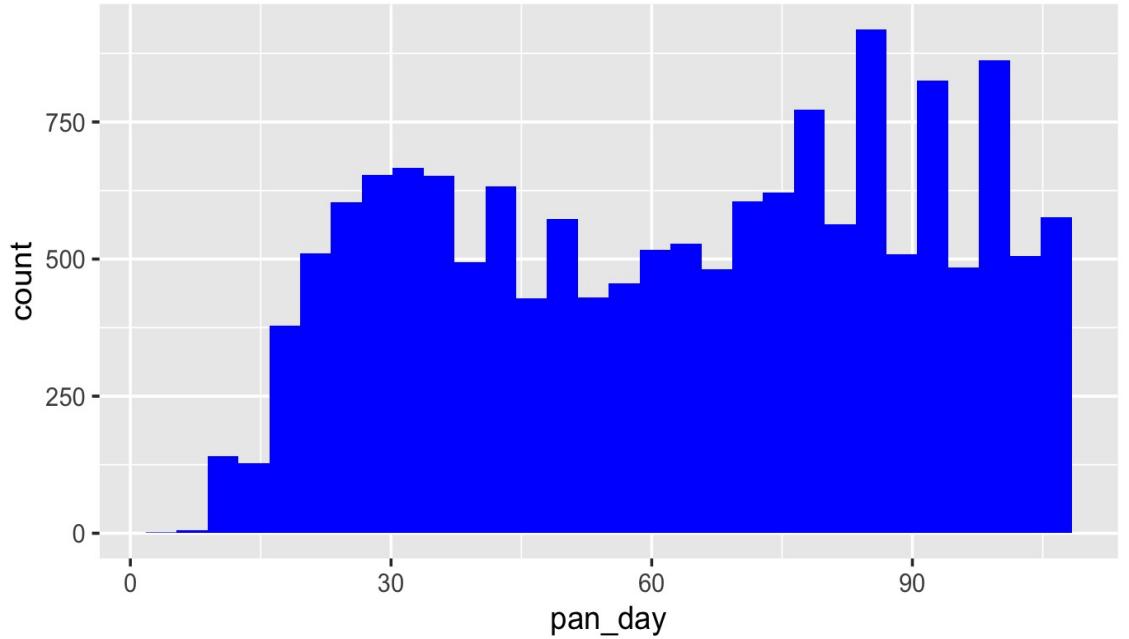

**Outside of aes():**  
set an aesthetic to  
a **value**

color name in  
“quotes”

```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day), fill = "blue")
```

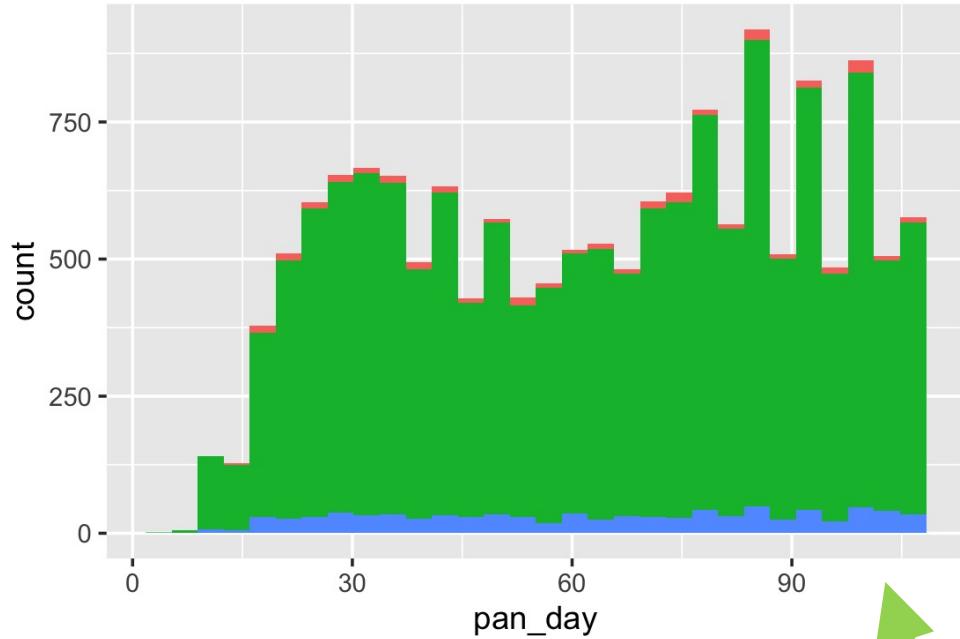


result

invalid

negative

positive


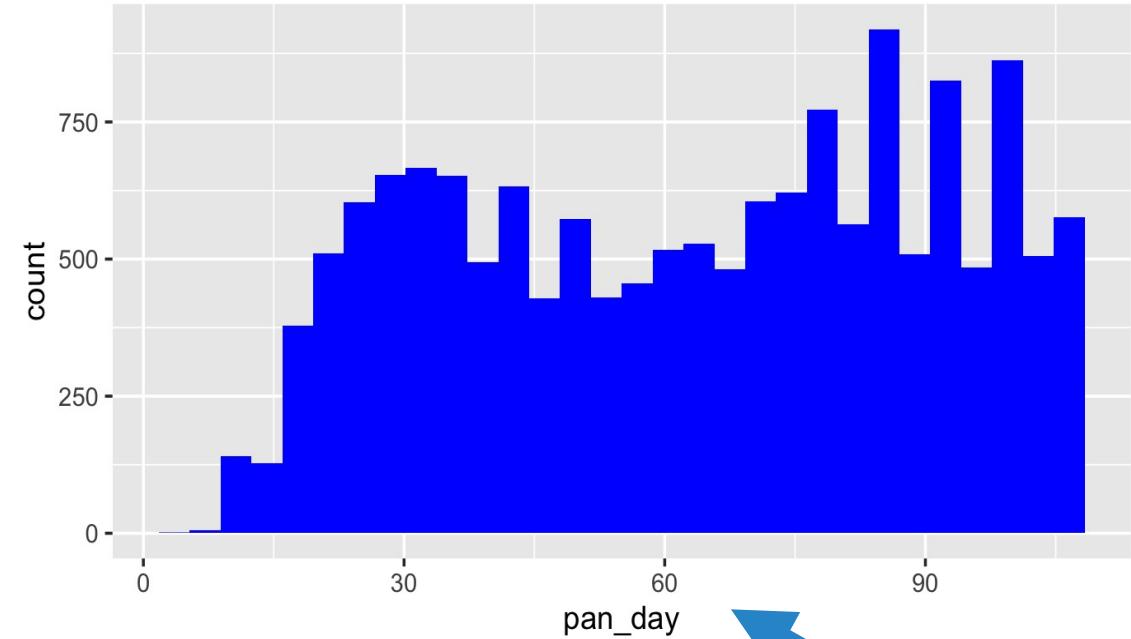


```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day, fill = result))
```

```
ggplot(data = covid_testing) +  
  geom_histogram(mapping = aes(x = pan_day), fill = "blue")
```



# Geom Functions

# How are these plots similar?

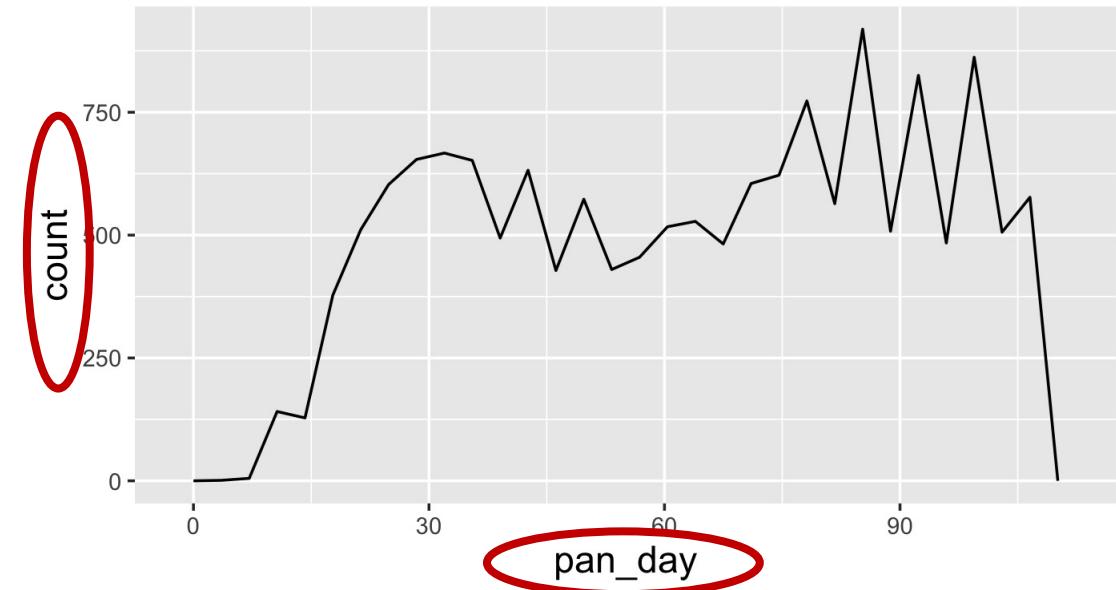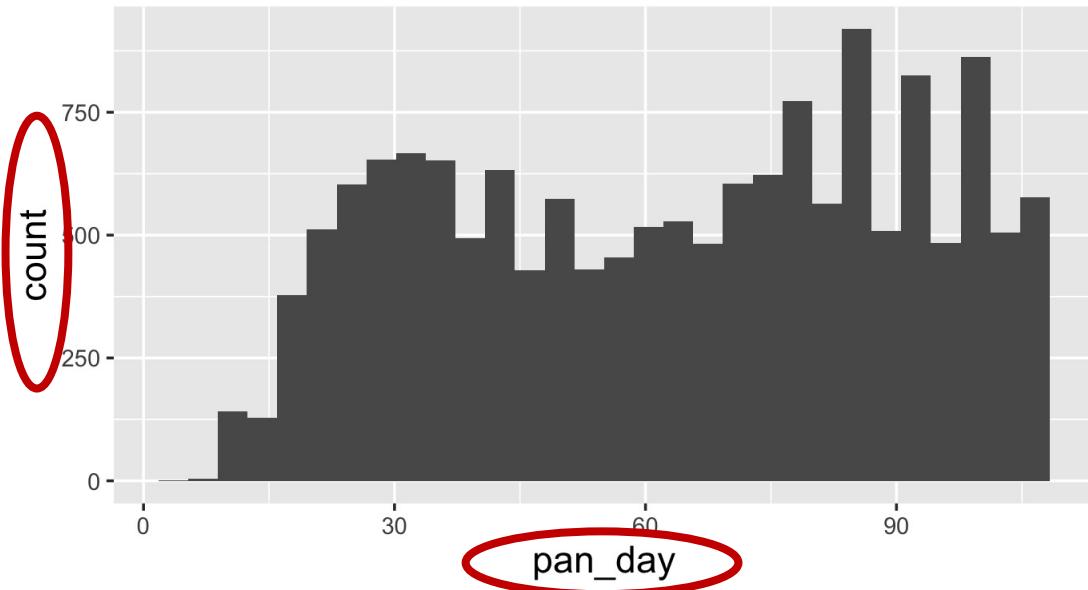

Same: x axis, y axis, data

# How are these plots different?

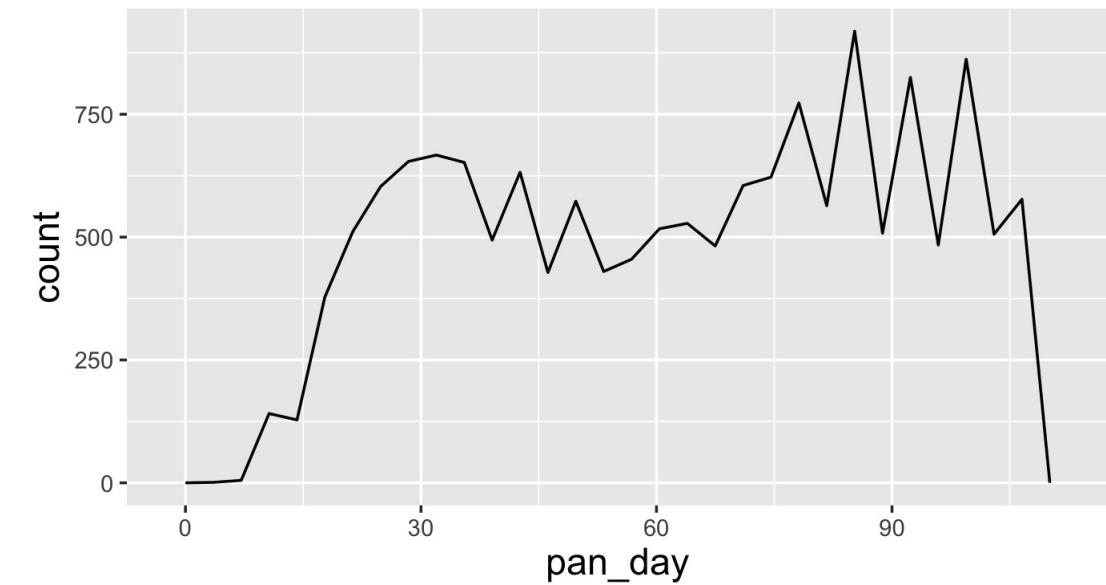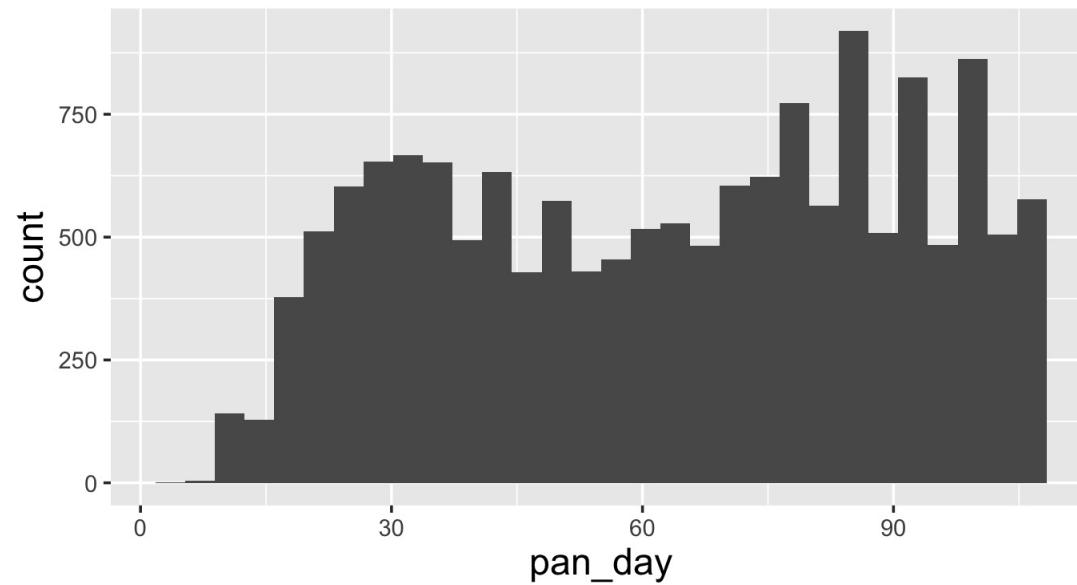






Different **geometric object** (“geom”) used to represent the data

# Your Turn 5

Return to 03-Visualize.Rmd. Work through the exercises of the section titled “Your Turn 5.”

Click “yes” when you’re done!

# Recap

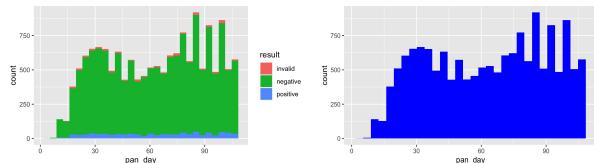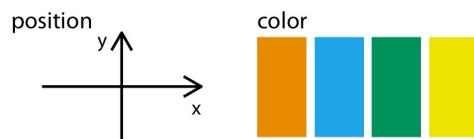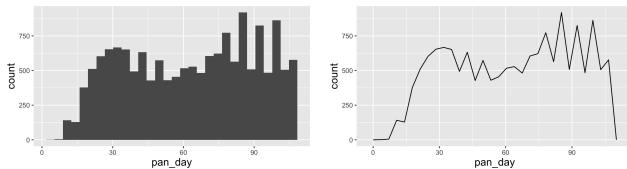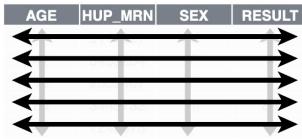

**ggplot2** is a package that provides a **grammar of graphics**. You can create **any type of plot** using a simple template to which you provide:


1. A **tidy data frame**, in which each **variable** is in its own **column**, each **observation** is in its own **row**, each **value** is in its own **cell**;
2. A **geom function**, which tells R what kind of plot to make; and
3. **Aesthetic mappings**, which tell R how to represent data as graphical markings on the plot.

Aesthetics can be **mapped** to a variable or **set** to a constant value.




**What Else?**

# Manually saving plots

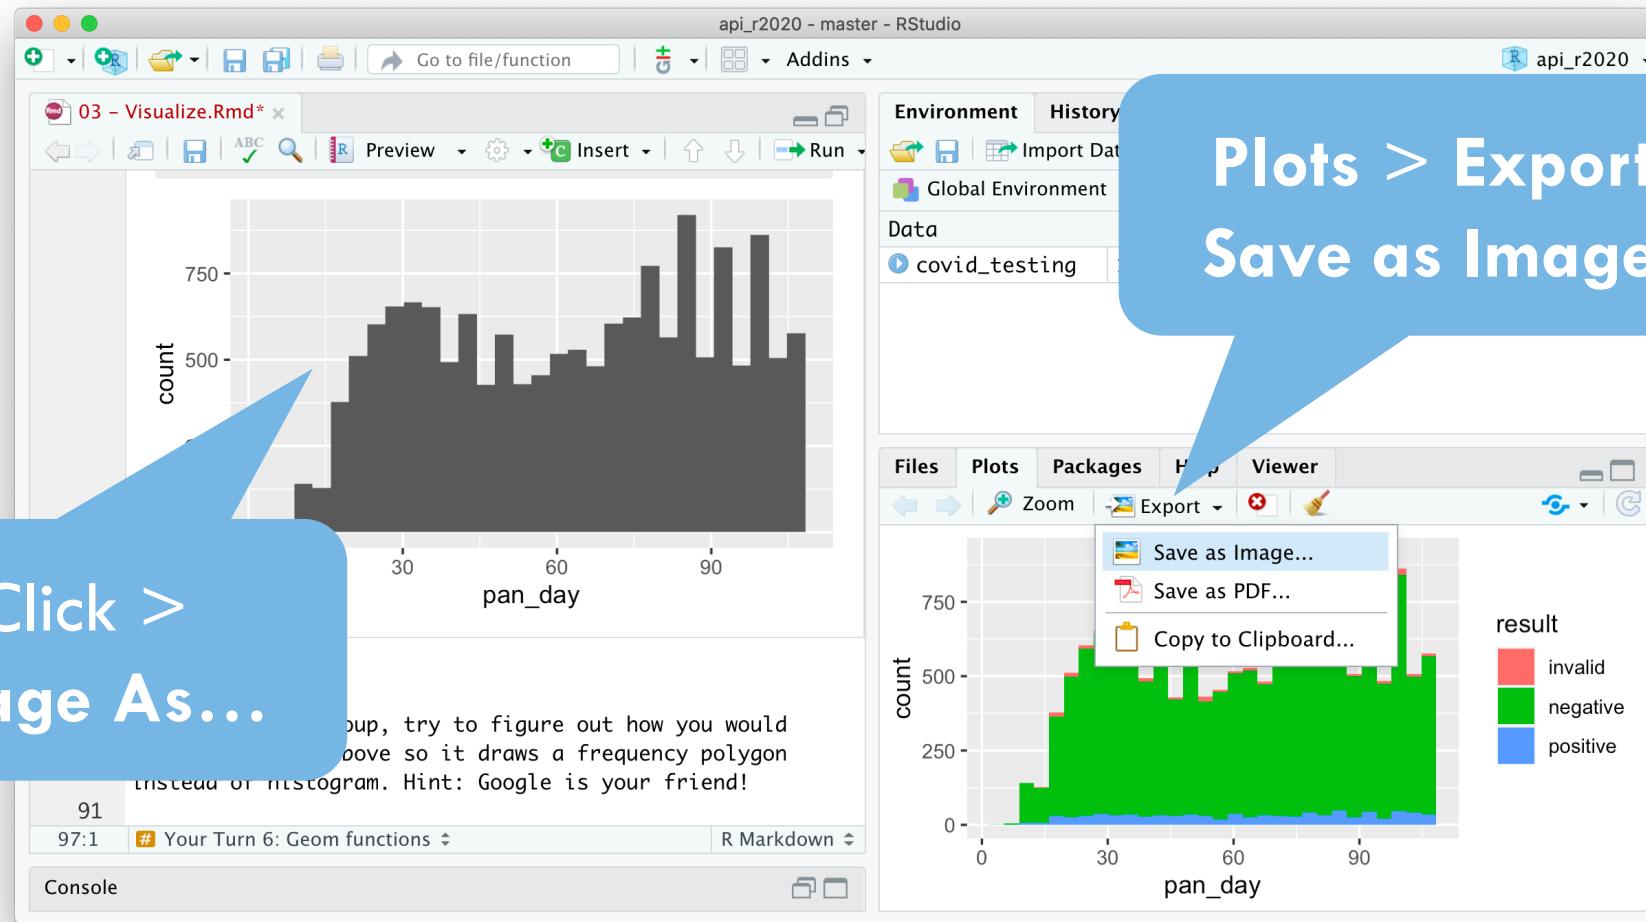


# Position adjustments

How overlapping objects are arranged

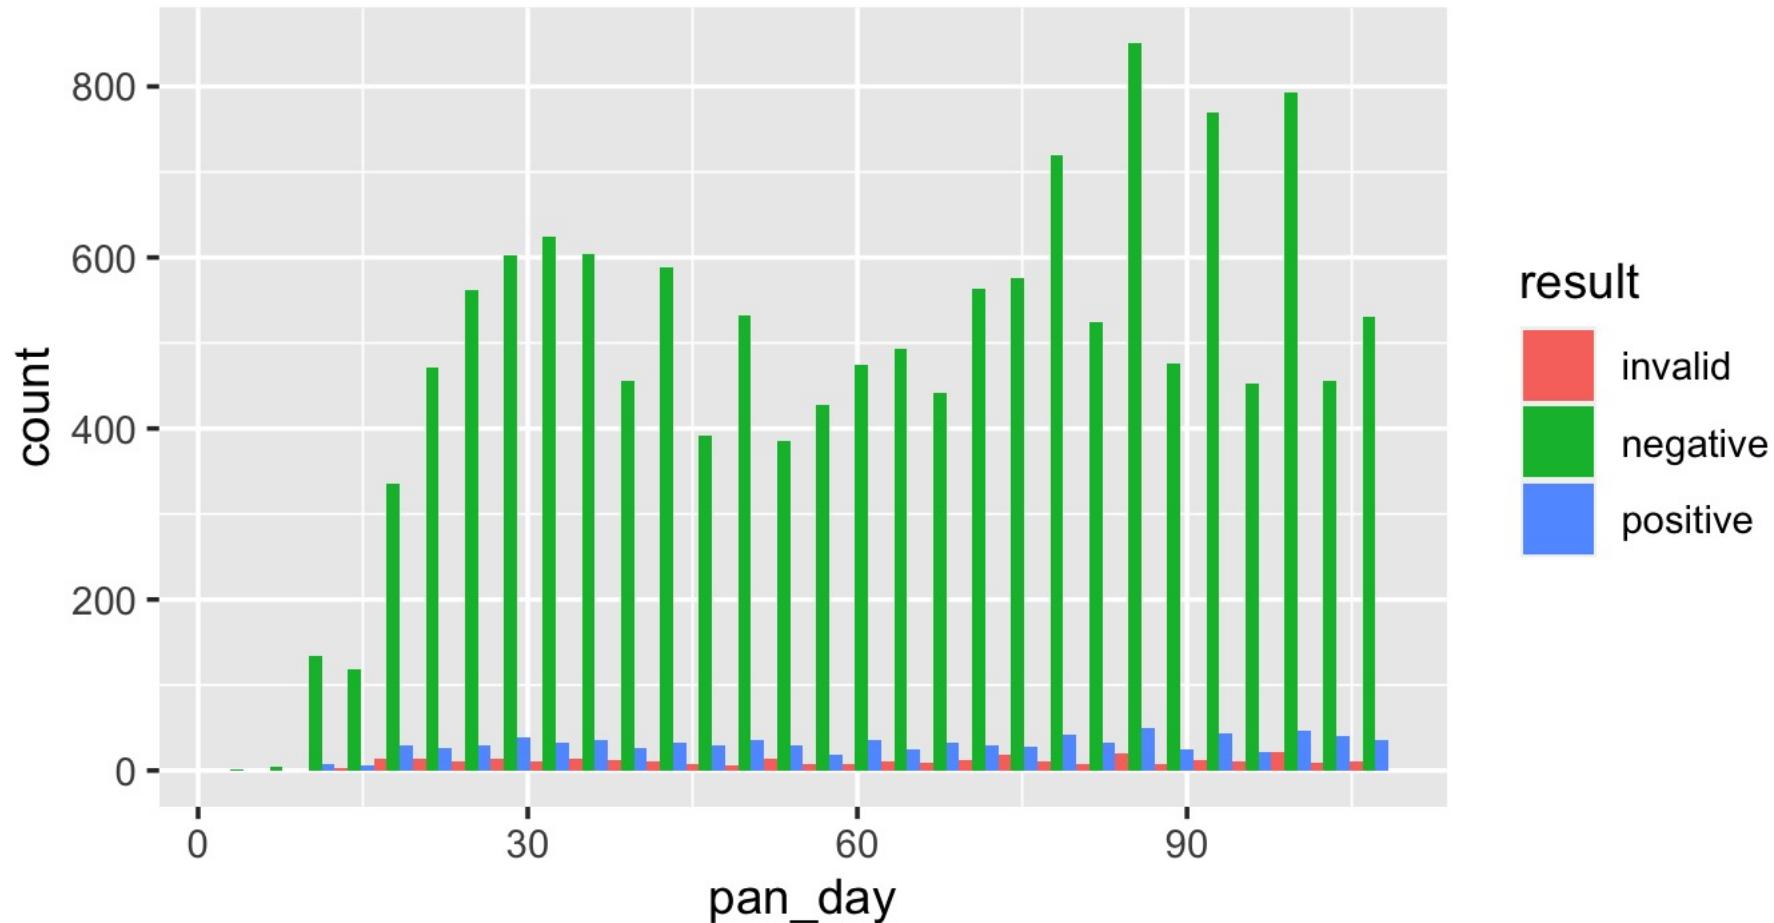


# Themes

## Visual appearance of non-data elements

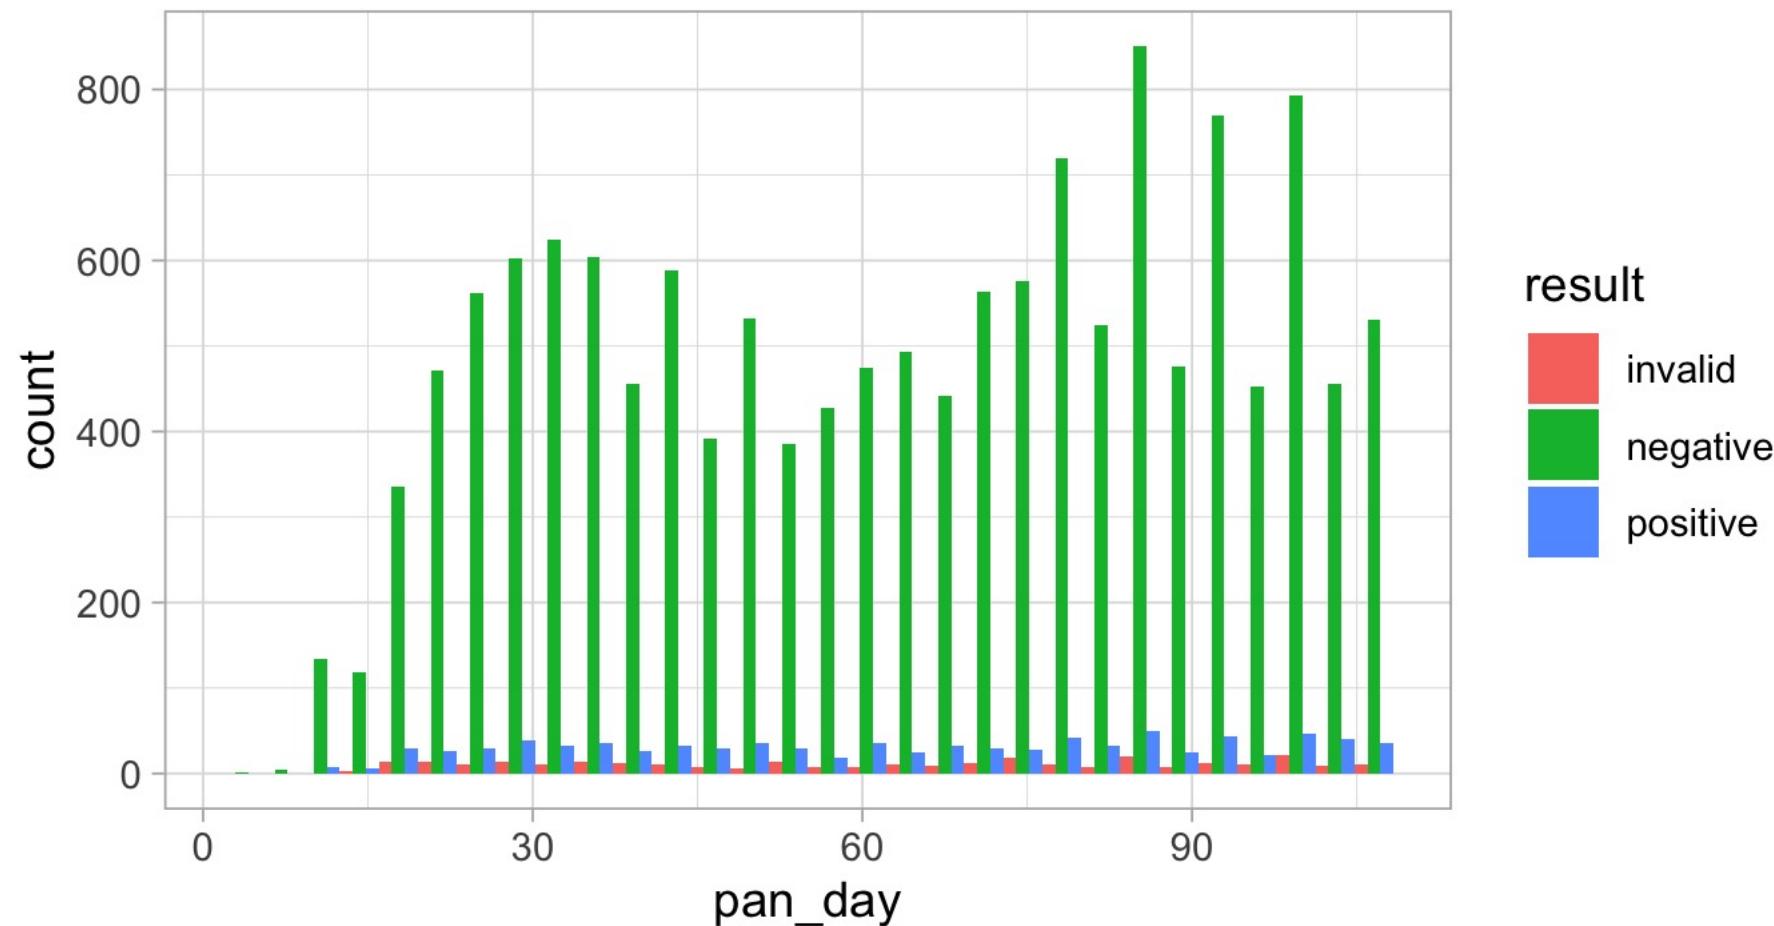


# Scales

Customize color scales and other mappings

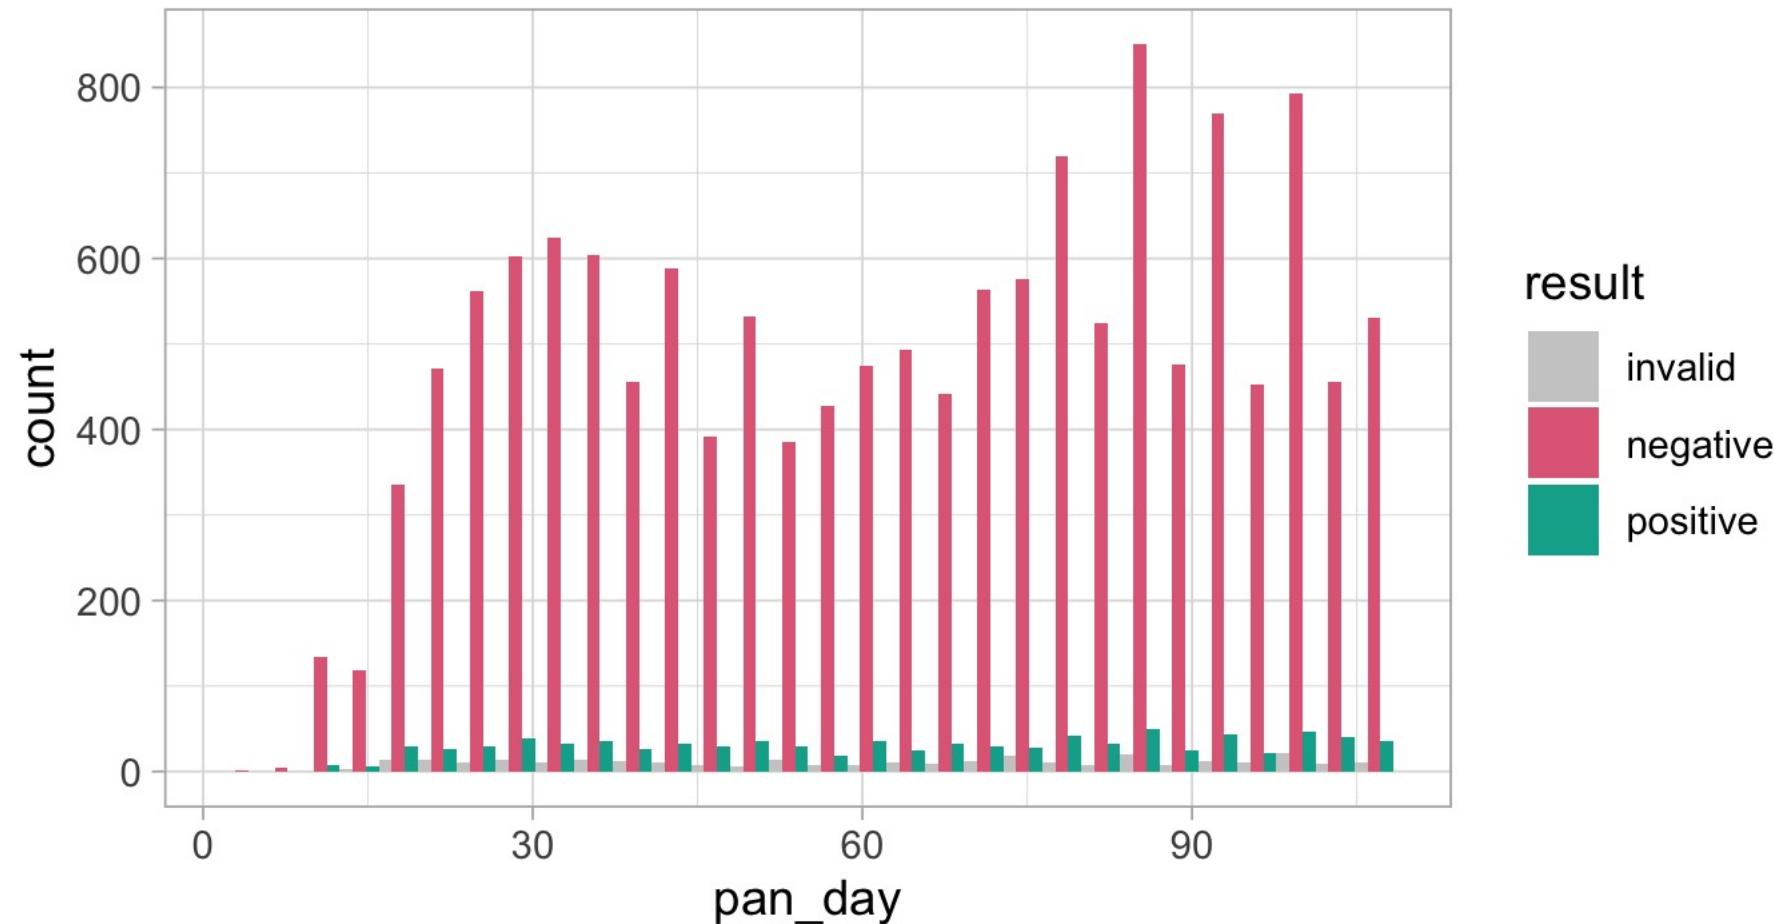


# Facets

Subplots that display subsets of the data

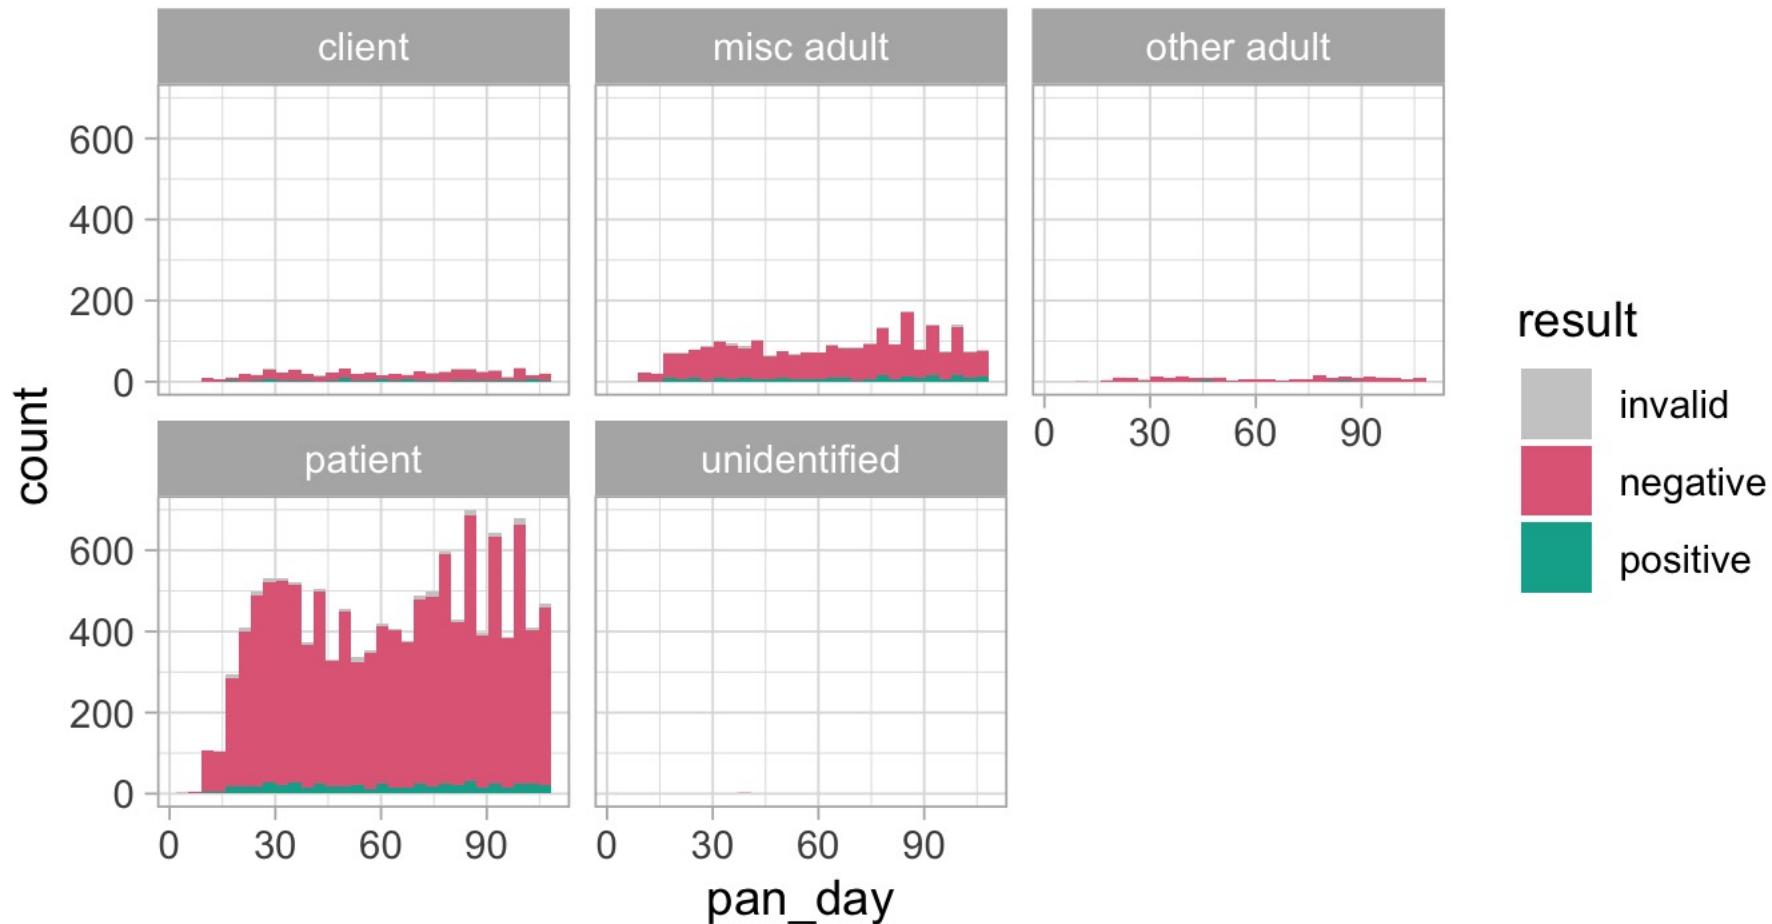


# Coordinate systems

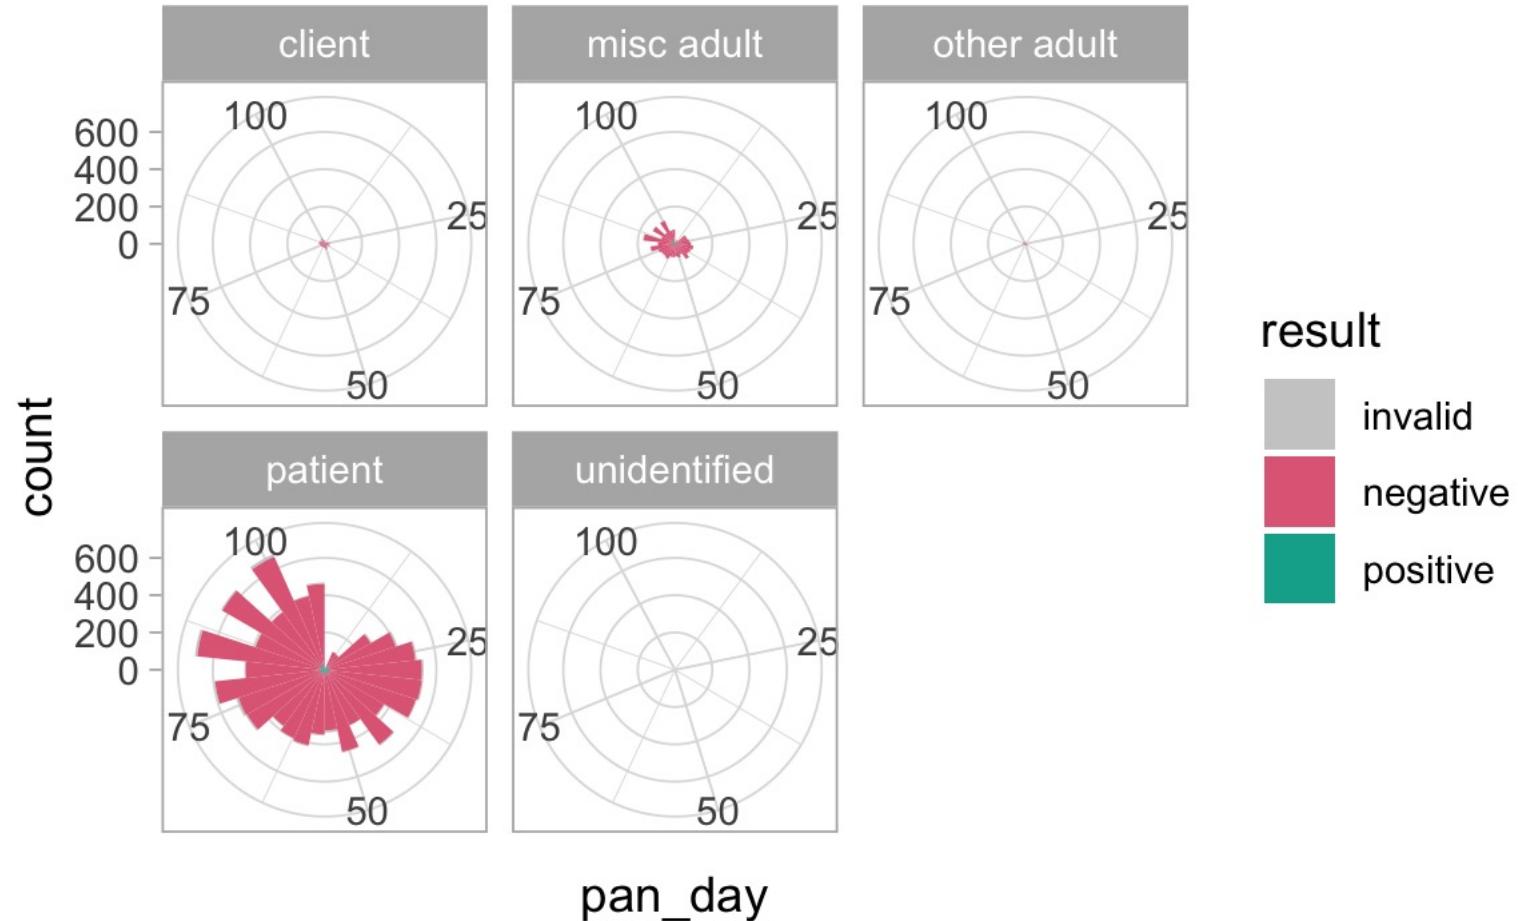

# Titles and captions

## COVID19 test volume

Displayed in polar coordinates, mostly to show off ggplot2

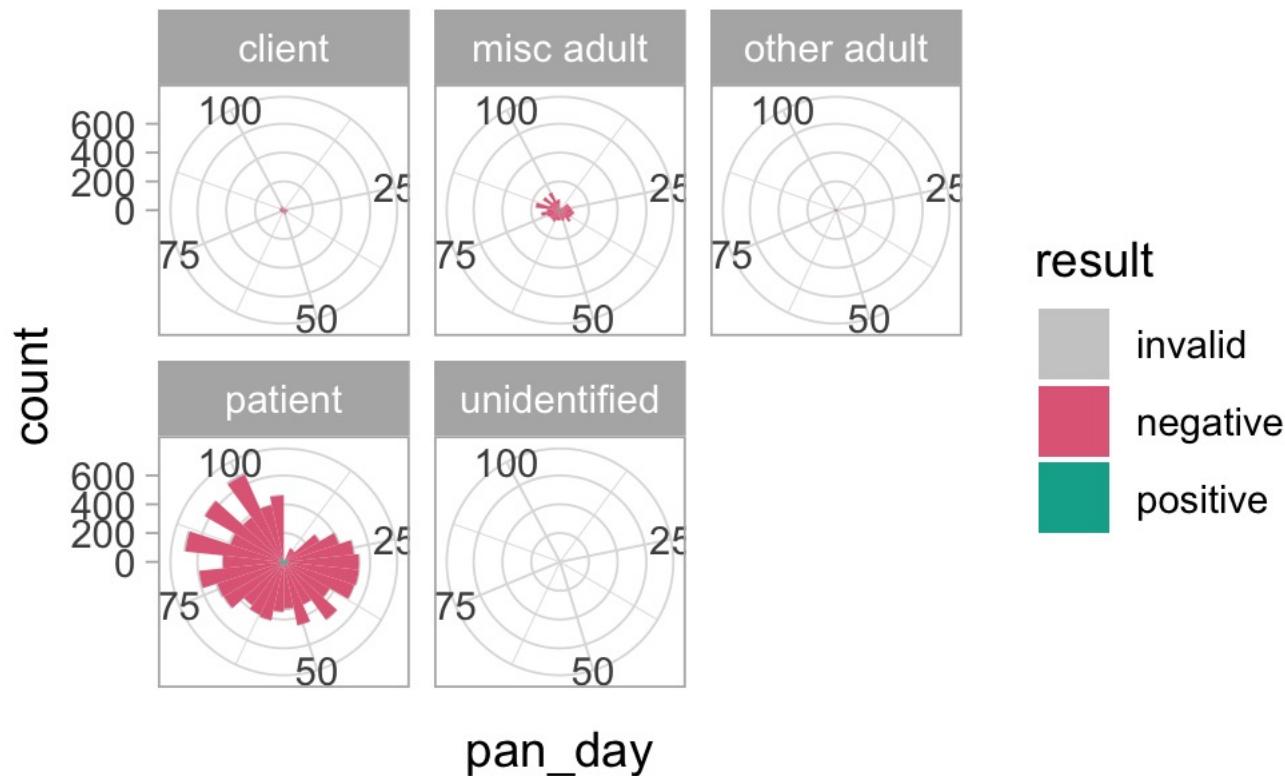

```
ggplot(data = data_frame) +  
  geom_function(mapping = aes(mappings)) +  
  theme_function +  
  scale_function +  
  facet_function +  
  coordinate_function +  
  ...
```

Required

Optional

<https://r4ds.had.co.nz/>

## R for Data Science

Search

Table of contents

### Welcome

1 Introduction

Explore

2 Introduction

3 Data visualisation

4 Workflow: basics

5 Data transformation

6 Workflow: scripts

7 Exploratory Data Analysis

8 Workflow: projects

Wrangle


9 Introduction

10 Tibbles

11 Data import

# Welcome

This is the website for “**R for Data Science**”. This book will teach you how to do data science with R: You’ll learn how to get your data into R, get it into the most useful structure, transform it, visualise it and model it. In this book, you will find a practicum of skills for data science. Just as a chemist learns how to clean test tubes and stock a lab, you’ll learn how to clean data and draw plots—and many other things besides. These are the skills that allow data science to happen, and here you will find the best practices for doing each of these things with R. You’ll learn how to use the grammar of graphics, literate programming, and reproducible research to save time. You’ll also learn how to manage cognitive resources to facilitate discoveries when wrangling, visualising, and exploring data.

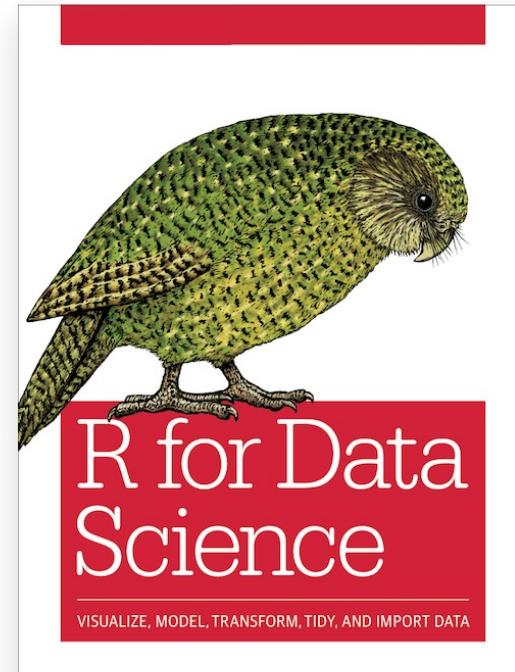

Hadley Wickham &  
Garrett Grolemund

<https://www.rstudio.com/resources/cheatsheets/>


# Data Visualization with ggplot2 :: CHEAT SHEET

## Basics

ggplot2 is based on the **grammar of graphics**, the idea that you can build every graph from the same components: a **data set**, a **coordinate system**, and geoms—visual marks that represent data points.



To display values, map variables in the data to visual properties of the geom (**aesthetics**) like **size**, **color**, and **x** and **y** locations.

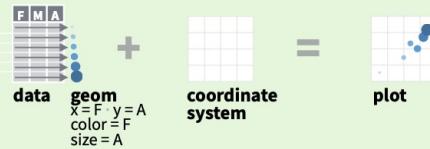

Complete the template below to build a graph.

```
ggplot(data = <DATA>) +  
  <GEOM_FUNCTION>(mapping = aes(<MAPPINGS>),  
    stat = <STAT>, position = <POSITION>) +  
  <COORDINATE_FUNCTION> +  
  <FACET_FUNCTION> +  
  <SCALE_FUNCTION> +  
  <THEME_FUNCTION>
```

**ggplot**(data = mpg, aes(x = cty, y = hwy)) Begins a plot that you finish by adding layers to. Add one geom

## Geoms

Use a geom function to represent data points, use the geom's aesthetic properties to represent variables. Each function returns a layer.

### GRAPHICAL PRIMITIVES

a <- ggplot(economics, aes(date, unemploy))  
b <- ggplot(seals, aes(x = long, y = lat))

- a + **geom\_blank()**  
(Useful for expanding limits)
- b + **geom\_curve**(aes(yend = lat + 1, xend = long + 1), curvature = 1) - x, xend, y, yend, alpha, angle, color, curvature, linetype, size
- a + **geom\_path**(lineend = "butt", linejoin = "round", linemetre = 1)  
x, y, alpha, color, group, linetype, size
- a + **geom\_polygon**(aes(group = group))  
x, y, alpha, color, fill, group, linetype, size
- b + **geom\_rect**(aes(xmin = long, ymin = lat, xmax = long + 1, ymax = lat + 1)) - xmax, xmin, ymax, ymin, alpha, color, fill, linetype, size
- a + **geom\_ribbon**(aes(ymin = unemploy - 900, ymax = unemploy + 900)) - x, ymax, ymin, alpha, color, fill, group, linetype, size

### LINE SEGMENTS

common aesthetics: x, y, alpha, color, linetype, size

- b + **geom\_abline**(aes(intercept = 0, slope = 1))
- b + **geom\_hline**(aes(yintercept = lat))
- b + **geom\_vline**(aes(xintercept = long))
- b + **geom\_segment**(aes(yend = lat + 1, xend = long + 1))
- b + **geom\_spoke**(aes(angle = 1:1155, radius = 1))

### ONE VARIABLE continuous

c <- ggplot(mpg, aes(hwy)); c2 <- ggplot(mpg)

- c + **geom\_area**(stat = "bin")  
x, y, alpha, color, fill, linetype, size
- c + **geom\_density**(kernel = "gaussian")

### TWO VARIABLES

#### continuous x , continuous y

e <- ggplot(mpg, aes(cty, hwy))

- e + **geom\_label**(aes(label = cty), nudge\_x = 1, nudge\_y = 1, check\_overlap = TRUE) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust
- e + **geom\_jitter**(height = 2, width = 2)  
x, y, alpha, color, fill, shape, size
- e + **geom\_point**(), x, y, alpha, color, fill, shape, size, stroke
- e + **geom\_quantile**(), x, y, alpha, color, group, linetype, size, weight

e + **geom\_rug**(sides = "bl")  
x, y, alpha, color, linetype, size


e + **geom\_smooth**(method = lm)  
x, y, alpha, color, fill, group, linetype, size, weight

e + **geom\_text**(aes(label = cty), nudge\_x = 1, nudge\_y = 1, check\_overlap = TRUE) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust

#### discrete x , continuous y

f <- ggplot(mpg, aes(class, hwy))

- f + **geom\_col**(), x, y, alpha, color, fill, group, linetype, size
- f + **geom\_boxplot**()  
x, y, lower, middle, upper, ymax, ymin, alpha, color, fill, group, linetype, shape, size, weight
- f + **geom\_dotplot**(binaxis = "y", stackdir = "center")  
x, y, alpha, color, fill, group
- f + **geom\_violin**(scale = "area")  
x, y, alpha, color, fill, group, linetype, size, weight

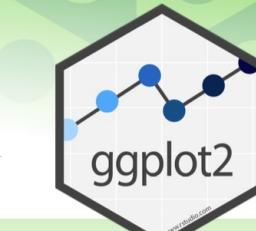

### continuous bivariate distribution

h <- ggplot(diamonds, aes(carat, price))

- h + **geom\_bin2d**(binwidth = c(0.25, 500))  
x, y, alpha, color, fill, linetype, size, weight
- h + **geom\_density2d**()  
x, y, alpha, colour, group, linetype, size
- h + **geom\_hex**()  
x, y, alpha, colour, fill, size

### continuous function

i <- ggplot(economics, aes(date, unemploy))

- i + **geom\_area**()  
x, y, alpha, color, fill, linetype, size
- i + **geom\_line**()  
x, y, alpha, color, group, linetype, size
- i + **geom\_step**(direction = "hv")  
x, y, alpha, color, group, linetype, size


### visualizing error

df <- data.frame(grp = c("A", "B"), fit = 4:5, se = 1:2)  
j <- ggplot(df, aes(grp, fit, ymin = fit - se, ymax = fit + se))

- j + **geom\_crossbar**(fatten = 2)  
x, y, ymax, ymin, alpha, color, fill, group, linetype, size
- j + **geom\_errorbar**()  
x, ymax, ymin, alpha, color, group, linetype, size, width (also **geom\_errorbarh**())
- j + **geom\_linerange**()  
x, ymin, ymax, alpha, color, group, linetype, size
- j + **geom\_pointrange**()  
x, y, ymin, ymax, alpha, color, fill, group, linetype, shape, size

# Fundamentals of Data Visualization

A Primer on Making Informative  
and Compelling Figures

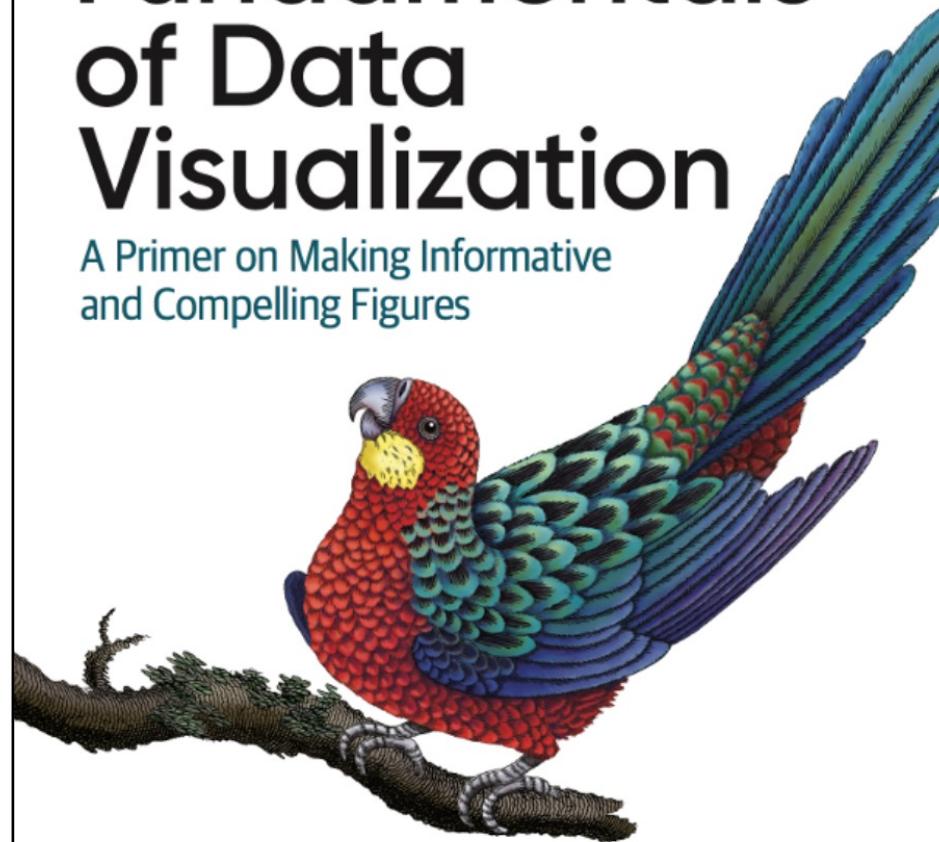

Claus O. Wilke

<https://clauswilke.com/dataviz/>

# Creating Survival Plots

## Informative and Elegant with survminer


### Survival Curves

The **ggsurvplot()** function creates **ggplot2** plots from **survfit** objects.

```
library("survival")
fit <- survfit(Surv(time, status)
               ~ sex, data = lung)


class(fit)
## [1] "survfit"

library("survminer")
ggsurvplot(fit, data = lung)
```

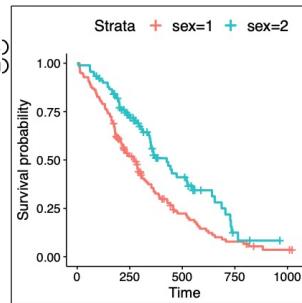

Use the **fun** argument to set the transformation of the survival curve. E.g. "**event**" for cumulative events, "**cumhaz**" for the cumulative hazard function or "**pct**" for survival probability in percentage.

```
ggsurvplot(fit, data = lung, fun = "event")
ggsurvplot(fit, data = lung, fun = "cumhaz")
```

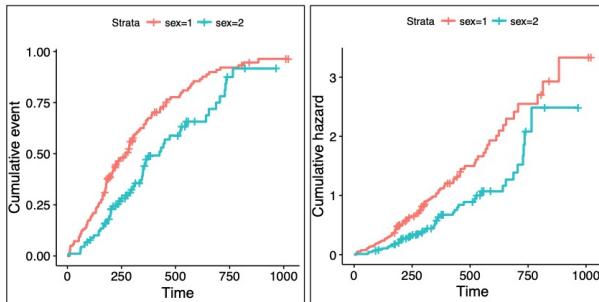


With lots of graphical parameters you have full control over look and feel of the survival curves. See [the vignette](#) for details.

### Diagnostics of Cox Model

The function **cox.zph()** from **survival** package may be used to test the proportional hazards assumption for a Cox regression model fit. The graphical verification of this assumption may be performed with the function **ggcoxzph()** from the **survminer** package. For each covariate it produces plots with scaled Schoenfeld residuals against the time.

```
library("survival")
fit <- coxph(Surv(time, status) ~ sex + age, data = lung)
ftest <- cox.zph(fit)
ftest
##          rho chisq      p
## sex     0.1236 2.452 0.117
## age    -0.0275 0.129 0.719
## GLOBAL   NA 2.651 0.266
library("survminer")
ggcoxzph(ftest)
```

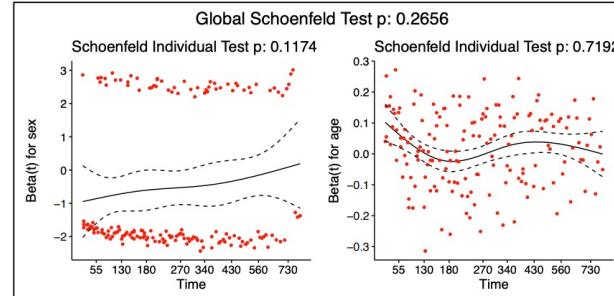

The function **ggcoxdiagnostics()** plots different types of residuals as a function of time, linear predictor or observation id. The type of residual is selected with **type** argument. Possible values are "martingale", "deviance", "score", "schoenfeld", "dfbeta", "dfbetas", and "scaledsch".


The **ox.scale** argument defines what shall be plotted on the OX axis. Possible values are "linear.predictions", "observation.id", "time".

Logical arguments **hline** and **sline** may be used to add horizontal line or smooth line to the plot.

```
library("survival")
library("survminer")
fit <- coxph(Surv(time, status) ~
              sex + age, data = lung)
```

```
ggcoxdiagnostics(fit,
                  type = "deviance",
                  ox.scale = "linear.predictions")

ggcoxdiagnostics(fit,
                  type = "schoenfeld").
```

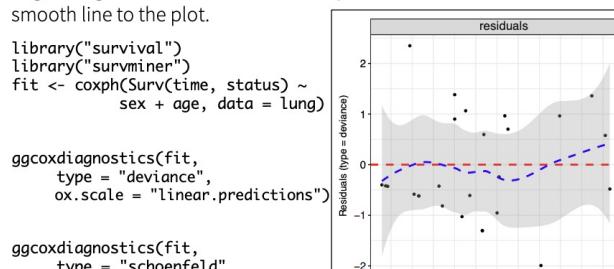


### Summary of Cox Model

The function **ggforest()** from the **survminer** package creates a forest plot for a Cox regression model fit. Hazard ratio estimates along with confidence intervals and p-values are plotted for each variable.

```
library("survival")
library("survminer")
lung$age <- ifelse(lung$age > 70, ">70", "<= 70")
fit <- coxph( Surv(time, status) ~ sex + ph.ecog + age, data = lung)
fit


## Call:
## coxph(formula = Surv(time, status) ~ sex+ph.ecog+age, data=lung)
##
##            coef exp(coef) se(coef)      z      p
## sex      -0.567   0.567   0.168 -3.37 0.00075
## ph.ecog   0.470   1.600   0.113  4.16 3.1e-05
## age>70   0.307   1.359   0.187  1.64  0.10175
##
## Likelihood ratio test=31.6  on
## n= 227, number of events= 164
ggforest(fit)
```

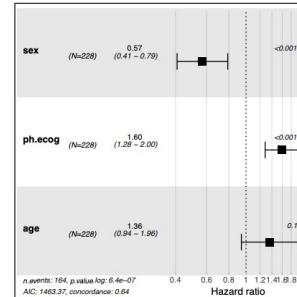

The function **ggadjustedcurves()** from the **survminer** package plots Adjusted Survival Curves for Cox Proportional Hazards Model. Adjusted Survival Curves show how a selected factor influences survival estimated from a Cox model.


Note that these curves differ from Kaplan Meier estimates since they present expected survival based on given Cox model.

```
library("survival")
library("survminer")
lung$sex <- ifelse(lung$sex == 1,
                   "Male", "Female")
fit <- coxph(Surv(time, status) ~
              sex + ph.ecog + age +
              strata(sex),
              data = lung)
ggadjustedcurves(fit, data=lung)
```

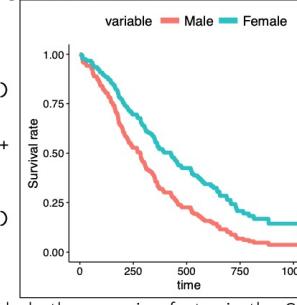

Note that it is not necessary to include the grouping factor in the Cox

# A grammar for tables

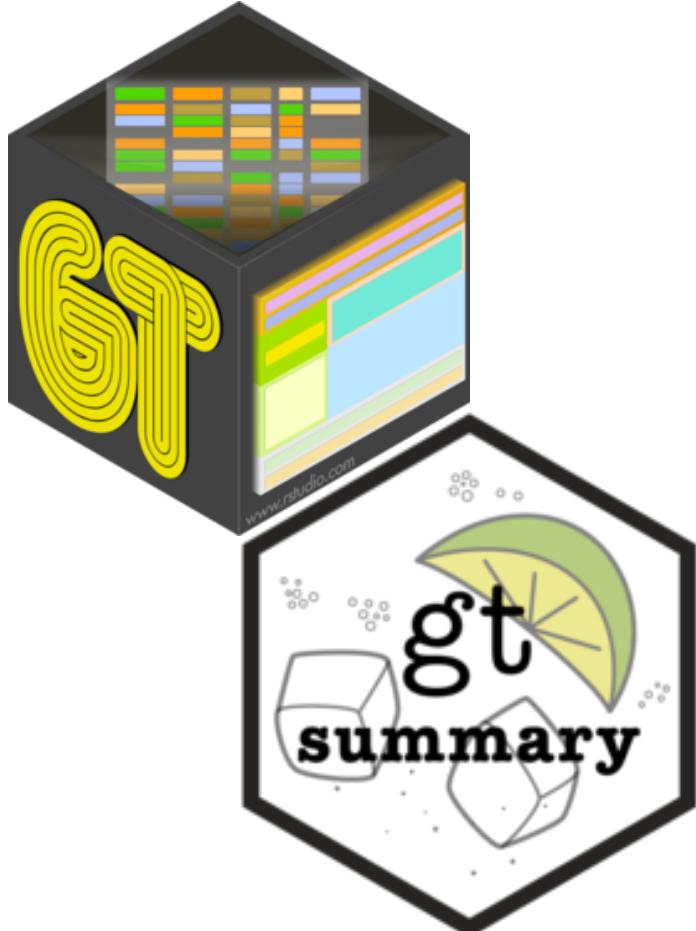

Variable	N	Drug A, N = 98 <sup>1</sup>	Drug B, N = 102 <sup>1</sup>	p-value <sup>2</sup>
Age	189	46 (37, 59)	48 (39, 56)	0.7
Grade	200			0.9
I		35 (36%)	33 (32%)	
II		32 (33%)	36 (35%)	
III		31 (32%)	33 (32%)	
Tumor Response	193	28 (29%)	33 (34%)	0.6

<sup>1</sup> Statistics presented: median (IQR); n (%)

<sup>2</sup> Statistical tests performed: Wilcoxon rank-sum test; chi-square test of independence

# Goals

1. Appreciate the importance of visualization for understanding data
2. Learn how to use ggplot2 to visualize data

# Objectives

1. Create a basic visualization using a simple **template**
2. Define “**aesthetic mapping**” and explain how aesthetic mappings relate variables of a data frame to features of graphic markings on a plot
3. Write the code to specify a type of plot and fine tune its appearance using “**geom**” functions
4. Explain how to add **layers** to a ggplot object to create complex and highly customized visualizations