


# Definition with Guards

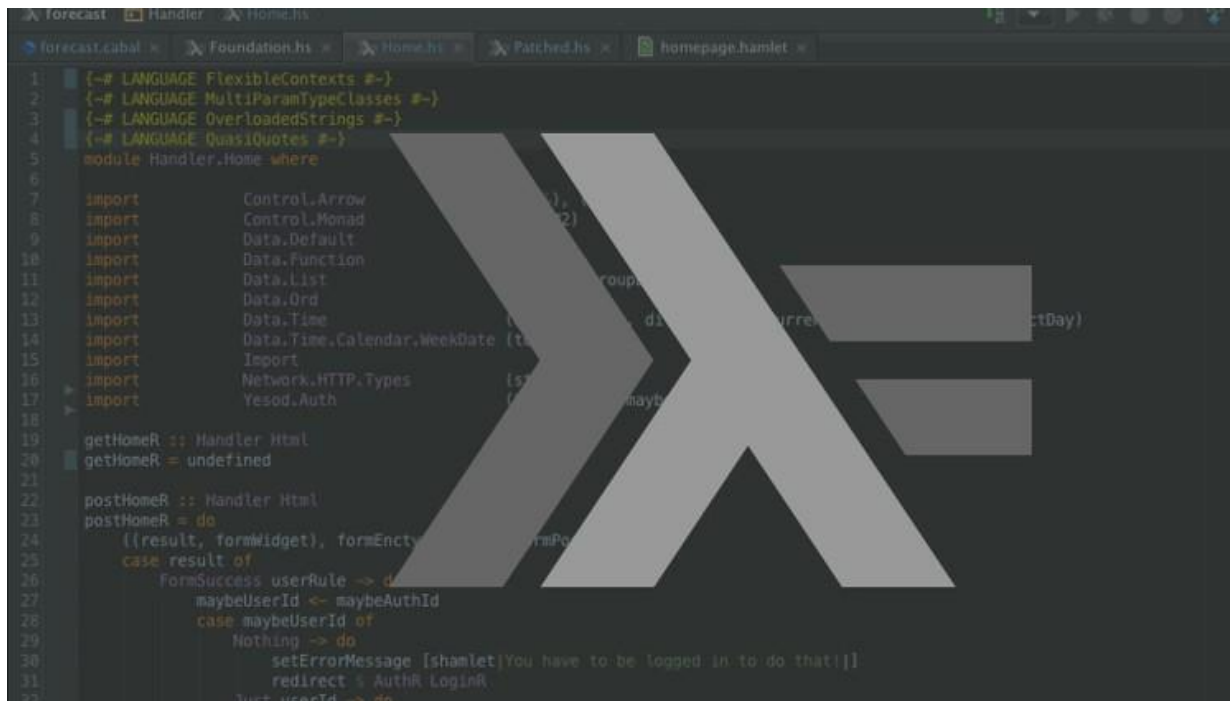

```
1 {-# LANGUAGE FlexibleContexts #-}
2 {-# LANGUAGE MultiParamTypeClasses #-}
3 {-# LANGUAGE OverloadedStrings #-}
4 {-# LANGUAGE QuasiQuotes #-}
5 module Handler.Home where
6
7 import Control.Arrow
8 import Control.Monad
9 import Data.Default
10 import Data.Function
11 import Data.List
12 import Data.Ord
13 import Data.Time
14 import Data.Time.Calendar.WeekDate
15 import Import
16 import Network.HTTP.Types
17 import Yesod.Auth
18
19 getHomeR :: Handler Html
20 getHomeR = undefined
21
22 postHomeR :: Handler Html
23 postHomeR = do
24   ((result, formWidget), formEnctype) <- runFormPost
25   case result of
26     FormSuccess userRule -> do
27       maybeUserId <- maybeAuthId
28       case maybeUserId of
29         Nothing -> do
30           setErrorMessage [shamlet|You have to be logged in to do that!|]
31           redirect % AuthR.LoginR
32         Just userId -> do
```

# Definition with Guards

Functions can be defined with **guards**:

```
valAbs :: Int -> Int
-- returns the absolute value of an integer

valAbs n
| n >= 0    = n
| otherwise = -n
```

Guard evaluation is top-down and returns the result of the first true branch.

Pattern definitions can also have guards.

The `otherwise` is the same as `True`, but more readable.

△ Equality goes after every guard!