

IE 345 - K “Introduction to Deep Learning: Fundamentals Concepts”

Prof. Yuzo

Supervised & Unsupervised Learning

pg. 56 - 58

In [1]:

```
# Code source: Jaques Grobler
# License BSD 3 clause

import matplotlib.pyplot as plt
import numpy as np
from sklearn import datasets, linear_model
from sklearn.metrics import mean_squared_error, r2_score
```

In [2]:

```
# Load the diabetes dataset
diabetes = datasets.load_diabetes()

# Use only one feature
diabetes_x = diabetes.data[:, np.newaxis, 2]

# Split the data into training/testing sets
diabetes_x_train = diabetes_x[:-20]
diabetes_x_test = diabetes_x[-20:]

# Split the targets into training/testing sets
diabetes_y_train = diabetes.target[:-20]
diabetes_y_test = diabetes.target[-20:]

# Create linear regression object
regr = linear_model.LinearRegression()
```

In [3]:

```
# Train the model using the training sets
regr.fit(diabetes_x_train, diabetes_y_train)

# Make predictions using the testing set
diabetes_y_pred = regr.predict(diabetes_x_test)
```

In [4]:

```
# The coefficients
print('Coefficients: \n', regr.coef_)


# The mean squared error
print('Mean squared error: %.2f' % mean_squared_error(diabetes_y_test, diabetes_y_pred))

# Explained variance score: 1 is perfect prediction
print('Variance score: : %.2f' % r2_score(diabetes_y_test, diabetes_y_pred))
```

Coefficients:
[938.23786125]
Mean squared error: 2548.07
Variance score: : 0.47

In [5]:

```
# Plot Outputs
plt.scatter(diabetes_x_test, diabetes_y_test, color='black')
plt.plot(diabetes_x_test, diabetes_y_pred, color='blue', linewidth=3)
plt.xticks(())
plt.yticks(())
plt.show()
```

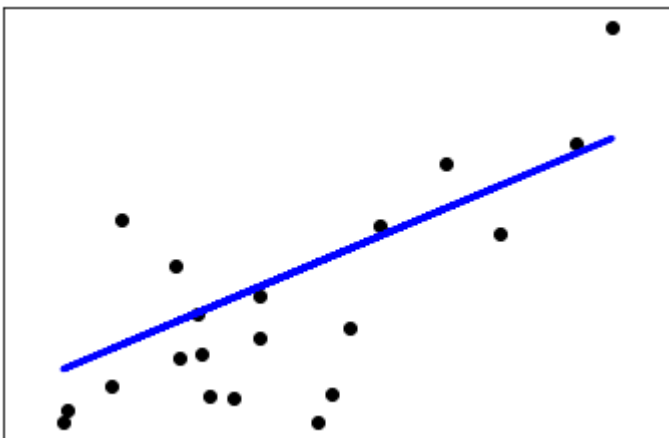

Pablo David Minango Negrete

pablodavid218@gmail.com

Lisber Arana Hinostroza

lisberarana@gmail.com