


install ArgoCD

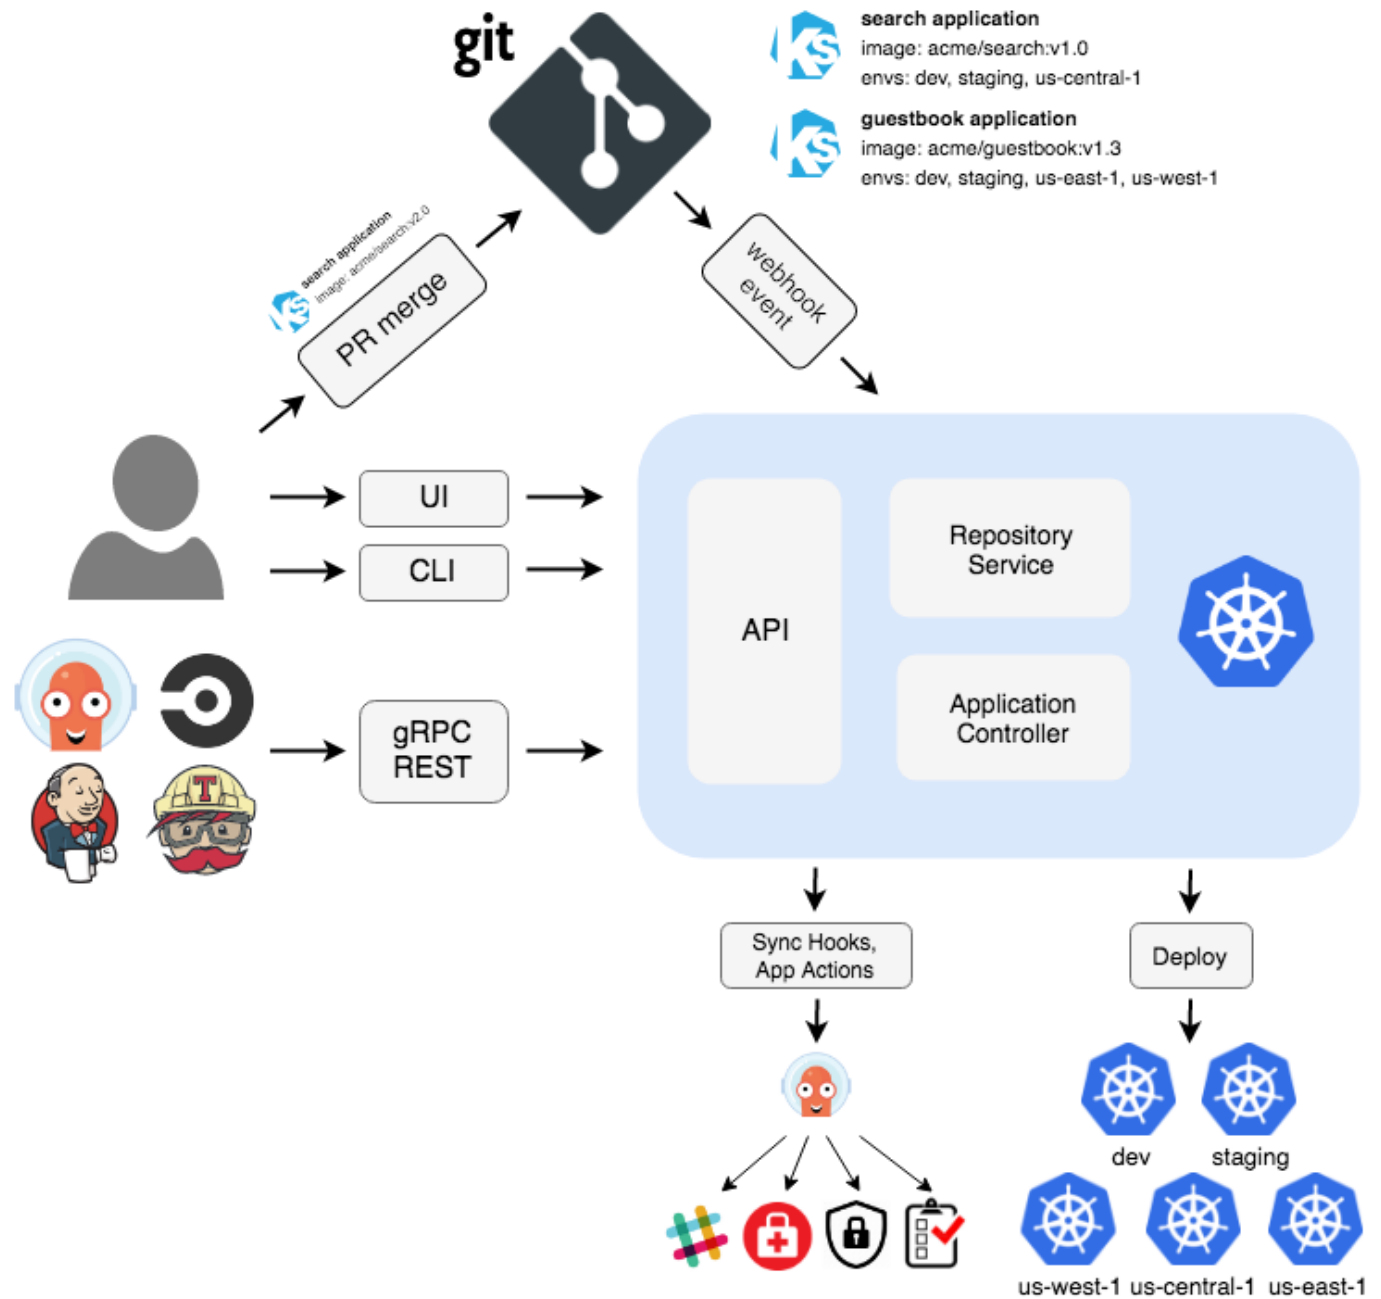

Requirements

- Installed [kubectl](#) command-line tool.
- Have a [kubeconfig](#) file (default location is `~/.kube/config`).

1. Install Argo CD

```
kubectl create namespace argocd
kubectl apply -n argocd -f https://raw.githubusercontent.com/argoproj/argo-cd/stable/manifests/install.yaml
kubectl patch svc argocd-server -n argocd -p '{"spec": {"type": "LoadBalancer"}}'
```

the username is "admin"

to get the admin password :

```
kubectl -n argocd get secret argocd-initial-admin-secret -o jsonpath="{.data.password}" | base64 -d ; echo
```

Install Argo CD CLI

To interact with the API Server we need to deploy the CLI:

```
sudo curl --silent --location -o /usr/local/bin/argocd https://github.com/argoproj/argo-cd/releases/download/v2.0.4/argocd-linux-amd64
```

```
sudo chmod +x /usr/local/bin/argocd
```