

CSE 105:  
Computation

---

*by* Liu Tan

# Contents


<b>1</b>	<b>Deterministic Finite Automaton (DFA)</b>	<b>1</b>
----------	---	----------

# 1 Deterministic Finite Automaton (DFA)

A machine consists different drawn in circles with names. Often a state drawn as a double circle is an “acceptive state,” and a plain circle indicates a rejective state. A machine receives a string consisted of ‘1’s and ‘0’s as input and the states change as the machine read through input digits. An arrow is used to indicate which state is to start with. See [Example 1.1](#) for detailed information.

Example 1.1: A DFA

Let’s first look at the DFA below which starts at state *A*.

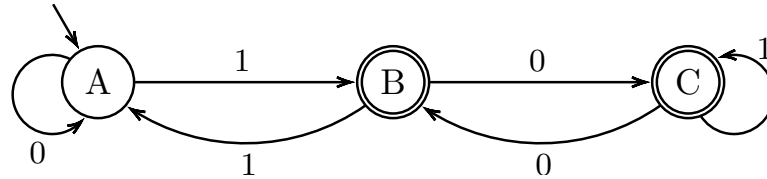

If the string “010110” is input to the machine, will it result in true or false? Will the State be acceptive or rejective?

$$\xrightarrow{010110} \boxed{M} \xrightarrow{1/0(\text{True/False, Accept / Reject})}$$

There are two arrows leaving state *A*: one with a label reading ‘1’ which points to state *B* and one reading ‘0’ which goes back to state *A* itself. That means, if an input digit reads ‘1,’ the state changes to *B*, and if ‘0’ the state stays in *A*

Now step through the procedure:

1. The machine starts off at state *A* with input ‘0,’ which, as explained above, changes the state to *A* itself.
2. Next, the second digit ‘1’ is read so the state is changed to *B*.
3. The next digit ‘0’ make the state *B* to switch to state *C*
4. Then state *C* reads ‘1’ so no state change occurs.
5. The next digit is ‘1’ again so the state remains still on *C*.
6. Last, the digit ‘0’ switches the state from *C* to *B*.

Thus the input string “010110” changes the machine to state *B*, which is an acceptive state.

**Definition 1.1 DFA.** *A DFA is a 5-tuple*

$$M = (Q, \Sigma, \delta, s, F)$$

where

$Q$  is a finite set, for states

$\Sigma$  is a finite set, for input alphabet

$s \in Q$ , for start states

$F \subseteq Q$ , for acceptive states

$\delta: Q \times \Sigma \mapsto Q$ , a function that specifies the transition between states

### Example 1.2: DFA table

According to definition 1.1, the machine in Example 1.1 can be denoted by

$$M = (Q, \Sigma, \delta, s, F)$$

where

- $Q = \{A, B, C\}$
- $\Sigma = \{0, 1\}$
- $s = \{A\}$
- $F = \{B, C\}$

And function  $\delta$  can be described by the table below.

$\delta$	0	1
A	A	B
B	C	A
C	B	C

**Definition 1.2**  $f_M$ . For an DFA  $M = (Q, \Sigma, \delta, s, F)$ , let

$$f_M : \Sigma^* \mapsto \{True, False\}$$

where  $\Sigma^*$  is a set of string over  $\Sigma$ .

$$f_M(w) = \begin{cases} True, & \delta^*(s, w) \in F \\ False, & else \end{cases}$$

**Definition 1.3**  $\delta^*$ .

$$\delta^* : Q \times \Sigma^* \mapsto Q$$

which is an inductive function defined as

$$\begin{cases} \delta^*(q, \varepsilon) &= q \\ \delta^*(q, aw) &= \delta^*(\delta(q, a), w) \end{cases}$$

where  $(q \in Q, a \in \Sigma, w \in \Sigma^*)$

**Definition 1.4 Configuration.**

$$Conf = Q \times \Sigma^*$$

**Definition 1.5 Initial Configurations.** *The initial configuration of a machine  $I_M(w) \in Conf$*

$$I_M(w) = (s, w)$$

**Definition 1.6 .** *The final configuration of a machine  $H_M(w) \subseteq Conf$*

$$H_M = \{(q, u) \mid q \in Q, u = \varepsilon\}$$

**Definition 1.7 .** *The output of a machine is a function that either “True” or “False.”*

$$O_M : H_M \mapsto \{True, False\}$$

defined as

$$O_M(q, \varepsilon) = \begin{cases} True, & \text{if } q \in F \\ False, & \text{if } q \notin F \end{cases}$$

In summary :

- $F \subseteq Q$
- $s \in Q$
- $\varepsilon : Q \times \Sigma \mapsto Q$

#### Example 1.3: [Example 1.1](#) as configurations

With input “10010” write in mathematical language, the configuration of machine in [Example 1.1](#):

$$I_M(10010) = (A, 10010) \rightarrow (B, 0010) \rightarrow (C, 010) \rightarrow (B, 10) \rightarrow (A, 0) \rightarrow (A, \varepsilon) \in H_M$$

And thus the out put

$$O_F(A, \varepsilon) = False$$

The machine in fact will only accept integers that are **not** multiples of 3.

**Definition 1.8 .**

$$R_M \subseteq Conf \rightarrow_M = \{(q, aw), (\delta(q, a), w) \mid q \in Q, a \in \Sigma, w \in \Sigma^*\}$$

**Definition 1.9 .**

$$f'_n(w) = O_F(C_n)$$

*e.g.*

$$I_M(w) \rightarrow_M C_1 \rightarrow_M C_2 \rightarrow_M \cdots \rightarrow_M \in H_M$$

for example

$$L(M) = \{w \in \Sigma^* \mid f_M(w) = \text{True}\}$$

$$L(M_1) \neq \Sigma^*$$

$$1001 \notin 3 \times \mathbb{Z}$$