

Arborly

A library for producing beautiful syntax tree graphs.

Version 0.3.0

2025-05-14

MIT

Table of Contents

I	Usage	2
I.1	Importing the Package	2
I.2	Building a Syntax Tree	2
II	Arguments	3
III	Styling and Attributes	5
III.1	Hierarchy	5
III.2	Defaults	6
III.3	Effects	6
III.3.1	Align	6
III.3.2	Align-Content	7
III.3.3	Triangle	7
III.3.4	Lines	8
III.3.5	Anchor	9
III.3.6	Text	10
III.3.7	Padding	11
III.3.8	Name	11
IV	Examples	12
IV.1	The Quick Brown Fox	13
IV.2	Sphinx of Black Quartz	14
IV.3	Math Nodes	15
IV.4	Content Nodes	16
IV.5	Tight	17
IV.6	Long Sentence	18
IV.7	Deep Sentence	19

Part I Usage

I.1 Importing the Package


```
#import "@preview/arborly:0.3.0": *
```

I.2 Building a Syntax Tree

Technically each node is some content optionally followed by a number of bracket-enclosed nodes. For example: content [node] [node]. This is so that you can place a node into the body position of tree, and all nodes appear bracket-enclosed without needing an additional layer. Which is to say, you get to type `#tree[A[B]]` instead of `#tree[[A[B]]]`.

To give a demonstration:

```
#tree[TP
  [NP
    [N [this]]
  ]
  [VP
    [V [is]]
    [NP
      [D [a]]
      [N [wug]]
    ]
  ]
]
```

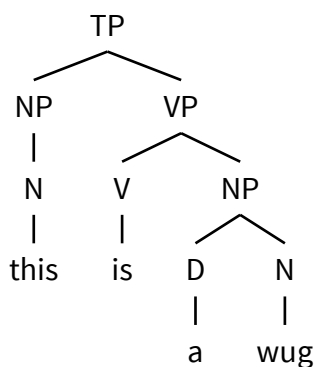

Part II Arguments

#a(..{args})

Used for adding attributes to nodes. See the Styling and Attributes section for more details.

```
#tree(
  {style}: (:),
  {vertical-snapping-threshold}: 2pt,
  {vertical-gap}: 8mm,
  {dense}: true,
  {horizontal-gap}: 7mm,
  {code}: none
)[body] → content
```

Generate a syntax tree

Argument

{style}: (:

dictionary

A root style dictionary that is inherited by all nodes. Any more specific configuration within the tree takes precedence.

Argument

{vertical-snapping-threshold}: 2pt

length

If the height of a node's content differs from regular text by less than this amount, it will be vertically spaced as though it had the same height.

This is not useful if most nodes are significantly larger than simple text (eg. being surrounded by rect).

Argument

{vertical-gap}: 8mm

length

The vertical gap between nodes

Argument

{horizontal-gap}: 7mm

length

The horizontal gap between nodes

Argument

{code}: none

A code block to be inserted into the cetz canvas after the syntax tree. It can be used for drawing arrows between nodes. Remember to name nodes using #a in order to reference them. See Styling and Arguments for more.

II Arguments

Argument

(**body**)

content

The tree's structure denoted using bracket-enclosed values, as described in Building a Syntax Tree


Part III Styling and Attributes

The attribute function `#a` is exposed for two purposes: styling the syntax tree, and naming nodes for usage with injected `cetz` code. A fallback set of attributes may be provided to the `tree` function.

III.1 Hierarchy

Attributes directly in a node take the highest precedence, followed by those in the `inherit` key of its parent's attributes, and so on until the root node. If none of those places specify the key, it goes to the values in the `style` argument, and then the default value. Here's an example with edge cases:

```
#show text: strong
#tree(
  style: (text: (fill: blue))
)[
  A
  [B #a(inherit: (text: (fill: orange)))
    [D #a(text: (fill: black), inherit: (text: (fill: gray)))
      [H] [I]
    ]
    [E]
  ]
  [C #a(text: (fill: red))
    [F]
    [G #a(text: (fill: green))]]
  ]
]
```

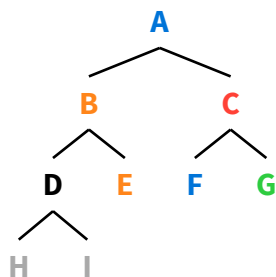

Note that F is blue, since the red styling of C was not put under `inherit`. Whereas E is orange just like B, since it was set to be inherited.

It is also possible to specify both node-specific and inherited styles at the same time, in which case the node-specific styles will take precedence for that node. In the above example that's used for setting D to black while its children are gray.

III.2 Defaults

This is the set of default attributes. They are used when a style is not specified for a node or inherited from any of its ancestors.


```
(
  align: center,
  align-content: center,
  triangle: false,
  parent-line: (:),
  child-lines: (:),
  parent-anchor: "north",
  child-anchor: "south",
  text: (:),
  padding: 0.5em,
  name: none,
  fit: "tight",
)
```

III.3 Effects

III.3.1 Align

Accepts an alignment of left, center, or right. In future might support an auto, acting like center but snapping in some situations. Currently does not.


```
#grid(
  gutter: 1em,
  columns: 3,
  ..(left, center, right).map(alignment => {
    tree(style: (align: alignment))[A[B][C]]
  })
)
```

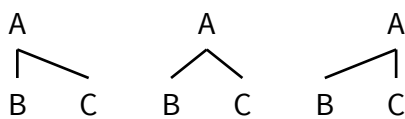

III.3.2 Align-Content

Shorthand for wrapping nodes in `#align(alignment)[...]`


```
#grid(
  gutter: 1em,
  columns: 3,
  ..(left, center, right).map(alignment => {
    tree(style: (align-content: alignment))[Root[Child \ (on two lines)]]
  })
)
```

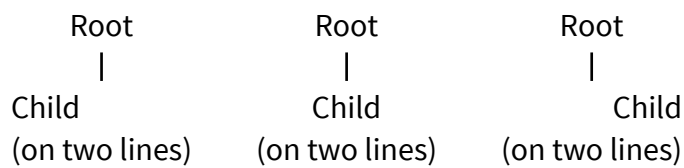

III.3.3 Triangle

This is commonly used to indicate that the content could be further broken down.

```
#grid(
  gutter: 1em,
  columns: 2,
  ..(false, true).map(boolean => {
    tree(vertical-gap: 1.2cm)[
      AdjP
      [bright green #a(triangle: boolean)]
    ]
  })
)
```

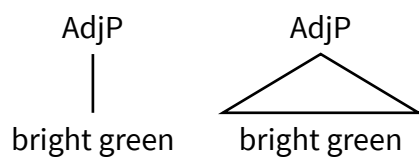


III.3.4 Lines

Used to style either the line to a node's parent, or the lines to its children. If both are set then the options are merged, with parent-line's configuration taking precedence as it is more specific (a node only has one line to its parent).

These options are equivalent to the options for styling `cetz.draw.line`

```
#tree[
  A #a(inherit: (child-lines: (stroke: (thickness: 2pt))))
  [B #a(parent-line: (stroke: (thickness: 0.5pt)))
   [D]
  ]
  [C #a(parent-line: (stroke: (paint: red)), child-lines: (stroke:
    (paint: blue)))
   [E #a(child-lines: (stroke: none))
    [G]
   ]
   [F [H]]
  ]
]
```

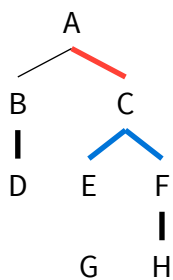


Note that the style merging can only merge dictionaries, so to merge you will need to use more explicit syntax. For example, C's parent-line would have overridden the thickness if A had simply used `(stroke: 2pt)`.

III.3.5 Anchor

The `cetx` anchor for a connecting line's ends to attach to. A value of `none` indicates the center.


```
#tree(  
  style: (padding: 0.3em)  
) [  
  A  
  [B #a(child-anchor: "south-west")  
    [D #a(parent-anchor: "north-east")]  
    [E #a(parent-anchor: "south-west")]  
  ]  
  [C #a(parent-anchor: "north", inherit: (parent-anchor: none, child-  
    anchor: none))  
    [F] [G] [H]  
  ]  
]
```

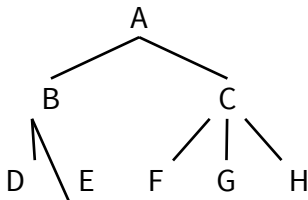

III.3.6 Text

These are equivalent to the named arguments of the `text` function, which you would usually customize with `#set text(...)`. Unfortunately set rules cannot be used within the tree's body, unless they are tightly scoped to only the content of one node like so.

```
#tree[A
  [
    #[
      #set text(size: 20pt)
      B
    ]
    [C]
  ]
  [B #a(text: (size: 20pt))
  [C]
  ]
]
```




This is very verbose, especially when used for several nodes. So the provided parameter (used on for the right branch of this tree) is exposed (and as usual can be inherited if specified).

However a similar option is not exposed for all elements that support set, so this is a useful trick to know.

III.3.7 Padding

This is simply passed on to the padding argument of `cetz.draw.content`


```
#tree(
  style: (padding: none)
)[A
  [B #a(inherit: (padding: 0.3em))
    [D]
  ]
  [C #a(padding: 0.8em)
    [E]
  ]
]
```



III.3.8 Name

This is used as the name for `cetz.draw.content` if it is set to a non-`none` value. It's crucial to use this attribute to label nodes that you plan to reference in `cetz` code, such as when drawing arrows between nodes. Here is an example.

```
#let arrow = {
  import "@preview/cetz:0.3.4"
  cetz.draw.set-style(mark: (end: ">"))
  cetz.draw.bezier(
    "bee.south", "see.south",
    (rel: (-90deg, 1cm), to: ("bee", 50%, "see"))
  )
}
#tree(code: arrow)[A
  [B #a(name: "bee")]
  [C #a(name: "see")]
]
```




Part IV **Examples**

Note that I am not a linguist, so these analyses may be wrong. There are intended to show the appearance of arborly syntax trees. Please create a github issue if you see a mistake, or would like to submit another example.


IV.1 The Quick Brown Fox

```
#tree[TP
  [NP
    [D [The]]
    [AdjP
      [Adj [quick]]
    ]
    [AdjP
      [Adj [brown]]
    ]
    [N [fox]]
  ]
  [VP
    [V [jumps]]
    [PP
      [P [over]]
      [NP
        [D [the]]
        [AdjP
          [Adj [lazy]]
        ]
        [N [dog]]
      ]
    ]
  ]
]
```

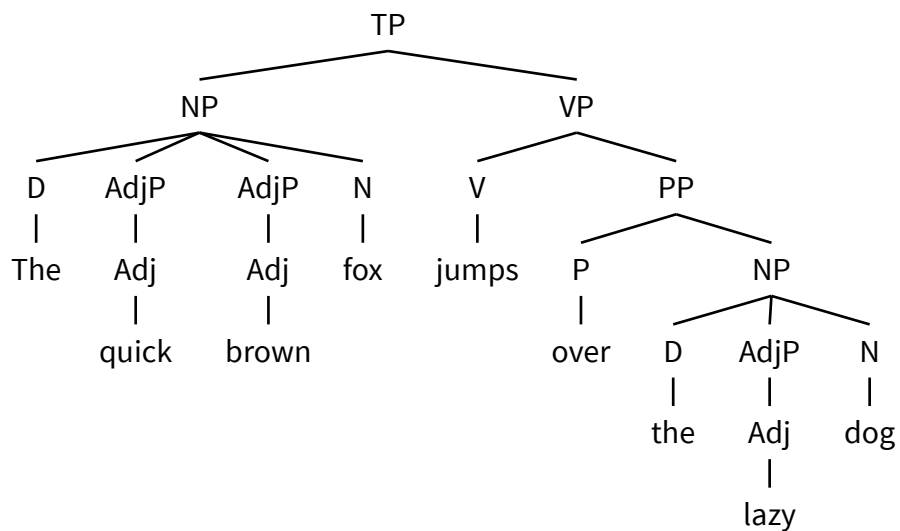


IV.2 Sphinx of Black Quartz

```
#tree(
  style: (fit: "band")
)[TP
  [NP
    [N [Sphinx]]
    [PP
      [P [of]]
      [NP
        [AdjP
          [Adj [black]]
        ]
        [N [quartz]]
      ]
    ]
  ]
  [VP
    [V [judge]]
    [NP
      [AdjP
        [Adj [my]]
      ]
      [N [vow.]]
    ]
  ]
]
```

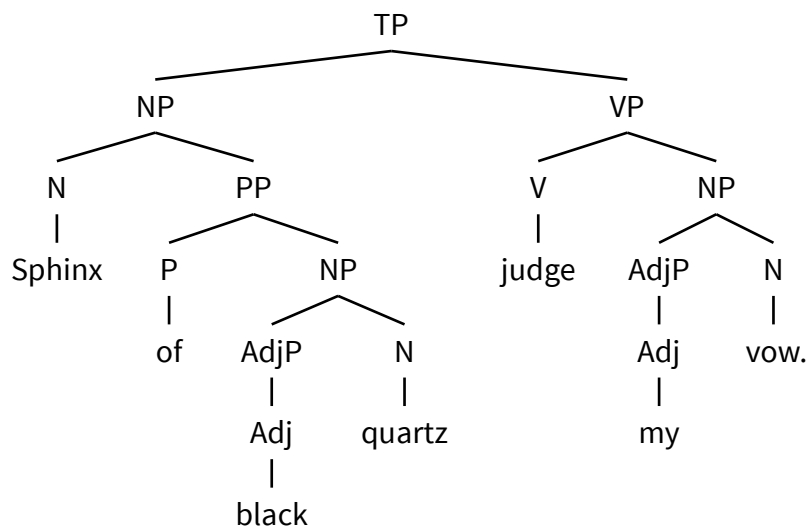


IV.3 Math Nodes

```
#tree[$S$
  [$a$]
  [$S$
    [$S$
      [$b$]
      [$S$ [$\lambda$]]
      [$a$]
    ]
    [$S$
      [$a$]
      [$S$ [$\lambda$]]
      [$b$]
    ]
  ]
]
[$b$]
]
```

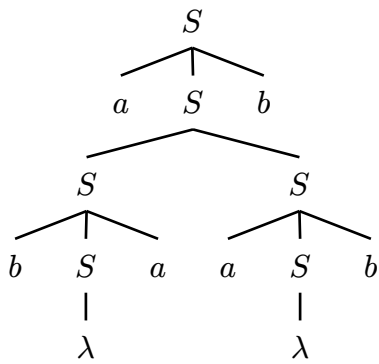

IV.4 Content Nodes

```
#tree(
  vertical-gap: 1.2cm,
  horizontal-gap: 1cm,
)[#table(columns: 2, [1],[2])
  [*bold* [_italics_]]
  [$e^{pi i} = -1$
    [[] []]
    [Nested:
      [#tree[1 [2] [3]]]
    ]
  ]
  [#circle(radius: 0.5em)]
]
```

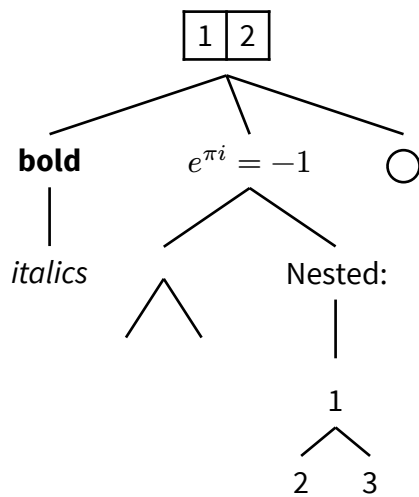

IV.5 Tight

```
#tree(  
  horizontal-gap: 0pt,  
) [1234  
  [12 [1] [2]]  
  [34 [3] [4]]  
]
```

1234

∧


1234

∧ ∧

1234

```
#let sentence = [TP[NP[D[the]][N[move]]][PP[P[from]]][NP[D[a]]  
[AdjP[Adj[structuralist]]][N[account]]][PP[P[in]]][CP[C[which]]  
[TP[NP[N[capital]]][T[is]]][VP[V[understood]]][TP[T[to]]  
[VP[V[structure]]][NP[AdjP[Adj[social]]][N[relations]]][PP[P[in]]  
[NP[AdjP[Adv[relatively]]][Adj[homologous]]][N[ways]]]]]]]]]  
[PP[P[to]]][NP[D[a]]][N[view]]][PP[P[of]]][N[hegemony]]][PP[P[in]]  
[CP[C[which]]][TP[NP[AdjP[Adj[power]]][N[relations]]][VP[V[are]]  
[AdjP[Adj[subject]]][PP[Pto]]][NP[N[repetition]]][N[convergence]]  
[Conj[and]]][N[rearticulation]]]]]]]]][VP[V[brought]]][NP[D[the]]  
[N[question]]][PP[P[of]]][NP[N[temporality]]][PP[P[into]]][NP[D[the]]  
[N[thinking]]][PP[P[of]]][NP[N[structure]]]]]]][Conj[and]]  
[VP[V[marked]]][NP[D[a]]][N[shift]]][PP[P[from]]][NP[D[a]]][N[form]]  
[PP[P[of]]][NP[AdjP[Adj[Althusserian]]][N[theory]]][CP[C[that]]  
[TP[VP[V[takes]]][NP[AdjP[Adj[structural]]][N[totalities]]][PP[P[as]]  
[NP[AdjP[Adj[theoretical]]][N[objects]]]]]]]]][PP[P[to]]][N[one]]  
[PP[Pin]]][CP[C[which]]][TP[NP[D[the]]][N[insights]]][PP[P[into]]  
[NP[D[the]]][AdjP[Adj[contingent]]][N[possibility]]][PP[P[of]]  
[NP[N[structure]]]]]]][VP[V[inaugurate]]][NP[D[a]]][AdjP[Adj[renewed]]]  
[N[conception]]][PP[P[of]]][NP[N[hegemony]]][PP[P[as]]][AdjP[Adj[bound]]  
[AP[Adv[up]]]]][PP[Pwith]]][NP[D[the]]][AdjP[Adj[contingent]]][N[sites]]  
[Conj[and]]][N[strategies]]][PP[Pof]]][NP[D[the]]][N[rearticulation]]  
[PP[P[of]]][NP[N[power]]]]]]]]]]]]]
```

```
#scale(
  21%,
  reflow: true,
  tree(
    horizontal-gap: 3mm,
    vertical-gap: 1cm,
    sentence
  )
)
```

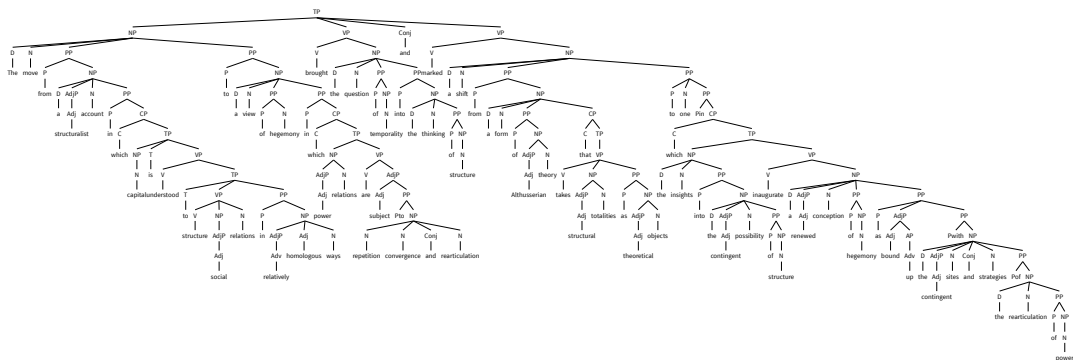

IV.7 Deep Sentence

```
#tree(style: (padding: 0.01), vertical-gap: 0.1cm)
```

```
[1[2[3[4[5[6[7[8[9[10[11[12[13[14[15[16[17[18[19[20[21[22[23[24[25]]]]]]]]]]]]]]]
```

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25