

DMVPN



CISCO TM

Pedro Egea Ortega

Índice

ESQUEMA..... 3

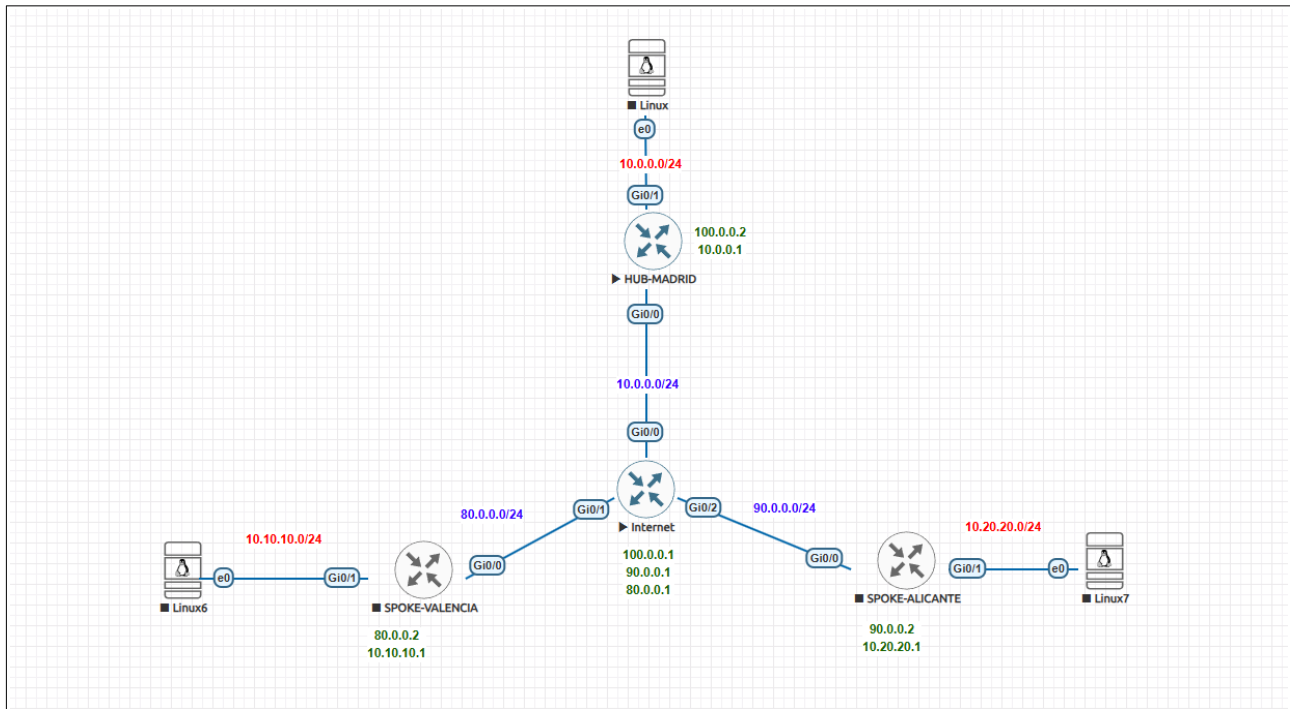
CONFIGURACIÓN IPSEC (IGUAL EN HUB Y SPOKES).....4

INTERNET..... 6

HUB-MADRID.....7

SPOKE-ALICANTE.....10

SPOKE-VALENCIA.....13

ESQUEMA**HUB-MADRID**

WAN: 100.0.0.2/24

LAN: 10.0.0.1/24

SPOKE-VALENCIA

WAN: 80.0.0.2/24

LAN: 10.10.10.1/24

SPOKE-ALICANTE

WAN: 90.0.0.2/24

LAN: 10.20.20.1/24

RED DMVPN

RED TUNNEL: 172.16.0.0/24

HUB: 172.16.0.1

VALENCIA: 172.16.0.2

ALICANTE: 172.16.0.3

CONFIGURACIÓN IPSEC (IGUAL EN HUB Y SPOKES)

crypto isakmp policy 1

authentication pre-share

encryption aes

hash sha

group 2

lifetime 86400

crypto isakmp key pedro address 0.0.0.0

crypto ipsec transform-set prac_dmvpn esp-aes esp-sha-hmac

mode transport

crypto ipsec profile vpnDMVPN

set transform-set prac_dmvpn

```
HUB-MADRID(config)#crypto isakmp policy 1
HUB-MADRID(config-isakmp)# authentication pre-share
HUB-MADRID(config-isakmp)# encryption aes
HUB-MADRID(config-isakmp)# hash sha
HUB-MADRID(config-isakmp)# group 2
HUB-MADRID(config-isakmp)# lifetime 86400
HUB-MADRID(config-isakmp)#
HUB-MADRID(config-isakmp)#crypto isakmp key pedro address 0.0.0.0
HUB-MADRID(config)#
HUB-MADRID(config)#crypto ipsec transform-set prac_dmvpn esp-aes esp-sha-hmac
HUB-MADRID(cfg-crypto-trans)# mode transport
HUB-MADRID(cfg-crypto-trans)#
HUB-MADRID(cfg-crypto-trans)#crypto ipsec profile vpnDMVPN
HUB-MADRID(ipsec-profile)# set transform-set prac_dmvpn
HUB-MADRID(ipsec-profile)#end
HUB-MADRID#wr
Building configuration...
[OK]
HUB-MADRID#
```

```
SPOKE-ALICANTE(config)#crypto isakmp policy 1
SPOKE-ALICANTE(config-isakmp)# authentication pre-share
SPOKE-ALICANTE(config-isakmp)# encryption aes
SPOKE-ALICANTE(config-isakmp)# hash sha
SPOKE-ALICANTE(config-isakmp)# group 2
SPOKE-ALICANTE(config-isakmp)# lifetime 86400
SPOKE-ALICANTE(config-isakmp)#
SPOKE-ALICANTE(config-isakmp)#crypto isakmp key pedro address 0.0.0.0
SPOKE-ALICANTE(config)#
SPOKE-ALICANTE(config)#%c transform-set prac_dmvpn esp-aes esp-sha-hmac
SPOKE-ALICANTE(cfg-crypto-trans)# mode transport
SPOKE-ALICANTE(cfg-crypto-trans)#
SPOKE-ALICANTE(cfg-crypto-trans)#crypto ipsec profile vpnDMVPN
SPOKE-ALICANTE(ipsec-profile)# set transform-set prac_dmvpn
SPOKE-ALICANTE(ipsec-profile)#end
SPOKE-ALICANTE#wr
Building configuration...
[OK]
SPOKE-ALICANTE#
```

```
SPOKE-VALENCIA(config)#crypto isakmp policy 1
SPOKE-VALENCIA(config-isakmp)# authentication pre-share
SPOKE-VALENCIA(config-isakmp)# encryption aes
SPOKE-VALENCIA(config-isakmp)# hash sha
SPOKE-VALENCIA(config-isakmp)# group 2
SPOKE-VALENCIA(config-isakmp)# lifetime 86400
SPOKE-VALENCIA(config-isakmp)#
SPOKE-VALENCIA(config-isakmp)#crypto isakmp key pedro address 0.0.0.0
SPOKE-VALENCIA(config)#
SPOKE-VALENCIA(config)#%c transform-set prac_dmvpn esp-aes esp-sha-hmac
SPOKE-VALENCIA(cfg-crypto-trans)# mode transport
SPOKE-VALENCIA(cfg-crypto-trans)#
SPOKE-VALENCIA(cfg-crypto-trans)#crypto ipsec profile vpnDMVPN
SPOKE-VALENCIA(ipsec-profile)# set transform-set prac_dmvpn
SPOKE-VALENCIA(ipsec-profile)#end
SPOKE-VALENCIA#wr
Building configuration...
[OK]
SPOKE-VALENCIA#
```

INTERNET

Configuración inicial

```
interface GigabitEthernet0/0  
ip address 100.0.0.1 255.255.255.0  
no shutdown  
  
interface GigabitEthernet0/1  
ip address 80.0.0.1 255.255.255.0  
no shutdown  
  
interface GigabitEthernet0/2  
ip address 90.0.0.1 255.255.255.0  
no shutdown
```

```
INTERNET(config)#interface GigabitEthernet0/0  
INTERNET(config-if)#ip address 100.0.0.1 255.255.255.0  
INTERNET(config-if)#no shutdown  
INTERNET(config-if)#exit  
INTERNET(config)#interface GigabitEthernet0/1  
INTERNET(config-if)#ip address 80.0.0.1 255.255.255.0  
INTERNET(config-if)#no shutdown  
INTERNET(config-if)#exit  
INTERNET(config)#interface GigabitEthernet0/2  
INTERNET(config-if)#ip address 90.0.0.1 255.255.255.0  
INTERNET(config-if)#no shutdown  
INTERNET(config-if)#end  
INTERNET#wr  
Building configuration...  
[OK]  
INTERNET#
```

HUB-MADRID

Configuración inicial

```
interface GigabitEthernet0/0
```

```
ip address 100.0.0.2 255.255.255.0
```

```
no shutdown
```

```
interface GigabitEthernet0/1
```

```
ip address 10.0.0.1 255.255.255.0
```

```
no shutdown
```

```
ip route 0.0.0.0 0.0.0.0 100.0.0.1
```

```
access-list 1 permit 10.0.0.0 0.255.255.255
```

```
ip nat inside source list 1 interface Gi0/0 overload
```

```
int Gi0/0
```

```
ip nat outside
```

```
int Gi0/1
```

```
ip nat inside
```

```
HUB-MADRID(config)#interface GigabitEthernet0/0
HUB-MADRID(config-if)#ip address 100.0.0.2 255.255.255.0
HUB-MADRID(config-if)#no shutdown
HUB-MADRID(config-if)#exit
HUB-MADRID(config)#interface GigabitEthernet0/1
HUB-MADRID(config-if)#ip address 10.0.0.1 255.255.255.0
HUB-MADRID(config-if)#no shutdown
HUB-MADRID(config-if)#exit
HUB-MADRID(config)#ip route 0.0.0.0 0.0.0.0 100.0.0.1
HUB-MADRID(config)#access-list 1 permit 10.0.0.0 0.255.255.255
HUB-MADRID(config)#ip nat inside source list 1 interface Gi0/0 overload
HUB-MADRID(config)#int Gi0/0
HUB-MADRID(config-if)#ip nat outside

-Traceback- 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3CFE1AAz 3CFE0ECz 3CFE08Bz 38FE55Fz 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D6B
-Traceback- 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3CFE1AAz 3CFE0ECz 3CFE08Bz 38FE5A0z 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D73
HUB-MADRID(config-if)#exit
HUB-MADRID(config)#int Gi0/1
HUB-MADRID(config-if)#ip nat inside
HUB-MADRID(config-if)#end
HUB-MADRID#
Building configuration...
[OK]
HUB-MADRID#
```

Configuración HUB

```
interface Tunnel0
bandwidth 1000
ip address 172.16.0.1 255.255.255.0
no ip redirects
ip mtu 1400
no ip split-horizon eigrp 1
ip nhrp authentication pedro
ip nhrp map multicast dynamic
ip nhrp network-id 1000
ip nhrp holdtime 600
delay 1000
tunnel source GigabitEthernet0/0
tunnel mode gre multipoint
tunnel key 1000
tunnel protection ipsec profile vpnDMVPN
```

```
HUB-MADRID(config)#interface Tunnel0
HUB-MADRID(config-if)# bandwidth 1000
HUB-MADRID(config-if)# ip address 172.16.0.1 255.255.255.0
HUB-MADRID(config-if)# no ip redirects
HUB-MADRID(config-if)# ip mtu 1400
HUB-MADRID(config-if)# no ip split-horizon eigrp 1
HUB-MADRID(config-if)# ip nhrp authentication pedro
HUB-MADRID(config-if)# ip nhrp map multicast dynamic
HUB-MADRID(config-if)# ip nhrp network-id 1000
HUB-MADRID(config-if)# ip nhrp holdtime 600
HUB-MADRID(config-if)# delay 1000
HUB-MADRID(config-if)# tunnel source GigabitEthernet0/0
HUB-MADRID(config-if)# tunnel mode gre multipoint
HUB-MADRID(config-if)# tunnel key 1000
HUB-MADRID(config-if)# tunnel protection ipsec profile vpnDMVPN
HUB-MADRID(config-if)#end
HUB-MADRID#wr
Building configuration...
[OK]
HUB-MADRID#
```


EIGRP en MADRID

```
router eigrp 1

network 172.16.0.0 0.0.0.255

network 10.0.0.0 0.0.0.255

no auto-summary
```

```
HUB-MADRID(config)#router eigrp 1
HUB-MADRID(config-router)# network 172.16.0.0 0.0.0.255
HUB-MADRID(config-router)# network 10.0.0.0 0.0.0.255
HUB-MADRID(config-router)# no auto-summary
HUB-MADRID(config-router)#end
HUB-MADRID#wr
Building configuration...
[OK]
HUB-MADRID#
```

Comprobaciones

```
show crypto isakmp sa | show ip eigrp neighbors | show ip route eigrp
```

```
HUB-MADRID>en
HUB-MADRID#show crypto isakmp sa
IPv4 Crypto ISAKMP SA
dst          src          state          conn-id status
100.0.0.2    90.0.0.2     QM_IDLE        1002 ACTIVE
100.0.0.2    80.0.0.2     QM_IDLE        1001 ACTIVE

IPv6 Crypto ISAKMP SA

HUB-MADRID#show ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(1)
H   Address                Interface          Hold Uptime    SRTT    RTO  Q  Seq
                               (sec)           (ms)          Cnt  Num
1   172.16.0.3                Tu0                13 00:02:11    17   132  0   3
0   172.16.0.2                Tu0                11 00:04:31    12   132  0   4
HUB-MADRID#show ip route eigrp
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 100.0.0.1 to network 0.0.0.0

    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
D       10.10.10.0/24 [90/2816256] via 172.16.0.2, 00:02:16, Tunnel0
D       10.20.20.0/24 [90/2816256] via 172.16.0.3, 00:02:16, Tunnel0
HUB-MADRID#
```

SPOKE-ALICANTE

Configuración inicial

```
interface GigabitEthernet0/0
```

```
ip address 90.0.0.2 255.255.255.0
```

```
no shutdown
```

```
interface GigabitEthernet0/1
```

```
ip address 10.20.20.1 255.255.255.0
```

```
no shutdown
```

```
ip route 0.0.0.0 0.0.0.0 90.0.0.1
```

```
access-list 1 permit 10.0.0.0 0.255.255.255
```

```
ip nat inside source list 1 interface Gi0/0 overload
```

```
int Gi0/0
```

```
ip nat outside
```

```
int Gi0/1
```

```
ip nat inside
```

```
SPOKE-ALICANTE(config)#interface GigabitEthernet0/0
SPOKE-ALICANTE(config-if)#ip address 90.0.0.2 255.255.255.0
SPOKE-ALICANTE(config-if)#no shutdown
SPOKE-ALICANTE(config-if)#exit
SPOKE-ALICANTE(config)#interface GigabitEthernet0/1
SPOKE-ALICANTE(config-if)#ip address 10.20.20.1 255.255.255.0
SPOKE-ALICANTE(config-if)#no shutdown
SPOKE-ALICANTE(config-if)#exit
SPOKE-ALICANTE(config)#ip route 0.0.0.0 0.0.0.0 90.0.0.1
SPOKE-ALICANTE(config)#access-list 1 permit 10.0.0.0 0.255.255.255
SPOKE-ALICANTE(config)#ip nat inside source list 1 interface Gi0/0 overload
SPOKE-ALICANTE(config)#int Gi0/0
SPOKE-ALICANTE(config-if)#ip nat outside

-Traceback= 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3D15412z 3CFE103z 3CFE08Bz 38FE55Fz 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D68
-Traceback= 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3CFE1AAz 3CFE0ECz 3CFE08Bz 38FE5A0z 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D73
SPOKE-ALICANTE(config-if)#int Gi0/1
SPOKE-ALICANTE(config-if)#ip nat inside
SPOKE-ALICANTE(config-if)#end
SPOKE-ALICANTE#wr
Building configuration...
[OK]
SPOKE-ALICANTE#
```

Configuración SPOKE

```
interface Tunnel0
bandwidth 1000
ip address 172.16.0.3 255.255.255.0
ip mtu 1400
no ip split-horizon eigrp 1
ip nhrp authentication pedro
ip nhrp map 172.16.0.1 100.0.0.2
ip nhrp map multicast 100.0.0.2
ip nhrp network-id 1000
ip nhrp holdtime 600
ip nhrp nhs 172.16.0.1
delay 1000
tunnel source GigabitEthernet0/0
tunnel destination 100.0.0.2
tunnel key 1000
tunnel protection ipsec profile vpnDMVPN
```

```
SPOKE-ALICANTE(config)#interface Tunnel0
SPOKE-ALICANTE(config-if)# bandwidth 1000
SPOKE-ALICANTE(config-if)# ip address 172.16.0.3 255.255.255.0
SPOKE-ALICANTE(config-if)# ip mtu 1400
SPOKE-ALICANTE(config-if)# no ip split-horizon eigrp 1
SPOKE-ALICANTE(config-if)# ip nhrp authentication pedro
SPOKE-ALICANTE(config-if)# ip nhrp map 172.16.0.1 100.0.0.2
SPOKE-ALICANTE(config-if)# ip nhrp map multicast 100.0.0.2
SPOKE-ALICANTE(config-if)# ip nhrp network-id 1000
SPOKE-ALICANTE(config-if)# ip nhrp holdtime 600
SPOKE-ALICANTE(config-if)# ip nhrp nhs 172.16.0.1
SPOKE-ALICANTE(config-if)# delay 1000
SPOKE-ALICANTE(config-if)# tunnel source GigabitEthernet0/0
SPOKE-ALICANTE(config-if)# tunnel destination 100.0.0.2
SPOKE-ALICANTE(config-if)# tunnel key 1000
SPOKE-ALICANTE(config-if)# tunnel protection ipsec profile vpnDMVPN
SPOKE-ALICANTE(config-if)#end
SPOKE-ALICANTE#wr
Building configuration...
[OK]
SPOKE-ALICANTE#
```

EIGRP en ALICANTE

```
router eigrp 1
```

```
network 172.16.0.0 0.0.0.255
```

```
network 10.20.20.0 0.0.0.255
```

```
no auto-summary
```

```
SPOKE-ALICANTE(config)#router eigrp 1
SPOKE-ALICANTE(config-router)# network 172.16.0.0 0.0.0.255
SPOKE-ALICANTE(config-router)# network 10.20.20.0 0.0.0.255
SPOKE-ALICANTE(config-router)# no auto-summary
SPOKE-ALICANTE(config-router)#end
SPOKE-ALICANTE#wr
Building configuration...
[OK]
SPOKE-ALICANTE#
```

Comprobaciones

```
show crypto isakmp sa | show ip eigrp neighbors | show ip route eigrp
```

```
SPOKE-ALICANTE#show crypto isakmp sa
IPv4 Crypto ISAKMP SA
dst          src          state          conn-id status
100.0.0.2    90.0.0.2      QM_IDLE        1001 ACTIVE

IPv6 Crypto ISAKMP SA

SPOKE-ALICANTE#show ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(1)
H   Address          Interface          Hold Uptime    SRTT   RTO  Q  Seq
                          (sec)           (ms)          Cnt  Num
0   172.16.0.1         Tu0                11 00:04:20    18   138  0   6
SPOKE-ALICANTE#show ip route eigrp
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 90.0.0.1 to network 0.0.0.0

    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
D       10.0.0.0/24 [90/2816256] via 172.16.0.1, 00:04:24, Tunnel0
D       10.10.10.0/24 [90/3072256] via 172.16.0.1, 00:04:24, Tunnel0
SPOKE-ALICANTE#
```

SPOKE-VALENCIA

Configuración inicial

```
interface GigabitEthernet0/0

ip address 80.0.0.2 255.255.255.0

no shutdown

interface GigabitEthernet0/1

ip address 10.10.10.1 255.255.255.0

no shutdown

ip route 0.0.0.0 0.0.0.0 80.0.0.1

access-list 1 permit 10.0.0.0 0.255.255.255

ip nat inside source list 1 interface Gi0/0 overload

int Gi0/0

ip nat outside

int Gi0/1

ip nat inside
```

```
SPOKE-VALENCIA(config)#interface GigabitEthernet0/0
SPOKE-VALENCIA(config-if)#ip address 80.0.0.2 255.255.255.0
SPOKE-VALENCIA(config-if)#no shutdown
SPOKE-VALENCIA(config-if)#exit
SPOKE-VALENCIA(config)#interface GigabitEthernet0/1
SPOKE-VALENCIA(config-if)#ip address 10.10.10.1 255.255.255.0
SPOKE-VALENCIA(config-if)#no shutdown
SPOKE-VALENCIA(config-if)#exit
SPOKE-VALENCIA(config)#ip route 0.0.0.0 0.0.0.0 80.0.0.1
SPOKE-VALENCIA(config)#access-list 1 permit 10.0.0.0 0.255.255.255
SPOKE-VALENCIA(config)#ip nat inside source list 1 interface Gi0/0 overload
SPOKE-VALENCIA(config)#int Gi0/0
SPOKE-VALENCIA(config-if)#ip nat outside

-Traceback= 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3D15412z 3CFE103z 3CFE08Bz 38FE55Fz 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D6B
-Traceback= 114AEA8z 130825z 15E41Ez 15E140z 15DF4Dz 158075z 158CABz 158C3Fz 3D15412z 3CFE103z 3CFE08Bz 38FE5A0z 38F0E1Cz 38F1150z 38F8376z 38FD130z - Process "Exec", CPU hog, PC 0x00153D6B
SPOKE-VALENCIA(config-if)#int Gi0/1
SPOKE-VALENCIA(config-if)#ip nat inside
SPOKE-VALENCIA(config-if)#end
SPOKE-VALENCIA#wr
Building configuration...
[OK]
SPOKE-VALENCIA#
```

Configuración SPOKE

```
interface Tunnel0
bandwidth 1000
ip address 172.16.0.2 255.255.255.0
ip mtu 1400
no ip split-horizon eigrp 1
ip nhrp authentication pedro
ip nhrp map 172.16.0.1 100.0.0.2
ip nhrp map multicast 100.0.0.2
ip nhrp network-id 1000
ip nhrp holdtime 600
ip nhrp nhs 172.16.0.1
delay 1000
tunnel source GigabitEthernet0/0
tunnel destination 100.0.0.2
tunnel key 1000
tunnel protection ipsec profile vpnDMVPN
```

```
SPOKE-VALENCIA(config)#interface Tunnel0
SPOKE-VALENCIA(config-if)# bandwidth 1000
SPOKE-VALENCIA(config-if)# ip address 172.16.0.2 255.255.255.0
SPOKE-VALENCIA(config-if)# ip mtu 1400
SPOKE-VALENCIA(config-if)# no ip split-horizon eigrp 1
SPOKE-VALENCIA(config-if)# ip nhrp authentication pedro
SPOKE-VALENCIA(config-if)# ip nhrp map 172.16.0.1 100.0.0.2
SPOKE-VALENCIA(config-if)# ip nhrp map multicast 100.0.0.2
SPOKE-VALENCIA(config-if)# ip nhrp network-id 1000
SPOKE-VALENCIA(config-if)# ip nhrp holdtime 600
SPOKE-VALENCIA(config-if)# ip nhrp nhs 172.16.0.1
SPOKE-VALENCIA(config-if)# delay 1000
SPOKE-VALENCIA(config-if)# tunnel source GigabitEthernet0/0
SPOKE-VALENCIA(config-if)# tunnel destination 100.0.0.2
SPOKE-VALENCIA(config-if)# tunnel key 1000
SPOKE-VALENCIA(config-if)# tunnel protection ipsec profile vpnDMVPN
SPOKE-VALENCIA(config-if)#end
SPOKE-VALENCIA#wr
Building configuration...
[OK]
SPOKE-VALENCIA#
```

EIGRP en VALENCIA

```
router eigrp 1
```

```
network 172.16.0.0 0.0.0.255
```

```
network 10.10.10.0 0.0.0.255
```

```
no auto-summary
```

```
SPOKE-VALENCIA(config)#router eigrp 1
SPOKE-VALENCIA(config-router)# network 172.16.0.0 0.0.0.255
SPOKE-VALENCIA(config-router)# network 10.10.10.0 0.0.0.255
SPOKE-VALENCIA(config-router)# no auto-summary
SPOKE-VALENCIA(config-router)#end
SPOKE-VALENCIA#wr
Building configuration...
[OK]
SPOKE-VALENCIA#
```

Comprobaciones

```
show crypto isakmp sa | show ip eigrp neighbors | show ip route eigrp
```

```
SPOKE-VALENCIA#show crypto isakmp sa
IPv4 Crypto ISAKMP SA
dst          src          state          conn-id status
100.0.0.2    80.0.0.2      QM_IDLE       1001 ACTIVE

IPv6 Crypto ISAKMP SA

SPOKE-VALENCIA#show ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(1)
H   Address          Interface          Hold Uptime    SRTT    RTO  Q  Seq
                          (sec)           (ms)          Cnt  Num
0   172.16.0.1        Tu0                14 00:07:24    12   138  0   6
SPOKE-VALENCIA#show ip route eigrp
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 80.0.0.1 to network 0.0.0.0

    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
D       10.0.0.0/24 [90/2816256] via 172.16.0.1, 00:07:29, Tunnel0
D       10.20.20.0/24 [90/3072256] via 172.16.0.1, 00:05:09, Tunnel0
SPOKE-VALENCIA#
```