Examen 1 modulo 2

- Creamos sg de la EC2 publica para acceso SSH de mi IP

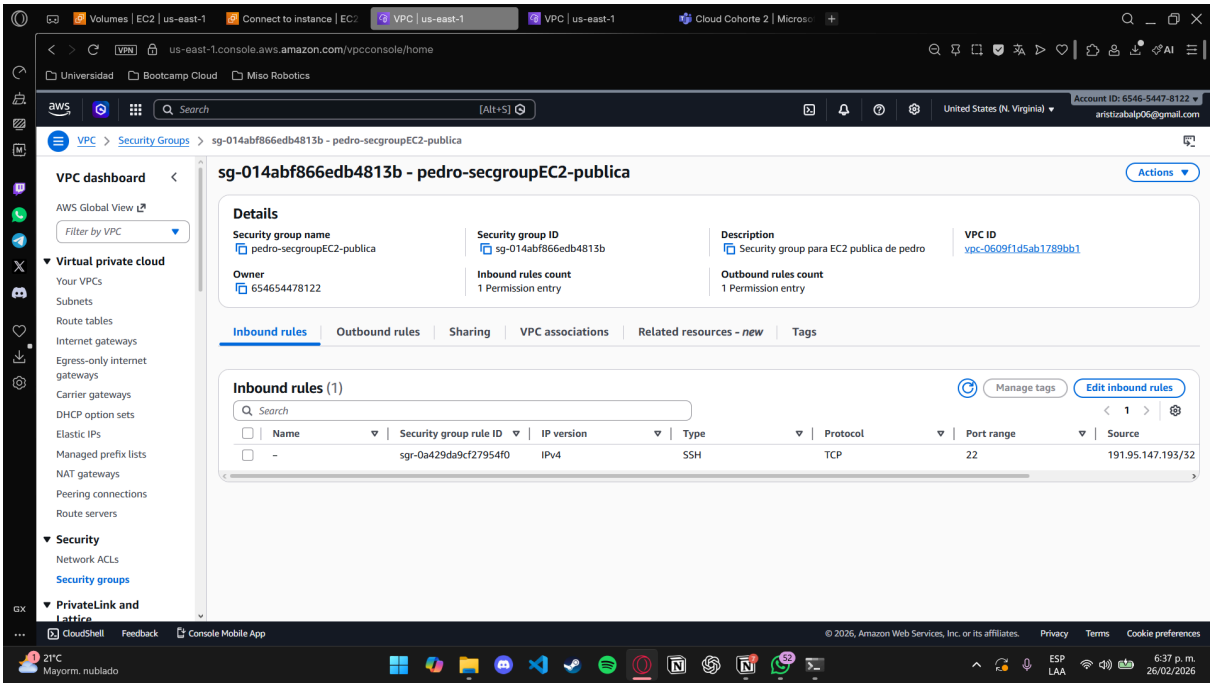

- Creamos VPC

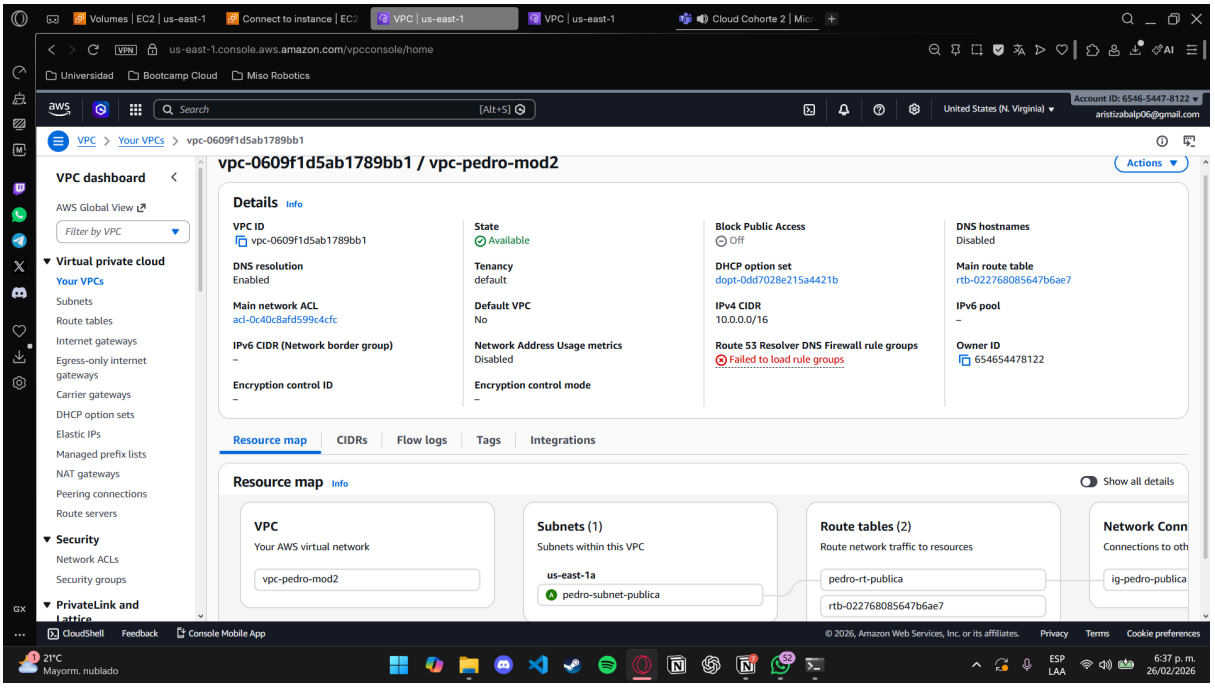

- Creamos subnet, route table e internet gateway para la publica

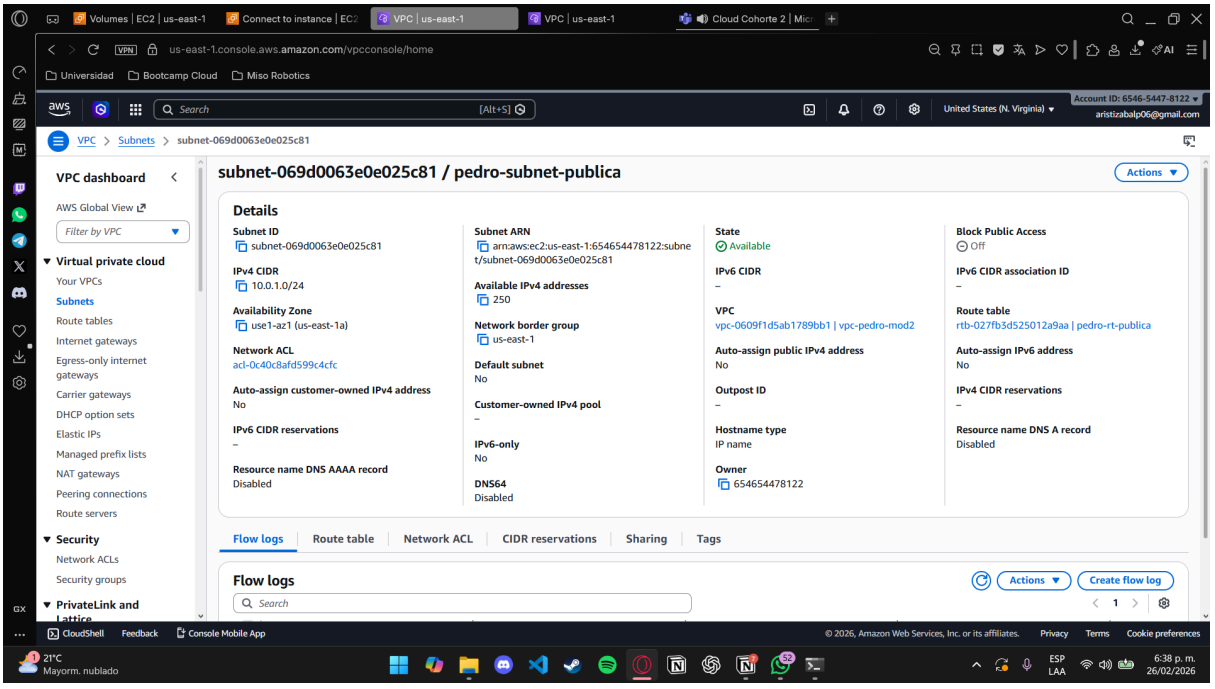
Volumes | EC2 | us-east-1
Connect to instance | EC2
VPC | us-east-1
VPC | us-east-1
Cloud Cohorte 2 | Micr
us-east-1.console.aws.amazon.com/vpcconsole/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
VPC > Subnets > subnet-069d0063e0e025c81
VPC dashboard
AWS Global View
Filter by VPC
Virtual private cloud
Your VPCs
Subnets
Route tables
Internet gateways
Egress-only internet gateways
Carrier gateways
DHCP option sets
Elastic IPs
Managed prefix lists
NAT gateways
Peering connections
Route servers
Security
Network ACLs
Security groups
PrivateLink and Lattice
subnet-069d0063e0e025c81 / pedro-subnet-publica
Actions
Details
Subnet ID
subnet-069d0063e0e025c81
IPv4 CIDR
10.0.1.0/24
Availability Zone
use1-az1 (us-east-1a)
Network ACL
acl-0c40c8afd599c4cfc
Auto-assign customer-owned IPv4 address
No
IPv6 CIDR reservations
–
Resource name DNS AAAA record
Disabled
Subnet ARN
arn:aws:ec2:us-east-1:654654478122:subnet/subnet-069d0063e0e025c81
Available IPv4 addresses
250
Network border group
us-east-1
Default subnet
No
Customer-owned IPv4 pool
–
IPv6-only
No
DNS64
Disabled
State
Available
IPv6 CIDR
–
VPC
vpc-0609f1d5ab1789bb1 | vpc-pedro-mod2
Auto-assign public IPv4 address
No
Outpost ID
–
Hostname type
IP name
Owner
654654478122
Block Public Access
Off
IPv6 CIDR association ID
–
Route table
rtb-027fb3d525012a9aa | pedro-rt-publica
Auto-assign IPv6 address
No
IPv4 CIDR reservations
–
Resource name DNS A record
Disabled
Flow logs
Route table
Network ACL
CIDR reservations
Sharing
Tags
Flow logs
Actions
Create flow log
Search
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
21°C
Mayorm. nublado
ESP
LAA
6:38 p. m.
26/02/2026

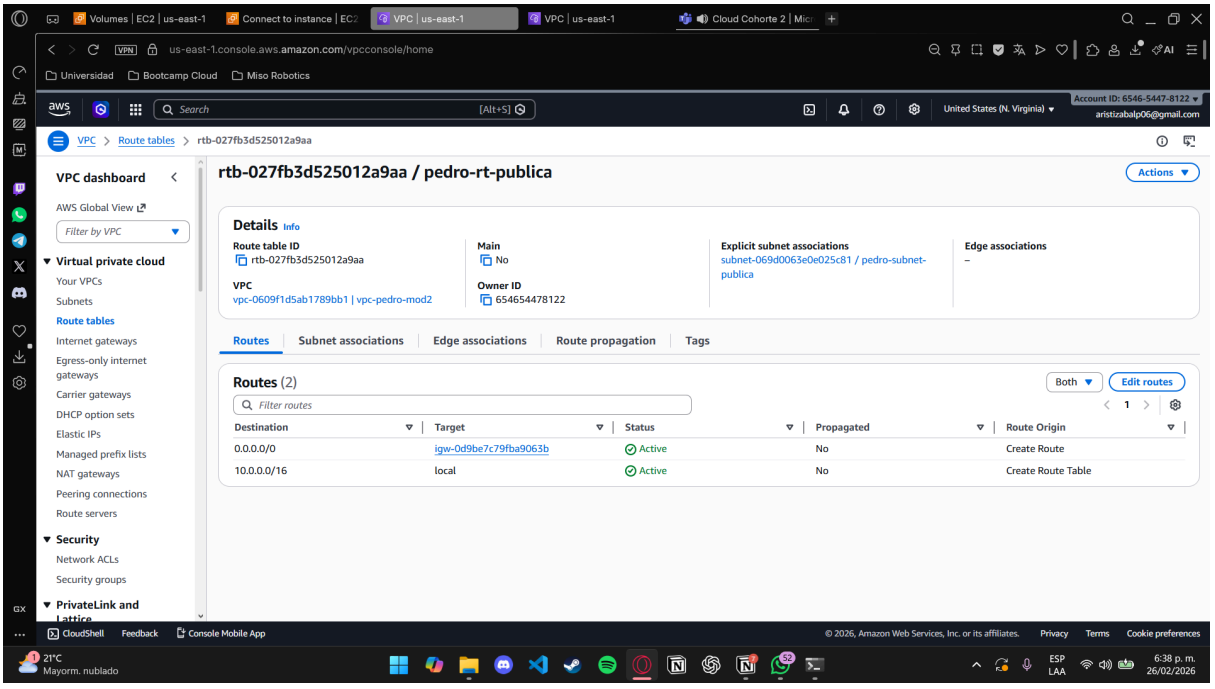
Volumes | EC2 | us-east-1
Connect to instance | EC2
VPC | us-east-1
VPC | us-east-1
Cloud Cohorte 2 | Micr
us-east-1.console.aws.amazon.com/vpcconsole/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
VPC > Route tables > rtb-027fb3d525012a9aa
VPC dashboard
AWS Global View
Filter by VPC
Virtual private cloud
Your VPCs
Subnets
Route tables
Internet gateways
Egress-only internet gateways
Carrier gateways
DHCP option sets
Elastic IPs
Managed prefix lists
NAT gateways
Peering connections
Route servers
Security
Network ACLs
Security groups
PrivateLink and Lattice
rtb-027fb3d525012a9aa / pedro-rt-publica
Actions
Details Info
Route table ID
rtb-027fb3d525012a9aa
VPC
vpc-0609f1d5ab1789bb1 | vpc-pedro-mod2
Main
No
Owner ID
654654478122
Explicit subnet associations
subnet-069d0063e0e025c81 / pedro-subnet-publica
Edge associations
–
Routes
Subnet associations
Edge associations
Route propagation
Tags
Routes (2)
Both
Edit routes
Filter routes
Destination | Target | Status | Propagated | Route Origin
0.0.0.0/0 | igw-0d9be7c79fba9063b | Active | No | Create Route
10.0.0.0/16 | local | Active | No | Create Route Table
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
21°C
Mayorm. nublado
ESP
LAA
6:38 p. m.
26/02/2026

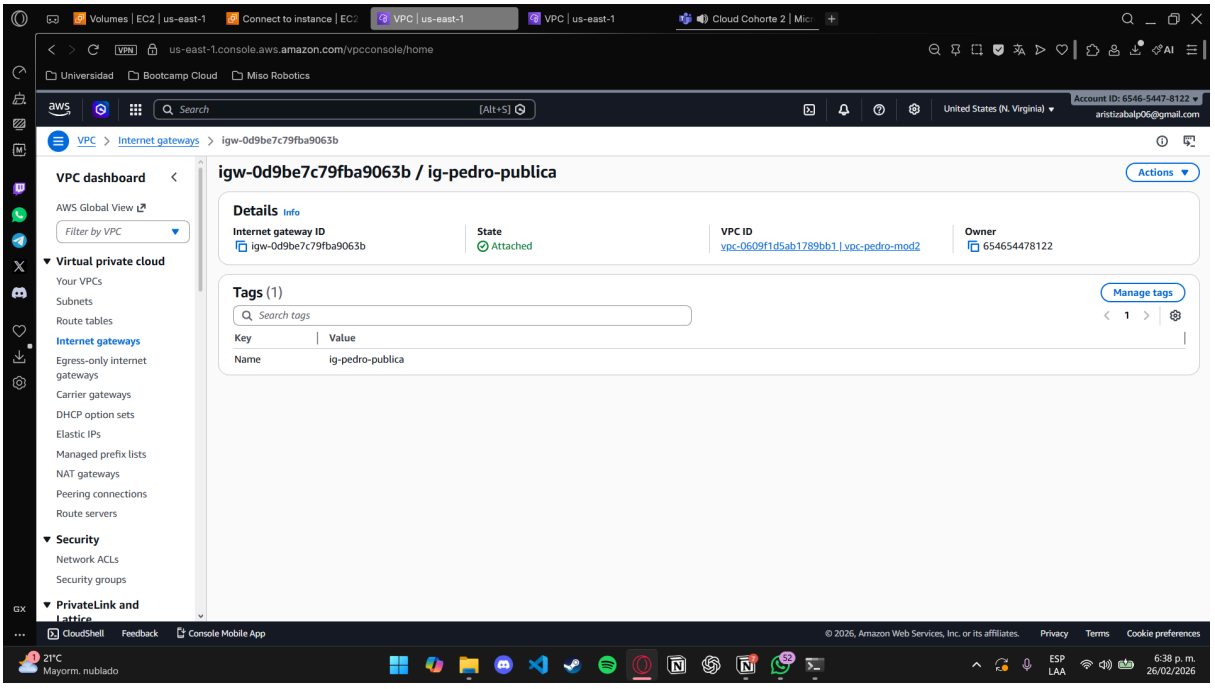

- Creamos sg para la subnet privada: solo habilitamos puerto 3306 para entrada MYSQL desde mi security group de mi subnet publica

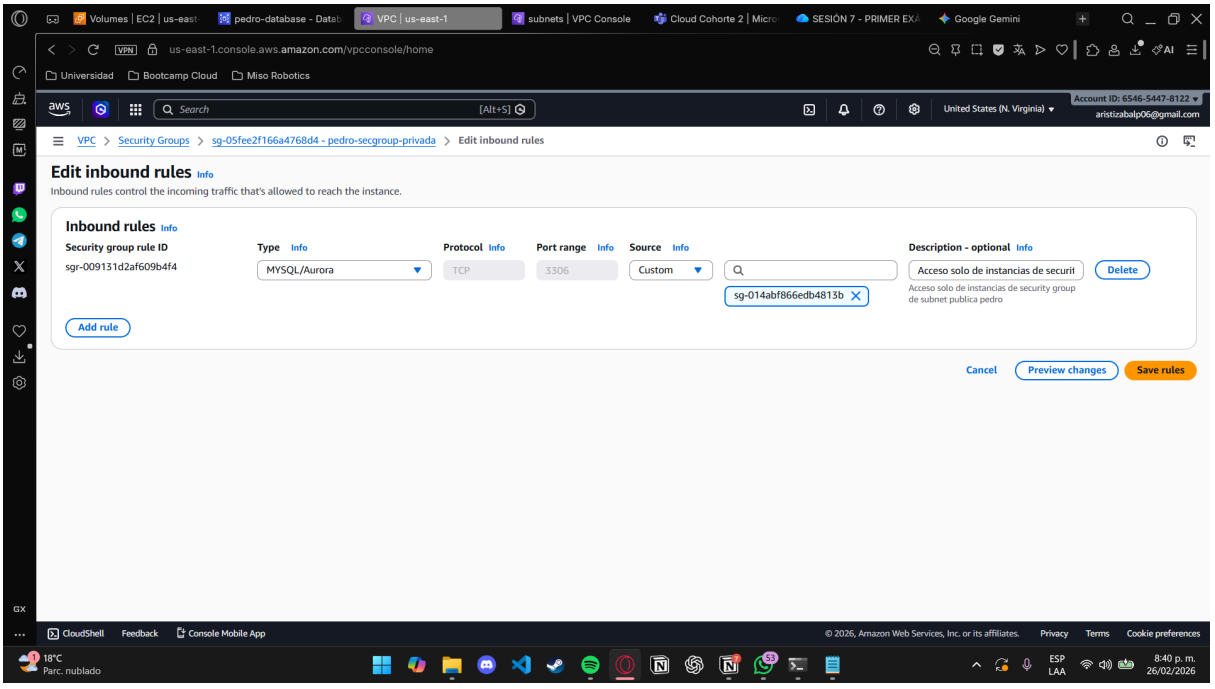

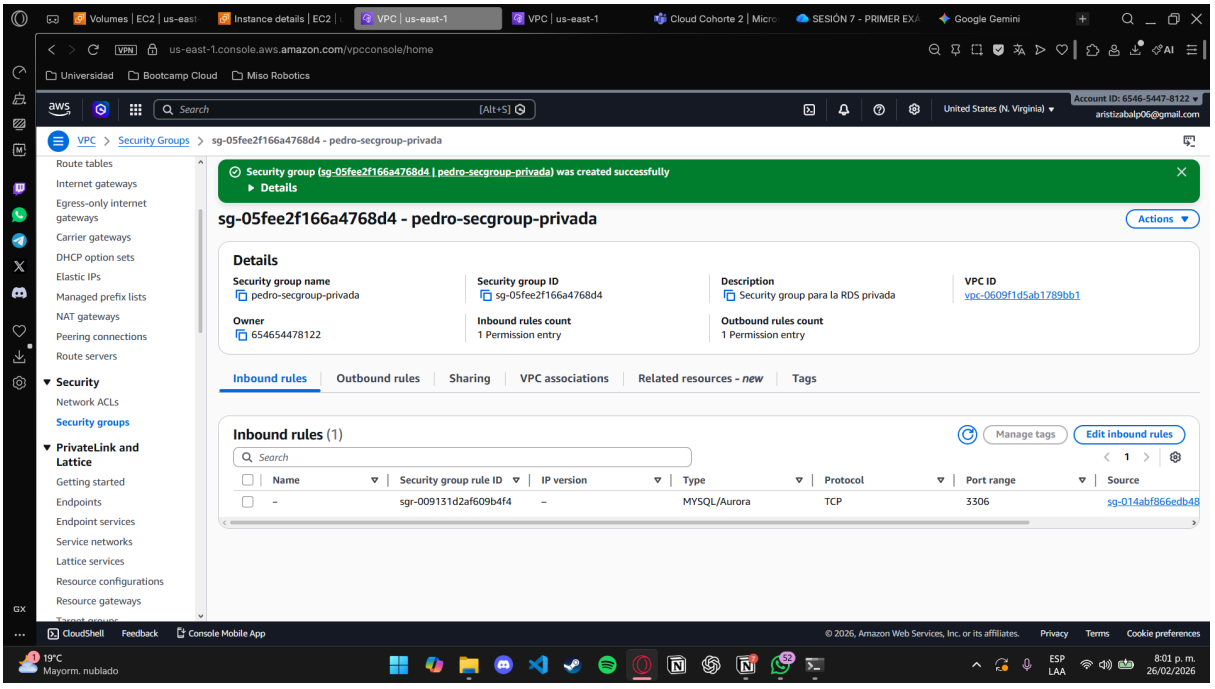

- Creamos subnets privadas en 3 AZ diferentes para posteriormente crear el subnet group en RDS

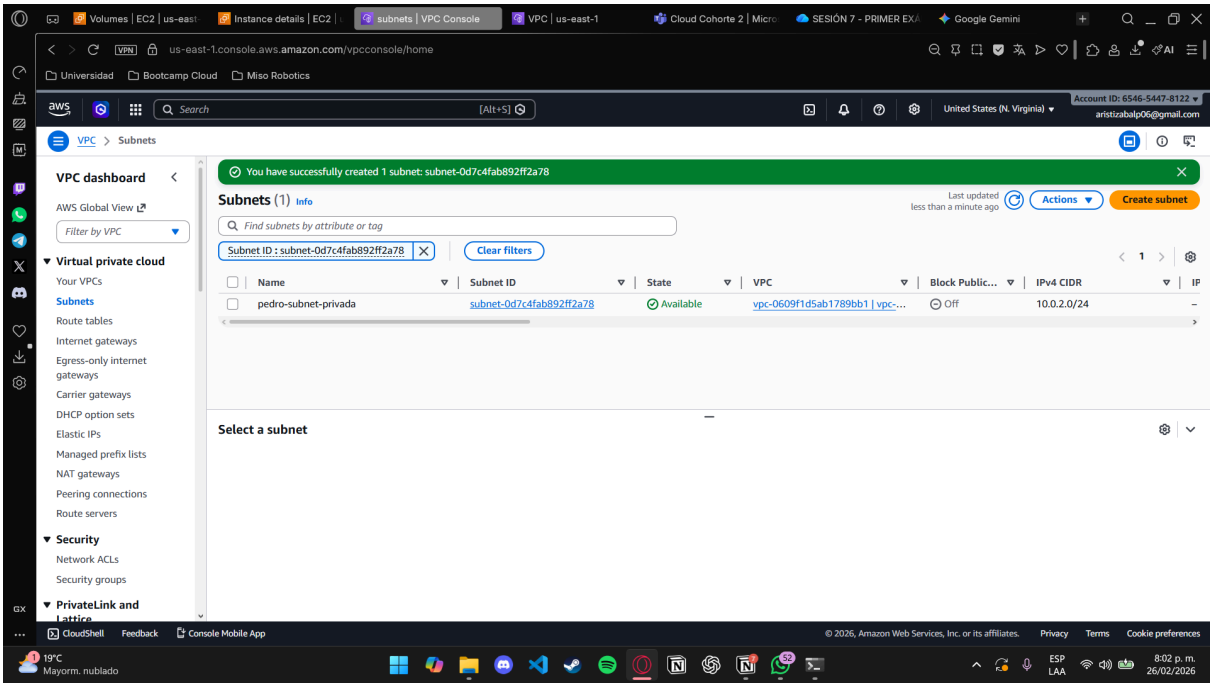

- Creamos el subnet group seleccionando las AZ y subnets privadas

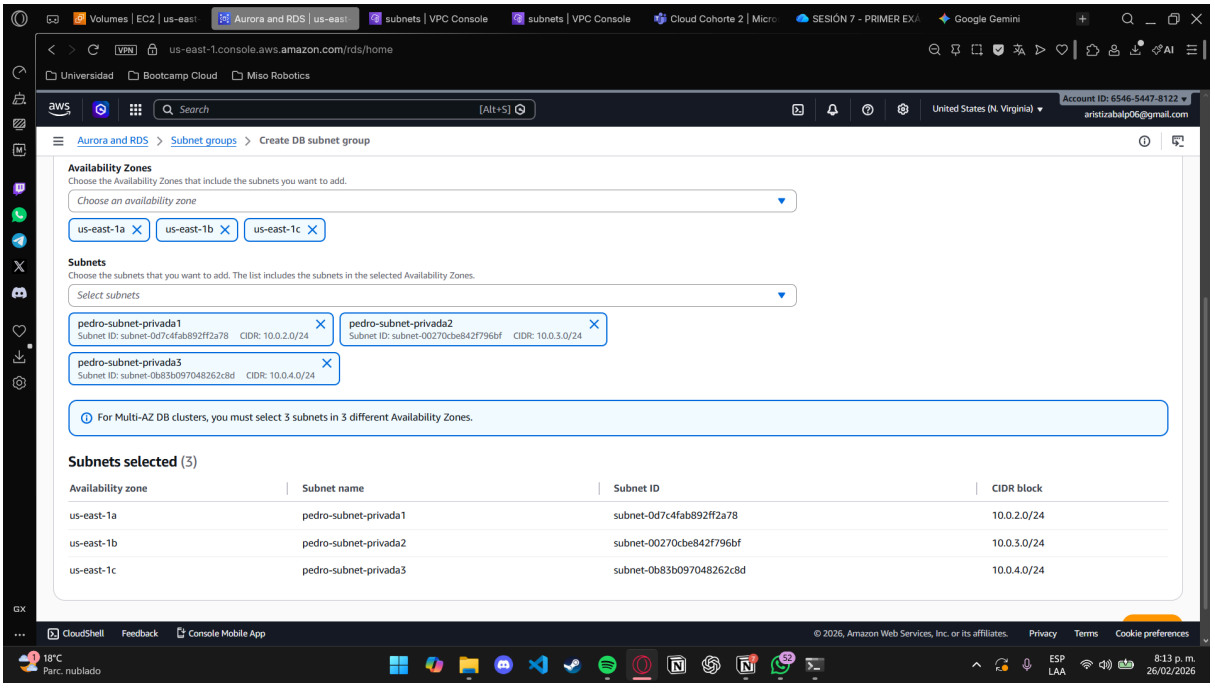

- Creamos la DB con los requerimientos pedidos

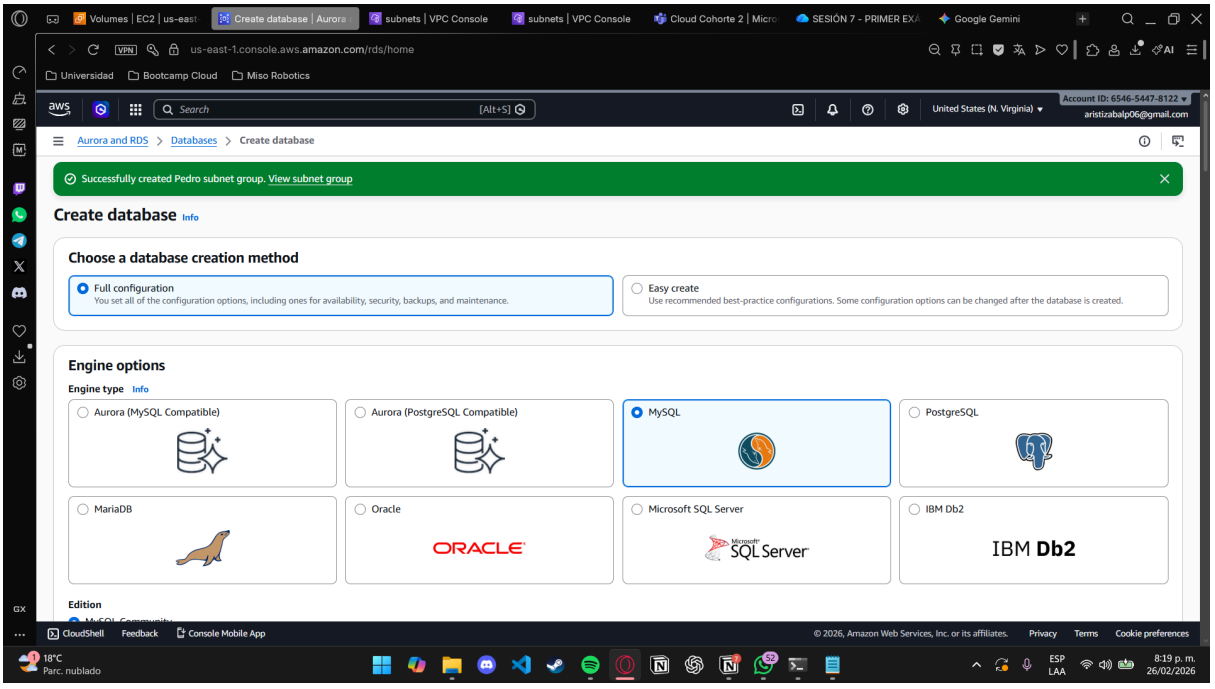

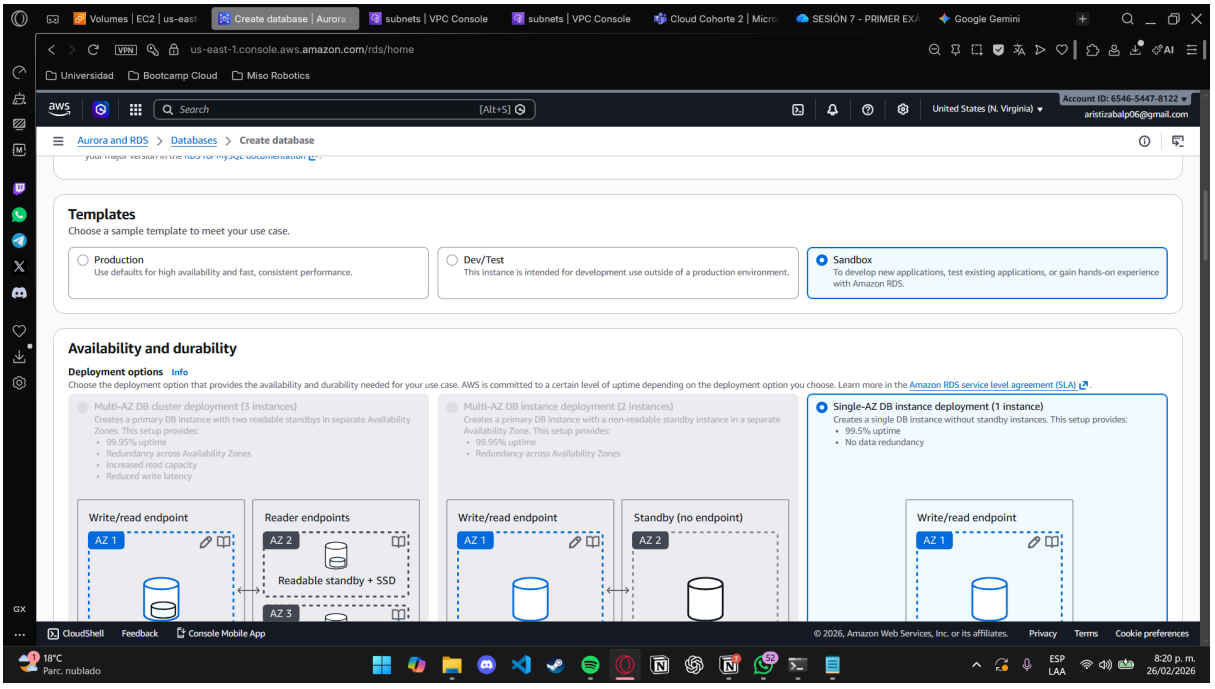
Volumes | EC2 | us-east
Create database | Aurora
subnets | VPC Console
subnets | VPC Console
Cloud Cohorte 2 | Micro
SESIÓN 7 - PRIMER EXA
Google Gemini
us-east-1.console.aws.amazon.com/rds/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Aurora and RDS > Databases > Create database
Templates
Choose a sample template to meet your use case.
Production
Use defaults for high availability and fast, consistent performance.
Dev/Test
This instance is intended for development use outside of a production environment.
Sandbox
To develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.
Availability and durability
Deployment options Info
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the Amazon RDS service level agreement (SLA).
Multi-AZ DB cluster deployment (3 instances)
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Increased read capacity
Reduced write latency
Multi-AZ DB instance deployment (2 instances)
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Single-AZ DB instance deployment (1 instance)
Creates a single DB instance without standby instances. This setup provides:
99.5% uptime
No data redundancy
Write/read endpoint
AZ 1
Reader endpoints
AZ 2
Readable standby + SSD
AZ 3
Write/read endpoint
AZ 1
Standby (no endpoint)
AZ 2
Write/read endpoint
AZ 1
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
18°C
Parc. nublado
ESP
LAA
8:20 p. m.
26/02/2026

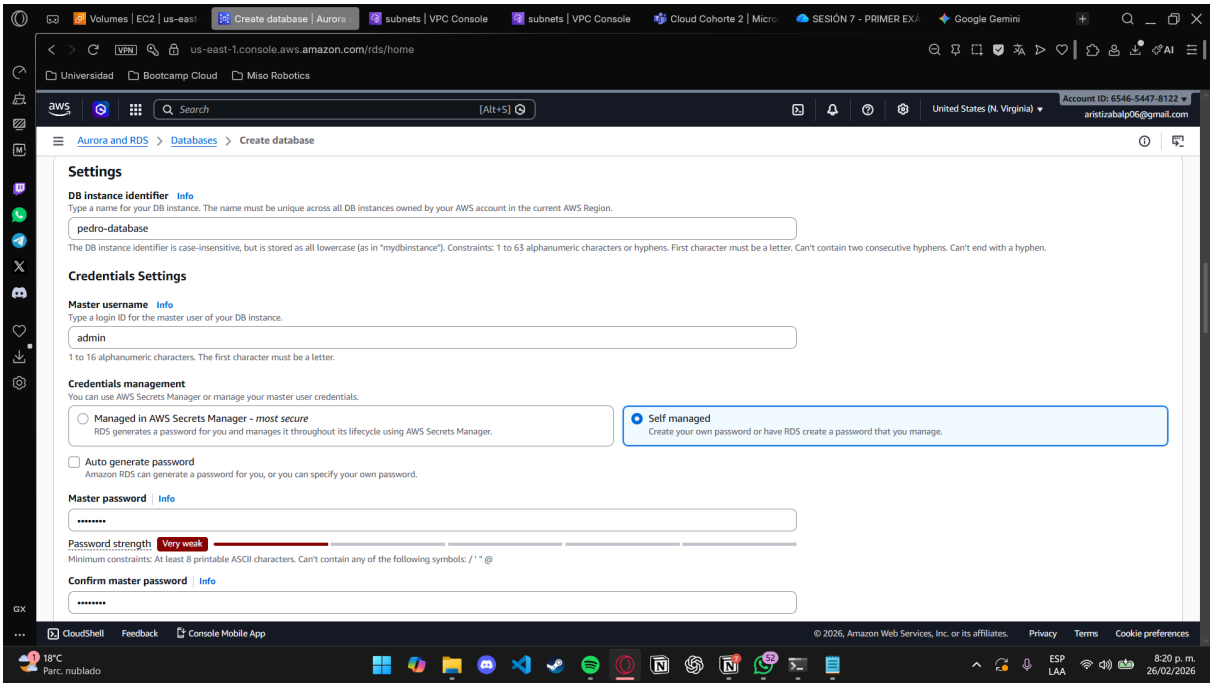
Volumes | EC2 | us-east
Create database | Aurora
subnets | VPC Console
subnets | VPC Console
Cloud Cohorte 2 | Micro
SESIÓN 7 - PRIMER EXA
Google Gemini
us-east-1.console.aws.amazon.com/rds/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Aurora and RDS > Databases > Create database
Settings
DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.
pedro-database
The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.
Credentials Settings
Master username Info
Type a login ID for the master user of your DB instance.
admin
1 to 16 alphanumeric characters. The first character must be a letter.
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
Managed in AWS Secrets Manager - most secure
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
Self managed
Create your own password or have RDS create a password that you manage.
Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.
Master password Info
Password strength
Very weak
Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @
Confirm master password Info
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
18°C
Parc. nublado
ESP
LAA
8:20 p. m.
26/02/2026

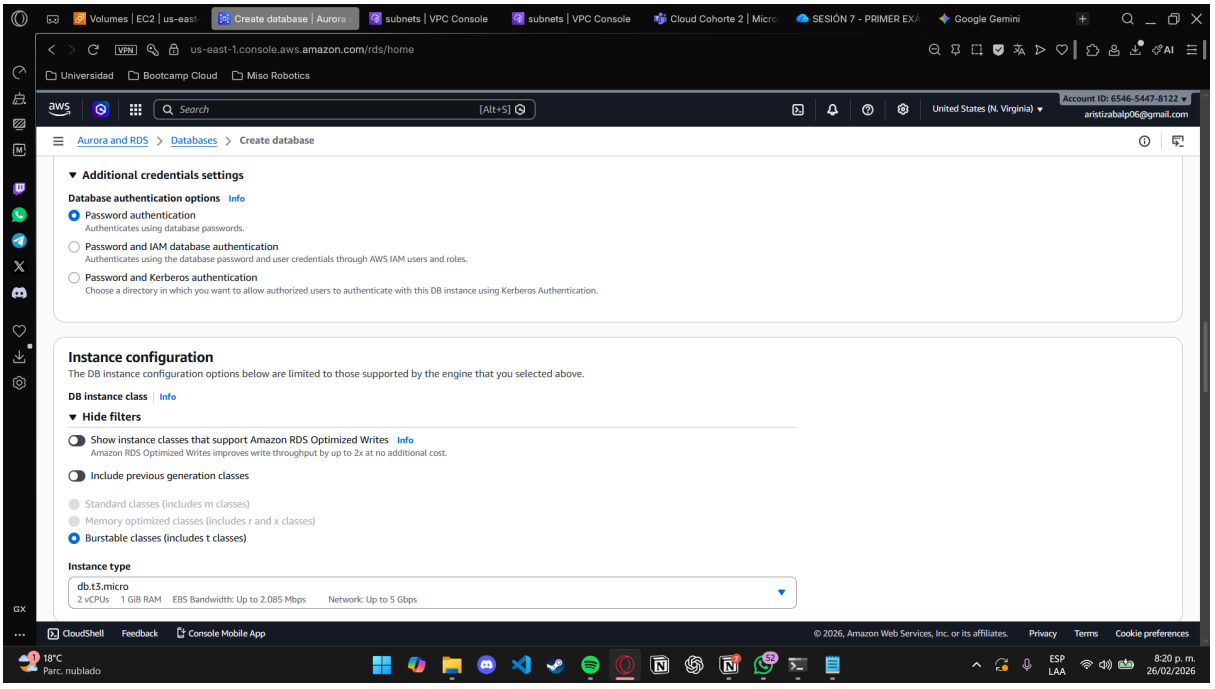
Volumes | EC2 | us-east
Create database | Aurora
subnets | VPC Console
subnets | VPC Console
Cloud Cohorte 2 | Micro
SESIÓN 7 - PRIMER EXA
Google Gemini
us-east-1.console.aws.amazon.com/rds/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Aurora and RDS > Databases > Create database
Additional credentials settings
Database authentication options Info
Password authentication
Authenticates using database passwords.
Password and IAM database authentication
Authenticates using the database password and user credentials through AWS IAM users and roles.
Password and Kerberos authentication
Choose a directory in which you want to allow authorized users to authenticate with this DB instance using Kerberos Authentication.
Instance configuration
The DB instance configuration options below are limited to those supported by the engine that you selected above.
DB instance class Info
Hide filters
Show instance classes that support Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Include previous generation classes
Standard classes (includes m classes)
Memory optimized classes (includes r and x classes)
Burstable classes (includes t classes)
Instance type
db.t3.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2.085 Mbps Network: Up to 5 Gbps
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
18°C
Parc. nublado
ESP
LAA
8:20 p. m.
26/02/2026

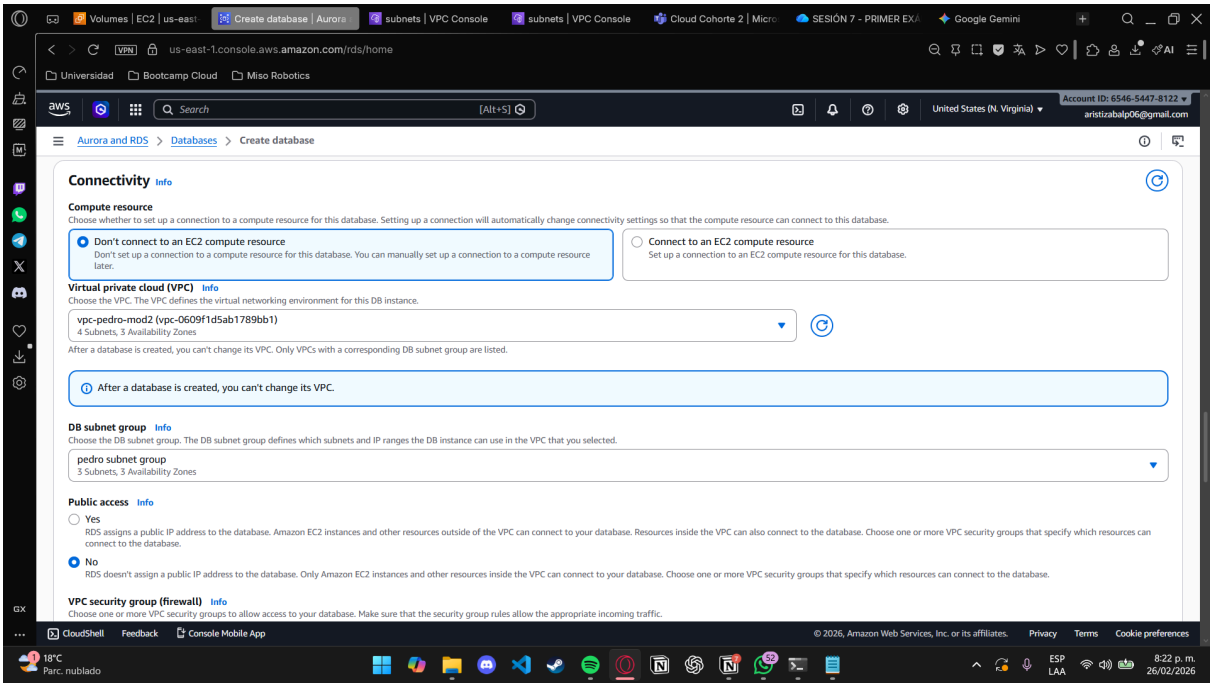
Volumes | EC2 | us-east
Create database | Aurora
subnets | VPC Console
subnets | VPC Console
Cloud Cohorte 2 | Micro
SESIÓN 7 - PRIMER EXA
Google Gemini
us-east-1.console.aws.amazon.com/rds/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Aurora and RDS > Databases > Create database
Connectivity Info
Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.
Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.
Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.
Virtual private cloud (VPC) Info
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.
vpc-pedro-mod2 (vpc-0609f1d5ab1789bb1)
4 Subnets, 3 Availability Zones
After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.
After a database is created, you can't change its VPC.
DB subnet group Info
Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.
pedro subnet group
3 Subnets, 3 Availability Zones
Public access Info
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
18°C
Parc. nublado
ESP
LAA
8:22 p. m.
26/02/2026

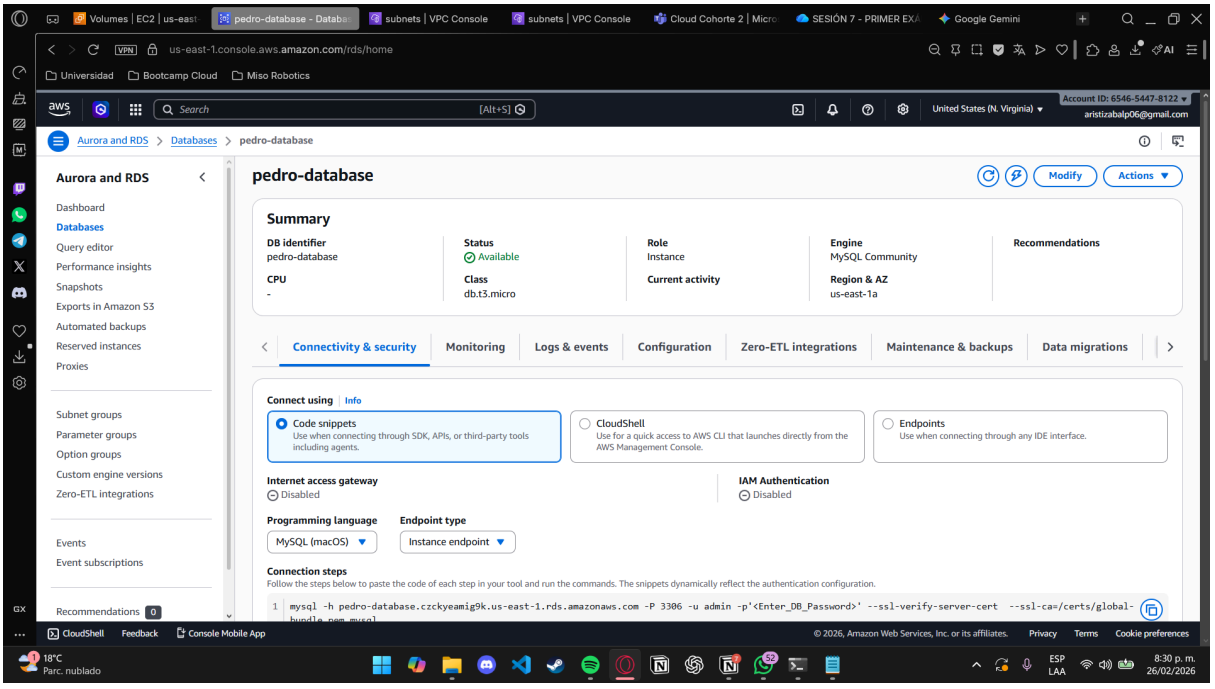

- Nos conectamos por SSH a la EC2 publica e instalamos mysql

→ sudo dnf install mariadb105

```
ec2-user@ip-10-0-1-230:~
[ec2-user@ip-10-0-1-230 ~]$ sudo dnf install mariadb105
Last metadata expiration check: 0:57:20 ago on Fri Feb 27 00:27:28 202
6.
Dependencies resolved.
==================================================================
 Package            Arch   Version                  Repository   Size
==================================================================
Installing:
 mariadb105         x86_64 3:10.5.29-1.amzn2023.0.1 amazonlinux 1.5 M
Installing dependencies:
 mariadb-connector-c
                    x86_64 3.3.10-1.amzn2023.0.1    amazonlinux 211 k
 mariadb-connector-c-config
                    noarch 3.3.10-1.amzn2023.0.1    amazonlinux 9.9 k
 mariadb105-common  x86_64 3:10.5.29-1.amzn2023.0.1 amazonlinux  28 k
 perl-Sys-Hostname  x86_64 1.23-477.amzn2023.0.7    amazonlinux  16 k

Transaction Summary
==================================================================
Install  5 Packages

Total download size: 1.8 M
Installed size: 19 M
Is this ok [y/N]: y
Downloading Packages:
(1/5): mariadb-connector-c-config-3.3 247 kB/s | 9.9 kB     00:00
(2/5): mariadb-connector-c-3.3.10-1.a 4.3 MB/s | 211 kB     00:00
(3/5): mariadb105-10.5.29-1.amzn2023.  22 MB/s | 1.5 MB     00:00
(4/5): mariadb105-common-10.5.29-1.am 918 kB/s |  28 kB     00:00
(5/5): perl-Sys-Hostname-1.23-477.amz 626 kB/s |  16 kB     00:00
------------------------------------------------------------------
Total                                  15 MB/s | 1.8 MB     00:00
Running transaction check
Transaction check succeeded.
```

- Nos conectamos a la bd

→ mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com \ -u admin \ -p

```
ec2-user@ip-10-0-1-230:~

  Preparing        :                                                 1/1
  Installing       : mariadb-connector-c-config-3.3.10-1.amzn20      1/5
  Installing       : mariadb-connector-c-3.3.10-1.amzn2023.0.1.      2/5
  Installing       : mariadb105-common-3:10.5.29-1.amzn2023.0.1      3/5
  Installing       : perl-Sys-Hostname-1.23-477.amzn2023.0.7.x8      4/5
  Installing       : mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64      5/5
  Running scriptlet: mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64      5/5
  Verifying        : mariadb-connector-c-3.3.10-1.amzn2023.0.1.      1/5
  Verifying        : mariadb-connector-c-config-3.3.10-1.amzn20      2/5
  Verifying        : mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64      3/5
  Verifying        : mariadb105-common-3:10.5.29-1.amzn2023.0.1      4/5
  Verifying        : perl-Sys-Hostname-1.23-477.amzn2023.0.7.x8      5/5

Installed:
  mariadb-connector-c-3.3.10-1.amzn2023.0.1.x86_64
  mariadb-connector-c-config-3.3.10-1.amzn2023.0.1.noarch
  mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64
  mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64
  perl-Sys-Hostname-1.23-477.amzn2023.0.7.x86_64

Complete!
[ec2-user@ip-10-0-1-230 ~]$ mysql -h pedro-database.czckyeamig9k.us-ea
st-1.rds.amazonaws.com \-u admin \-p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 27
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input st
atement.

MySQL [(none)]>
```

- Creamos una tabla y verificamos

```
ec2-user@ip-10-0-1-230:~

  mariadb-connector-c-config-3.3.10-1.amzn2023.0.1.noarch
  mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64
  mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64
  perl-Sys-Hostname-1.23-477.amzn2023.0.7.x86_64

Complete!
[ec2-user@ip-10-0-1-230 ~]$ mysql -h pedro-database.czckyeamig9k.us-ea
st-1.rds.amazonaws.com \-u admin \-p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 27
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input st
atement.

MySQL [(none)]> CREATE DATABASE laboratorioPedro;
Query OK, 1 row affected (0.045 sec)

MySQL [(none)]> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| laboratorioPedro   |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
5 rows in set (0.011 sec)

MySQL [(none)]>
```