Practica

- Creamos una carpeta en el PC con los archivos de los codigos de la app

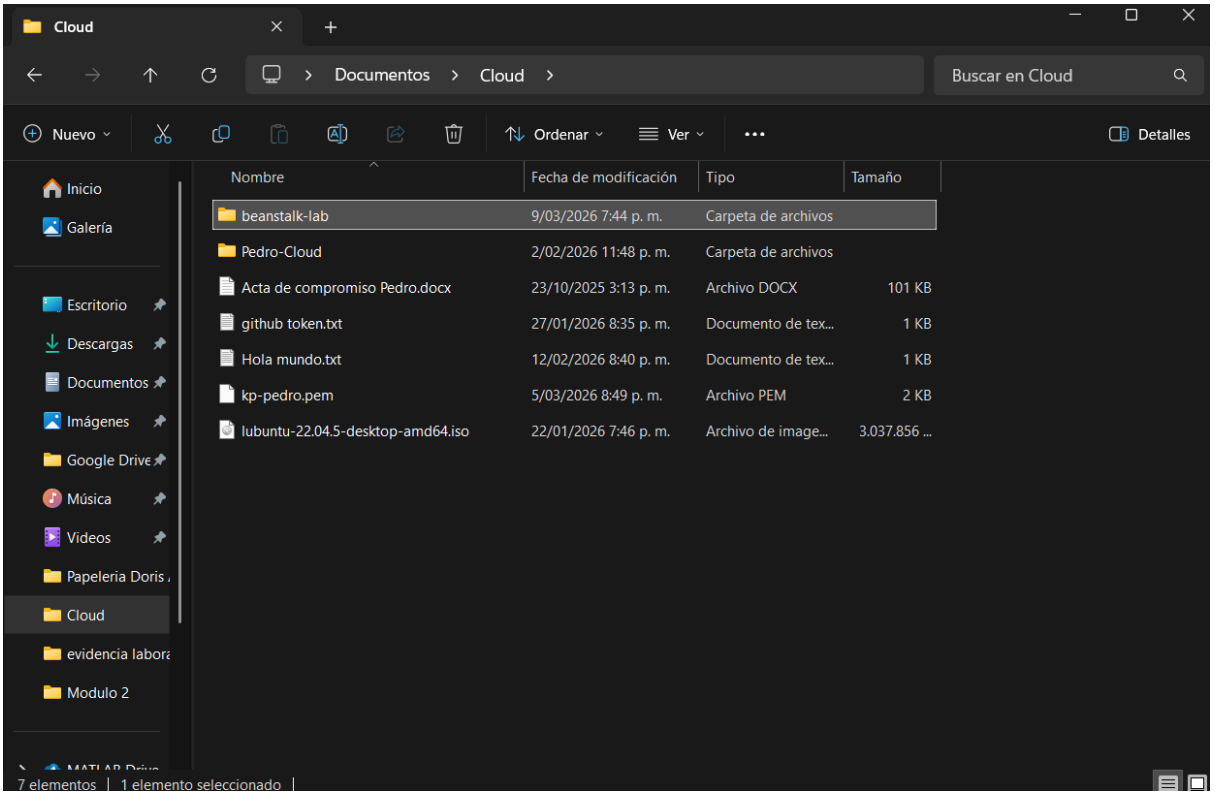

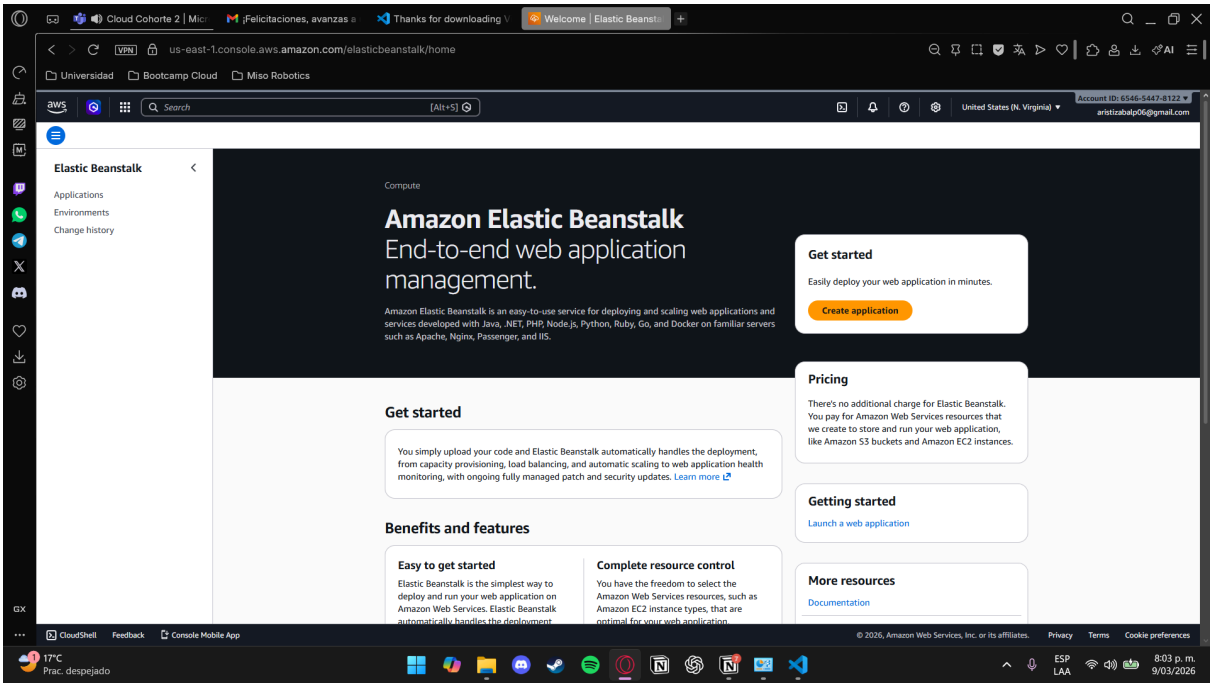

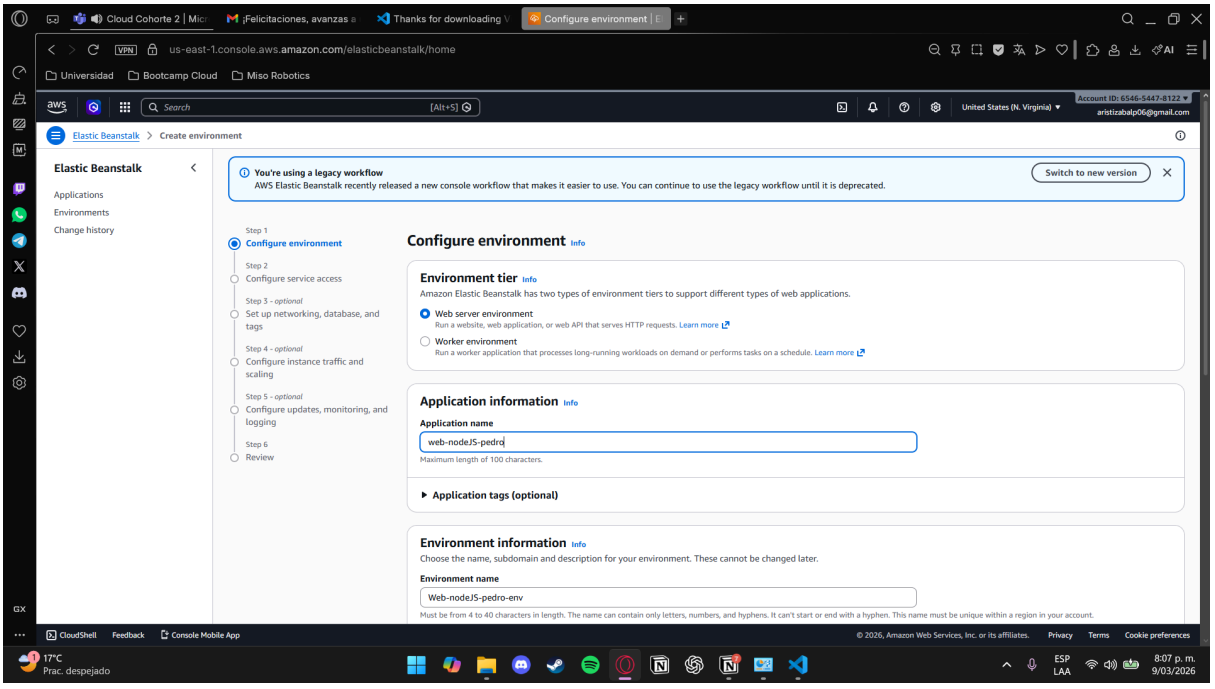
Cloud Cohorte 2 | Micr
¡Felicitaciones, avanzas a
Thanks for downloading V
Configure environment | E
us-east-1.console.aws.amazon.com/elasticbeanstalk/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Elastic Beanstalk > Create environment
Elastic Beanstalk
Applications
Environments
Change history
You're using a legacy workflow
AWS Elastic Beanstalk recently released a new console workflow that makes it easier to use. You can continue to use the legacy workflow until it is deprecated.
Switch to new version
Step 1
Configure environment
Step 2
Configure service access
Step 3 - optional
Set up networking, database, and tags
Step 4 - optional
Configure instance traffic and scaling
Step 5 - optional
Configure updates, monitoring, and logging
Step 6
Review
Configure environment Info
Environment tier Info
Amazon Elastic Beanstalk has two types of environment tiers to support different types of web applications.
Web server environment
Run a website, web application, or web API that serves HTTP requests. Learn more
Worker environment
Run a worker application that processes long-running workloads on demand or performs tasks on a schedule. Learn more
Application information Info
Application name
web-nodeJS-pedro
Maximum length of 100 characters.
Application tags (optional)
Environment information Info
Choose the name, subdomain and description for your environment. These cannot be changed later.
Environment name
Web-nodeJS-pedro-env
Must be from 4 to 40 characters in length. The name can contain only letters, numbers, and hyphens. It can't start or end with a hyphen. This name must be unique within a region in your account.
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
17°C
Prac. despejado
ESP
LAA
8:07 p. m.
9/03/2026

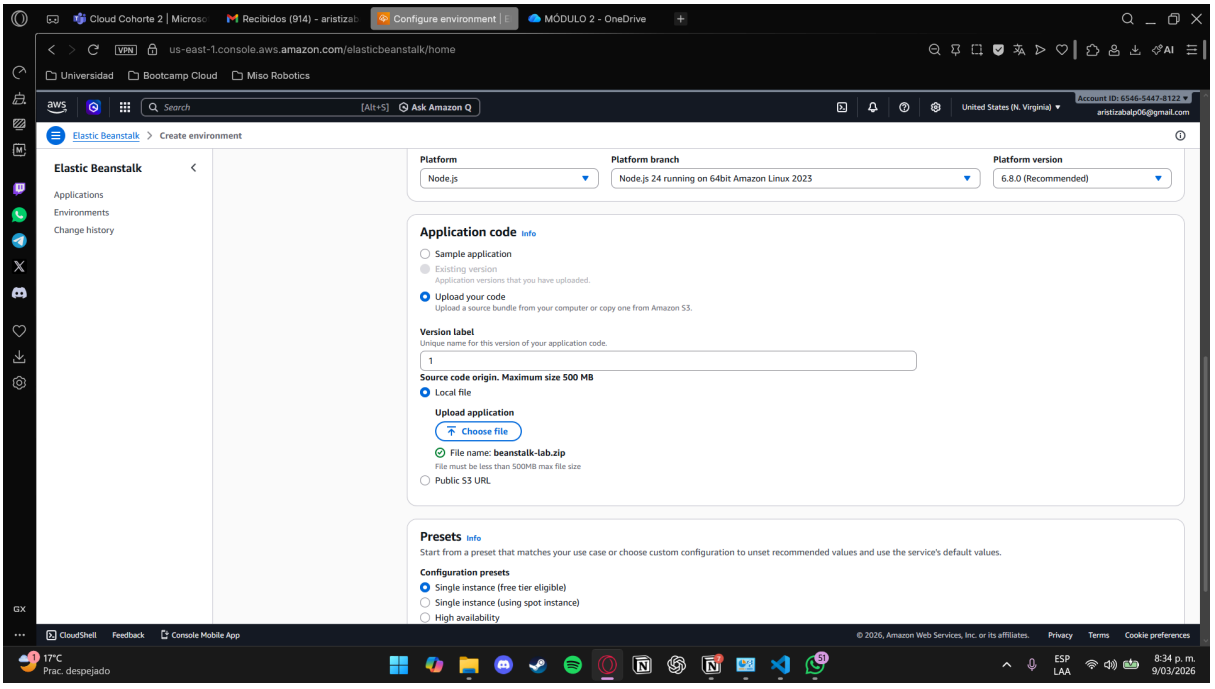
Cloud Cohorte 2 | Microso
Recibidos (914) - aristizab
Configure environment | E
MÓDULO 2 - OneDrive
us-east-1.console.aws.amazon.com/elasticbeanstalk/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
Ask Amazon Q
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Elastic Beanstalk > Create environment
Elastic Beanstalk
Applications
Environments
Change history
Platform
Node.js
Platform branch
Node.js 24 running on 64bit Amazon Linux 2023
Platform version
6.8.0 (Recommended)
Application code Info
Sample application
Existing version
Application versions that you have uploaded.
Upload your code
Upload a source bundle from your computer or copy one from Amazon S3.
Version label
Unique name for this version of your application code.
1
Source code origin. Maximum size 500 MB
Local file
Upload application
Choose file
File name: beanstalk-lab.zip
File must be less than 500MB max file size
Public S3 URL
Presets Info
Start from a preset that matches your use case or choose custom configuration to unset recommended values and use the service's default values.
Configuration presets
Single instance (free tier eligible)
Single instance (using spot instance)
High availability
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
17°C
Prac. despejado
ESP
LAA
8:34 p. m.
9/03/2026

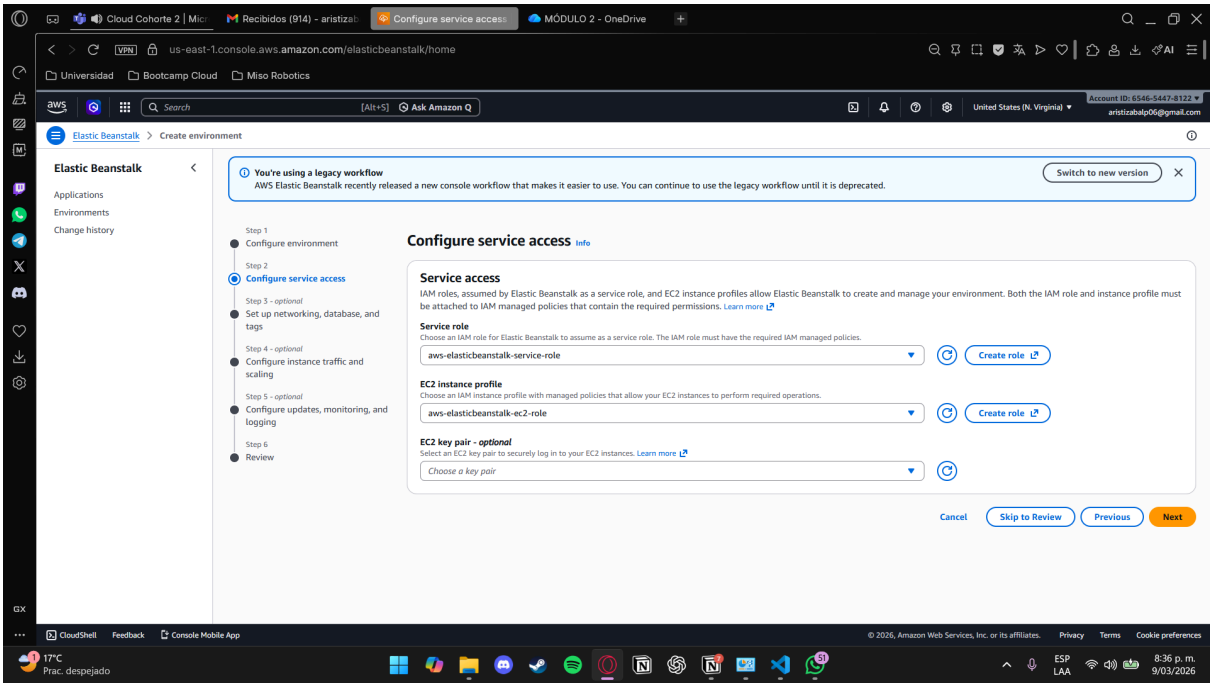
Cloud Cohorte 2 | Micr
Recibidos (914) - aristizab
Configure service access
MÓDULO 2 - OneDrive
us-east-1.console.aws.amazon.com/elasticbeanstalk/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
Ask Amazon Q
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Elastic Beanstalk > Create environment
Elastic Beanstalk
Applications
Environments
Change history
You're using a legacy workflow
AWS Elastic Beanstalk recently released a new console workflow that makes it easier to use. You can continue to use the legacy workflow until it is deprecated.
Switch to new version
Step 1
Configure environment
Step 2
Configure service access
Step 3 - optional
Set up networking, database, and tags
Step 4 - optional
Configure instance traffic and scaling
Step 5 - optional
Configure updates, monitoring, and logging
Step 6
Review
Configure service access Info
Service access
IAM roles, assumed by Elastic Beanstalk as a service role, and EC2 instance profiles allow Elastic Beanstalk to create and manage your environment. Both the IAM role and instance profile must be attached to IAM managed policies that contain the required permissions. Learn more
Service role
Choose an IAM role for Elastic Beanstalk to assume as a service role. The IAM role must have the required IAM managed policies.
aws-elasticbeanstalk-service-role
Create role
EC2 instance profile
Choose an IAM instance profile with managed policies that allow your EC2 instances to perform required operations.
aws-elasticbeanstalk-ec2-role
Create role
EC2 key pair - optional
Select an EC2 key pair to securely log in to your EC2 instances. Learn more
Choose a key pair
Cancel
Skip to Review
Previous
Next
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
17°C
Prac. despejado
ESP
LAA
8:36 p. m.
9/03/2026

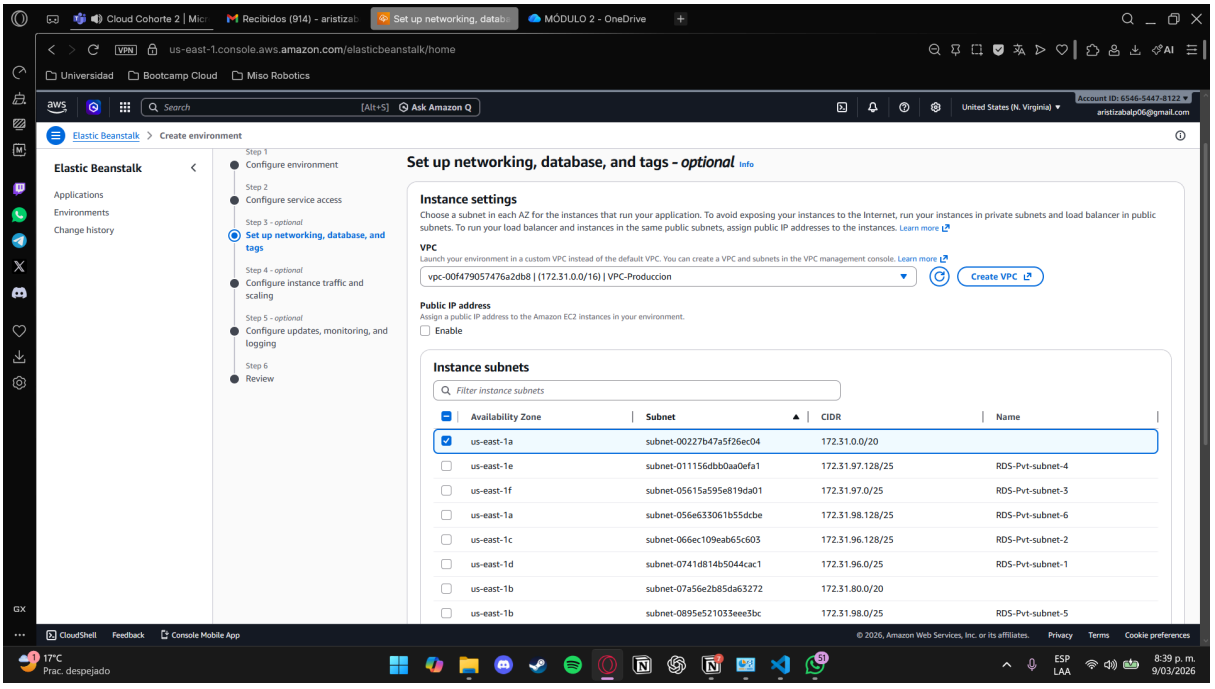
Cloud Cohorte 2 | Micr
Recibidos (914) - aristizab
Set up networking, databa
MÓDULO 2 - OneDrive
us-east-1.console.aws.amazon.com/elasticbeanstalk/home
Universidad
Bootcamp Cloud
Miso Robotics
Search
[Alt+S]
Ask Amazon Q
United States (N. Virginia)
Account ID: 6546-5447-8122
aristizabalp06@gmail.com
Elastic Beanstalk > Create environment
Elastic Beanstalk
Applications
Environments
Change history
Step 1
Configure environment
Step 2
Configure service access
Step 3 - optional
Set up networking, database, and tags
Step 4 - optional
Configure instance traffic and scaling
Step 5 - optional
Configure updates, monitoring, and logging
Step 6
Review
Set up networking, database, and tags - optional Info
Instance settings
Choose a subnet in each AZ for the instances that run your application. To avoid exposing your instances to the Internet, run your instances in private subnets and load balancer in public subnets. To run your load balancer and instances in the same public subnets, assign public IP addresses to the instances. Learn more
VPC
Launch your environment in a custom VPC instead of the default VPC. You can create a VPC and subnets in the VPC management console. Learn more
vpc-00f479057476a2db8 | (172.31.0.0/16) | VPC-Produccion
Create VPC
Public IP address
Assign a public IP address to the Amazon EC2 instances in your environment.
Enable
Instance subnets
Filter instance subnets
Availability Zone | Subnet | CIDR | Name
us-east-1a | subnet-00227b47a5f26ec04 | 172.31.0.0/20
us-east-1e | subnet-011156dbb0aa0efa1 | 172.31.97.128/25 | RDS-Pvt-subnet-4
us-east-1f | subnet-05615a595e819da01 | 172.31.97.0/25 | RDS-Pvt-subnet-3
us-east-1a | subnet-056e633061b55dcbe | 172.31.98.128/25 | RDS-Pvt-subnet-6
us-east-1c | subnet-066ec109eab65c603 | 172.31.96.128/25 | RDS-Pvt-subnet-2
us-east-1d | subnet-0741d814b5044cac1 | 172.31.96.0/25 | RDS-Pvt-subnet-1
us-east-1b | subnet-07a56e2b85da63272 | 172.31.80.0/20
us-east-1b | subnet-0895e521033eee3bc | 172.31.98.0/25 | RDS-Pvt-subnet-5
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
17°C
Prac. despejado
ESP
LAA
8:39 p. m.
9/03/2026

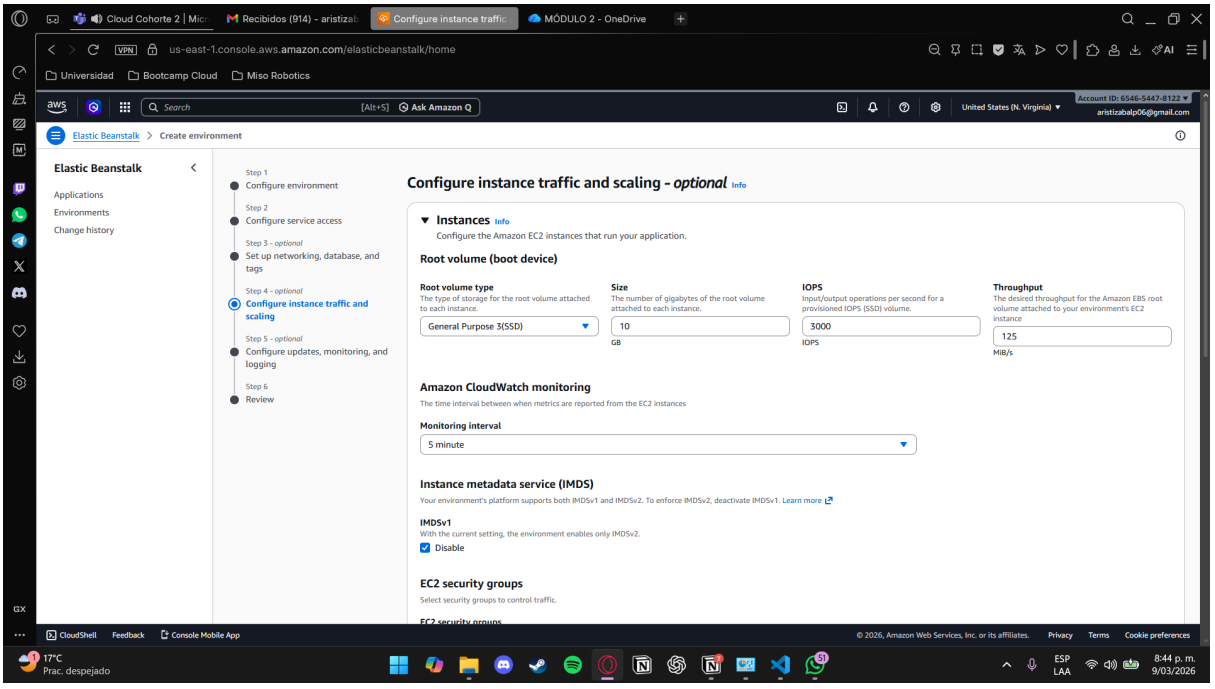

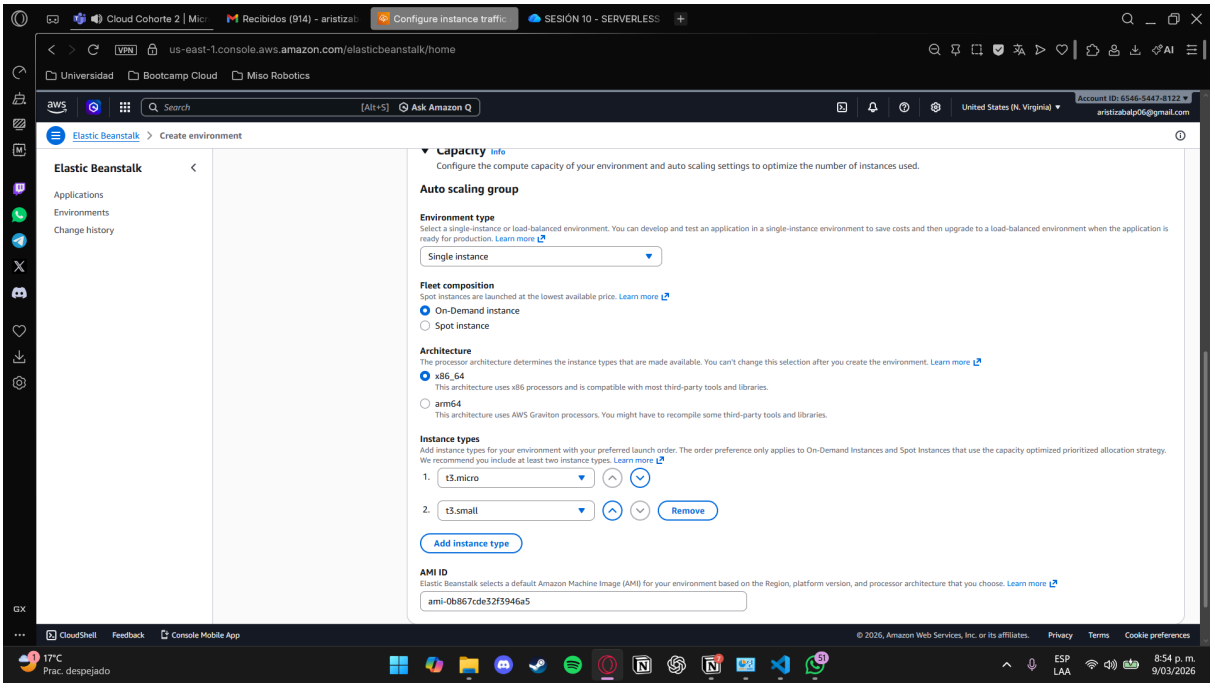

- **Step 5: Configure updates, monitoring, and logging: se deja tal cual**
- Step 6: Review: le damos en create

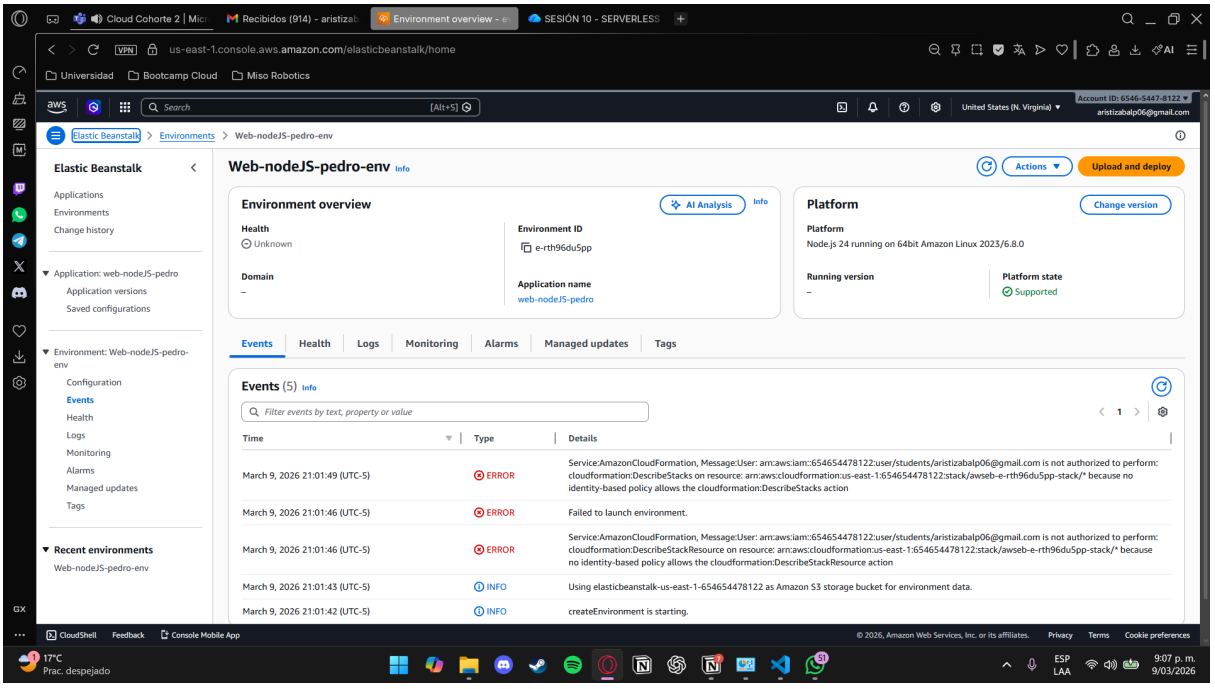

- Al final en domain deberia salir un link que redirige a la pagina web
- El punto es tener la idea de que beanstalk por detras empieza a desplegar muchos recursos que permiten que se lance la webapp solo dandole el codigo