



**Pedro Santos Rodrigues**

Bachelor in Computer Science

## **Accelerating SQL with Complex Visual Querying**

Dissertation submitted in partial fulfillment  
of the requirements for the degree of

Master of Science in  
**Computer Science and Informatics Engineering**

Adviser: Teresa Romão, Assistant Professor,  
NOVA University of Lisbon

Co-advisers: Rui Nóbrega, Assistant Professor,  
NOVA University of Lisbon  
Tiago Simões, Principal Product Designer,  
OutSystems

Examination Committee

Chair: Name of the committee chairperson

Rapporteurs: Name of a rapporteur

Name of another rapporteur

Members: Another member of the committee

Yet another member of the committee



FACULDADE DE  
CIÊNCIAS E TECNOLOGIA  
UNIVERSIDADE NOVA DE LISBOA

**October, 2020**



## **Accelerating SQL with Complex Visual Querying**

Copyright © Pedro Santos Rodrigues, Faculty of Sciences and Technology, NOVA University Lisbon.

The Faculty of Sciences and Technology and the NOVA University Lisbon have the right, perpetual and without geographical boundaries, to file and publish this dissertation through printed copies reproduced on paper or on digital form, or by any other means known or that may be invented, and to disseminate through scientific repositories and admit its copying and distribution for non-commercial, educational or research purposes, as long as credit is given to the author and editor.



*To my dear grandparents Júlio and Fátima.*



## ACKNOWLEDGEMENTS

The acknowledgements. You are free to write this section at your own will. However, usually it starts with the institutional acknowledgements (adviser, institution, grants, workmates, ...) and then comes the personal acknowledgements (friends, family, ...).





*Your work is going to fill a large part of your life, and the only way to be truly satisfied is to do what you believe is great work.*

*Steve Jobs*



## ABSTRACT

---

This dissertation addresses a usability improvement of a graphical user interface that allows query formulation without using textual query languages, such as SQL. This visual tool, called Aggregates, is provided on the OutSystems Low-Code Development Platform, to formulate data queries, through interaction and manipulation of visual components.

Since Aggregates do not support all the existing functionalities of SQL, the OutSystems Platform allows users to build queries using this textual query language. Nonetheless, by evaluating customers' SQL queries, it was revealed that a considerable subset of the queries written in SQL could have been formulated using the visual tool.

The users' interviews and the results of the SQL queries evaluation have foreseen that the cause of the reduced acceptance of the visual approach, could be the existing usability problems on the interface. Furthermore, the interface is inadequate to build more complex queries, which involve more entities and conditions.

Through an iterative design process, this dissertation includes the design, implementation, and evaluation of prototypes with different fidelity levels. The aim is to optimize the effectiveness and efficiency of the process where the user communicates to the system what data they intend to extract from the database. Moreover, the readability and comprehension improvement of the query visual representation is intended, reducing the time and the effort required to understand what data will be gathering from the database. The final goal is a functional prototype incorporated on the OutSystems Platform which accelerates the query formulation process without harming the learnability of the system.

**Keywords:** Visual Query Interfaces, Low-Code Development, User-Centered Design, Human-computer Interaction, Iterative Design, Database Querying

---



## RESUMO

---

Esta dissertação tem como objetivo melhorar a usabilidade de uma interface gráfica que permite consultar dados sem recorrer a linguagens de consulta textuais, tais como o *SQL*. A ferramenta visual abordada, denominada *Aggregates*, está inserida na Plataforma de Desenvolvimento *Low-Code OutSystems*, de modo a permitir a formulação de consultas a bases de dados, através da interação e manipulação de componentes visuais.

Tendo em conta que a interface gráfica disponibilizada não suporta todos os tipos de consultas suportadas pelo *SQL*, os utilizadores podem recorrer a esta linguagem textual para construir as suas pesquisas. No entanto, ao avaliar estas consultas criadas textualmente em *SQL*, por clientes da plataforma, percebeu-se que: um conjunto considerável de consultas foram construídas usando *SQL*, embora pudessem ter sido construídas usando a ferramenta visual disponibilizada.

Tanto as entrevistas dos utilizadores, como a análise das consultas construídas usando *SQL*, indicaram que a falta de aceitação do método visual de construção de consultas era causada por problemas de usabilidade na interface. Para além disso, quando as consultas de dados envolvem mais entidades e condições, a interface apresenta um pior desempenho.

Através de um processo de desenho iterativo, esta dissertação apresenta o desenho, implementação e avaliação de protótipos com diferentes níveis de fidelidade. O objetivo é otimizar a eficácia e a eficiência do processo utilizado pelo utilizador para comunicar ao sistema que dados pretende consultar da base de dados. Além disso, também se pretende melhorar a legibilidade da representação visual da consulta, de modo a diminuir o tempo e esforço necessário para compreender que dados pretendem ser extraídos da base de dados, através da respetiva consulta. O objetivo final é a criação de um protótipo funcional, incorporado na Plataforma *OutSystems*, que acelere o processo de criação de consultas de dados sem aumentar o nível de aprendizagem necessária para utilizar o sistema.

**Palavras-chave:** Interfaces Gráficas de Consulta de Dados, Desenvolvimento *Low-Code*, Desenho Centrado no Utilizador, Interação Pessoa-Máquina, Desenho Iterativo, Consulta de Bases de Dados

---



# CONTENTS

<b>List of Figures</b>	<b>xvii</b>
<b>List of Tables</b>	<b>xix</b>
<b>Acronyms</b>	<b>xxi</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	2
1.2 Problem Description . . . . .	3
1.3 Research Questions . . . . .	4
1.4 Main Expected Contributions . . . . .	5
1.5 Document Structure . . . . .	5
<b>2 Background</b>	<b>7</b>
2.1 Human-Computer Interaction . . . . .	7
2.1.1 Main Concepts . . . . .	7
2.1.2 User-centered Design . . . . .	9
2.2 OutSystems Background . . . . .	15
2.2.1 Visual Development Environment . . . . .	15
2.2.2 Visual Data Querying . . . . .	16
<b>3 Related Work</b>	<b>23</b>
3.1 Query Conceptual Models . . . . .	23
3.2 Query Formulation Problems . . . . .	25
3.3 Visual Query Composition . . . . .	27
3.4 Discussion . . . . .	33
<b>4 Design</b>	<b>35</b>
4.1 Problem Definition . . . . .	35
4.1.1 Analysis . . . . .	36
4.1.2 User Interviews . . . . .	38
4.1.3 Data Analysis . . . . .	40
4.1.4 Community Ideas . . . . .	42
4.1.5 Current Implementation Evaluation . . . . .	43

## CONTENTS

---

4.2	User and Task Analysis . . . . .	43
4.2.1	User Groups . . . . .	45
4.2.2	Testing Scenarios . . . . .	45
4.2.3	Evaluation Technique . . . . .	45
4.3	Sketching and Prototyping . . . . .	45
4.3.1	Sketching . . . . .	45
4.3.2	Paper Prototype . . . . .	45
<b>5</b>	<b>Implementation</b>	<b>47</b>
<b>6</b>	<b>Evaluation</b>	<b>49</b>
<b>7</b>	<b>Conclusions</b>	<b>51</b>
	<b>Bibliography</b>	<b>53</b>
	<b>Webography</b>	<b>57</b>
	<b>Appendices</b>	<b>61</b>
<b>A</b>	<b>Taxonomy of Problems - Existing Interface</b>	<b>61</b>



## LIST OF FIGURES

2.1	The two dimensions of prototyping: Horizontal prototyping keeps the features but eliminates depth of functionality, and vertical prototyping gives full functionality for a few features (source: Nielsen [17]) . . . . .	11
2.2	Severity Levels of the Problems based on their impact on the users (source: Nielsen [17]) . . . . .	14
2.3	Main areas of Service Studio (source: OutSystems[60]) . . . . .	15
2.4	Simple Query example in Hub Edition 2.0 (source: OutSystems [61]) . . . . .	17
2.5	Aggregate Example . . . . .	18
2.6	Aggregate - Defining Sources . . . . .	19
2.7	Aggregates - Filtering, Sorting and Test Values in an example of querying DueDates after a month indicated in a variable . . . . .	20
2.8	Query Design functions while interacting with Query Result . . . . .	20
2.9	Calculated Attribute Insertion . . . . .	21
3.1	Models of Query Writing Process. . . . .	25
3.2	New and experienced users' query processes (source: Robb <i>et al.</i> [23]). . . . .	26
3.3	Different approaches to select the entities of the query. . . . .	30
3.4	Data merging approaches. . . . .	31
4.1	Hidden option to add an aggregation function, since it is enclosed in a right-click on the query result table column header. . . . .	37
4.2	Hidden attributes - primary and foreign keys are hidden by default. . . . .	39
4.3	Filter edition modal - example of a filter edition after selection of the intended filter (the first one in that case). . . . .	39



## LIST OF TABLES

3.1	Query Language Requisites . . . . .	28
3.2	Visual Query Systems (VQSs) Summary . . . . .	34
4.1	Queries that contain operations not supported by Aggregates . . . . .	41
4.2	Queries that could be designed using Aggregates and the queries which the tool does not support . . . . .	42
4.3	User Groups . . . . .	46
A.1	Taxonomy of Aggregates' Problems - Existing Interface (Last community posts update: May 06, 2020) . . . . .	63



## ACRONYMS

ANSI	American National Standards Institute
DBMS	Database Management System
DQL	Data Query Languages
HCI	Human-computer Interaction
IDE	Integrated Development Environment
ISO	International Organization for Standardization
IT	Information Technology
RDBMS	Relational Database Management System
SQL	Structured Query Language
UX	User Experience
VQI	Visual Query Interface
VQL	Visual Query Language
VQS	Visual Query System



## INTRODUCTION

Nowadays, database queries are required not only in computer systems areas but also in most sectors of professional environments or personal demands. The database information gathering claim needs should resort to actual technologies to optimize the time spent and reduce the errors of this query process since the most important is to obtain the intended information.

In the decades of the 1960s, [Database Management Systems \(DBMSs\)](#) arose, and later in 1970s new management systems that use relational models, designated as [Relational Database Management Systems \(RDBMSs\)](#). Besides, the first [Data Query Languages \(DQLs\)](#) appeared, such as [Structured Query Language \(SQL\)](#) [5] which was considered by the [American National Standards Institute \(ANSI\)](#) and [International Organization for Standardization \(ISO\)](#) as the standard query language [10]. Even though these new technologies provide a structured way to access databases, knowledge of relational logic and [DQL](#) was mandatory to fetch data from relational databases. Thereby, only a subset of people could use these powerful querying technologies.

[VQSs](#) were defined by Catarci *et. al.* [3] as “systems for querying databases that use a visual representation to depict the domain of interest and express related requests”. These systems use different visual representations and interaction strategies to build database queries. This visual approach could improve the user’s learning curve and reduce the mandatory previous knowledge of a [DQL](#), which are more difficult to learn mainly for people without programming base knowledge. Furthermore, some visual interface mechanisms such as automatisms, accelerators, or feedback messages, can be explored in order to accelerate the querying formulation process and reduce the errors that users can make while they are building queries.

In that way, those visual systems are not only useful to users not familiarized with [DQLs](#). Conversely, some studies have revealed that visual languages might be convenient

to the expert users too. For instance, the comparison made by Catarci and Santucci [4] concludes that diagrammatic languages can reduce the error rate of the queries, in comparison with the ones that were build using textual languages, even when they were formulated by expert users. These results have demonstrated that even expert users make mistakes in simple queries (e.g., they may not remember the name of the tables or the precise syntax of some language expressions). Therefore, the **Visual Query Interfaces (VQIs)** should be built strategically in order to take advantage of their peculiarities that could optimize the querying process not only to the users with a low database querying experience level but also for highly experienced users.

## 1.1 Motivation

Low-Code Development is a recent development paradigm that seeks to reduce the time and effort spent on tasks that would not have a significant impact on the final product outcome. As high-level languages, APIs and third-party infrastructures have allowed developers to be more productive and focus on the most valued sections of the software they produce. Low-code approaches have followed this endeavor, using visual **Integrated Development Environments (IDEs)**, connectors between components and lifecycle managers to employ an abstraction layer on the high-level languages, removing concerns of infrastructure or pattern reimplementations. In that way, developers could focus on tasks that truly accelerate the growth of the end product, achieving the desired goals with greater efficiency [65].

The OutSystems provides a cloud solution of low-code development, which allows developers to build and deploy enterprise-grade applications through visual interactions optimizing the time, effort, and previous knowledge necessary. Then, the OutSystems Platform aims to provide an application development environment that could be used by users with different backgrounds to build, deploy and manage their applications, using good practices and state-of-the-art technologies, even if they do not need to concern about that. Therefore, the vision and potential of the OutSystems Platform are similar to the **VQIs** under-mentioned above since both intend to facilitate, accelerate, and optimize processes through visual interaction.

In spite of development in OutSystems is based principally on visual languages, there is the possibility to use low-level code, written in textual languages, such as Java, .NET or **SQL**, in order to increase the extensibility and the power of solutions. In that way, there are alternatives to performing operations not supported by the low-code visual approaches. This is the difference between Low-Code and No-Code paradigms since in No-Code is not possible to use low-level code [67]. Nonetheless, if the visual languages of low-code platforms are more robust, responding more thoroughly to users' requirements, there is a diminished demand to resort to these textual programming languages which are high error-prone and have a worse learning curve, requiring also, on multiple situations, previous coding experience.



Furthermore, as mentioned by Amaral *et. al.* [12], web and mobile applications produced on OutSystems' technology, have proven an increase in quality. Also, it was concluded that low-code developers are 10.9 times more productive than the standard of [Information Technology \(IT\)](#) Industry, which does not use these rapid software solutions [20]. These results reinforce the importance of the improvement of the visual languages used on these platforms.

Following that vision, the principal motivation is the existence of a platform component that accelerates the query building process and reduces the errors that could occur throughout, keeping the experience simple and understandable by all users.

## 1.2 Problem Description

The OutSystems Platform [58] provides a [Visual Query Language \(VQL\)](#) that allows users to query data from databases through visual interactions. Using that interface, it is possible to perform some operations that are usually supported by textual [DQLs](#), namely join, filter, sort, and aggregation operations.

Although the existing interface turns the process of query formulation more simple and intuitive, it does not support all [SQL](#) functionalities. Due to that lack of expressiveness, the platform allows its users to formulate queries using SQL. However, as Catarci *et al.* referred [4], visual languages could give advantages in query formulation for all users, including the ones that are proficient in SQL. Thus, it is important to provide a powerful and consistent interface in order to give users the possibility to accelerate the formulation process, reducing also the rate of errors that may arise.

The principal purpose of this visual interface is to provide a more visual and dynamic tool that accelerates the query formulation process and turns it easier and less error-prone. So, the existing interface should be a useful and efficient tool for developers due to the potential of that visual approaches above-mentioned. However, OutSystems knew there were developers that were not using the visual querying interface, maintaining their preference for SQL. Therefore, it was necessary to verify the main causes that lead users to not use that visual tool.

At the beginning of this dissertation, the lack of functionalities (e.g., IN, NOT IN, EXISTS, NOT EXISTS, DISTINCT, UNION and the possibility to use subqueries) was indicated as a significant factor for users to use SQL. Nevertheless, the first interface explorations revealed impactful usability problems. That is an important point since it could considerably harm users' query formulation process, reducing the value proposition of the system which intends to accelerate the querying process, keeping it more effective and less error-prone. Moreover, there were metric results and user interviews that confirmed the presumption concluded after interface exploration, highlighting the user experience of the interface as the core subject to research and improve.

Beyond the motivation of turning the query building process faster, effective, and less error-prone, the following questions would guide the problem definition process in order

to clearly understand the existing problems of the interface:

- Why do OutSystems developers often use [SQL](#) to formulate database queries?
- What are the main causes that users point out to use [SQL](#)?
- Who are the users more unsatisfied with the current provided visual approach to retrieve data? What are their reasons?

Under the above-mentioned circumstances, the goal of this thesis is the design, implementation, and evaluation of a new and more powerful [VQI](#) to provide an improved [User Experience \(UX\)](#) that:

- Accelerates the query formulation process;
- Improves the readability of queries (i.e., turns easier to understand what data will be fetched from database);
- Maintains the interface simple and intuitive for all users even the ones that do not know SQL or OutSystems, reducing also the existing learnability curve, whenever possible.

### 1.3 Research Questions

The main research question that is being addressed in this dissertation is:

Can we enable OutSystems developers to easily do complex  
database queries without ever using [SQL](#)?

Regarding the main question and the diverse background of the system target users, it is important to research how can be developed a solution that covers the requirements of all user types with the best usability possible.

The following research questions focus on this usability trade-off which depends on the users and the system particularities:

**Research Question 1:** Does the current implementation have usability problems for the less experienced users?

Considering the [VQI](#) already implemented, the most complex queries have not been correctly covered by the tool. However, it is important to analyze also if novice users had similar problems or others that could have an impact on the task performing.

**Research Question 2:** Can experienced users take advantage in using the visual interface to build queries instead of [SQL](#)?

Since the users more experienced who know other textual query languages, such as [SQL](#), can use [SQL](#) to perform the queries, are advantages for them in the usage of a [VQI](#)? What are the advantages and disadvantages of this type of approach for these users?

**Research Question 3:** Can expert users' [UX](#) be improved without reducing the system's learnability and satisfaction for less experienced users?

The usability attributes trade-off depends on the system's target users' expectations and requirements. Thus it is important to take into account if the development to improve the efficiency, effectiveness, and satisfaction of expert users does not harm the effectiveness and the learnability of the operations performed for the less experienced users.

## 1.4 Main Expected Contributions

This work aims to provide a set of contributions not only as scientific research but also as additional value to OutSystems. Thus, a summary of the main expected contributions for this project are presented below:

- A synthesization of the design concepts, including relevant interaction and conceptual models, usability definitions, guidelines and principles, and a description of the processes to evaluate the [Human-computer Interaction \(HCI\)](#) in the context of a software analysis;
- Provide a state-of-the-art about what are the most significant [VQs](#), presenting also a comparison of visual representation techniques and interaction strategies used, as well as other important features proper for this study;
- A description of the analysis made to identify what are the most impactful problems regarding the existing [VQI](#), which includes user interviews and data analysis;
- Design and implementation of a new graphical user interface prototype that tries to improve the existing solution to visually build queries. This prototype expects to fix some predominant problems selected as the most relevant to solve;
- An usability evaluation of the prototype developed through the use of user tests;
- Increase the number of users that prefer using the visual query interface instead of [SQL](#).

## 1.5 Document Structure

The remaining chapters of this thesis are organized as follows:

- Chapter 2 - [Background](#): introduces some design and usability concepts to be used in this work. Besides, it is provided a context of the OutSystems Platform current progress, which explains the functionalities of the existing data querying tool;
- Chapter 3 - [Related Work](#): analyses the users' interaction with database systems to improve the interfaces' suitability to the target users of the system. Also, approaches used by other systems to create interfaces that allow to visually build queries, are described and compared, detailing the interaction strategies used.
- Chapter 4 - [??](#): explains the work made in the requirements analysis, including user's interviews and metrics gathering, and the decisions of what are the principal and impactful problems to be tackled. Moreover, the design approach and process adopted to develop the solution will be detailed.

# CHAPTER 2

## BACKGROUND

This thesis aims to improve the interface that allows users to build queries in a more efficient and effective way. Therefore, [HCI](#) is a core subject of the work since such an interface can only be improved if its interaction and usability in the user perspective are studied.

Accordingly, this chapter will introduce key concepts of [HCI](#), as well as, a brief contextualization of the OutSystems Platform that is indispensable for the comprehension and progression of this study.

### 2.1 Human-Computer Interaction

Although computer systems have been designed by humans, these two parts of [HCI](#) do not speak the same language. Nonetheless, these types of systems were created to support, in a transparent way, human tasks and requirements, forgiving careless mistakes [9]. Thus, [HCI](#) aims to study the relationship of users and computer systems, in the context of the users' desired tasks, in order to “unfold and reveal challenges and insights, and to instrument appropriate solutions for alleviating the current obstacles to the access and use of advanced information technologies” [26].

#### 2.1.1 Main Concepts

The **Usability** of a system is one of the most important concepts in [HCI](#), that can not be forgotten on the design process, since its attributes must be taken into account performing also a guidance function through all this process. This concept was standardized in ISO-9241 [46] as “extent to which a system, product or service can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use”.

However, usability is not a single-dimensional property, being always associated with its attributes, that characterize the user accessibility when is using the system into five different points, such as referred by Nielsen [17]:

- **Learnability:** How easy is the learning process until a novice user (who has not used the system before) achieves a high-level of proficiency using the system [28]. The learnability is higher as the learning process is faster, and the user has to spend less effort to reach his goal. Also, it depends on the tutorials and training provided to users. A system that requires less training has higher learnability than a system that requires more training. The time that a novice user requires to perform some specific tasks can be used to measure learnability. Learnability can be improved using tips while a novice user explores the system doing his first tasks.
- **Efficiency:** Refers to the productivity level of a user who has already learned how to use the system. Efficiency can be measured analyzing the time that expert users spent to do specific tasks on the system. This attribute can be improved, for example, adding shortcuts to accelerate the interaction process.
- **Memorability:** Defines how easy is for a user, that was using a system before but did not use it for a time period, to do his desired tasks on the system. So it's related to how many times the user has not used the system and the time that the user needs to remember how the system works. Therefore, if a system has good memorability the user does not need much time to remember it, even if it has stopped using it for a long period of time. Memorability can be measured, for example, analyzing the interaction process of a user who has been away from the system, while he uses the system again. The use of visual components and metaphors with real-life objects helps, sometimes, the users in this process.
- **Errors:** A system not only must have a low error-rate but if an error occurs, the user should be able to recover from that. Since there are multiple types of errors with different severity levels, catastrophic errors should not occur. This attribute can be measured by the evaluation of the error-rate, taking into account the severity levels of the errors. Furthermore, if a system has errors, that can be reverted and does not have a negative impact on the final result, cannot be forgotten that these errors also harm the efficiency of the system.
- **Satisfaction:** The most subjective attribute of the usability that is related to the overall satisfaction of the user when uses the system. It could be measured by asking the users about the experience while they are using the system, always searching for subjective answers.

Nonetheless, as mentioned by Nielsen [17]: “**it is not always possible to achieve optimal scores for all usability attributes simultaneously**”. Thus, when a system is

designed it is necessary to prioritize what are the most important attributes for the users and the domain where the system will be used and applied. These trade-offs are one of the most challenging tasks of the design processes because it depends on user expectations and their backgrounds, as well as, the problem domain and what are the main focus of the system use. Accordingly, it is fundamental that the design process can focus on target users of the systems. Therefore, the main concepts, processes, and techniques for a design process centered on the users will be described.

### 2.1.2 User-centered Design

Before user-centered design principles and methodologies were adopted, the Waterfall model was commonly adopted as a software development process. This model comprises five sequential phases, from the requirements specification phase to the operation and maintenance phase, and has a good quality control since documentation and planning are a major concern of this methodology [2]. However, the stages of this model are not overlapping stages, so other development methodologies and philosophies arose to mitigate this problem and include the user on the design process, due to their impact on the usability of the system.

Consequently, it was necessary a new model that has the users included in the development process to verify, along with the development, if the approaches adopted are positive and what is the users' acceptability. Nielsen [16] reinforces this saying that "user interfaces should be designed iteratively in almost all cases because it is virtually impossible to design a user interface that has no usability problems from the start. Even the best usability experts cannot design perfect user interfaces in a single attempt, so a usability engineering lifecycle should be built around the concept of iteration".

The Spiral model of iterative design arose as an iteration through design, implementation and evaluation phases where the cost and accuracy increase on each iteration. The first iterations should use low-cost resources, like paper prototypes, and when the results are positive the accuracy should be incremented, changing to high-fidelity prototypes, such as computer prototypes [13].

#### 2.1.2.1 User and Task Analysis

Regarding the concept of usability presented above and the importance of the users on the design process, it is important to define the users and their desired tasks of the system in order to find the best solution as possible to the usability attributes trade-offs. Just a good description of the users and the tasks of the system leads the designers to the best choice of what are the usability attributes most important for the system.

Accordingly, it is important to make a **User Analysis** to understand all users' characteristics that could have an impact on the acceptability of the system. The expected result of this analysis should be a set of structured information that characterize the users of

the system in terms of technological expertise, knowledge of the business domain, application experience, educational background, gender, and age, as other aspects that might be useful to comprehend, depending on the system's users and domain [8]. The more traditional process to gather this information is through questionnaires or interviews, but that can also be obtained by conducting market analyses or observational studies [17].

Furthermore, it is essential to enumerate and analyze the tasks the users should perform using the system. The **Task Analysis** process aims to aggregate information about the tasks that should be performed on the system, starting from the system's overall goals and break down these to obtain individual tasks [17]. Moreover, the goal of this analysing process is to obtain more structured information about: how the tasks are performed using the existing systems, what are the pre-conditions and the requirements of each task, why the users need to perform this tasks, and others that might be useful to characterize the tasks of the system.

The techniques used, to extract information to this analysis, aims at figuring out how the tasks should be done instead of how they would perform them. The idea is to resort to examples, as well as possible, in order to understand what type of strategies are used, what type of exceptions from their normal workflow is occurring, and other aspects that can be observed where the communication with users is on a concrete level [17]. In addition, Nielsen [17] points out that "The users' model of the task should also be identified, since it can be used as a source for metaphors for the user interface", which reinforces that these dialogues with users to obtain analysis content, can be useful also to find relevant solutions to latter design process phases.

Therefore, the outcome of this analysis should contain a list of the entire tasks that users what to perform in the system, the information that is required to complete them, the steps and the dependencies between tasks, all the outputs that must be generated, and how is the communication process between the users associated with the system's tasks [17].

### 2.1.2.2 Sketching and Prototyping

After the user and task analysis process, designers must start sketching and prototyping ideas and approaches, in order to think about how can they solve the problems. Nevertheless, this phase of the design process should start with sketching techniques, as these are not only a good and inexpensive starting point to communicate ideas, but also help to develop structure and enrich the reasoning, leading to the perception of other details as well as of other approaches to solving the related problems.

While sketching techniques are more plentiful, and have a low detail level, being mainly based on suggesting and exploring, rather than retrieving results, the prototyping phases, have more refinement approaches and are used to test the design choices made.

However, prototypes may have different thoroughness degrees, presenting different advantages and disadvantages. Thus, it is important to start the prototyping process with



low fidelity prototypes, as paper prototypes, since the objective of these is to evaluate the conceptual model (if the users understand the system), the functionalities presented, the navigation, the screen components distribution, and the terminology used. After the evaluation of these prototypes presents good results, high fidelity prototypes should be used, like computer prototypes. There are a set of available tools to assist in the building process of these prototypes, such as Balsamiq [30] and Mockingbird [53]. These different prototype types can detect different issues when tested with users, so it is very important to test prototypes with different granularity levels.

Furthermore, there is another relevant aspect of the prototype designing, that is the scope definition of the prototype. It is important to define what features the prototype undertakes and what is the inherent detail level. Nielsen [17] describes this as two dimensions of prototyping: horizontal prototyping and vertical prototyping, as demonstrated in Figure 2.1. A vertical prototype is characterized as a prototype to test a restricted part of the system but with real users and circumstances. A horizontal prototype is presented as suitable for test the entire system but in a less realistic approach.

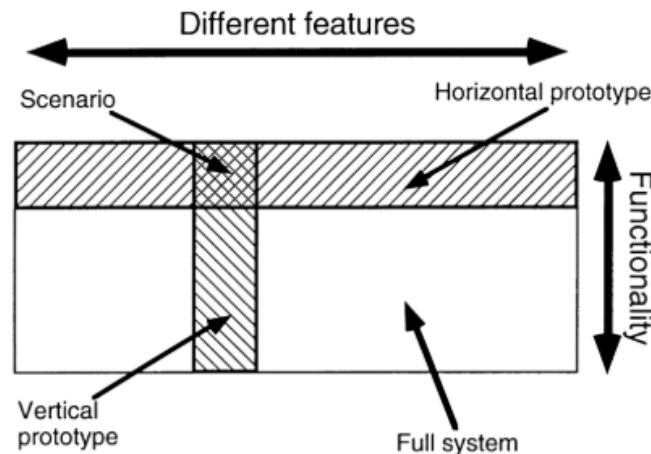


Figure 2.1: The two dimensions of prototyping: Horizontal prototyping keeps the features but eliminates depth of functionality, and vertical prototyping gives full functionality for a few features (source: Nielsen [17])

Finally, regarding the methodology about how to use the prototypes built, Dix et al. [9] refer that are three main approaches:

- **Throw-away:** After the prototype is built and tested, it is used on the final system development, but after that, the prototype is discarded and the rest of the design process continues without relying on the prototype previously built;
- **Incremental:** First, the system is separated into different parts, and each part is built, one at a time. So the prototypes are developed separately, regarding its correspondent part, and finally are combined to build the final system;

- **Evolutionary:** Contrary to the throw-away approach, the prototypes developed are used as the basis for the next iteration of the design.

### 2.1.2.3 Evaluation Techniques

The evaluation phases are crucial in the design process, since they allow designers to understand the systems' specific problems and the impact of the interfaces on users. So, the expected outcome of these processes is a list of usability issues ordered by priority level, referring to what usability principles and guidelines are not being accomplished and what solutions can be applied to solve the problem [17].

However, there are different approaches to evaluate interfaces. First, one important topic that distinguishes two types of techniques is who performs the evaluation. There are techniques where only the designers and specialists are involved in the process and are another type of evaluation where users participate in [9]. Thus, there are two types of evaluation: evaluation through expert analysis and evaluation through user participation.

#### Evaluation through expert analysis

In this type of evaluation, designers, or other specialists, evaluate the system, supporting their analysis on cognitive principles, to preview usability problems likely to occur. Moreover, this evaluation not only is cheaper because it does not involve users, as it also can be applied to any phase of the design process, from the design specification to the high fidelity prototypes [9].

Regarding the approach presented above, these two methods are one of the most used:

- **Heuristic Evaluation** [18]: The system is thoroughly analyzed in order to find problems that do not follow importantly and recognized usability heuristics. After a problem has been detected, it should be reported, not only with a description of the problem but also the indication of the heuristics that have not been accomplished, the severity level of the problem and possible solutions to solve it [17].
- **Cognitive Walkthrough** [21]: This method uses a sequence of actions as the principal resource to guide the evaluation process. For each action, the evaluator tries to understand if all steps are clear and visible, as well as, if the system gives clear feedback, confirming if the action has been completed. Usually, the main focus of this method is to analyze the learnability of the system. Mainly, to understand if the system provides a good learning mechanism through exploration, rather than using manuals, training or other types of *a priori* learning processes [9].

A study made by Desurvire *et al.* [7] concluded that Heuristic Evaluation made by specialists is better to predict some problems before the user testing process than Cognitive Walkthrough. The reason pointed out for this result is that heuristic evaluation can often help to remind the designers of problems since this method analyses more dimensions of the system than Cognitive Walkthrough.

**Evaluation through user participation**

Although there exist methods that do not need the users to evaluate the system usability, it is difficult to predict all the behaviors of the users when they interact with a system. Therefore, there are multiple methods to make usability tests with people that are the system's target. Some methods of user testing which can be resourceful on the context of this work, are the following, respecting the terminology used by Dix *et al.* [9]:

- **Observational Methods:** the main principle of these methods is observing users using the system to conclude important usability information about it. Usually, it is requested to the user to 'thinks aloud' since it might be possible to obtain more insights that can be useful, not only to understand why the user might have made an error, but also it can be a good strategy to find starting points for other possible solutions. Moreover, although usually, these tests have a set of predetermined tasks, since it is easier to find the user reaction to the system part the need to be tested, also can be executed tests only by evaluating the normal tasks of the users on their work;
- **Experimental Methods:** starting from a properly defined test hypothesis, it is selected a set of users to perform an experimental test to verify if the test hypothesis proves to be true or not. Thus, it is necessary to define previously all the experimental environment, which includes: the test hypothesis that wants to be verified, the users that will perform the test, and the independent and dependent variables. The dependent variables are the ones that express the result of the test in function of the independent variables, such as the task execution time or the number of the errors that occurred. The independent variables are chosen by the test designer to produce different conditions for comparison. Examples of independent variables can be the size of an interface component or the use of an interaction technique. This method is very useful to verify through a test hypothesis which of the possible solutions presented (independent variables) have a better performance for the intended application context;
- **Query Methods:** these methods focus on what the users think about the system, collecting information from interviews or questionnaires to analyze their opinion. One advantage of this method is that it might reveal issues not observed previously complained before, but contrary a lot of cases are not tested, since in the interaction field, many times, the user only finds a problem when it occurs for the first time. So it is not possible to extract concrete information from users that never have passed for this situation.

Finally, independently of the evaluation process adopted (through expert analysis or user participation), severity ratings should be attributed to the problems identified in order to define the main priorities and understand which might have a larger impact

on the system acceptability. However, although these levels should be attributed by specialists, if they use not only cognitive principles, but also use the results observed from the user testing phase to sustain the classification of the problems detected, the result can be more accurate.

Besides, the Figure 2.2, extracted from [17], displays two influential factors that should be taken into account to attribute a severity level to a problem: how many users are experiencing this problem and what is the impact level on the user.

		Proportion of users experiencing the problem	
		<i>Few</i>	<i>Many</i>
Impact of problem on the users who experience it	<i>Small</i>	Low severity	Medium severity
	<i>Large</i>	Medium severity	High severity

Figure 2.2: Severity Levels of the Problems based on their impact on the users (source: Nielsen [17])

#### 2.1.2.4 Errors Classification

The errors that occurred when a user interacts with a system are excellent indicators for designers because the understanding of the reason that led to error situations is a good strategy to classify them. Therefore, errors can be classified as slips and mistakes, as will be presented below according to Dix *et al.* [9]:

- **Slips:** in these types of errors, the user knows how to do the intended task on the system, however, he presses a wrong button or closes one window accidentally. So, he understands the action, but a misaction does not allow that he reaches his goal;
- **Mistakes:** these errors occur when the user does not understand the system, formulating a wrong goal. An example of a mistake is when the user does not understand the action associated with an icon, performing a not intended action.

Therefore, the strategy to mitigate the problems associated with these two types of errors could be different, as mentioned by Dix *et al.* [9]: “Slips may be corrected by, for instance, better screen design, perhaps putting more space between buttons. However, mistakes need users to have a better understanding of the systems, so it will require far more radical redesign or improved training, perhaps a totally different metaphor for use.”



Figure 2.3: Main areas of Service Studio (source: OutSystems[60])

## 2.2 OutSystems Background

The OutSystems Platform has the mission of simplifying and accelerating the development and management of digital enterprise solutions, no matter the dimension and domain of the applications. It covers the entire development lifecycle which aims to promote rapid development and integration, to facilitate and speed up the deployment stages, to keep track of the status and health of the applications produced, and to expedite the management of daily operations and configurations on the final products [57].

### 2.2.1 Visual Development Environment

Service Studio is the low-code development environment of the platform, which allows the developers to create complete applications using visual elements to perform drag and drop actions. Figure 2.3 presents an overview of the IDE, which highlights the different areas of the workspace.

Using the widgets and icons provided in the toolbox, the main area is dedicated to designing the applications' interface and logic. So, in the main area, there are visual elements, which can be set using the properties editor, placed on the bottom right corner of the screen.

Also, it includes other sections whose main purpose is not the product development, but are related to key actions of the software development process. Therefore, on the window's top, there is a toolbar which has shortcuts to some of the most common operations, and a green circle button, denominated "1-Click Publish button", to start the automated deployment process provided. Besides, the bottom of the window is dedicated not only to the presentation of messages, errors, and warnings but also to debugging the application.

Since the development environment can be used to develop a complete full-stack application, the elements, which can be manipulated in the Service Studio, can be related to different parts of the application. The Application Layer Tabs, which contain a tree view of its elements, are the following:

In the **Processes** tab is possible to create and manage business processes of the systems through a flow that can be composed by human or automatic activities, time waits, conditional decisions and indications to execute processes. Also, this section can be used to configure the timers of the application. Then, it is possible to indicate when a timer should start, what is its period and what action should be performed when it is triggered.

The **Interface** tab can be used to manage the components related to the visual interface of the final application. It is possible to observe all applications' screens, as well as, the variables and the actions related to each one. Moreover, flows between the various screens can be also defined. If one screen or action is selected, it will be possible to add new visual components to the interface or assign new elements to the action flow in order to define all the client-side logic of the screen.

The **Logic** tab is where the core logic of the application could be defined. It includes not only the server actions of the application but also the exceptions specification, the existing user's roles and also the integration with external services. Although there is a data section on the application layer tabs, which will be described below, the actions which require data querying are managed in this section.

In the **Data** section is covered the database modeling, making possible the creation of diagrams to represent the schema of the database. Moreover, in the tree view of this tab is allowed to establish new entities and static entities in order to define the data model of the application.

### 2.2.2 Visual Data Querying

The main topic of this work is the improvement of the visual data querying process on the low-code development of applications, using OutSystems. Consequently, the headway of visual querying components of the platform is an essential factor to properly understand the entire project. Regarding the last version of the OutSystems platform, the actual visual data querying tool, which is the starting point of this study, will be described.

#### 2.2.2.1 Previous Work

Since 2002, which is the release date of the first OutSystems low-code development environment, the Hub Edition 1.0, allows two manners to create database queries [66]:

- **Simple Queries:** visual query builder that allows the creation of some less complex queries, interacting with a graphical user interface;



Figure 2.4: Simple Query example in Hub Edition 2.0 (source: OutSystems [61])

- **Advanced Queries:** feature to specify queries textually, using a language based on [SQL](#), but includes some extra syntax to reference variables used of the application development;

Then, since the first versions of the [IDE](#), it is provided two ways to build queries. The first uses the visual language, which does not need so many learning requirements but also diminishes the necessity to remember the entities' name or the language syntax. The second provided relies on [SQL](#), which is the standardized textual query language, known for the developers' majority.

The first simple queries versions have accelerated the query building process finding automatically the relationships between the entities chosen. The main idea is that the developer only needs to select the entities intended and the respective join conditions would appear automatically in the query view interface. After this, it will be possible to change the join type, as well as, to add, edit and remove filtering or sorting conditions. Figure 2.4 presents a simple query example in Hub Edition 2.0 (2003) when the developer was changing the join type to an Outer Join.

This visual querying approach continued in the next versions, adding some minor improvements, such as the support to structures in order to store temporary information without changing the entity definition [62], and the inclusion of a properties pane to view and change the properties of all query elements in a single window [63].

However, at the launch of the OutSystems Platform 9 (2013), an entirely new way to manipulate data and express database queries has been released. These new components of the system, called **Aggregates**, have replaced Simple Queries, promoting a new interaction strategy to query databases, where the main focus is the data, instead of query design. Also, new features have been introduced to improve the expressiveness of the [VQL](#), namely grouping functions and the ability to add calculated columns easier.



Employee Name	Employee Email	Employee JobTitle	Employee IsManager	Project Name	Project DueDate
Cathleen Martt	cmartt9@yellowpages.com	Internal Auditor	true	Project K	2020-06-14
Anny Ledington	aledington2@chron.com	Senior Sales Associate	true	Project D	2020-09-06
Oralee Broe	obroe1@example.com	Compensation Analyst	false	Project H	2020-09-14
Cherida Wrate	cwrated@wisc.edu	Account Representative II	true	Project F	2020-12-16
Roseanne Pencott	rpencottk@tiny.cc	Recruiting Manager	true	Project J	2020-12-31

Figure 2.5: Aggregate Example

### 2.2.2.2 Current Progress

Since the implementation of Aggregates, the query process without textual languages is more visual and more focused on the query outcome. Aggregates can be used to query data from the server or mobile local storage, and can be created in the following ways:

- If someone is designing the user interface and wants to present some data gathered from the database (server or local storage), he can right-click on the screen where data will be displayed and select “Fetch Data from Database”;
- When an action flow is designed, there is an Aggregate icon in the toolbox that can be dragged and dropped to the main area;

When the Aggregate is created, the first step is the data source selection in order to specify what entities should be included in the query. Then, the developer should click in the main area and choose the entities he wants or drag and drop the entities to add them to the query. When an entity is added, all its attributes are automatically included in Aggregate. Since an Aggregate can include one or more entities, added on the beginning or later, if it has more than one, it will be analyzed to verify if there are relationships between them. Unless there is a relationship that links them, the Aggregate will request the condition to join them. Otherwise, the entities will be included automatically using an inner join.

Hereupon, the Aggregate has already been created and its data source specified, so the visual querying process can be started, in a progressive way, seeing at the same time the query output. Figure 2.5 demonstrates an Aggregate on the referred state, to be possible to understand the structure of the interface.

First, this component of the OutSystems Platform presents two main capabilities, represented visually in two distinct areas: the query design area, and the viewer of the





Figure 2.6: Aggregate - Defining Sources

query result. The former, located at the top of the window, is composed of a set of four tabs, where each selection action changes the grey area to the respective form-based interface. The latter is a table-based interface, which is similar to spreadsheets applications, such as Microsoft Excel [48] or Google Sheets [45] and its principal aim is to provide a direct and visual approach to show the query output.

Focusing on the query design area, the sources tab, illustrated in Figure 2.6, can be used to add, change or remove the entities of the query, defining also, the join types between them. There are three join types available: "only with", "with or without", and "with". The respective joins in SQL are: "inner join", "left join", and "full outer join". Additionally, each one appears with a visual representation similar to Venn Diagrams [15] to be easier to identify which data is selected on each join type. Moreover, it is possible to edit the join condition textually, using the platform expression editor.

The filtering tab can be used to apply filters in the query likewise the WHERE statements in SQL. These filters can be defined through boolean conditions inserted in the expression editor. The conditions are specified textually with the assistance of some auto-completes and shortcuts available in a tree view.

The sort conditions can be added in the sorting tab choosing the "add sort" or the "add dynamic sort" options available. The difference between them is that dynamic sort relies on a variable of the system, contrary to the other that depends only on an entity attribute. To add a sort, the user has to select what entity wants to sort and specify what are the sort criteria, for example, ascending or descending. Moreover, more than one sort can be inserted and they can be ordered to establish the priorities between them.

Finally, the last tab has a different behavior when compared with the rest of the options available in this interface area. The main goal of this feature is the testing of query output when concrete values are assigned to the variables referred to in the query. Thus, it does not contribute to the query design in the same way as the other tabs, presenting only a test purpose in the context of the query result visualization.

Figure 2.7 presents a usage example of the last functionalities mentioned, to create a query to filter and sort dates, regarding the value of a variable.

On the other side, the area dedicated to viewing the query output provides also some



Figure 2.7: Aggregates - Filtering, Sorting and Test Values in an example of querying DueDates after a month indicated in a variable



Figure 2.8: Query Design functions while interacting with Query Result

functionalities to design the query while the user is interacting and exploring the query result. Therefore, as represented by an example in Figure 2.8, the user can change the query when he performs a right-click on a column or when clicks on the new attribute. The only options in the list presented that does not change the query are the hide options since they just change the result in the presentation layer. So, if the user hides a set of columns, he will not see them in the result table, however, the query did not change. Besides, the user can add other attributes based on the existing ones, so Figure 2.9 shows an example of this functionality.

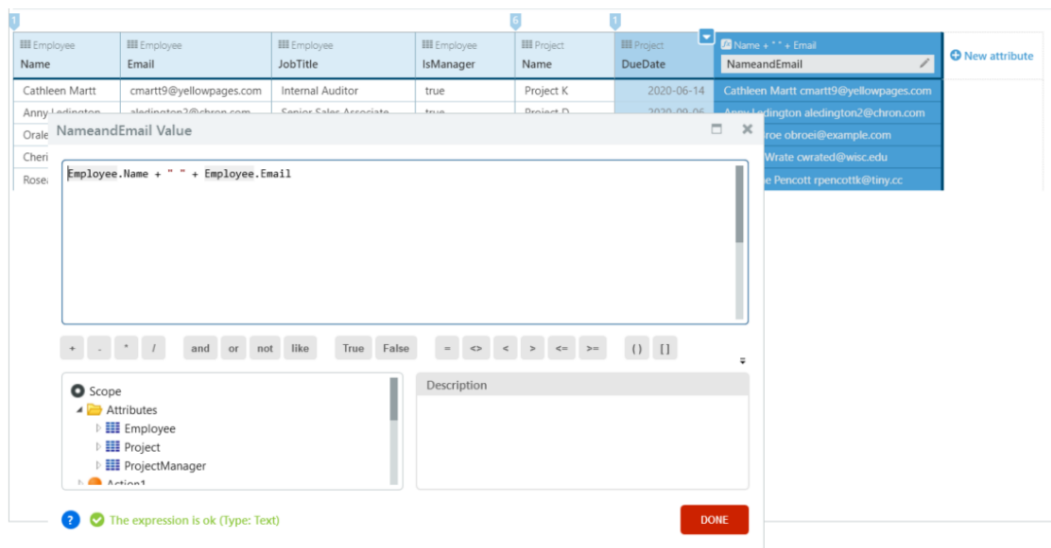


Figure 2.9: Calculated Attribute Insertion



## RELATED WORK

Since the users are a fundamental component of the study, their relationship with data and what are their expectations of these query systems will be discussed. Moreover, a set of technologies and techniques will be described and compared. This information can turn to be useful to explore solution, and understand different points of view to manage problems, regarding the project scope.

### 3.1 Query Conceptual Models

The perception of the user's conceptual model is important to understand how the user reason while interacting with the system the perform the intended actions. A query is built to gather data. To transmit what is the intended data, the user needs to think about how it could express the data required in the query. The understanding of the user's conceptual model could be useful to remove the existing gap between what the user wants to query from the database and what system register that the user wants to retrieve.

Some studies have analyzed this reasoning process of the users when they were writing queries. Siau *et al.* [24] have referred that "The semantics communicated through the interface can be classified according to abstraction levels, such as the conceptual and logical levels". Also, there is one more level, the physical level, where is considered the system details, such as physical storage and access structures. Since the physical level is low level, usually, the conceptual and logical levels are most used. The logical level takes into account abstract structures for data and operations, and the conceptual level uses real-world objects and concepts to communicate. Through an empirical method of evaluation, the conceptual level has revealed a higher accuracy. Also, this abstraction level makes the users more confident in their answers than the physical level or logical levels.

Moreover, the time that users need to design the queries is reduced using conceptual levels [24].

Reisner [22] provided a model of query writing from the reading of the query intention in an English statement to the query writing in SQL (Figure 3.1a). After understanding what data is required, the user applies two parallel steps. In the **Template Generation** phase, the user formulates a template identifying the SQL keywords necessary, such as SELECT, FROM, and WHERE. In the other step, called **Lexical Transformation**, the user identifies the name of the tables and columns involved. Finally, the results of these two steps are combined in the last step, denominated **Insertion**, in order to produce the final query [22]. The recall of table and column names represents a significant use of long-term memory, being a concern that should be taken into account [25].

In the same field, Ogden [19] presented a three-stage cognitive model of the query process (Figure 3.1b):


1. **Query Formulation:** according to the existing data, the user specifies, in natural language, what data is required;
2. **Query Translation:** regarding the existing data model, the operations and relations necessary are defined, in order to adapt the natural language request to the pragmatics of the intended query;
3. **Query Writing:** the information of the previous steps is used to build the query, using the syntactic and the semantics of the query language.

Comparing the two previous models, the Lexical Transformation phase is present in the Query Translation phase of the latter model, as well as, Template Generation and insertion are part of the Query Writing phase [6]. Moreover, although the query writing and comprehension are the focus of this work, it was verified in a comparison between three different models (relational model, extended-entity-relationship model, and object-oriented model) that the data model influence the query writing and comprehension [6].

The query comprehension is one of the important concerns of this work, since it is important to consider if the query representation, no matter if it is visual or textual, indicates clearly what data will be gathered. Chan *et al.* [6] have postulated that the query comprehension could be covered by the reverse of the stages included in the Ogden Model. First, the user should identify the data structure and operations, to translate them, in the next step, to the natural language. After this, the user needs to read and understand what data gathering is intended. Moreover, in this evaluation, it was concluded that although data modeling influence query writing, it does not influence the query comprehension. The explanation is provided by the authors: "Both query writing and comprehension require an understanding of the query language syntax. This is a component not needed in the data modeling task."



(a) Reisner Model (adapted: Reisner [22])

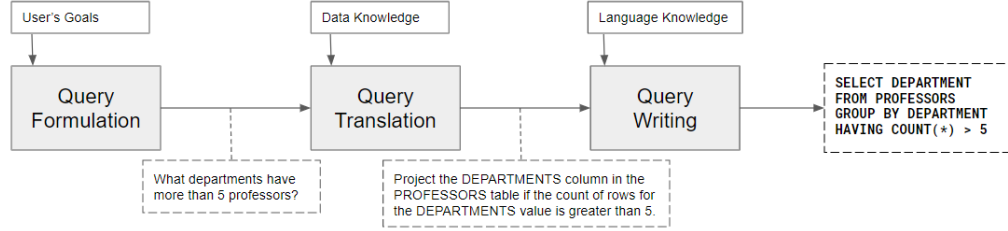

(b) Ogden Model (adapted: Ogden [19])

Figure 3.1: Models of Query Writing Process.

The experience with the data involved is another factor that influences the query comprehension. If novice users do not understand the data involved, they cannot validate if the query result is correct. This situation was analyzed by Robb *et al.* [23] that were distinguished the query process between new users and experienced users (Figure 3.2). Besides, they concluded that if the novice users were alerted to the details of the data queried, the query effectiveness will increase.

## 3.2 Query Formulation Problems

Since the goal of this work is the improvement of an interface that allows its user to build queries, it is important to summarize a set of significant problems that usually occur in query formulation. The problems that will be presented are related to SQL queries. However, as the visual tool of this work aims to substitute some functionalities of SQL, the comprehension of the interaction problems that exist in the textual language can be considered and mitigated in the development of the new interface.

Lu *et al.* [14] have evaluated the SQL usage in a diverse population, which includes people of different enterprise areas with different levels of experience in the database systems domain. The authors concluded that the comprehension of the queries is difficult, as well as the logical errors are difficult to detect. Moreover, the joins and aggregation functions are the other problems pointed out.

The query errors could be syntactic or semantic. The **Syntactic Errors** are related to the grammar rules of the language and are detected by the compiler. Therefore, the impact of these errors is reduced since the user can see that the query is incorrect through the compiler alert. The **Semantic Errors** are a major concern because they occur when



Figure 3.2: New and experienced users' query processes (source: Robb *et al.* [23]).

the returned information is not intended by the user, even if the query does not have compilation errors [25]. These errors could affect the correctness of the results.

In *SQL*, the join clauses are used when is necessary to merge data from different tables in one column in order to specify which data of each table will be considered. Several studies have demonstrated that the indication of the join clause is one of the most representative semantic errors [1, 14]. Smeller [25] has studied what are the cognitive causes that lead the user to forget the join clauses:

- **Working memory overload:** if the user needs to recall the table and column names, and the conditions necessary after the identification of the join's requirement, the required join clauses could be forgotten in this period;
- **Absence of the clue:** when the statement that explains what data is required do not present clues for the join necessity;
- **Procedural fixedness:** when a query that only extracts data from one table is reused for another that requires the join clauses but this join is forgotten;



- **Ignorance:** when the user does not know how to merge the tables and specify the join clauses.

The cognitive causes of the problems are important to develop interfaces that could mitigate the existing problems in the query formulation. For instance, if the join clues are provided in the interface, the user does not need to remember them. This approach, which follows one of the usability heuristics presented by Nielsen [17], minimizes the user memory load.

A study that evaluated novice programmers' semantic mistakes concluded also that omissions are the principal semantic error, mainly in the WHERE clause [1]. Besides, the authors have referred also the problem of working memory overload: "This error may occur when the capacity of a student's working memory is surpassed".

Another study has analyzed a large dataset of queries composed by university students enrolled in an introductory database course. However, this study is more extensive and includes a list of the principal errors committed by the students [27]. Continuing the focus on the semantic errors, the authors have pointed out the following error categories: inconsistent expressions, inconsistent joins, joins omission, duplicate rows, redundant column outputs [27].

### 3.3 Visual Query Composition

The interfaces to build queries resort to visual representations to communicate with the user. Catarci *et al.* [3] presented an interesting classification according to the visual formalism which the interface is based on:

- **Form-based:** based on forms, which can be seen as a rectangular grid of other components (subforms, groups of cells, a combination of cells, etc.) that group objects in a named collection regarding its structure. Forms and tables are similar, but contrary to the tables, forms allow nesting. Thus, forms can be seen as a generalization of tables. In this approach, the relationships can be represented among cells, cells subsets, or even the overall set, providing to the user three information levels;
- **Diagram-based:** usage of graphical representations, such as graphs, charts, and diagrams to better transmit the relationships among data. The aim is to use visual representations to help the understanding of the relationships between concepts which are represented by textual labels;
- **Icon-based:** as the opposite of the diagram-based, this type of interface tries to facilitate the understanding of the concepts instead of relationships. So, Icons are used, which are visual segmented objects to transmit a message or information, using analogies and metaphors with the real-world objects, or even conventions that are used to express no tangible objects, as computer processes;

Table 3.1: Query Language Requisites

Specification	Description	SQL Indication
<b>Data Source</b>	Entities and attributes which will be presented in the query	Using SELECT and FROM statements
<b>Merge Type</b>	Define how will be merged attributes of different entities	Using JOIN clauses
<b>Filtering Criteria</b>	Criteria that can be used to filter records, presenting in the result only those that fulfil a set of conditions	Using WHERE or HAVING clauses
<b>Sorting Criteria</b>	Define what are the criteria to sort the records of the result	Using ORDER BY
<b>Aggregation Functions</b>	Group a set of records by comparison or using mathematical functions	Using GROUP BY statements or SQL functions, such as MIN, MAX, COUNT, AVG and SUM
<b>Calculated Attributes</b>	Attributes added, based on existing ones	Using SELECT statement
<b>Distinct Values</b>	If only different values will be considered in the result (removing duplicated values)	Using SELECT DISTINCT statement
<b>Unions</b>	Combine the result of two different queries	Using UNION operator
<b>Subqueries</b>	Defining a query that uses other queries, for example, to filter the result	Nesting SELECT statements

- **Hybrid:** these approaches can combine the previous visual formalisms in order to select the best combination of advantages to the application usage domain.

In order to compare different interfaces, it is essential to analyze what a query language has to support to build the query. Accordingly, Table 3.1 presents the query creation required specifications, comparing them with the respective indication in SQL.

Nevertheless, there are two relevant aspects, according to the last requisites presented: the interaction process to indicate the query specifications, the overview of what data wants to be retrieved using the current query. Both are fundamental since a good visual query language aims to simplify not only, the query formulation process but also, the query readability, promoting an efficient and effective recognition of what are the desired data.

#### Data Source:

Chartio [32] has two components to query databases visually: using the Data Explorer [33] or using the new Visual SQL [35]. Regarding the data source specification, these two systems use different strategies to select and present the entities and attributes related

to the query. In the Data Explorer, the user can expand the items of a list of tables in a scrollable and searchable tree view, which is pinned in one side of the window, to choose the desired attributes. This system divides the attributes into two different types: Measures and Dimensions. Usually, measure refers to quantitative data and dimensions to categorical data. So, to insert the attributes in the query, users can drag and drop the required attributes to the form-based interface that contains the Measures, Dimensions, and Filters of the query (Figure 3.3a) [33].

On the other hand, the new component of Chartio, Visual SQL provides a different interface to select the data sources. Contrary to the previous approach, in this interface, there is no fixed list to choose the attributes. In this way, there is only a search text component that is activated when the user clicks on “add column” action. When this action occurs, a pop-up style component that has a list, similar to the referred above, where it is possible to preview some data entries of the table, is presented (Figure 3.3b) [35].

In the systems referred above the columns are added one by one sequentially, but other systems have different methods to select the table’s columns. For example, in Tableau Prep [73] there is a checkbox list to chose the intended attributes (Figure 3.3c), and in Microsoft Power BI [49] the table is chosen using a list, and all its attributes are added automatically. Also, users can remove, the columns not desired afterwards [51, 74].

Other systems, as Devart dbForge Query Builder [41], uses a diagram-based interface to select the entities and attributes of the query. In this system, the user can drag and drop the desired tables to the diagram area, and select through checkboxes the intended attributes, that are presented in the database schema diagram (Figure 3.3d).

#### **Merge Type:**

Merges are used when it is necessary to extract data from different tables, so it is necessary to establish what is the join kind to merge the data. Therefore, the interface needs to adopt an interaction and representation technique to specify it. To define a join in Devart dbForge Query Builder [41], the user can only select the attributes’ checkboxes of the different tables and the system generates an inner join automatically. In this system, there are buttons on the toolbar to select all rows of one table, of another, or both, allowing to perform left, right and outer joins respectively [40].

Another approach used by some systems, such as Chartio Data Explorer [33] and Microsoft Power BI [49], is a form-based interface to insert a join. In the former, two queries can be merged clicking on a button to popup a form that can be used to select the merge type and the first columns that will be merged using dropdowns [33] (Figure 3.4a). Also, if there are null values on the merge related columns, there is an option to include or not the null values match rows [34]. Similarly, the latter provides a button to merge queries that opens a modal where the attributes that will be used on the merge (viewing also a table preview) and the join kind can be chosen, using a dropdown [51] (Figure 3.4b).

Tableau Prep [73] provides two options to start a join between two tables: clicking

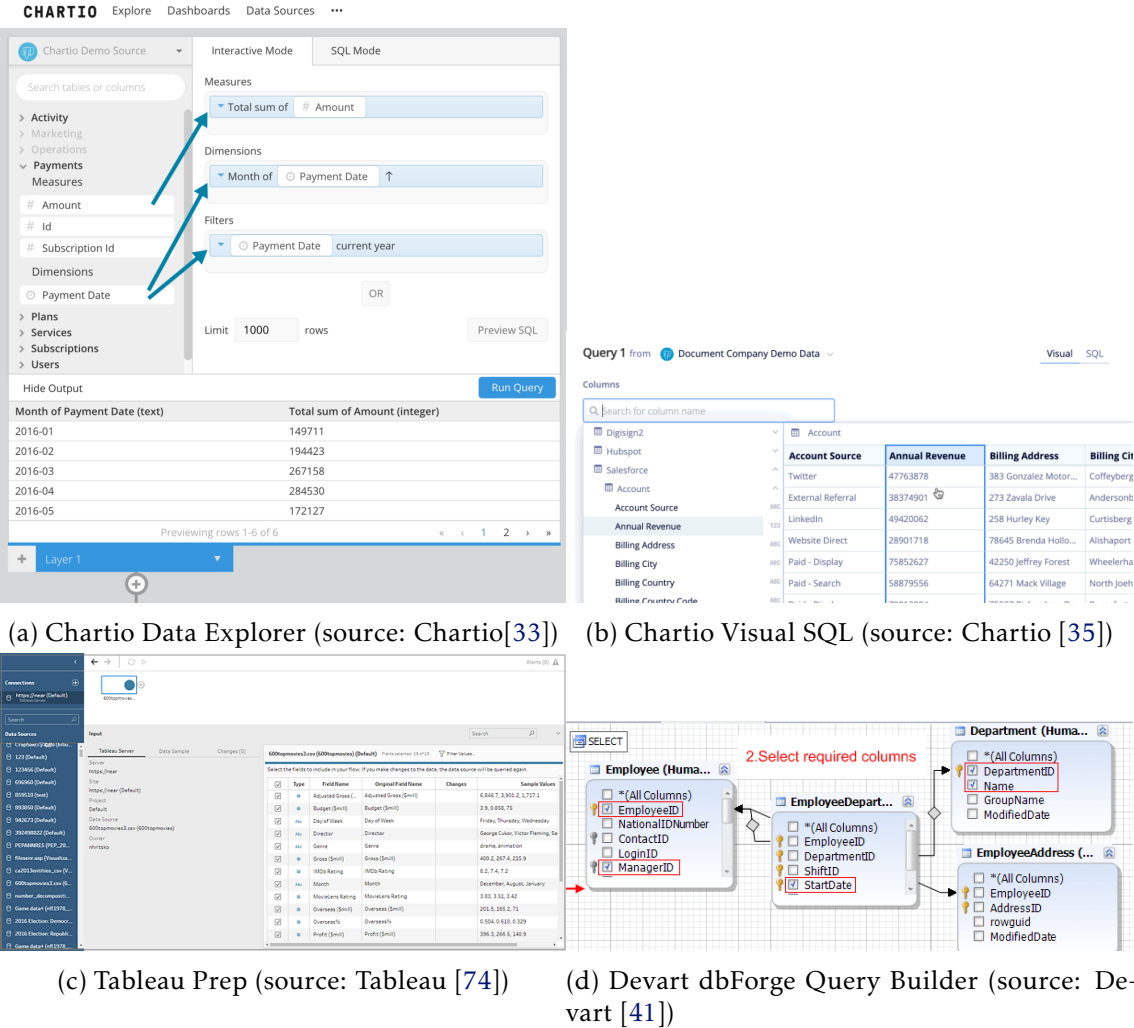


Figure 3.3: Different approaches to select the entities of the query.

on a "add join" hover button above the table visual representation with the suggestion of related tables, or merge the visual representation of two tables using a drag and drop action. After this selection, the inner join type is selected automatically by the system according to the tables' relationship [68, 69]. However, the user can configure the join in a dedicated section (Figure 3.4c) where it is possible to define the join type using a Venn Diagram, to manage the join clauses using dropdown lists to select the fields, including also some join clause recommendations based on the database schema. Moreover, a summary of the join result that contains counters with the values included and excluded by each table, in a visual way using diagrams is provided. Finally, a list of the values included and excluded, where the red values represent the values excluded is presented, as well as a preview of the join result [69].

**Filtering Criteria:**

To represent and manage the filtering criteria of the queries, usually it is used text to indicate the logical conditions. However, some systems are trying to optimize the

### 3.3. VISUAL QUERY COMPOSITION



(a) Chartio Data Explorer (source: Chartio [33]) (b) Microsoft Power BI (source: Microsoft [51])



(c) Tableau Prep (source: Tableau [29])

Figure 3.4: Data merging approaches.

usability, helping the user in the specification process through some autocompletes. These diminish the necessity to remember all the syntax and the name of the functions. Besides, other systems present the logical conditions using a more structured layout, although keeping resorting in a textual representation. An example is Devart dbForge Query Builder [41] that represents the WHERE and HAVING clauses in a tree where the user can organize the conditions into groups [38].

Furthermore, some query systems also allow the user to view the query result, providing a shortcut in the column's name to insert filters. So, the user can change the query while is viewing the results. In this way, the user can apply a filter and view its effect

almost immediately. Power BI Query Editor [49] is an example of a system that uses this approach.

Different interfaces can be used to select filters regarding the field data type. The advantages of the graphical interfaces could support the filtering criteria definition. For example, if a filter is applied to constraint dates, then a date input box with a visual calendar can be useful to simplify the date typing. In this way, some software, such as Chartio Visual SQL [35] and Chartio Data Explorer [33], not only helps in the data typing but also provide dropdown lists that contain operators that can be applied to the referred data type (e.g. less than, contains, like, etc) to helps the user in the boolean operator specification [33, 37].

Tableau Prep [73] follows this more strictly, distinguishing between data types when filtering criteria are indicated. It provides different forms depending on the data type. The main difference of this system is that not only provides a more diversity of controls, as integrating range selectors, radio button, and the option to include or exclude fields through an action accessible near its value, but also gives to the user the option to use a calculation form where the interaction style is more textually and more extensible [71].

#### **Sorting Criteria:**

Usually, in the actual **VQIs**, the sorting criteria could be indicated in two ways: a right-click action on the column header of the table that represents the query result, or using a form-based interface to define the sort criteria of each entity. Devart dbForge Query Editor [41] is a pure example of the first approach [42]. Chartio Data Explorer [33] adopts the second approach, providing a pop-up form to apply sorting criteria to the query. The user can use this form to select the intended attributes and the criteria to apply [31]. Moreover, Chartio Visual SQL [35], Tableau Prep [73], and Microsoft Power BI [49] combines the previous solutions with the possibility to redefine the priority of the sorting criteria, through drag-and-drop actions [37, 51, 72].

#### **Aggregation Functions:**

In order to perform aggregations functions, such as MIN, MAX, COUNT, AVG, SUM, or GROUP BY, some systems provide these functionalities through interaction with the query result table. Devart dbForge Query Editor [41] provides this option to create an aggregation function. Moreover, in this editor exists another aggregation dedicated view which contains the aggregation functions in a tree view. In this view, users can group or ungroup the elements present in the window [39]. Microsoft Power BI [49] allows also the users to add aggregations through the right-clicking on the column header, but in this case, it is open a form to enter the intended function and columns [50]. Chartio Visual SQL [35] and Chartio Data Explorer [33] presents a pop-up form where could be selected the columns and the aggregations intended [36]. Using a different interaction strategy, in Tableau Prep [73], the user drag and drop the desired columns to a specific area that is divided into two: Grouped Fields and Aggregated Fields. The first is to add the **SQL** corresponding GROUP BY, and the second to add the other aggregation functions, such as COUNT, MIN, MAX, AVG, and SUM.

**Other Specifications:**

Regarding the option to add new calculated attributes, all the systems referred above allow inserting calculated attributes to the query, excepting the Devart dbForge Query Editor which does not support [37, 50, 70].

The option to show only distinct values is provided in Tableau Prep [73], Microsoft Power BI [49], and Devart dbForge Query Editor [41], through a button or a checkbox to does not see in the result the duplicated values. However, Chartio Visual SQL [35] and Chartio Data Explorer [33] does not support a specific interaction method to specify this. Nonetheless, the distinct effect can be applied, using the group by in all the columns of the query.

Some system provides visual options to build queries that contain UNIONS. For example, Chartio Visual SQL [35] and Chartio Data Explorer [33] provides this option in the same components of the joins. In these systems, when the user chooses the join type, the union is one of the join types available, although there is a different operation in SQL. Tableau Prep [73] and Microsoft Power BI [49] present different options between the joins and unions, but the interface and the interaction strategies are similar [51, 69].

Moreover, a visual way to perform subqueries is provided by the diagrammatic-based interface of Devart dbForge Query Editor [41], using tabs to alternate between the selected query. Links are used as assistants and shortcuts to view and change between the queries [43, 44].

### 3.4 Discussion

The conceptual models of query writing presented in this chapter will be taken into account along the design of the solution since these are a good baseline to understand how users reason while are interacting with the system to achieve their goals. The system's tasks will be optimized according to the presented users' conceptual models presented, in order to reduce the semantic errors, as much as possible. Therefore, the most relevant semantic errors that occur using SQL were presented. In the design of the solution, these errors are part of the problems to solve using a new user interface and UX. As referred in section 3.2, the semantic errors will be the main concern since these could have a negative impact on the results. The syntactic errors also will be addressed in this work but require less study about the users' conceptual model. The major concern in this type of error is to provide the maximum feedback to the user. In that way, the user will understand the error and correct it.

Furthermore, since the design of an interface needs to tackle with the usability attributes trade-off, it is important to characterize and consider the problems of the application's target users. This characterization is essential to define the usability priorities of the interface. The population used in the studies presented in this chapter will be an excellent reference to the target user analysis. The target users of the intended system are low-code developers. Since low-code development has advantages not only for not



Table 3.2: VQSs Summary

Feature \ System		Chartio Data Explorer	Chartio Visual SQL	Tableau Prep	Power BI Query Editor	Devart dbForge Query Builder
<b>Tables and Columns</b>	Only the required	✓	✓	✓	✗	✓
	All the attributes at once	✗	✗	✓	✓	✓
	Remove Columns	✓	✓	✓	✓	✓
<b>Merge</b>	Inner Join	✓	✓	✓	✓	✓
	Left Join	✓	✓	✓	✓	✓
	Right Join	✗	✓	✓	✓	✓
	Full Outer Join	✓	✓	✓	✓	✓
	Cross Join	✓	✓	Using Calculated Attributes	Using Calculated Attributes	Textually
	Null Option	✓	✓	✗	✓	✗
	Define Join Condition	✓	✓	✓	Selecting Columns Visually	Textually
<b>Filtering Criteria</b>		✓	✓	✓	✓	✓
<b>Sorting Criteria</b>		✓	✓	✓	✓	✓
<b>Aggregation Functions</b>		✓	✓	✓	✓	✓
<b>Unions</b>		✓	✓	✓	✓	✗
<b>Calculated Attributes</b>		✓	✓	✓	✓	✗
<b>Distinct</b>		✗	✗	✓	✓	✓
<b>Subqueries</b>		✗	✗	✗	✗	✓

programmers but to programmers with different levels of expertise, the target users of the system are wide. Thus, the studies that have evaluated a wide diversity of users, such as the evaluation of Lu *et al.* [14], could reveal important results to the work development. Moreover, the studies presented that have analyzed students of database systems [1], [27], could add more important data, since some details only occur if the queries formulated are more complex.

Finally, a set of actual graphical user interfaces used to formulate queries was presented and compared. The approaches used by other systems are a relevant object study for the design and the development of the new interface. Table 3.2 represents a summary of the database query operations supported by each one of the presented systems.



## DESIGN

As mentioned, the main goal of this dissertation is the development of an efficient and effective query formulation visual interface. Being the first phase of solution development, the design process is where all the existing relevant problems were combined and took into account in order to explore the first solution ideas. Firstly, this chapter describes the process used to structure the problems of the current visual interface. Secondly, it is included the user and task analysis performed in order to categorize the target users in accordance with their background, expectations, and necessities. Considering the problems registered and users' necessities, the testing scenarios and the testing methodology used to evaluate the current implementation and the solution prototypes are also described. Finally, the first sketching and prototyping stages are presented in this chapter, explaining the strategies adopted to improve the user experience of the visual query builder.

## 4.1 Problem Definition

The problem definition not only was the starting point for the design process but also has represented a source for the solution conception. As the actual visual interface has not been having the expected acceptability due to its interaction problems, these problems have an impactful role in the solution building process. In that way, multiple approaches were used to collect interaction problems, understanding for each of them what are the tasks involved, and the users harmed.

The following sections describe the strategies used to define the problem of the dissertation as completely as possible. The result of those analyses was combined in a table that characterizes each problem identified of the existing interface. This table is presented in [Taxonomy of Problems - Existing Interface](#) and describes all the problems identified. For

each problem, it was detailed the interface components involved and the Nielsen Heuristics [54] affected. Moreover, the issues were classified according to the artifact and task attributes of a Framework adapted from Usability-ODC Framework [11], as well as it was registered how many posts and likes have been related to the problem in the OutSystems Community [59].

Hereinafter, the approaches and strategies used to collect and organize data regarding the existing problems of the interface will be explained. As usability issues depend on interaction with users, it is important to analyze the problems in perspective, considering in each problem the impact on users and what type of users would be most affected.

#### 4.1.1 Analysis


The exploration and analysis of the query formulation interface was the first method used to comprehend the existing problems. The process started with the visualization of two OutSystems tutorials [55, 56] about visual data querying. The tutorial included also some hand-on explanations that provide an initial contextualization of the visual query builder and its functionalities. After that, other scenarios of query formulation were explored to comprehend the system barriers and difficulties.

As pointed out in 4.1, the lack of some advanced functionalities were observed during that exploration process. However, other problems that harm the user experience and principally the efficiency and effectiveness of the user task were identified.

First of all, some functionalities were hidden, which damage the learnability of the system due to the lack of the "Recognition rather than recall" principle of the Nielsen Heuristics [54]. Notwithstanding that learnability issues harm principally the novice users of all systems, there are peculiarities of this system and its environment that aggravate that problem. In that case, SQL is an alternative to perform the same tasks. Accordingly, if SQL users do not find the intended functionalities in the visual query builder due to its hiddenness, they could use SQL to perform their tasks, stopping to use the visual system.

The hidden functionalities are not only advanced features of query formulation. For instance, there is no visible option in the existing interface to add an aggregation function, such as Group By, SUM, MIN, MAX, AVERAGE, or COUNT. These options are accessible for an exclusive interaction path which requires a right-click on the column header of the attribute where the user intends to apply the aggregation function. Figure 4.1 illustrates an example of the application of an aggregation function. Other options are not always hidden but are not prepared to keep visible owing to some interface components modification. For example, despite the option to add calculated attributes is visible (after all columns of the query result table), if the query result has several columns it is necessary to scroll horizontally until the end to find that option.

Furthermore, the interface has not revealed as flexible, efficient, and effective for users that need to formulate queries for professional purposes since there was identified some

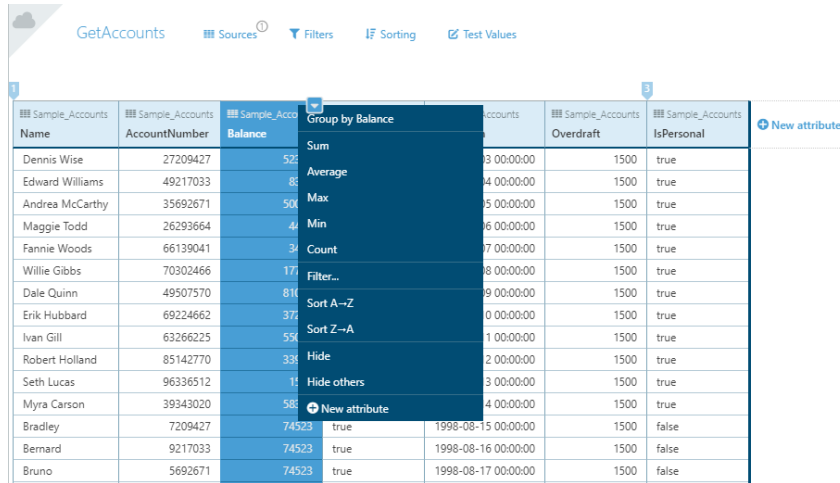

Sample_Accounts	Sample_Accounts	Sample_Accounts	Group by Balance	accounts	Sample_Accounts	Sample_Accounts	New attribute
Name	AccountNumber	Balance		Overdraft		IsPersonal	
Dennis Wise	27209427	52	Sum	3 00:00:00	1500	true	
Edward Williams	49217033	8	Average	4 00:00:00	1500	true	
Andrea McCarthy	35692671	50	Max	5 00:00:00	1500	true	
Maggie Todd	26293664	4	Min	6 00:00:00	1500	true	
Fannie Woods	66139041	3	Count	7 00:00:00	1500	true	
Willie Gibbs	70302466	17	Filter...	8 00:00:00	1500	true	
Dale Quinn	49507570	81	Sort A-Z	9 00:00:00	1500	true	
Erik Hubbard	69224662	37	Sort Z-A	0 00:00:00	1500	true	
Ivan Gill	63266225	59	Hide	1 00:00:00	1500	true	
Robert Holland	85142770	33	Hide others	2 00:00:00	1500	true	
Seth Lucas	96336512	1	New attribute	3 00:00:00	1500	true	
Myra Carson	39343020	58		4 00:00:00	1500	true	
Bradley	7209427	74523	true	1998-08-15 00:00:00	1500	false	
Bernard	9217033	74523	true	1998-08-16 00:00:00	1500	false	
Bruno	5692671	74523	true	1998-08-17 00:00:00	1500	false	

Figure 4.1: Hidden option to add an aggregation function, since it is enclosed in a right-click on the query result table column header.

obstacles that prevent users from accelerating their query formulation process and reduce the rate of queries' errors. Following, there are some examples of the aspects identified through the interface's analysis, that hinder the query formulation and query comprehension, breaking the most valued proposition of the data querying visual approach:

- Search engines: there is no option to efficiently search for an attribute either to look for some data in the query result or to apply some aggregation function (as illustrated in Figure 4.1). Moreover, there is no general search in all queries, which could be useful when users need to find if some entity or variable is present in the query.
- Hidden columns: in the existing interface, primary and foreign keys are automatically hidden in the query result table since they were not considered as relevant data for the query output. That strategy has been implemented since the start of the interface's implementation to provide a clear output for users without a technical background, considering that they could not understand the meaning of those attributes. However, those attributes are so relevant for the query that there is a possibility to make them visible. Nevertheless, there is no efficient way to expand all hidden columns, which could difficult significantly the comprehension and formulation of all queries do not have a reduced number of entities and attributes. Figure 4.2 illustrates how the hidden attributes are presented in the interface.
- Filter edition: In the existing interaction, the user can edit query filters using the expression editor modal, as demonstrated in Figure 4.3. This modal is useful because it provides some guidance in the expression formulation. Thereby, users, can select the intended language expressions or the entities, attributes, or variables that need without having to recall those names. However, if users do not need that assistance, this interaction strategy could be less efficient due to the time and visual context

wasted every time that a modal is opened. In that way, the modal is definitely a good feature but it should not be the only way to edit filters since it could increase the time spent to build queries. Moreover, there is no way to copy and past filter or to read effectively those content since there is no color highlighting in filters expressions.


- Accelerators feedback: this visual query interface has multiple accelerators that turn the query building process faster. Nevertheless, sometimes that automatic mechanisms are silent and users may not comprehend they were applied. For example, when two entities are added and have a relationship between them, the system automatically joins those entities. However, there is no highlight or other visual interaction mechanism that provides feedback to the user and shows him what action was applied.
- Inconsistency problems: some functionalities were accessible through a determined context and option but other alternative options do not have the same behavior;
- Multiple actions at once: sometimes it could be useful to do several actions at once in order to reduce the time spent to build the query. For instance, it should be possible to add multiple entities at once instead of adding one at a time;

Those are some problems identified before communicating with users to comprehend what are the problems that harm their usage of the system every day to perform their tasks. The list of all problems identified is presented in [Taxonomy of Problems - Existing Interface](#).

In a nutshell, the first analysis and exploration of the interface lead to conclude that the interface is useful for users without technical background and has implemented good strategies that could optimize the query formulation process even more than [SQL](#) if those strategies would be reconsidered and redesigned. Moreover, it was concluded that it is necessary to provide search engines and other accelerators to enhance the efficiency value proposition of the system. The value of the system increases if users could build queries in that system as fast as [SQL](#) or even more.

#### 4.1.2 User Interviews

After the analysis and study of the existing interface, there was a necessity to realize how are the usage of the visual query system for users. There was a demanding to comprehend what are the most impacting problems of the interface for users' tasks, what are the first users' reactions when asked about the utility of that interface, and if it could be applied, what are the reasons to use [SQL](#) instead of OutSystems' visual query builder. Asking that general questions to users was the technique used to understand what is their in-depth and sincere opinion about the system utility and its most impacting problems.

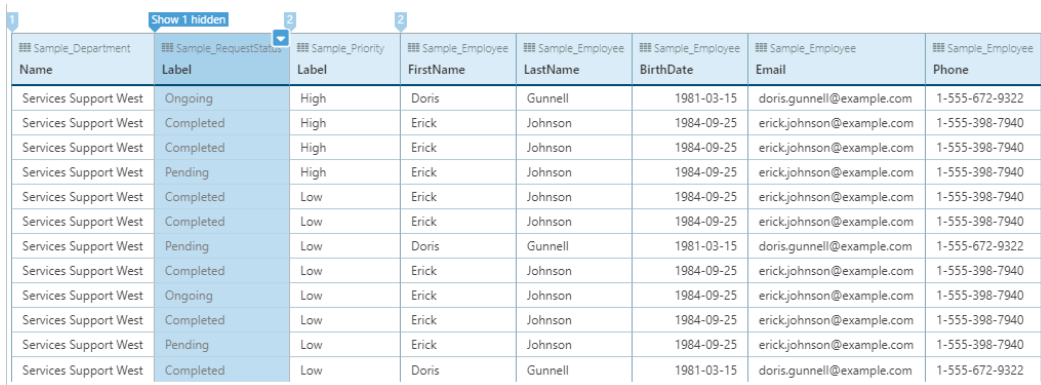

Sample_Department Name	Sample_RequestStatus Label	Sample_Priority Label	Sample_Employee FirstName	Sample_Employee LastName	Sample_Employee BirthDate	Sample_Employee Email	Sample_Employee Phone
Services Support West	Ongoing	High	Doris	Gunnell	1981-03-15	doris.gunnell@example.com	1-555-672-9322
Services Support West	Completed	High	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Completed	High	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Pending	High	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Completed	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Completed	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Pending	Low	Doris	Gunnell	1981-03-15	doris.gunnell@example.com	1-555-672-9322
Services Support West	Completed	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Ongoing	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Completed	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Pending	Low	Erick	Johnson	1984-09-25	erickjohnson@example.com	1-555-398-7940
Services Support West	Completed	Low	Doris	Gunnell	1981-03-15	doris.gunnell@example.com	1-555-672-9322

Figure 4.2: Hidden attributes - primary and foreign keys are hidden by default.

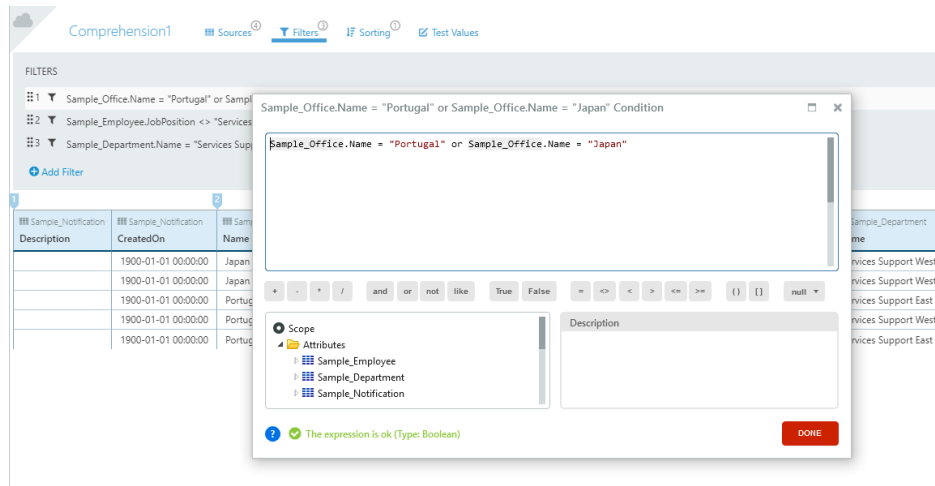


Figure 4.3: Filter edition modal - example of a filter edition after selection of the intended filter (the first one in that case).

Therefore, around ten user interviews were performed to explore the tool's limits and understand their impact on user actions. The interviews started with some brief questions to perceive the background of the participant. After that, more directed questions were asked in order to understand the users' opinions about the advantages and disadvantages of the visual query tool. Besides, it was asked in which situations users prefer to use **SQL** instead of the visual tool. Not only was registered the situations that lead users to resort on **SQL** alternative but also what are the main causes to stop using the visual query builder interface. Additionally, whenever possible, users were asked to demonstrate their problems using practical examples in order to completely understand the causes and the impact of the problems as well as other problems that have not already identified.

Furthermore, some questions about the lack of some advanced functionalities and some usability problems previously identified were prepared. The purpose of those questions is the comprehension of the user's opinion about those problems and how those problems have affected their tasks. However, it is important to understand if the user clearly identifies those problems by themselves or not. In that way, those questions only

were pointed after perceiving if users would refer something about that by themselves or not. Since if they do not refer to those problems by themselves before, it is an indication that those problems have not increasingly affected them.

The results revealed that the most novice users, with less than six months of experience, consider Aggregates simple to use and it covers their necessities, referring also that it is more simple to learn than [SQL](#). The most experienced users, who use the OutSystems platform to develop applications, every day, for professional purposes, and have a technological background, reported that in the visual tool they cannot have a global view of the query. Moreover, they referred they work with queries that contain several tables, attributes, and business rules, and for those cases, the interface does not provide sufficient access to all functionalities. Besides, switching between tabs in the interface to view the data sources, and the filtering and sorting criteria were other issues presented, as well as the lack of control on the query output<sup>1</sup>. Asked about the aggregation functions<sup>2</sup>, they do not refer any problem with the approach interaction strategy adopted, but they have one more time referred that is so difficult to find the intended column to apply a function due to the lack of a search or navigation functionality. Finally, other usability problems that decrease the users' satisfaction have been pointed out. such as the difficult to search something in all query or to copy and paste query components.

In conclusion, the results of this problem definition phase indicated that the interface is simple to use but could not be satisfactory for professional purpose tasks. In that way, it was pointed out the requirements to create an improved overview of the query where it is faster to comprehend what data the query is fetching as well as the implementation of interface accelerators to make the query editor powerful such as search engines and several access alternatives to the same functionality. Regardless of this, the user experience of the interface should keep simple in order to still easy to learn and easy to use for users without a superior technical background.

### 4.1.3 Data Analysis

Even though the analysis made and the first user interviews have indicated user experience problems of the interface as the factor that has been impacting the user acceptance of the visual query builder, a quantitative analysis was performed to perceive what are the operations most used by developers when they formulate queries textually. Thereby, the analysis was complemented with a metric study on queries executed on the OutSystems cloud, in order to find patterns that could justify users reasons to use [SQL](#) instead of Aggregates.

The queries analyzed, which have been extracted in July 2019 from customers' projects,

---

<sup>1</sup>As referred on section [2.2.2.2](#), when a user adds an entity to an Aggregate, all its attributes are added automatically and if the user hides them the output of the query does not change.

<sup>2</sup>Functionality added when Simple Queries have been replaced by Aggregates (Section [2.2.2.1](#))

Table 4.1: Queries that contain operations not supported by Aggregates

	IN	NOT IN	EXIST	NOT EXIST	UNIONS	DISTINCT	SUBQUERIES	Total
Queries	7538	2697	132	118	2385	7987	6827	67828
Percentage	11.11%	3.98%	0.19%	0.17%	3.52%	11.78%	10.07%	100%

were built using Advanced Queries<sup>3</sup>. The data set used is composed of 214.400 statements. However, only 60.8% were used in this study since only the queries are important for the results and not other SQL statements, such as inserts, updates, deletes, and transactions. Nevertheless, that set of 125.613 queries has duplicated results, so that these ones were removed resulting in a final data set of 67.828 queries. The operators and clauses were identified using a [SQL Parser](#) developed in JavaScript [47]. After obtaining the abstract syntax trees of the queries in a JSON file, that data was analyzed in a program to count the operators and the clauses that were present in the queries.

The first measured aimed to identify the percentage of [SQL](#) queries that contain operations not supported by the visual tool. Table 4.1 summarizes the number and the percentage of queries that contain these operations. It is important to refer that the intersection of the subsets is not null, so there are queries that have two or more of the indicated operations. Nevertheless, it can be observed that there was no operation that has a significant representation of the results. For example, the DISTINCT operation was the operation not supported by the visual tool with a superior percentage and it only was included in 11.78% of the queries analyzed.

Furthermore, it was measured how many queries are performed using the textual language but could be designed using the visual query builder. Table 4.2 shows the results obtained separating the queries performed in three categories:

- Not Supported: Queries which include operations not supported by Aggregates, such as IN, NOT IN, EXIST, NOT EXIST, Unions, Distincts and Subqueries;
- Supported by Aggregates: Queries that could be designed totally using Aggregates. These are divided into two subcategories:
  - Simpler: Queries which include only operations supported by aggregates excluding the indication of sorting criteria and the use of aggregation functions (e.g. GROUP BY or SUM, AVG, MIN, MAX, COUNT);
  - More Complex: Queries that are supported by Aggregates excluding the above (simplers).

Since user interviews suggested that aggregation functions and sorting criteria were not the main problems. The queries supported by Aggregates were divided to compare the quantitative analysis with the qualitative analysis extracted in interviews. This is

<sup>3</sup>The option of the OutSystems Platform, invoked in section 2.2.2.1, that allows the query design in a textual way using a language based on [SQL](#).



Table 4.2: Queries that could be designed using Aggregates and the queries which the tool does not support

	Not Supported	Supported (Simpler)	Supported (More Complex)	Total
Queries	28130	24026	15672	67828
Percentage	41.5%	35.4%	23.1%	100%

important because these operations can be specified using a different interaction technique where the user changes the query when he is interacting with the query result, as mentioned in section 2.2.2.2.

In the set of queries analyzed, around 58.5% could be designed using Aggregates, is evident that the lack of support of some SQL expressions might not be the main problem. Under the circumstances, the results were discussed together with the stakeholders. It was determined that the main problem was the usability of the system.

In conclusion, the results of the quantitative analysis have confirmed the assumptions pointed out after the analysis and exploration of the interface and the first user interviews. All the studies made have concluded that the main priority of the project should be the usability improvement of the visual querying tool interface. Thereby, there are metrics that sustain the conclusions made in the problem definition phase.

#### 4.1.4 Community Ideas

Since OutSystems has a wide a worldwide Community of developers and they can use the OutSystems Community Website [59] to express their problems or difficulties or even new contribution ideas for the product, it was thought that could be advantageous for the final solution if ideas and problems of community ideas would be taken into account. Accordingly, all 306 posts of category "Aggregates & Queries" were analyzed in order to extract useful information for the design phase of this dissertation.

First of all, it has been taken into account for each post if the topic is related to the lack of some functionalities or related to some problems in the interface. That approach leads to perceive that the predominance of the posts are about usability problems of the interface, whereas there are a reduce quantity of posts about functionalities not supported.

Therefore, the users' problems and suggestions regarding usability problems or enhancements of the interface were processed to transform that information as a relevant input to the next design phases. Despite all the problems and suggestions identified are detailed in [Taxonomy of Problems - Existing Interface](#), following there are some examples of the problems and suggestions indicated in the OutSystems Community:

- Search engines: users requested in multiple posts alternatives to search for an entity, attribute, or filter inside the query. Not only they refer that the readability in the interface is difficult since there is no color highlight in the text but also there is no possibility to search for the intended fields. Also, they refer that is extremely



important for their work since they need to build queries with a large set of entities, attributes, and conditions;

- **Filters Edition:** it was pointed out in several posts suggestions to improve interface in order to support filters comments with color highlighting, since they could be useful to explain the intention of the filter, or even the possibility to disable filters instead of deleting them.
- **Result Count:** there is no visible count of how many rows the query result has;
- **Accelerators and Utilities:** regarding this, it has been suggested different accelerators in order to accelerate and streamline the query formulation process as well as different ways to present the query structure since in the user's point of view the query readability provided with the existing interface should be improved.

In summary, beyond the necessity of new advanced functionalities, the developers on the OutSystems Community have indicated different situations where the interface turns out not to be as powerful as it could be, since there is a lack of utilities or accelerators that could assist users keeping his task on track.

#### 4.1.5 Current Implementation Evaluation

In order to analyze users' behavior while they are interacting with the visual query interface, it was prepared testing scenarios used to evaluate usability attributes of the interface.<sup>4</sup> The main purpose of this evaluation is the analysis of the current effectiveness, efficiency, and learnability of the system to compare them, on the final of this dissertation, with those of the proposed solution.

Nevertheless, during the tests, users have mentioned other details of the interface that could be a useful input for the next design iterations. In that way, that feedback was also taken into account and registered as all the other issues identified. Thereby, [Taxonomy of Problems - Existing Interface](#) includes also all problems or possible enhancements identified during the user testing process of the existing visual query interface.

## 4.2 User and Task Analysis

After obtaining a detailed and wide view of the existing problems, the following step was the exploration of how those problems can be solved. As the main goal is the development of an improved interface that gives to the users a solution to manage data queries efficiently, and effectively through intuitive interaction strategies, users are a crucial factor that must be taken into account throughout the entire solution development. Each user has his peculiarities, then the user experience of the solution should be adapted as much as possible to the target users of the query formulation system.

---

<sup>4</sup>This evaluation process is described in sections [4.2.2](#) and [4.2.3](#).

Considering that users will only use the visual query system if they use the OutSystems Platform, that low-code development context where the query system is inserted cannot be dissociated from the user analysis. Thereby, the user analysis process started by a study to categorize the profile of OutSystems Platform users according to the specifics of the data querying domain.

Since the low-code development paradigm has integrated more people who do not have the strict software engineer profile into software development tasks, the users of the OutSystems Platform do not have the same backgrounds, requirements, and expectations. If, on the one hand, there are OutSystems Developers that have Computer Science academic backgrounds or similar, and experience working with low-level programming language, on the other hand, there are business experts or specialized in other engineering fields that are also developing in OutSystems. In that way, the provided query building experience should be a hybrid approach that covers the traditional software developers demands without turning the development and the language intuitive for people that are not familiarized with classical development patterns, terminologies, or processes.

As the set of users that may use the visual query system is so broad and heterogeneous, it was necessary to analyze and register the aspects of the user profile which could branch out their needs and expectations in different directions. In this sense, the following three points of the users' background were considered the ones that could accurately cluster the users' expectations and demands, considering the usage context of the interface, which combines software development, low-code development, and relational databases querying domains:

**Software Development Background:** The previous knowledge and experiences of users in the software development scope can lead significantly to their expectations while they are interacting with a graphical user interface. Being the object of study an interface that allows users to formulate queries, the factor mentioned becomes even more relevant. In software development, most users often associate database querying to languages that are considered a standard to perform those tasks, such as SQL. In that way, most users end up unconsciously relating the visual query building process to the languages they are familiar with. Therefore, if the visual query interface will be used by users that are familiar with technical languages, it is important to not forget to apply a language that could invoke similar principles and reasonings.

**OutSystems Development Experience:** The user experience on low-code development, in particular using the OutSystems Platform, has also an impact on how the user will experience the visual data querying tool, even if the user does not build queries regularly through the Platform. As a complete solution for low-code development, the Service Studio has a consistent design across its sections. Consequently, a user familiarized with the Platform could have more facility to find options and understand interface language than a user that is using the Platform for the first time, since there are multiple design patterns and built-in behaviors across all the product.

Nevertheless, users who have considerable experience using the existing solution of OutSystems to build queries could be highly adapted to the existing design. Therefore, this fact should be taken into account throughout the solution design process in order to realize how modifications could impact regular users of the systems. Even knowing that frequent users could be skeptical of changes, it is necessary to properly assess whether the changes only require adaptation or if users could reject them. Therefore, it is important to improve the user experience of the existing interface without removing all its most representative features, in order to keep its singularity.

**Data Tools Expertise:** Besides textual [DQLs](#), other tools allow users to manage and visualize data through graphical user interfaces. For instance, spreadsheet applications such as Microsoft Excel [48] and Google Sheets [45] presents an intuitive interface where users can manage, organize, and edit data. Using these interfaces, users do not need to know how relational databases work since data is presented in tables that could be manipulated directly under simple controls. For this reason, the language used in those systems is frequently less technical, in such a way that is important to consider that these users are expecting direct manipulation of data and simple language to query and manage data.

#### 4.2.1 User Groups

Being the relational database knowledge a crucial point to frame users' mental model of query formulation, it is important to split up the users who perceive relational databases to the other ones. On the other hand, low-code programming experience can affect how users interact with a visual programming system, thus it is important to study users with experience in low-code development through a different perspective. Considering the aspects mentioned, three user groups were created in order to cluster users that have similar profiles. Thereby, each user could integrate one of the following groups according to their characteristics:

#### 4.2.2 Testing Scenarios

#### 4.2.3 Evaluation Technique

### 4.3 Sketching and Prototyping

#### 4.3.1 Sketching

#### 4.3.2 Paper Prototype

##### 4.3.2.1 Design

##### 4.3.2.2 Implementation

##### 4.3.2.3 Evaluation

Table 4.3: User Groups

Software Developer	Software Developer or Engineer who has a solid previous knowledge of programming and databases. These users are familiarized with textual programming languages, such as C#, SQL, and others. In that way, they cannot abstract their previous knowledge in such a way that communication with these users should be more technical and specific. Finally, this user group is not an expert in low-code development. However, as they have solid programming, logic, and database knowledge, they could develop some applications using low-code if necessary.
OutSystems Developer	Independently of their background, these users are experienced in OutSystems. That way, they are proficient and faster in low-code development, regardless of their experience in other traditional software development paradigms. This is your principal characteristic that should be taken into account.
Citizen Developer	Users who do not have an extensive programming or software development background. Even though they are not software developers, they could develop some simple apps using low-code due to its simplicity. As some of these users may not know how relational databases work, they may use other applications, such as Microsoft Excel, Google Sheets, Salesforce, and others to manage data.

CHAPTER

5

## IMPLEMENTATION



CHAPTER



## EVALUATION





CHAPTER



## CONCLUSIONS



## BIBLIOGRAPHY

- [1] A. Ahadi, J. Prior, V. Behbood, and R. Lister. “Students’ Semantic Mistakes in Writing Seven Different Types of SQL Queries.” In: *Proceedings of the 2016 ACM Conference on Innovation and Technology in Computer Science Education*. ITiCSE ’16. Arequipa, Peru: Association for Computing Machinery, 2016, 272–277. ISBN: 9781450342315. DOI: [10.1145/2899415.2899464](https://doi.org/10.1145/2899415.2899464). URL: <https://doi.org/10.1145/2899415.2899464>.
- [2] A. Alshamrani and A. Bahattab. “A comparison between three SDLC models waterfall model, spiral model, and Incremental/Iterative model.” In: *International Journal of Computer Science Issues (IJCSI)* 12.1 (2015), p. 106.
- [3] T. CATARCI, M. F. COSTABILE, S. LEVIALDI, and C. BATINI. “Visual Query Systems for Databases.” In: *J. Vis. Lang. Comput.* 8.2 (Apr. 1997), 215–260. ISSN: 1045-926X. DOI: [10.1006/jvlc.1997.0037](https://doi.org/10.1006/jvlc.1997.0037). URL: <https://doi.org/10.1006/jvlc.1997.0037>.
- [4] T. Catarci and G. Santucci. “Diagrammatic Vs Textual Query Languages: A Comparative Experiment.” In: *Visual Database Systems 3: Visual information management*. Ed. by S. Spaccapietra and R. Jain. Boston, MA: Springer US, 1995, pp. 69–83. ISBN: 978-0-387-34905-3. DOI: [10.1007/978-0-387-34905-3\\_5](https://doi.org/10.1007/978-0-387-34905-3_5). URL: [https://doi.org/10.1007/978-0-387-34905-3\\_5](https://doi.org/10.1007/978-0-387-34905-3_5).
- [5] D. D. Chamberlin and R. F. Boyce. “SEQUEL: A Structured English Query Language.” In: *Proceedings of the 1974 ACM SIGFIDET (Now SIGMOD) Workshop on Data Description, Access and Control*. SIGFIDET ’74. Ann Arbor, Michigan: Association for Computing Machinery, 1974, 249–264. ISBN: 9781450374156. DOI: [10.1145/800296.811515](https://doi.org/10.1145/800296.811515). URL: <https://doi.org/10.1145/800296.811515>.
- [6] H. Chan, H. Teo, and X. Zeng. “An evaluation of novice end-user computing performance: Data modeling, query writing, and comprehension.” In: *Journal of the American Society for Information Science and Technology* 56.8 (2005), pp. 843–853. DOI: [10.1002/asi.20178](https://doi.org/10.1002/asi.20178). eprint: <https://asistdl.onlinelibrary.wiley.com/doi/pdf/10.1002/asi.20178>. URL: <https://asistdl.onlinelibrary.wiley.com/doi/abs/10.1002/asi.20178>.

- [7] H. Desurvire, J. Kondziela, and M. E. Atwood. "What is Gained and Lost When Using Methods Other than Empirical Testing." In: *Posters and Short Talks of the 1992 SIGCHI Conference on Human Factors in Computing Systems*. CHI '92. Monterey, California: Association for Computing Machinery, 1992, 125–126. ISBN: 9781450378048. DOI: [10.1145/1125021.1125115](https://doi.org/10.1145/1125021.1125115). URL: <https://doi.org/10.1145/1125021.1125115>.
- [8] A. Dillon and C. Watson. *User analysis in HCI: the historical lesson from individual differences research*. 1996. URL: <http://hdl.handle.net/10150/105824>.
- [9] A. Dix, A. J. Dix, J. Finlay, G. D. Abowd, and R. Beale. *Human-computer interaction*. Pearson Education, 2003. ISBN: 978-0-13-046109-4.
- [10] J. Gehrke and R. Ramakrishnan. *Database management systems*. McGraw-Hill, 2003.
- [11] R. Geng, M. Chen, and J. Tian. "In-process Usability Problem Classification, Analysis and Improvement." In: *2014 14th International Conference on Quality Software*. 2014, pp. 240–245.
- [12] H. Henriques, H. Lourenço, V. Amaral, and M. Goulão. "Improving the Developer Experience with a Low-Code Process Modelling Language." In: *Proceedings of the 21th ACM/IEEE International Conference on Model Driven Engineering Languages and Systems*. MODELS '18. Copenhagen, Denmark: Association for Computing Machinery, 2018, 200–210. ISBN: 9781450349499. DOI: [10.1145/3239372.3239387](https://doi.org/10.1145/3239372.3239387). URL: <https://doi.org/10.1145/3239372.3239387>.
- [13] P. Jennifer, R. Yvonne, and S. Helen. "Interaction design: beyond human-computer interaction." In: NY: Wiley (2002).
- [14] H. Lu, H. C. Chan, and K. K. Wei. "A Survey on Usage of SQL." In: *SIGMOD Rec.* 22.4 (Dec. 1993), 60–65. ISSN: 0163-5808. DOI: [10.1145/166635.166656](https://doi.org/10.1145/166635.166656). URL: <https://doi.org/10.1145/166635.166656>.
- [15] J. V. M.A. "I. On the diagrammatic and mechanical representation of propositions and reasonings." In: *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science* 10.59 (1880), pp. 1–18. DOI: [10.1080/14786448008626877](https://doi.org/10.1080/14786448008626877). eprint: <https://doi.org/10.1080/14786448008626877>. URL: <https://doi.org/10.1080/14786448008626877>.
- [16] J. Nielsen. "Iterative user-interface design." In: *Computer* 26.11 (1993), pp. 32–41. ISSN: 1558-0814. DOI: [10.1109/2.241424](https://doi.org/10.1109/2.241424).
- [17] J. Nielsen. *Usability Engineering*. San Francisco, CA, USA: Morgan Kaufmann Publishers Inc., 1993. ISBN: 0-12-518406-9.

- 
- [18] J. Nielsen and R. Molich. "Heuristic Evaluation of User Interfaces." In: *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. CHI '90. Seattle, Washington, USA: Association for Computing Machinery, 1990, 249–256. ISBN: 0201509326. DOI: [10.1145/97243.97281](https://doi.org/10.1145/97243.97281). URL: <https://doi.org/10.1145/97243.97281>.
- [19] W. C. Ogden. "IMPLICATIONS OF A COGNITIVE MODEL OF DATABASE QUERY: COMPARISON OF A NATURAL LANGUAGE, FORMAL LANGUAGE AND DIRECT MANIPULATION INTERFACE." In: *SIGCHI Bull.* 18.2 (Oct. 1986), 51–54. ISSN: 0736-6906. DOI: [10.1145/15683.1044078](https://doi.org/10.1145/15683.1044078). URL: <https://doi.org/10.1145/15683.1044078>.
- [20] OutSystems. *OutByNumbers - Benchmark Overview Repor.* Tech. rep. 2013.
- [21] P. G. Polson, C. Lewis, J. Rieman, and C. Wharton. "Cognitive walkthroughs: a method for theory-based evaluation of user interfaces." In: *International Journal of Man-Machine Studies* 36.5 (1992), pp. 741–773. ISSN: 0020-7373. DOI: [https://doi.org/10.1016/0020-7373\(92\)90039-N](https://doi.org/10.1016/0020-7373(92)90039-N). URL: <http://www.sciencedirect.com/science/article/pii/002073739290039N>.
- [22] P. Reisner. "Human Factors Studies of Database Query Languages: A Survey and Assessment." In: *ACM Comput. Surv.* 13.1 (Mar. 1981), 13–31. ISSN: 0360-0300. DOI: [10.1145/356835.356837](https://doi.org/10.1145/356835.356837). URL: <https://doi.org/10.1145/356835.356837>.
- [23] D. A. Robb, P. L. Bowen, A. F. Borthick, and F. H. Rohde. "Improving New Users' Query Performance: Deterring Premature Stopping of Query Revision with Information for Forming Ex Ante Expectations." In: *J. Data and Information Quality* 3.4 (Sept. 2012). ISSN: 1936-1955. DOI: [10.1145/2348828.2348829](https://doi.org/10.1145/2348828.2348829). URL: <https://doi.org/10.1145/2348828.2348829>.
- [24] K. L. Siau, Hock Chuan Chan, and Kwok Kee Wei. "Effects of query complexity and learning on novice user query performance with conceptual and logical database interfaces." In: *IEEE Transactions on Systems, Man, and Cybernetics - Part A: Systems and Humans* 34.2 (2004), pp. 276–281. ISSN: 1558-2426. DOI: [10.1109/TSMCA.2003.820581](https://doi.org/10.1109/TSMCA.2003.820581).
- [25] J. B. Smelcer. "User errors in database query composition." In: *International Journal of Human-Computer Studies* 42.4 (1995), pp. 353–381. ISSN: 1071-5819. DOI: <https://doi.org/10.1006/ijhc.1995.1017>. URL: <http://www.sciencedirect.com/science/article/pii/S1071581985710178>.
- [26] C. Stephanidis. "User interfaces for all: New perspectives into human-computer interaction." In: *User Interfaces for All-Concepts, Methods, and Tools* 1 (2001), pp. 3–17.
- [27] T. Taipalus, M. Siponen, and T. Vartiainen. "Errors and Complications in SQL Query Formulation." In: *ACM Trans. Comput. Educ.* 18.3 (Aug. 2018). DOI: [10.1145/3231712](https://doi.org/10.1145/3231712). URL: <https://doi.org/10.1145/3231712>.

## BIBLIOGRAPHY

---

- [28] M. Unsöld. “Measuring Learnability in Human-Computer Interaction.” Master’s thesis. 2018.

## WEBOGRAPHY

- [29] C. Alchin, J. Martin, J. Allenby, and T. Prowse. 2019: *Week 9 Solution*. URL: <https://preppindata.blogspot.com/2019/04/2019-week-9-solution.html> (visited on 02/19/2020).
- [30] Balsamiq. *Balsamiq*. URL: <https://balsamiq.com/> (visited on 01/29/2020).
- [31] Chartio. *Advanced Sorting*. URL: <https://chartio.com/help/data-pipeline/advanced-sorting/> (visited on 02/10/2020).
- [32] Chartio. *Chartio*. URL: <https://chartio.com/> (visited on 02/07/2020).
- [33] Chartio. *Chartio Data Explorer | Documentation*. URL: <https://chartio.com/docs/data-explorer/> (visited on 02/07/2020).
- [34] Chartio. *Chartio FAQs: Joining Data Across Databases*. URL: <https://chartio.com/docs/visual-sql/actions/> (visited on 02/10/2020).
- [35] Chartio. *Chartio Visual SQL (beta) | Documentation*. URL: <https://chartio.com/docs/visual-sql/> (visited on 02/07/2020).
- [36] Chartio. *Data Pipeline Steps*. URL: <https://chartio.com/docs/data-pipeline/basic/steps/> (visited on 02/10/2020).
- [37] Chartio. *Visual SQL Actions | Chartio Documentation*. URL: <https://chartio.com/docs/visual-sql/actions/> (visited on 02/10/2020).
- [38] Devart. *Building WHERE or HAVING Clause*. URL: <https://docs.devart.com/querybuilder-for-sql-server/building-queries-with-query-builder/building-where-and-having-clause.html> (visited on 02/10/2020).
- [39] Devart. *Grouping Data In Grid*. URL: <https://docs.devart.com/querybuilder-for-sql-server/working-with-data-in-data-editor/grouping-data-in-grid.html> (visited on 02/10/2020).
- [40] Devart. *Making Joins Between Tables*. URL: <https://docs.devart.com/querybuilder-for-sql-server/building-queries-with-query-builder/making-joins-between-tables.html> (visited on 02/10/2020).
- [41] Devart. *Query Builder Tool in dbForge Studio for SQL Server*. URL: <https://www.devart.com/dbforge/sql/studio/query-builder.html> (visited on 02/07/2020).

- [42] Devart. *Sorting Data*. URL: <https://docs.devart.com/querybuilder-for-sql-server/working-with-data-in-data-editor/sorting-data-in-grid.html> (visited on 02/10/2020).
- [43] Devart. *Subqueries in From Clauses*. URL: <https://docs.devart.com/querybuilder-for-sql-server/building-queries-with-query-builder/subqueries-other-clauses.html> (visited on 02/10/2020).
- [44] Devart. *Subqueries Overview*. URL: <https://docs.devart.com/querybuilder-for-sql-server/building-queries-with-query-builder/subqueries-overview.html> (visited on 02/10/2020).
- [45] Google. *Google Sheets*. URL: <https://www.google.com/sheets/about/> (visited on 02/05/2020).
- [46] ISO. *ISO 9241-11:2018(en) Ergonomics of human-system interaction — Part 11: Usability: Definitions and concepts*. 2018. URL: <https://www.iso.org/obp/ui/#iso:std:iso:9241:-11:ed-2:v1:en> (visited on 01/27/2020).
- [47] JavaScriptor. *js-SQL-parser*. URL: <https://github.com/JavaScriptor/js-SQL-parser> (visited on 02/10/2020).
- [48] Microsoft. *Microsoft Excel*. URL: <https://products.office.com/en/excel> (visited on 02/05/2020).
- [49] Microsoft. *Microsoft Power BI*. URL: <https://powerbi.microsoft.com/en-us/> (visited on 02/07/2020).
- [50] Microsoft. *Perform common query tasks in Power BI Desktop*. URL: <https://docs.microsoft.com/en-us/power-bi/desktop-common-query-tasks#group-rows> (visited on 02/10/2020).
- [51] Microsoft. *Tutorial: Shape and combine data in Power BI Desktop*. URL: <https://docs.microsoft.com/en-us/power-bi/desktop-shape-and-combine-data> (visited on 02/07/2020).
- [53] Mockingbird. *Mockingbird*. URL: <https://gomockingbird.com/home> (visited on 01/29/2020).
- [54] J. Nielsen. *10 Usability Heuristics for User Interface Design*. 1994. URL: <https://www.nngroup.com/articles/ten-usability-heuristics/> (visited on 05/05/2020).
- [55] OutSystems. *Advanced Aggregates Course - Training - OutSystems*. URL: <https://www.outsystems.com/learn/courses/132/advanced-aggregates/?LearningPathId=18> (visited on 10/30/2019).
- [56] OutSystems. *Aggregates 101 Course - Training - OutSystems*. URL: <https://www.outsystems.com/learn/courses/126/aggregates-101/?LearningPathId=18> (visited on 10/28/2019).



- 
- [57] OutSystems. *Evaluation Guide (Developing with OutSystems)*. URL: <https://www.outsystems.com/evaluation-guide/developing-with-outsystems/> (visited on 02/01/2020).
- [58] OutSystems. *Low-Code Development Platform for Enterprise Applications*. URL: <https://www.outsystems.com/platform/> (visited on 01/31/2020).
- [59] OutSystems. *OutSystems Community*. URL: <https://www.outsystems.com/community/> (visited on 05/06/2020).
- [60] OutSystems. *Service Studio Overview - OutSystems 11 Documentation*. URL: [https://success.outsystems.com/Documentation/11/Getting\\_Started/Service\\_Studio\\_Overview](https://success.outsystems.com/Documentation/11/Getting_Started/Service_Studio_Overview) (visited on 02/02/2020).
- [61] OutSystems. *What's new in OutSystems Hub Edition 2.0*. 2003. URL: <https://drive.google.com/file/d/1wkKESumKhJbwK6aoeW2DGU4-TMq-snOp/view> (visited on 02/03/2020).
- [62] OutSystems. *What's new in OutSystems Hub Edition 2.2*. 2004. URL: [https://drive.google.com/file/d/0B7C37RyL27\\_oNHf4UmFRX3pFM1pMTV1CWnV5dzJCcmhRS2tj/view](https://drive.google.com/file/d/0B7C37RyL27_oNHf4UmFRX3pFM1pMTV1CWnV5dzJCcmhRS2tj/view) (visited on 02/03/2020).
- [63] OutSystems. *Agile Platform What's New in Version 5.0*. 2009. URL: <https://www.outsystems.com/home/document-download/542/31/0/0> (visited on 02/03/2020).
- [65] M. Revell. *What Is Low-Code?* 2020. URL: <https://www.outsystems.com/blog/what-is-low-code.html> (visited on 01/24/2020).
- [66] T. Simões. *What's (Not) New in OutSystems: A Product Timeline*. 2018. URL: <https://www.outsystems.com/blog/posts/not-new-product-timeline/> (visited on 02/03/2020).
- [67] C. Souther. *Low-Code vs. No-Code: What's the Real Difference*. 2019. URL: <https://www.outsystems.com/blog/posts/low-code-vs-no-code/> (visited on 01/25/2020).
- [68] Tableau. *Add More Data in the Input Step - Tableau*. URL: [https://help.tableau.com/current/prep/en-us/prep\\_add\\_input\\_data.htm](https://help.tableau.com/current/prep/en-us/prep_add_input_data.htm) (visited on 02/10/2020).
- [69] Tableau. *Aggregate, Join, or Union Data - Tableau*. URL: [https://help.tableau.com/current/prep/en-us/prep\\_combine.htm](https://help.tableau.com/current/prep/en-us/prep_combine.htm) (visited on 02/10/2020).
- [70] Tableau. *Create a Simple Calculated Field*. URL: [https://help.tableau.com/current/pro/desktop/en-us/calculations\\_calculatedfields\\_formulas.htm](https://help.tableau.com/current/pro/desktop/en-us/calculations_calculatedfields_formulas.htm) (visited on 02/10/2020).
- [71] Tableau. *Filter Your Data - Tableau*. URL: [https://help.tableau.com/current/prep/en-us/prep\\_filter.htm](https://help.tableau.com/current/prep/en-us/prep_filter.htm) (visited on 02/10/2020).

## WEBOGRAPHY

---

- [72] Tableau. *Sorting Data*. URL: [https://help.tableau.com/current/reader/desktop/en-us/reader\\_sort.htm](https://help.tableau.com/current/reader/desktop/en-us/reader_sort.htm) (visited on 02/10/2020).
- [73] Tableau. *Tableau Prep*. URL: <https://www.tableau.com/products/prep> (visited on 02/07/2020).
- [74] Tableau. *What's New in Tableau Prep Builder*. URL: [https://help.tableau.com/current/prep/en-us/prep\\_whatsnew.htm](https://help.tableau.com/current/prep/en-us/prep_whatsnew.htm) (visited on 02/07/2020).



## TAXONOMY OF PROBLEMS - EXISTING INTERFACE

The visual interface to formulate queries that was implemented before this dissertation had several usability problems which led users to prefer to use other [DQLs](#) such as SQL. In order to comprehend the existing problems of the visual interface or the characteristics that hamper users to extract advantages of that visual approach to query databases, there were performed the following studies:

- **Study and Analysis:** This was the first approach used to explore the existing problems of the interface. The process started with the visualization of two OutSystems tutorials [55, 56] about visual data querying. This was the first experience using the interface and there were pointed out some problems. As this was the first experience the were found principally issues regarding hidden operations and behaviors that were not clear for users who didn't use to the platform. After that tutorials, there has been made some more explorations using practical examples where there were found other problems related to efficiency and effectiveness of use;
- **User Interviews:** There were performed some dialogues with a reduced set of novice and expert users to comprehend what are the main issues pointed out. In the case of expert users, the causes to use SQL instead of the Visual Interface were registered as well as a set of other [UX](#) issues. Regarding users who did not have relevant experience either in SQL or OutSystems, it was registered the functionalities more difficult to learn or understand;
- **Community Ideas:** Since OutSystems contains a wide and worldwide Community where users could contribute with suggestions or express their problems or difficulties, all the ideas of the category "Aggregates and Queries" were explored to understand the problems presented. Moreover, the number of likes of each post was registered in order to know what are the problems which had more user reactions;

- **User Testing:** During the user tests of the existing implementation, there were pointed out some issues by users. Also, other problems were found through the interpretation of user-interface interaction.

Furthermore, each issue registered was characterized according to the Nielsen Heuristics [54] and the artifact and task attributes of a Framework adapted from Usability-ODC Framework [11]. Besides, for each issue it was checked if the action most hampered is the query formulation or the query comprehension as well as what are the interface components affected between the ones presented below:

- Actions and Nodes (Method/Function where the Visual Query was added)
- General Layout (The arrangement of the main interface components on the main window)
- Sources
- Joins
- Filters
- Sorting
- Aggregation Functions
- Calculated Attributes
- Static Entities
- Query Result Table
- Test Values

In that way, it is simple to categorize and prioritize the problems detected. Besides, as mentioned above, if the problem were referred in the OutSystems Community, there were included the respecting posts and their number of likes. Table X represents the result of all problems detected and categorized under the parameters mentioned:

Table A.1: Taxonomy of Aggregates' Problems - Existing Interface (Last community posts update: May 06, 2020)

Taxonomy of Aggregates' Problems		
ID	Issue	Description
1	Entity misadded (automatic joins deletion)	When the user adds an entity that trigger automatically a new join, if this entity is removed, the entity could also be removed.
Figured Out	Community Ideas	
Interface Components Related	Sources and Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of Information/Results	
Task Category	Task-facilitation	
Task Subcategory	User Error Tolerance	
Nielsen Heuristics	User Control and Freedom	
Community Posts		
Post		Likes
Changes to behaviour of adding Entities to an Aggregate <sup>1</sup>		25
2	Select multiple sources at once	There are some use cases where this is already possible. However, it should be possible in any use case where the user can add multiple entities.
Figured Out	Study and Analysis, User Interviews, Community Ideas, and User Testing	
Interface Components Related	Sources	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Continued on next page		

<sup>1</sup><https://www.outsystems.com/ideas/2890/changes-to-behaviour-of-adding-entities-to-an-aggregate>

## APPENDIX A. TAXONOMY OF PROBLEMS - EXISTING INTERFACE

Continuation of Table A.1		
ID	Issue	Description
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use, and Consistency and standards	
Community Posts		
Post		Likes
Changes to behaviour of adding Entities to an Aggregate <sup>2</sup>		25
Allow multiple entity selection on first screen of new aggregate <sup>3</sup>		6
Replace data with multiple entities <sup>4</sup>		1
3	Add the same entity more than once	Allow drag/dropping the same entity more than once (It's possible using Select Source pop-up but it's not possible using Drag and Drop.
Figured Out	Study and Analysis, and Community Ideas	
Interface Components Related	Sources	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use, and User control and freedom	
Community Posts		
Post		Likes
Changes to behaviour of adding Entities to an Aggregate <sup>5</sup>		25
Continued on next page		

<sup>2</sup><https://www.outsystems.com/ideas/2890/changes-to-behaviour-of-adding-entities-to-an-aggregate>
<sup>3</sup><https://www.outsystems.com/ideas/5417/allow-multiple-entity-selection-on-first-screen-of-new-aggregate>
<sup>4</sup><https://www.outsystems.com/ideas/7568/replace-data-with-multiple-entities>
<sup>5</sup><https://www.outsystems.com/ideas/2890/changes-to-behaviour-of-adding-entities-to-an-aggregate>

Continuation of Table A.1		
ID	Issue	Description
4	Add automatically a static entity even if it is not mandatory	“It’s very annoying that every time I drag to an aggregate an entity with a foreign key to a static entity (SE) - even if it’s not mandatory - that static entity is dragged along with it.”
Figured Out	Community Ideas	
Interface Components Related	Sources, and Static Entities	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-facilitation	
Task Subcategory	Task/function automation	
Nielsen Heuristics	Consistency and standards	
Community Posts		
Changes to behaviour of adding Entities to an Aggregate <sup>6</sup>		25
5	Join tables with more than one identifier of the same table (other table)	When an entity has several identifiers of same other entity, do the join like currently but with a warning or ask which field to do the join.
Figured Out	Study and Analysis, Community Ideas, and User Testing	
Interface Components Related	Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	No-message feedback	
Continued on next page		

<sup>6</sup><https://www.outsystems.com/ideas/2890/changes-to-behaviour-of-adding-entities-to-an-aggregate>

Continuation of Table A.1		
ID	Issue	Description
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	User control and freedom, and Visibility of System Status	
Community Posts		
Post		Likes
Changes to behaviour of adding Entities to an Aggregate <sup>7</sup>		25
Join tables with more than one identifier of same other table <sup>8</sup>		5
6	Move multiple aggregate columns at the same time	Actually it is possible to reorder one column. Extend this behavior.
Figured Out	Community Ideas, and User Testing	
Interface Components Related	Query Result Table	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Move multiple aggregate columns at the same time <sup>9</sup>		5
7	Search and focus for particular columns of the query result	There should be an intuitive solution to navigate through the query result columns. That solution should include search fields and vertical scroll lists to improve the user navigation and control.
Continued on next page		

<sup>7</sup><https://www.outsystems.com/ideas/2890/changes-to-behaviour-of-adding-entities-to-an-aggregate>

<sup>8</sup><https://www.outsystems.com/ideas/2885/aggregate-join-tables-with-more-than-one-identifier-of-same-other-table>

<sup>9</sup><https://www.outsystems.com/ideas/6590/move-multiple-aggregate-columns-at-the-same-time>



Continuation of Table A.1		
ID	Issue	Description
Figured Out	Study Analysis, User Interviews, Community Ideas, and User Testing	
Interface Components Related	Sources and Query Result Table	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-mapping	
Task Subcategory	Navigation	
Nielsen Heuristics	Flexibility and efficiency of use, and Visibility of System Status	
Community Posts		
Post	Likes	
Improve Aggregates to allow entity/attribute filtering <sup>10</sup>	18	
Aggregates improvement - Visual Filters <sup>11</sup>	32	
Ability to search attributes in aggregates while grouping <sup>12</sup>	5	
Search columns in Aggregate <sup>13</sup>	0	
Focus Aggregate Column <sup>14</sup>	2	
Aggregate Group By Tab <sup>15</sup>	19	
8	Expand hidden columns.	
Figured Out	Analysis and Study, User Interviews, Community Ideas, and User Testing	
Interface Components Related	Query Result Table	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Continued on next page		

<sup>10</sup><https://www.outsystems.com/ideas/5720/service-studio-improve-aggregates-to-allow-entity-attribute-filtering>

<sup>11</sup><https://www.outsystems.com/ideas/5955/aggregates-improvement-visual-filters>

<sup>12</sup><https://www.outsystems.com/ideas/5904/ability-to-search-attributes-in-aggregates-while-grouping>

<sup>13</sup><https://www.outsystems.com/ideas/6826/search-columns-in-aggregate>

<sup>14</sup><https://www.outsystems.com/ideas/6537/focus-aggregate-column>

<sup>15</sup><https://www.outsystems.com/ideas/7322/aggregate-group-by-tab>

Continuation of Table A.1		
ID	Issue	Description
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use, and Consistency and standards	
Community Posts		
Post		Likes
Expand hidden columns <sup>16</sup>		8
9	Hide multiple columns with right-click	Actually users can use table of query results to hidden some columns. In addition, they can right-click in an attribute column and select hide. However, if they select multiple columns and right-click in one of them, only one will be selected.
Figured Out	Analysis and Study, Community Ideas, and User Testing	
Interface Components Related	Query Result Table	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Interaction	
Nielsen Heuristics	Consistency and standards	
Community Posts		
Post		Likes
Ability to select multiple columns in an aggregate for hiding them <sup>17</sup>		1
10	If an attribute is lengthy the user cannot see the entry.	
Figured Out	Community Ideas	
Continued on next page		

<sup>16</sup><https://www.outsystems.com/ideas/5054/aggregate-expand-hidden-columns>

<sup>17</sup><https://www.outsystems.com/ideas/7102/ability-to-select-multiple-columns-in-an-aggregate-for-hiding-th>

Continuation of Table A.1		
ID	Issue	Description
<b>Interface Components Related</b>	Query Result Table	
<b>Main Action Hampered</b>	Query Comprehension	
<b>Usability-ODC Framework Attributes</b>		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-mapping	
Task Subcategory	Interaction	
<b>Nielsen Heuristics</b>	User control and freedom, and Visibility of System Status	
<b>Community Posts</b>		
Post		Likes
Adjust the columnsize in aggregates query data result <sup>18</sup>		2
Improve cell options for aggregate tables <sup>19</sup>		5
<b>11</b>	<b>Search and navigate between values</b>	<b>Actually users can only select columns. They cannot select rows or cells.</b>
<b>Figured Out</b>	Community Ideas	
<b>Interface Components Related</b>	Query Result Table	
<b>Main Action Hampered</b>	Query Comprehension	
<b>Usability-ODC Framework Attributes</b>		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-mapping	
Task Subcategory	Functionality	
<b>Nielsen Heuristics</b>	Flexibility and efficiency of use	
<b>Community Posts</b>		
Post		Likes
Position cursor on desired field within an aggregate <sup>20</sup>		1
Improve cell options for aggregate tables <sup>21</sup>		5
Continued on next page		

<sup>18</sup><https://www.outsystems.com/ideas/7027/adjust-the-columnsize-in-aggregates-query-data-result>

<sup>19</sup><https://www.outsystems.com/ideas/6009/service-studio-improve-cell-options-for-aggregate-tables>

<sup>20</sup><https://www.outsystems.com/ideas/7290/position-cursor-on-desired-field-within-an-aggregate>

<sup>21</sup><https://www.outsystems.com/ideas/6009/service-studio-improve-cell-options-for-aggregate-tables>

Continuation of Table A.1		
ID	Issue	Description
	Copy a value from the Aggregate preview data <sup>22</sup>	27
	In an aggregate you can't copy (Ctrl-C) values <sup>23</sup>	3
12	It's not possible to see all the results (disable remaining results).	
Figured Out	Community Ideas	
Interface Components Related	Query Result Table	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Visibility of System Status, and Match between system and the real world	
Community Posts		
Post	Likes	
In aggregates I should have an option to see all results in DEV mode <sup>24</sup>	18	
Don't always truncate aggregate results <sup>25</sup>	1	
Ability to switch off 'remaining results truncated' <sup>26</sup>	2	
13	Provide more shortcuts.	
Figured Out	Community Ideas	
Interface Components Related	General Layout, Sources, Joins, Filters, Sorting, Aggregation Functions, Calculated Attributes, Query Result Table, and Test Values	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Continued on next page		

<sup>22</sup><https://www.outsystems.com/ideas/2828/copy-a-value-from-the-aggregate-preview-data>

<sup>23</sup><https://www.outsystems.com/ideas/7015/in-an-aggregate-you-cant-copy-ctrl-c-values>

<sup>24</sup><https://www.outsystems.com/ideas/3052/in-aggregates-i-should-have-an-option-to-see-all-results-in-dev->

<sup>25</sup><https://www.outsystems.com/ideas/8097/dont-always-truncate-aggregate-results>

<sup>26</sup><https://www.outsystems.com/ideas/6824/ability-to-switch-off-remaining-results-truncated>

Continuation of Table A.1		
ID	Issue	Description
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Aggregate Editor - Shortcut Keys - Move Column Left and Right <sup>27</sup>		5
14	Present number of results (rows) of the query result.	
Figured Out	User Interviews and Community Tests	
Interface Components Related	Query Result Tables	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Visibility of System Status	
Community Posts		
Post		Likes
Record count in Aggregates <sup>28</sup>		7
Display number of rows returned for an aggregate <sup>29</sup>		2
15	Invert members of join operation	As we only have left join (with or without) it would be interesting one button that changes the entity in the left side of the join with the one that is in the right side.
Figured Out	Community Ideas and User Testing	
Interface Components Related	Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Continued on next page		

<sup>27</sup><https://www.outsystems.com/ideas/3322/aggregate-editor-shortcut-keys-move-column-left-and-right>

<sup>28</sup><https://www.outsystems.com/ideas/1780/record-count-in-aggregates>

<sup>29</sup><https://www.outsystems.com/ideas/6825/display-number-of-rows-returned-for-an-aggregate>

Continuation of Table A.1		
ID	Issue	Description
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Aggregate: swap join entities <sup>30</sup>		9
16	Improve joins readability	Change the visual representation of joins, because could be difficult to users to understand what are the tables joined in the query, principally if there is some nesting.
Figured Out	Community Ideas and User Testing	
Interface Components Related	Joins	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object appearance	
Task Category	Task-mapping	
Task Subcategory	Interaction	
Nielsen Heuristics	Visibility of System Status	
Community Posts		
Post		Likes
Aggregates: make them smarter (nested joins) <sup>31</sup>		14
Continued on next page		

<sup>30</sup><https://www.outsystems.com/ideas/1870/aggregate-swap-join-entities>

<sup>31</sup><https://www.outsystems.com/ideas/1846/aggregates-make-them-smarter-nested-joins>

Continuation of Table A.1		
ID	Issue	Description
17	Delete last joins automatically added if a user want to remove last entity added	When an entity is added, the system analyzes the relationships with other tables. In some cases the system put automatically other entities related with the added. But if the user removes the entity that he had added, the joins automatically added, remain in the aggregate.
Figured Out	Community Ideas	
Interface Components Related	Sources and Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object appearance	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Consistency and standards, and Match between system and the real world	
Community Posts		
Post		Likes
Delete joins automatically when we delete an entity <sup>32</sup>		22
18	Copy and past filters	Could be more efficient to user, to generate a similar filter.
Figured Out	Community Ideas and User Testing	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Continued on next page		

<sup>32</sup><https://www.outsystems.com/ideas/8104/aggregates-delete-joins-automatically-when-we-delete-an-entity>

## APPENDIX A. TAXONOMY OF PROBLEMS - EXISTING INTERFACE

Continuation of Table A.1		
ID	Issue	Description
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use, and Consistency and standards	
Community Posts		
Post		Likes
Ability to copy and paste Filters in Aggregates (including in bulk) <sup>33</sup>		2
19	Copy and past joins	Could be more efficient to user, to generate a similar join.
Figured Out	Analysis and Study	
Interface Components Related	Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use, and Consistency and standards	
20	Comments in Filters	Improve the highlighting of comments. It doesn't matter if the comments will be showed separated or if the comments would have a different color. Just examples...
Figured Out	Community Ideas	
Interface Components Related	Filters	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Continued on next page		

<sup>33</sup><https://www.outsystems.com/ideas/6627/ability-to-copy-and-paste-filters-in-aggregates-including-in-bulk>



Continuation of Table A.1		
ID	Issue	Description
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Match between system and the real world	
Community Posts		
Post		Likes
Comments and Activate/Deactivate on Aggregates (Filters, Joins) <sup>34</sup>		13
Comments on aggregate filter <sup>35</sup>		6
Comments inside Aggregates <sup>36</sup>		7
21	Disable filters	Option to disable filter's effect.
Figured Out	Community Ideas	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation and Query COmprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	User control and freedom	
Community Posts		
Post		Likes
Comments and Activate/Deactivate on Aggregates (Filters, Joins) <sup>37</sup>		13
Aggregate Filter option <sup>38</sup>		9
Temporarily disable aggregate Filters <sup>39</sup>		2
Allow to disable (not remove) aggregate filters <sup>40</sup>		5
Continued on next page		

<sup>34</sup><https://www.outsystems.com/ideas/2058/comments-and-activate-deactivate-on-aggregates-filters-joins>

<sup>35</sup><https://www.outsystems.com/ideas/7664/comments-on-aggregate-filter>

<sup>36</sup><https://www.outsystems.com/ideas/2891/comments-inside-aggregates>

<sup>37</sup><https://www.outsystems.com/ideas/2058/comments-and-activate-deactivate-on-aggregates-filters-joins>

<sup>38</sup><https://www.outsystems.com/ideas/1765/aggregate-filter-option>

<sup>39</sup><https://www.outsystems.com/ideas/7170/temporarily-disable-aggregate-filters>

<sup>40</sup><https://www.outsystems.com/ideas/7565/allow-to-disable-not-remove-aggregate-filters>

Continuation of Table A.1		
ID	Issue	Description
22	Turn filter edition more accessible	Change aggregate filter without opening aggregate.
Figured Out	Community Ideas	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Change Aggregate filter without opening Aggregate <sup>41</sup>		23
23	Change filter without necessity to open the modal of expression editor	Turn the insertion and edition process more faster.
Figured Out	Analysis and Study	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Direct Manipulation	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
24	Increase the readability of filters (text highlighting) without open expression editor modal.	
Figured Out	Analysis and Study	
Interface Components Related	Filters	
Main Action Hampered	Query Comprehension	
Continued on next page		

<sup>41</sup><https://www.outsystems.com/ideas/3309/change-aggregate-filter-without-opening-aggregate>

Continuation of Table A.1		
ID	Issue	Description
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Match between system and the real world	
25	Remove aggregate filter if rule is empty.	
Figured Out	Analysis and Study, Community Ideas, and User Testing	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-facilitation	
Task Subcategory	Task/function automation	
Nielsen Heuristics	Consistency and standards	
Community Posts		
Post		Likes
Remove Aggregate filter if rule is empty <sup>42</sup>		10
26	Bin button to delete filter is not visible.	
Figured Out	Community Ideas	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Screen layout	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	User control and freedom, and Recognition rather than recall	
Community Posts		
Post		Likes
Continued on next page		

<sup>42</sup><https://www.outsystems.com/ideas/5056/remove-aggregate-filter-if-rule-is-empty>

Continuation of Table A.1		
ID	Issue	Description
	Don't make me scroll to delete filters <sup>43</sup>	8
	Move delete filter button to be near the actual filter in an aggregate <sup>44</sup>	3
27	Group by attributes' names are not perceptive	For example if two different entities have attributes called "Name" and a user group by this two attributes, they will be presented as "Name1" and "Name2". Moreover, there is not any reference to attribute's entity.
Figured Out		Analysis and Study, Community Ideas, and User Testing
Interface Components Related		Aggregation Functions
Main Action Hampered		Query Comprehension
Usability-ODC Framework Attributes		
Artifact Category		Language
Artifact Subcategory		Nameling/labeling
Task Category		Task-mapping
Task Subcategory		Interaction
Nielsen Heuristics		Visibility of system status, and Error prevention
Community Posts		
Post		Likes
	Set attribute name when 'Group by Id' to Entity-NameId <sup>45</sup>	4
28	View area of group bys.	There is no list view with all aggregated attributes, in order to improve the efficiency of query comprehension.
Continued on next page		

<sup>43</sup><https://www.outsystems.com/ideas/5686/dont-make-me-scroll-to-delete-filters>

<sup>44</sup><https://www.outsystems.com/ideas/7145/move-delete-filter-button-to-be-near-the-actual-filter-in-an-aggregate>

<sup>45</sup><https://www.outsystems.com/ideas/6456/set-attribute-name-when-group-by-id-to-entitynameid>

Continuation of Table A.1		
ID	Issue	Description
Figured Out	Analysis and Study, Community Ideas, and User Testing	
Interface Components Related	Aggregation Functions	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-mapping	
Task Subcategory	Navigation	
Nielsen Heuristics	Visibility of system status	
Community Posts		
Post		Likes
Aggregate Group By Tab <sup>46</sup>		19
29	When the user clicks in "add attribute"(calculated attribute), set the cursor automatically to value	This is useful to turns the process of adding faster, reducing the user's effort, increasing the pleasant of use.
Figured Out	Analysis and Study, and Community Ideas	
Interface Components Related	Calculated Attributes	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Consistency and standards, and Recognition rather than recall	
Community Posts		
Post		Likes
Set cursor to 'value' after adding new attribute to an aggregate <sup>47</sup>		1
Continued on next page		

<sup>46</sup><https://www.outsystems.com/ideas/7322/aggregate-group-by-tab>

<sup>47</sup><https://www.outsystems.com/ideas/7528/set-cursor-to-value-after-adding-new-attribute-to-an-aggregate>

Continuation of Table A.1		
ID	Issue	Description
30	Inconsistent data formats between filters and test values	"The test values for Aggregate filters requires YYYY-MM-DD, but data in the results is displayed as MM/DD/YYYY. If you enter MM/DD/YYYY into the test values, you get an error."
Figured Out	Community Ideas	
Interface Components Related	Filters	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Language	
Artifact Subcategory	Nameling/labeling	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Consistency and standards	
Community Posts		
Post	Likes	
Allow date entry into test values in same format as results are displayed <sup>48</sup>		4
31	Inconsistent of sorting between aggregate properties and aggregate popup on action.	
Figured Out	Community Ideas	
Interface Components Related	Actions and Nodes	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Consistency and standards, and Flexibility and efficiency of use	
Continued on next page		

<sup>48</sup><https://www.outsystems.com/ideas/4985/allow-date-entry-into-test-values-in-same-format-as-results-are->

Continuation of Table A.1		
ID	Issue	Description
Community Posts		
Post		Likes
Consistency between Aggregate properties and popup info balloon when hovering <sup>49</sup>		10
32	Aggregates' Search engine.	General query search box.
Figured Out	Analysis and Study, and Community Ideas	
Interface Components Related	General Layout, Sources, Joins, Filters, Sorting, Aggregation Functions, Calculated Attributes, and Query Result Table	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use, and Recognition rather than recall	
Community Posts		
Post		Likes
Aggregate - Highlight/Find Usage by Source <sup>50</sup>		4
33	Freeze formulation areas while scroll horizontal in query result table.	
Figured Out	Analysis and Study, User Interviews, and Community Ideas	
Interface Components Related	General Layout	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Screen layout	
Task Category	Task-mapping	
Task Subcategory	Navigation	
Nielsen Heuristics	Visibility of system status	
Continued on next page		

<sup>49</sup><https://www.outsystems.com/ideas/5740/consistency-between-aggregate-properties-and-popup-info-balloon-v>

<sup>50</sup><https://www.outsystems.com/ideas/3412/aggregate-highlight-find-usage-by-source>

Continuation of Table A.1		
ID	Issue	Description
Community Posts		
Post		Likes
Freeze Sources, Filters, Sorting and Test Values in AG-GREGATE <sup>51</sup>		10
34	Duplicate tables.	
Figured Out	Community Ideas	
Interface Components Related	Sources	
Main Action Hampered	Query Formulaltion	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Aggregates: Duplicate Tables / Joins <sup>52</sup>		1
35	Duplicate joins.	
Figured Out	Community Ideas	
Interface Components Related	Joins	
Main Action Hampered	Query Formulaltion	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Aggregates: Duplicate Tables / Joins <sup>53</sup>		1
36	Duplicate filters.	
Figured Out	Analysis and Study	
Continued on next page		

<sup>51</sup><https://www.outsystems.com/ideas/5935/freeze-sources-filters-sorting-and-test-values-in-aggregate>

<sup>52</sup><https://www.outsystems.com/ideas/7582/aggregates-duplicate-tables-joins>

<sup>53</sup><https://www.outsystems.com/ideas/7582/aggregates-duplicate-tables-joins>



Continuation of Table A.1		
ID	Issue	Description
<b>Interface Components Related</b>	Filters	
<b>Main Action Hampered</b>	Query Formualtion	
<b>Usability-ODC Framework Attributes</b>		
Artifact Category	Manipulation	
Artifact Subcategory	Keyboard press	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
<b>Nielsen Heuristics</b>	Flexibility and efficiency of use	
Aggregates: Duplicate Tables / Joins <sup>54</sup>		1
37	<b>Distinct function</b>	<b>Without extending aggregates' expressiveness is the "Group by of all columns of the result".</b>
<b>Figured Out</b>	Analysis and Study, and Community Ideas	
<b>Interface Components Related</b>	Query Result Table	
<b>Main Action Hampered</b>	Query Formulation	
<b>Usability-ODC Framework Attributes</b>		
Artifact Category	Language	
Artifact Subcategory	Nameling/labeling	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
<b>Nielsen Heuristics</b>	Consistency and standards, and Match between system and the real world	
<b>Community Posts</b>		
Post		Likes
Aggregate with Distinct <sup>55</sup>		107
38	<b>Count Distinct function</b>	<b>Expressiveness problem (distinct in all could be "replaced"by group bys, but COUNT DISTINCT cannot be reached using group bys).</b>
Continued on next page		

<sup>54</sup><https://www.outsystems.com/ideas/7582/aggregates-duplicate-tables-joins>

<sup>55</sup>[https://www.outsystems.com/ideas/Idea\\_View.aspx?IdeaID=2179&IdeaName=aggregate-with-distinct&utm\\_source=community&utm\\_medium=email&utm\\_campaign=idea-comment](https://www.outsystems.com/ideas/Idea_View.aspx?IdeaID=2179&IdeaName=aggregate-with-distinct&utm_source=community&utm_medium=email&utm_campaign=idea-comment)

Continuation of Table A.1		
ID	Issue	Description
Figured Out	Community Ideas	
Interface Components Related	Aggregation Function, and Query Result Table	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use	
Community Posts		
Post		Likes
Aggregate: Count Distinct <sup>56</sup>		13
39	Drag and drop input parameters to automatically create filters into Aggregates.	
Figured Out	Community Ideas	
Interface Components Related	Actions and Nodes, and Filters	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object movement	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
40	Button to clear all the test values inserted	It could be a good resource if users have many values inserted and they want to clear all. It could be very annoying if they need to clear one at a time.
Figured Out	Analysis and Study	
Interface Components Related	Test Values	
Continued on next page		

<sup>56</sup><https://www.outsystems.com/ideas/1889/aggregate-count-distinct>

Continuation of Table A.1		
ID	Issue	Description
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Flexibility and efficiency of use	
41	Add variable into aggregate puts again the entity already inserted	When dragging a variable of type identifier (e.g. CompanyID) the entity Company is added even if it was added before. The only thing that it should add is the filter (if there isn't one already).
Figured Out	Analysis and Study	
Interface Components Related	Actions and Nodes, and Sources	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object movement	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	User control and freedom	
42	Query comprehension at a glance	To comprehend what data the query will retrieve (query structure) the user need to switch between tabs.
Figured Out	Analysis and Study, and User Interviews	
Interface Components Related	General Layout	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Continued on next page		

## APPENDIX A. TAXONOMY OF PROBLEMS - EXISTING INTERFACE

Continuation of Table A.1		
ID	Issue	Description
Artifact Category	Representation	
Artifact Subcategory	Screen layout	
Task Category	Task-mapping	
Task Subcategory	Navigation	
Nielsen Heuristics	Visibility of system status	
43	"Hide others" bug in group by	When someone clicks on “hide others” above an aggregation column, there is no visible effect (gray columns stay visible).
Figured Out	Analysis and Study	
Interface Components Related	Aggregation Functions, and Query Result Table	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use	
44	Highlight new additions (feedback)	Highlight elements added in last interaction. For example sources, joins, group bys sorts, etc...
Figured Out	Analysis and Study	
Interface Components Related	Sources, Joins, Filters, Sorting, Aggregation Functions, Calculated Attributes, Static Entities, and Query Result Table	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	No-message feedback	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Visibility of system status	
Continued on next page		

Continuation of Table A.1		
ID	Issue	Description
45	Turn visible query formulation options	Some query formulation options like aggregation functions or calculated attributes are only visible if the user uses accelerators like right-click on columns. As well as possible, try to show these options without pain simplicity of interface. Improve "Recognition, not recall"without harm "Aesthetic and minimalist design".
Figured Out	Analysis and Study, and User Testing	
Interface Components Related	General Layout	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object appearance	
Task Category	Task-facilitation	
Task Subcategory	Alternatives	
Nielsen Heuristics	Recognition rather than recall	
46	It's not possible to remove more than one aggregated attribute at the same time.	
Figured Out	Analysis and Study, and User Testing	
Interface Components Related	Aggregation Functions, Calculated Attributes, and Query Result Table	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use, and Consistency and standards	
Continued on next page		

Continuation of Table A.1		
ID	Issue	Description
47	It's not possible to change aggregation functions	To change an aggregation function (e.g. count, max, etc.) is necessary to remove the attribute and to add again.
Figured Out	Analysis and Study, and User Testing	
Interface Components Related	Aggregation Functions, and Query Result Table	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Flexibility and efficiency of use	
48	Add another join of two tables that are already merged.	When for example already exists a join between A and B with foreign key Key1 and we need to add another join between A and B but with the foreign key Key2, the interface should add automatically the entities twice (e.g., A2 join B using Key2).
Figured Out	User Testing	
Interface Components Related	Sources and Joins	
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Task/function automation	
Nielsen Heuristics	Error prevention, and Match between system and the real world	
Continued on next page		

Continuation of Table A.1		
ID	Issue	Description
49	The users don't know that exist hidden attributes	If the users don't have experience using the platform they don't know that some attributes are hidden.
Figured Out	User Testing	
Interface Components Related	Query Result Table	
Main Action Hampered	Query Formulation and Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Object appearance	
Task Category	Task-facilitation	
Task Subcategory	User error tolerance	
Nielsen Heuristics	Visibility of system status, and Match between system and the real world	
50	Function symbol of aggregated attributes isn't clickable.	
Figured Out	User Testing	
Interface Components Related	Aggregation Functions, and Query Result Table	
Main Action Hampered	Query Comprehension	
Usability-ODC Framework Attributes		
Artifact Category	Manipulation	
Artifact Subcategory	Mouse click	
Task Category	Task-facilitation	
Task Subcategory	Keeping the user task on track	
Nielsen Heuristics	Consistency and standards, and Visibility of system status	
51	No visual identifier to show that is a filter edition option	Reported by a user in an User Test.
Figured Out	User Testing	
Interface Components Related	Filters	
Continued on next page		

Continuation of Table A.1		
ID	Issue	Description
Main Action Hampered	Query Formulation	
Usability-ODC Framework Attributes		
Artifact Category	Representation	
Artifact Subcategory	Presentation of information/results	
Task Category	Task-mapping	
Task Subcategory	Functionality	
Nielsen Heuristics	Visibility of system status	
End of Table A.1		