

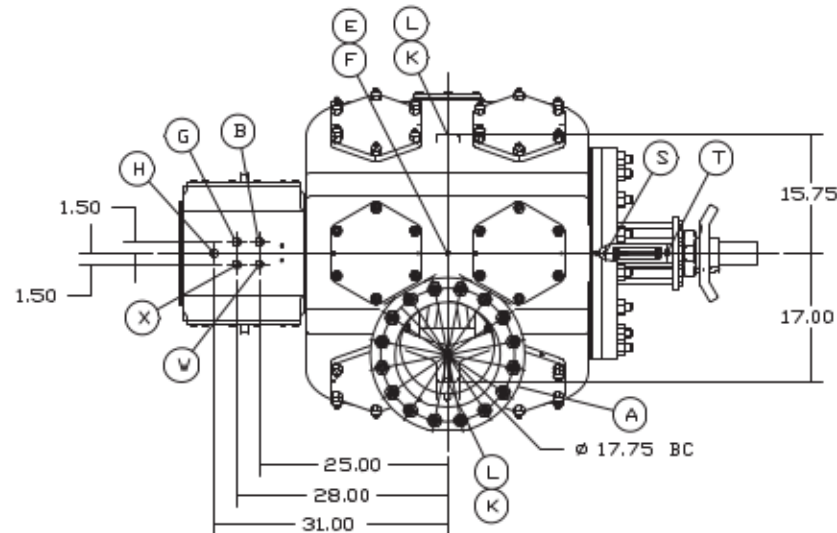


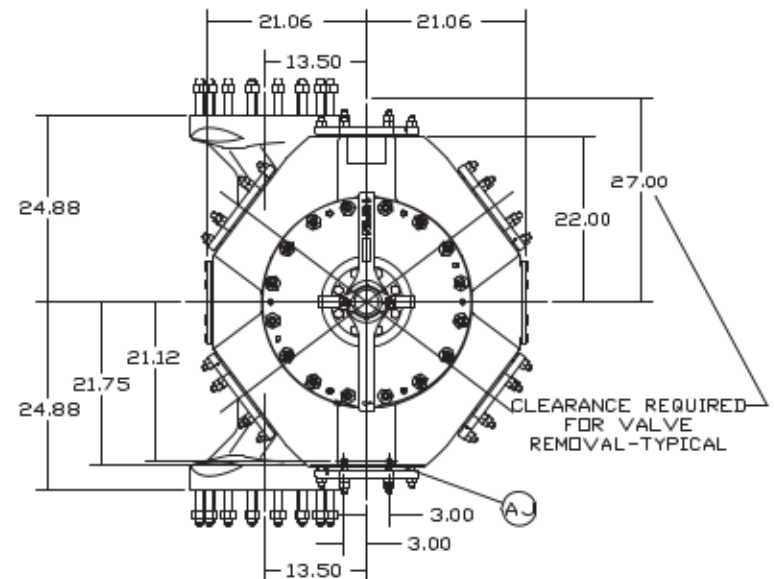

- REVISIONS
- | ZONE | REV | DESCRIPTION | DATE | APPROVED |
|------|-----|---|------|------------|
| A) | | 12.00"-300# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM | | |
| | | 16-1.125-8UN-3A STUDS ON 17.750 DIA B.C. 20.50 FLANGE DIA | | |
| B) | | .25 NPT -- PACKING LUBE CONN ----- | | TOP |
| C) | | .25 NPT -- PACKING VENT/DRAIN CONN ----- | | BOTTOM |
| D) | | .75 NPT -- YOKE DRAIN CONN ----- | | BOTTOM |
| E) | | .25 NPT -- CYL BORE LUBE CONN ----- | | TOP |
| F) | | .25 NPT -- CYL BORE LUBE CONN ----- | | BOTTOM |
| G) | | .75 NPT -- YOKE VENT/PURGE CONN ----- | | TOP |
| H) | | .38 NPT -- PACKING COOLANT OUT CONN ----- | | TOP |
| J) | | .38 NPT -- PACKING COOLANT IN CONN ----- | | BOTTOM |
| K) | | .75 NPT -- CYL COOLANT INLET CONN ----- | | BOTTOM |
| L) | | .75 NPT -- CYL COOLANT DISCH CONN ----- | | TOP |
| N) | | .75 NPT -- SPARE CONN ----- | | BOTTOM |
| S) | | .12 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA ----- | | TOP |
| T) | | .12 NPT -- GREASE FITTING ----- | | TOP |
| W) | | .25 NPT -- SCRAPER PURGE CONN (IF REQUIRED) ----- | | TOP |
| X) | | .25 NPT -- PACKING PURGE CONN (IF REQUIRED) ----- | | TOP |
| AD) | | .50 NPT -- OUTER END INDICATOR CONN ----- | | BOTH SIDES |
| AE) | | .50 NPT -- FRAME END INDICATOR CONN ----- | | BOTH SIDES |
| AJ) | | .750-10UNC-3B THD CYLINDER SUPPORT ----- | | BOTTOM |
| AP) | | .625-11UNC-3B YOKE SUPPORT ----- | | BOTTOM |
| BB) | | .75 NPT -- RTD CONN (IF REQUIRED) ----- | | BOTTOM |

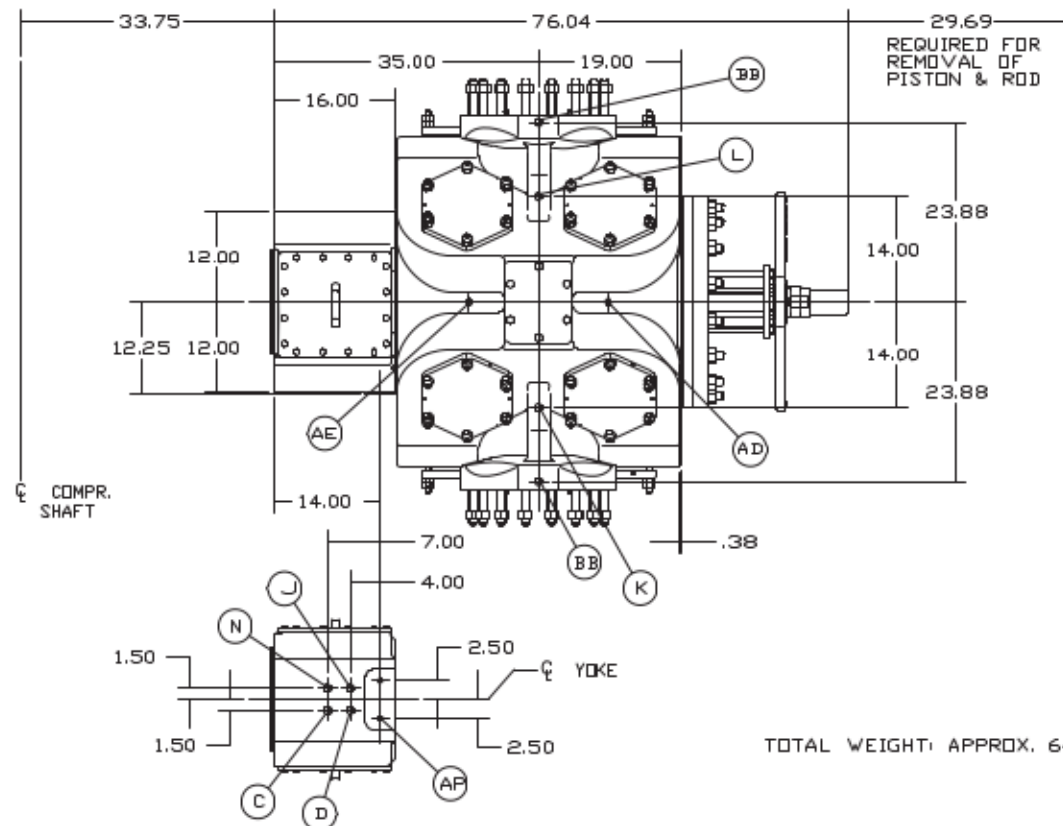

CHG TO: 72 124 149

THIRD ANGLE PROJECTION		SIZE	STROKE	TYPE
DRAWN	DATE	23.00	ALL	HOSS
K.DAVISON	26 JUN 09	NAME OF PART		
CHECKED	DATE	OUTLINE - 23.00" CYLINDER		
B.BENNETT	26 JUN 09	SIZE	FEDERAL SUPPLY CODE	DWG NO.
APPROVED	DATE	C	---	HIHQ2372
B.BENNETT	26 JUN 09	SCALE 1:12	WT. ---	REV. 00
UG PART				SHEET 1 OF 1

DWG NO. HIHQ2372 SH 1

30 JUN 09 11:51 AM