


4

3

2


1

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
			APPROVED

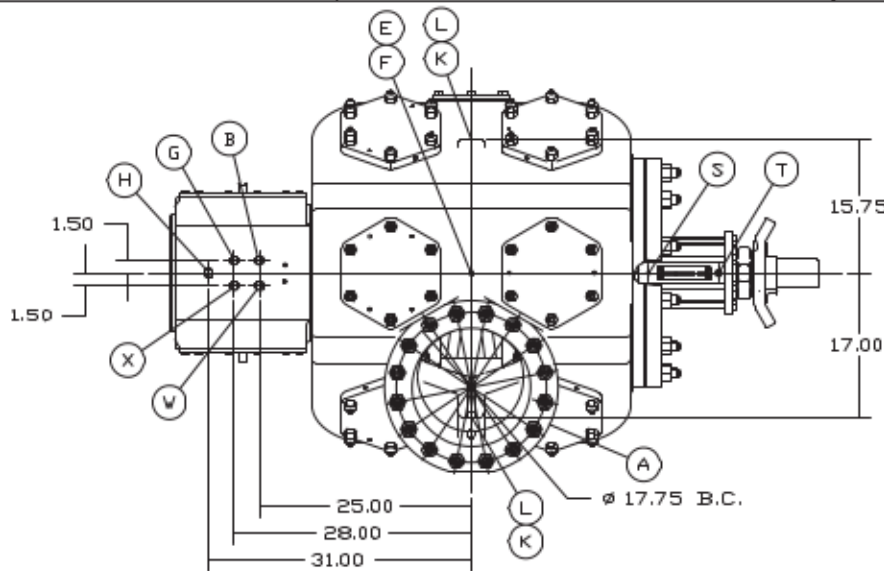


- A) 12.00"-300# FF FLANGE CONN-INLET TOP & DISCH BOTTOM
16-1.125 BOLTS ON 17.750 DIA B.C. 20.50 FLANGE DIA
- B) .25 NPT --- PACKING LUBE CONN --- TOP
C) .25 NPT --- PACKING VENT/DRAIN CONN --- BOTTOM
D) .75 NPT --- YOKE DRAIN CONN --- BOTTOM
E) .25 NPT --- CYL BORE LUBE CONN --- TOP
F) .25 NPT --- CYL BORE LUBE CONN --- BOTTOM
G) .75 NPT --- YOKE VENT/PURGE CONN (IF REQUIRED) --- TOP
H) .38 NPT --- PACKING COOLANT OUT CONN (IF REQUIRED) --- TOP
J) .38 NPT --- PACKING COOLANT IN CONN (IF REQUIRED) --- BOTTOM
K) .75 NPT --- CYL COOLANT INLET CONN (IF REQUIRED) --- BOTTOM
L) .75 NPT --- CYL COOLANT DISCH CONN (IF REQUIRED) --- TOP
N) .75 NPT --- SPARE CONN --- BOTTOM
S) .125 NPT --- VVCP ROD PKG VENT TO NON-HAZ AREA --- TOP
T) .125 NPT --- GREASE FITTING --- TOP
W) .25 NPT --- SCRAPER PURGE CONN (IF REQUIRED) --- TOP
X) .25 NPT --- PACKING PURGE CONN (IF REQUIRED) --- TOP
AD) .50 NPT --- OUTER END INDICATOR CONN --- SIDE
AE) .50 NPT --- FRAME END INDICATOR CONN --- SIDE
AJ) .750-10UNC-3B THD, CYLINDER SUPPORT --- BOTTOM
AP) .625-11UNC-3B THD, YOKE SUPPORT --- BOTTOM
BB) .75 NPT --- RTD CONN. (IF REQUIRED)


CLEARANCE REQUIRED
FOR VALVE
REMOVAL-TYPICAL

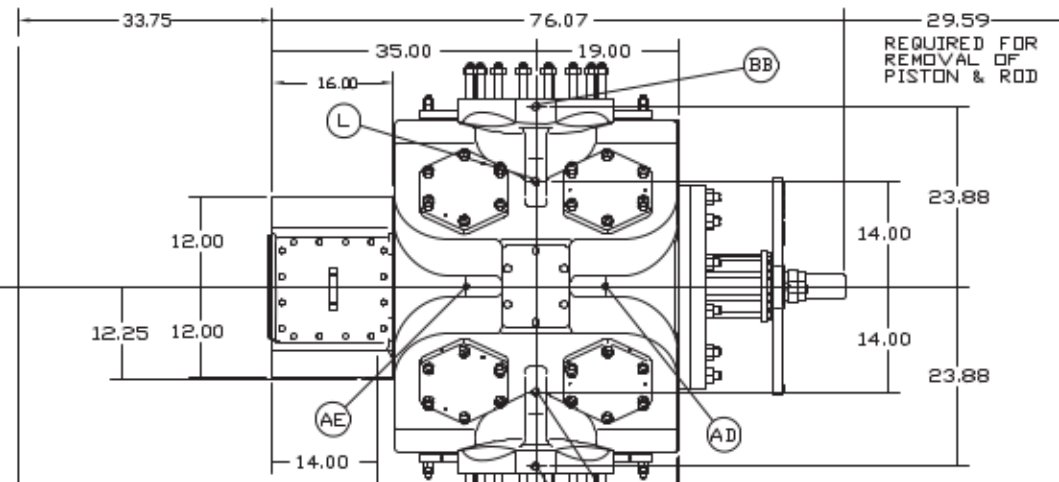


COMPR.
SHAFT

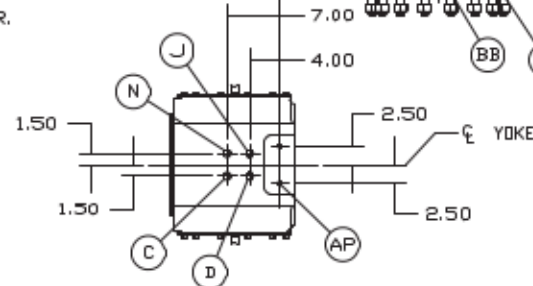

TOTAL WEIGHT: APPROX. 6500 LBS

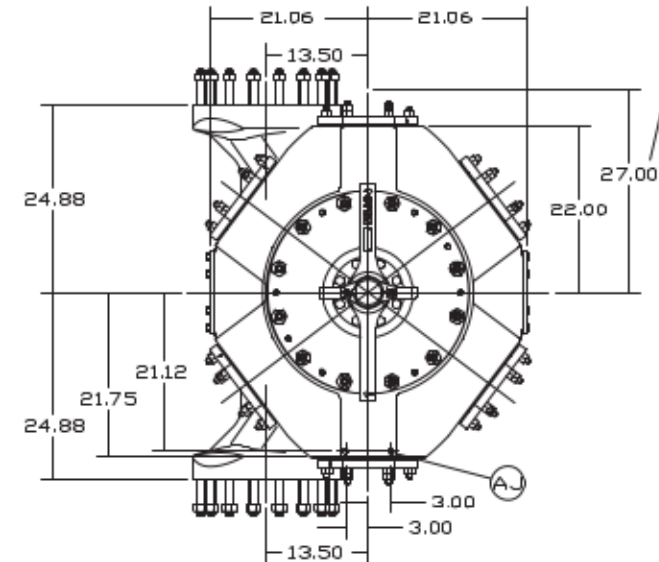

CHG TO: 72 124 149



THIRD ANGLE PROJECTION

DRAWN K.DAVIDSON DATE 23 JUL 09

CHECKED B.BENNETT DATE 21 JUL 09

APPROVED B.BENNETT DATE 21 JUL 09

US PART

SIZE	STROKE	TYPE
22.00	ALL	HOSS
NAME OF PART		
OUTLINE - CYLINDER W/VVCP		
SIZE	FEDERAL SUPPLY CODE	DWG NO.
C	---	HIH02274
SCALE	WT.	SHEET
1:12	---	1 OF 1

DWG NO HIH02274 SH 1

A

2010-2011