


PRÁCTICA 1

1. Crear un fork

Abrimos el link: <https://github.com/gitt-3-pat/p1>

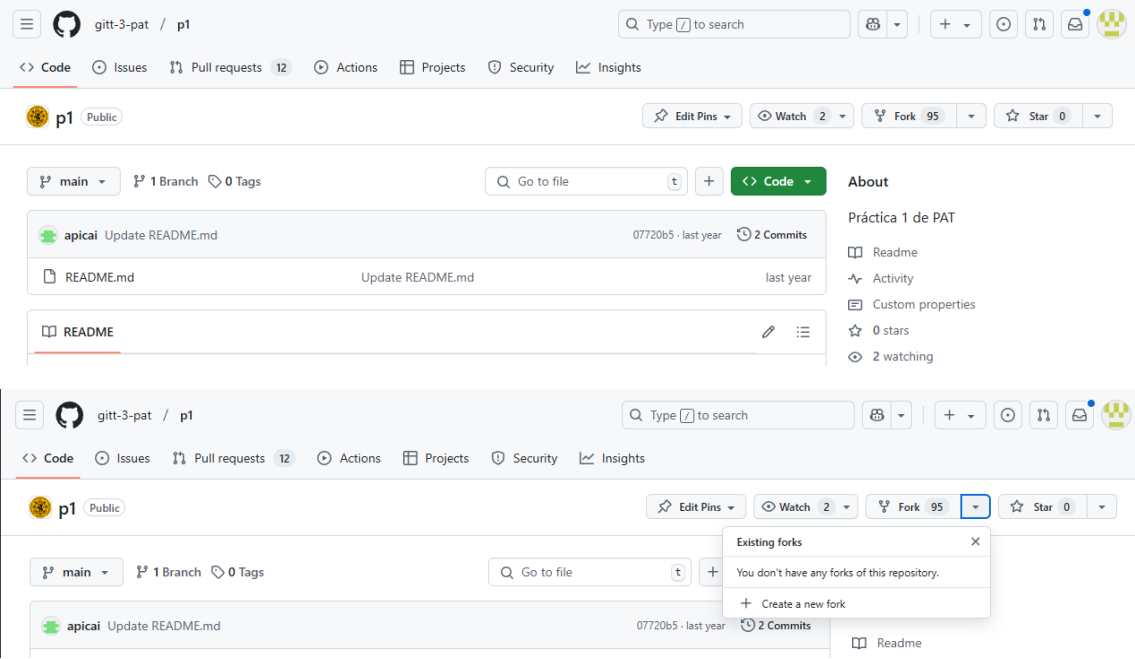


Create a new fork


A *fork* is a copy of a repository. Forking a repository allows you to freely experiment with changes without affecting the original project. [View existing forks.](#)

Required fields are marked with an asterisk (\*).

Owner \*

 pedromaarcos


 /

 p1 is available.

Description (optional)

☒ Copy the `main` branch only

Contribute back to gitt-3-pat/p1 by adding your own branch. [Learn more.](#)

 You are creating a fork in your personal account.


Create fork

## Create a new fork

A *fork* is a copy of a repository. Forking a repository allows you to freely experiment with changes without affecting the original project. [View existing forks.](#)

Required fields are marked with an asterisk (\*).

Owner \*

 pedromaarcos

 / 

p1-fork

p1-fork is available.

By default, forks are named the same as their upstream repository. You can customize the name to distinguish it further.

Description (optional)


Práctica 1 de PAT

☒ Copy the main branch only

Contribute back to gitt-3-pat/p1 by adding your own branch. [Learn more.](#)







 You are creating a fork in your personal account.

Create fork


 pedromaarcos / p1-fork


Q


Type [f](#) to search


     


<> Code


 Pull requests


 Actions


 Projects


 Wiki


 Security


 Insights


 Settings

 **p1-fork** Public


 Pin

 Watch 0

 Fork 0

 Star 0

forked from [gitt-3-pat/p1](#)

 main


1 Branch

0 Tags


Q


Go to file


+

 Code


This branch is up to date with [gitt-3-pat/p1:main](#).


 Contribute

 Sync fork

 apicai Update README.md


07720b5 · last year



 2 Commits

 README.md

Update README.md

last year


 README


 


Práctica 1


About


Práctica 1 de PAT

 Readme

 Activity

 0 stars

 0 watching

 0 forks



Releases


No releases published

[Create a new release](#)

2. Comandos

Primero nos cremos un codespaces:

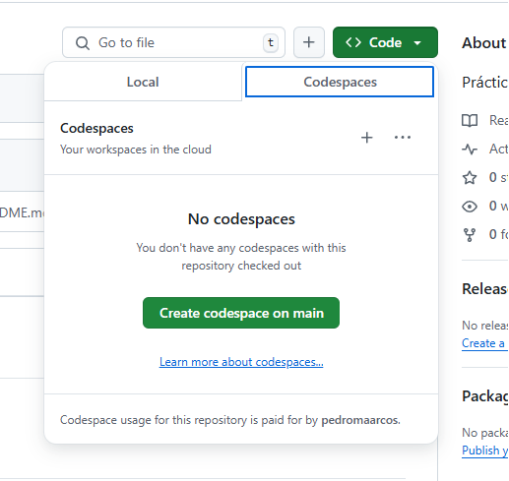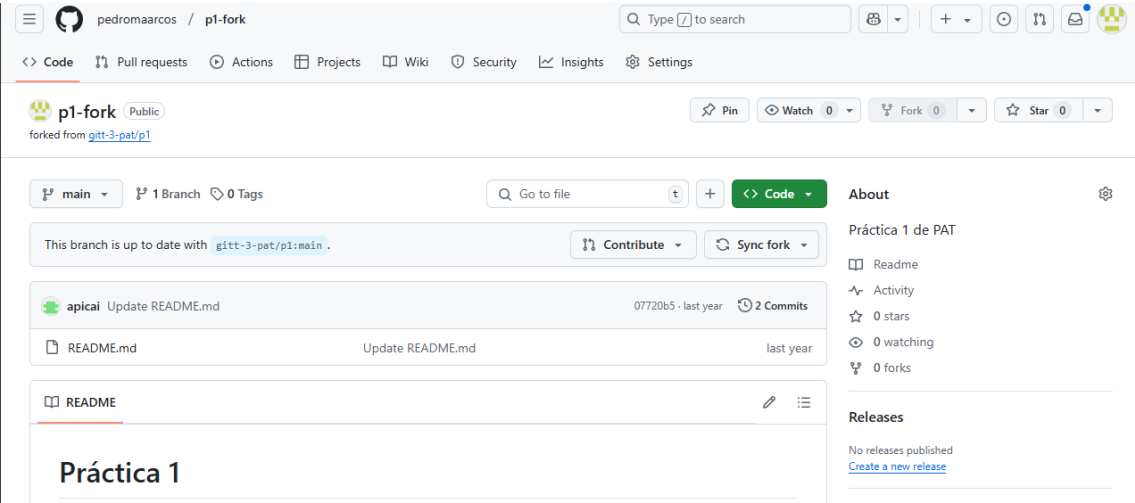

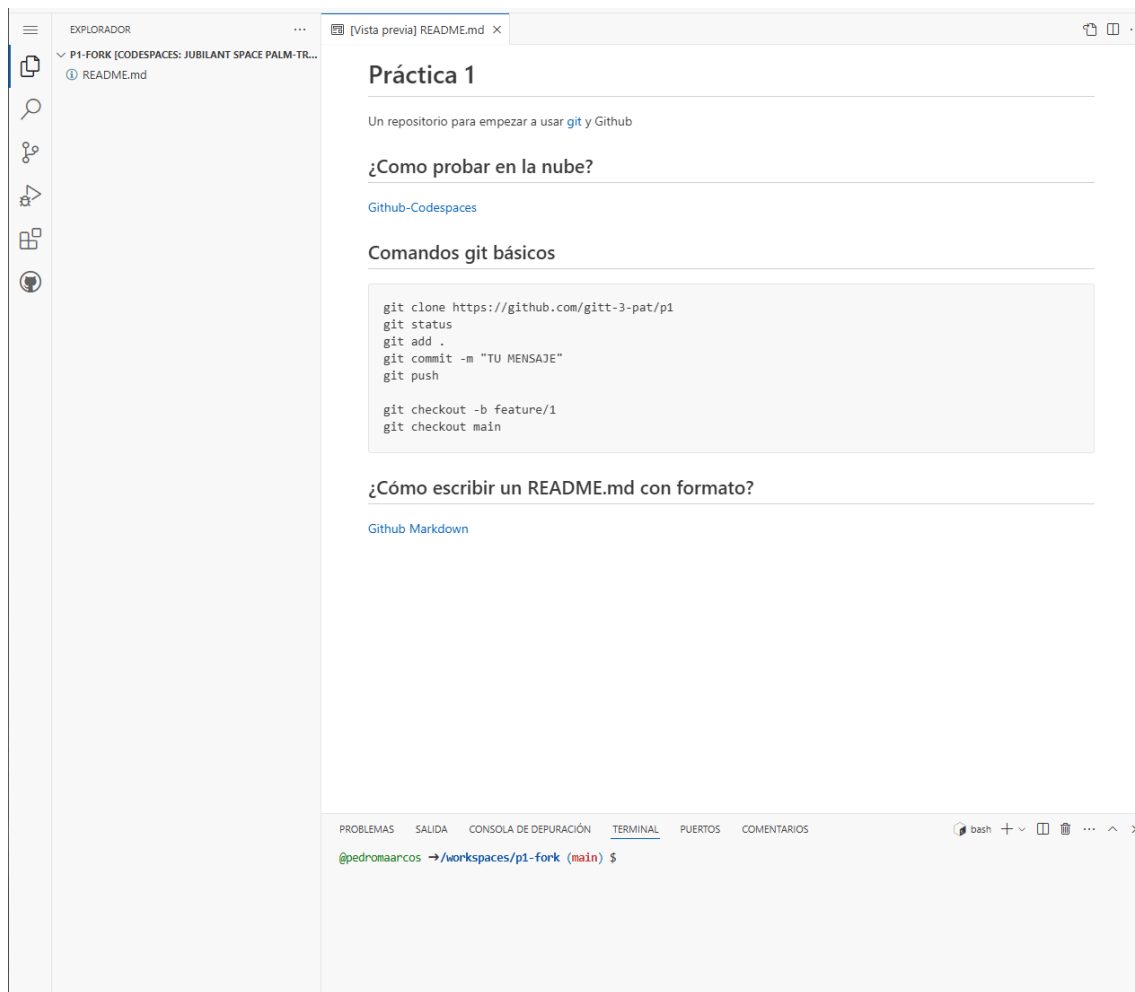

Y en la consola de abajo escribimos los comandos.

Git clone:

```
● @pedromaarcos →/workspaces/p1-fork (main) $ git clone https://github.com/pedromaarcos/p1-fork
Cloning into 'p1-fork'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (1/1), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 5 (from 1)
Receiving objects: 100% (6/6), done.
○ @pedromaarcos →/workspaces/p1-fork (main) $
```

Se crea una copia del repositorio en mi máquina local.

Git status:

```
● @pedromaarcos →/workspaces/p1-fork (main) $ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  p1-fork/

nothing added to commit but untracked files present (use "git add" to track)
○ @pedromaarcos →/workspaces/p1-fork (main) $
```

Proporciona información sobre el estado actual de tu repositorio local. Muestra detalles clave sobre los archivos que estás editando, el estado de tu rama actual y cualquier cambio pendiente.

Git add:

```
● @pedromaarcos →/workspaces/p1-fork (main) $ git add .
warning: adding embedded git repository: p1-fork
hint: You've added another git repository inside your current repository.
hint: Clones of the outer repository will not contain the contents of
hint: the embedded repository and will not know how to obtain it.
hint: If you meant to add a submodule, use:
hint:   git submodule add <url> p1-fork
hint:
hint: If you added this path by mistake, you can remove it from the
hint: index with:
hint:   git rm --cached p1-fork
hint:
hint: See "git help submodule" for more information.
hint: Disable this message with "git config advice.addEmbeddedRepo false"
○ @pedromaarcos →/workspaces/p1-fork (main) $
```





Añade todos los cambios de todos los archivos, tanto los nuevos como los modificados.

Git commit:

```
● @pedromaarcos →/workspaces/p1-fork (main) $ git commit -m "feat: homepage"
[main 05fb0bc] feat: homepage
1 file changed, 1 insertion(+)
create mode 160000 p1-fork
○ @pedromaarcos →/workspaces/p1-fork (main) $
```

Guarda todos los cambios que han sido añadidos previamente.

Resultado:

 pedromaarcos	feat: homepage	05fb0bc · 3 minutes ago	 3 Commits
 p1-fork	feat: homepage	3 minutes ago	
 README.md	Update README.md	last year	

Git checkout:

Branches

New branch

OverviewYoursActiveStaleAll

Q Search branches...

Default

Branch	Updated	Check status	Behind   Ahead	Pull request
main	4 minutes ago		Default	

```
@pedromaarcos →/workspaces/p1-fork (main) $ git checkout -b feature/1
Switched to a new branch 'feature/1'
@pedromaarcos →/workspaces/p1-fork (feature/1) $
```

Creamos una nueva rama y se cambia a esa rama.

```
@pedromaarcos →/workspaces/p1-fork (feature/1) $ git add .
@pedromaarcos →/workspaces/p1-fork (feature/1) $

@pedromaarcos →/workspaces/p1-fork (feature/1) $ git push -u origin feature/1
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'feature/1' on GitHub by visiting:
remote:   https://github.com/pedromaarcos/p1-fork/pull/new/feature/1
remote:
To https://github.com/pedromaarcos/p1-fork
 * [new branch]   feature/1 -> feature/1
branch 'feature/1' set up to track 'origin/feature/1'.
@pedromaarcos →/workspaces/p1-fork (feature/1) $
```

Añade la rama a Github.

```
@pedromaarcos →/workspaces/p1-fork (feature/1) $ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
@pedromaarcos →/workspaces/p1-fork (main) $
```

Default

Branch	Updated	Check status	Behind   Ahead	Pull request
main	27 minutes ago		Default	

Your branches

Branch	Updated	Check status	Behind   Ahead	Pull request
feature/1	2 minutes ago		0   0	

Active branches

Branch	Updated	Check status	Behind   Ahead	Pull request
feature/1	2 minutes ago		0   0	