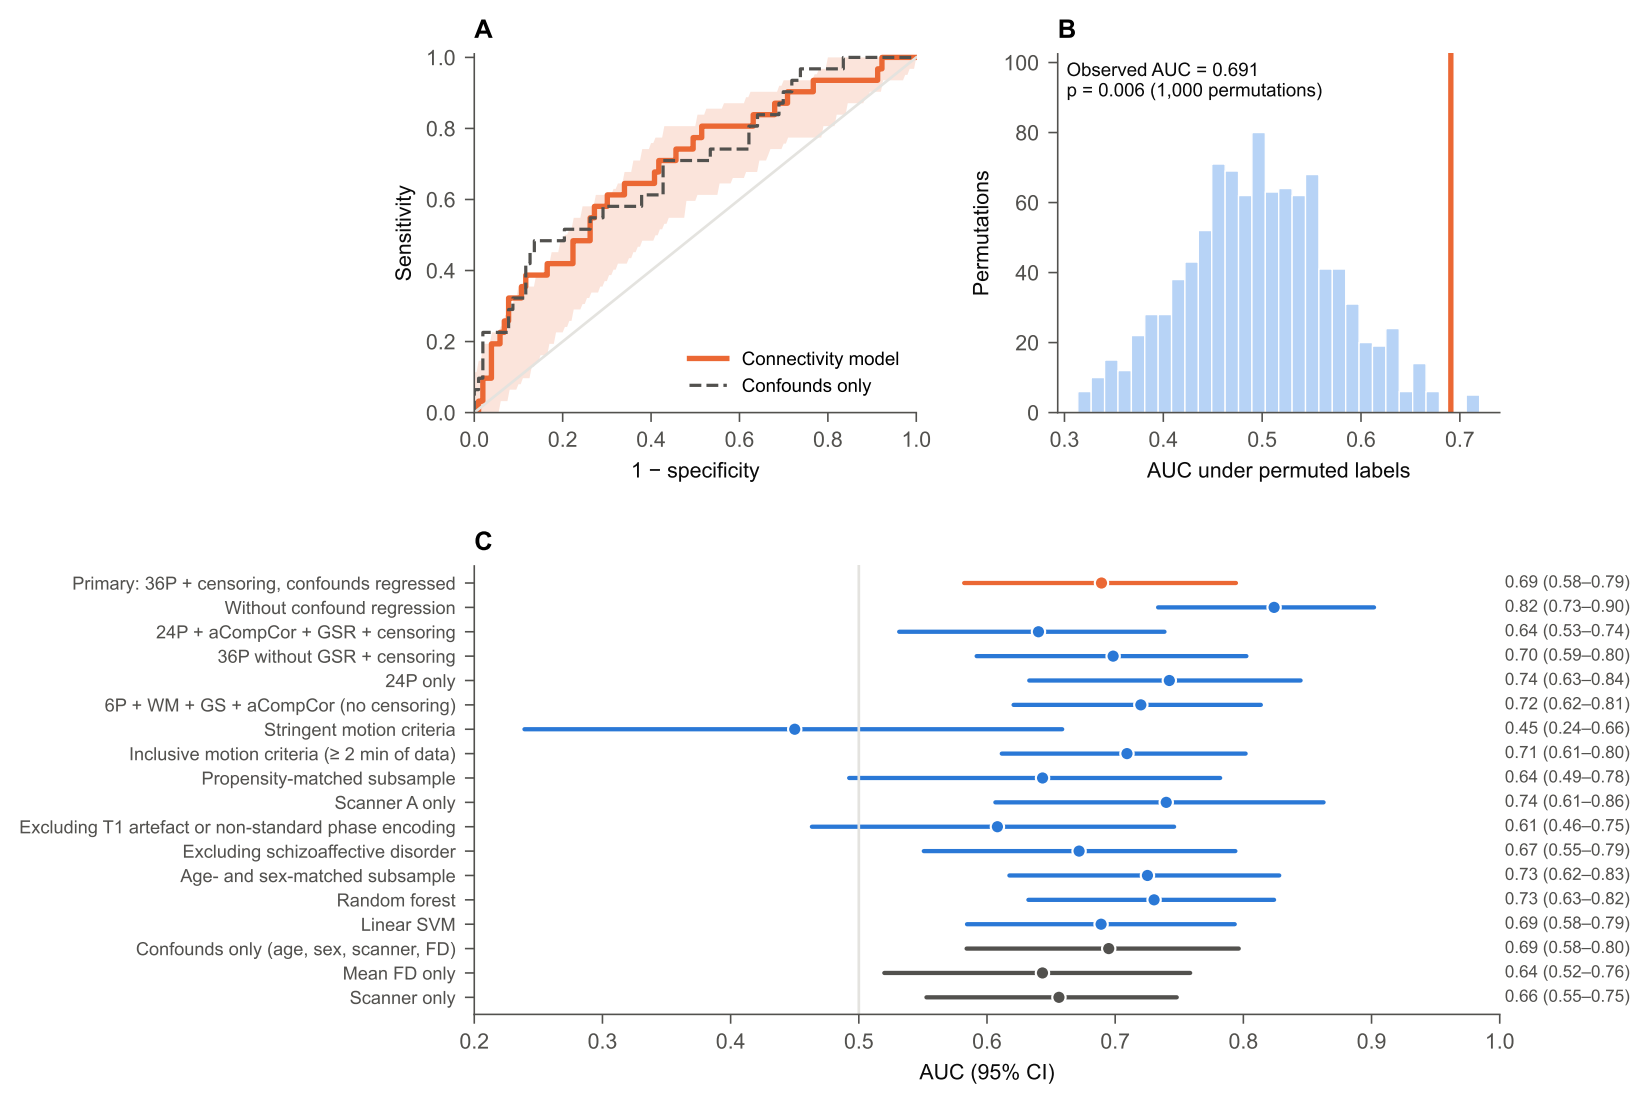
A
Sensitivity
1 − specificity
Connectivity model
Confounds only
B
Observed AUC = 0.691
p = 0.006 (1,000 permutations)
Permutations
AUC under permuted labels
C
Primary: 36P + censoring, confounds regressed
Without confound regression
24P + aCompCor + GSR + censoring
36P without GSR + censoring
24P only
6P + WM + GS + aCompCor (no censoring)
Stringent motion criteria
Inclusive motion criteria (≥ 2 min of data)
Propensity-matched subsample
Scanner A only
Excluding T1 artefact or non-standard phase encoding
Excluding schizoaffective disorder
Age- and sex-matched subsample
Random forest
Linear SVM
Confounds only (age, sex, scanner, FD)
Mean FD only
Scanner only
0.69 (0.58–0.79)
0.82 (0.73–0.90)
0.64 (0.53–0.74)
0.70 (0.59–0.80)
0.74 (0.63–0.84)
0.72 (0.62–0.81)
0.45 (0.24–0.66)
0.71 (0.61–0.80)
0.64 (0.49–0.78)
0.74 (0.61–0.86)
0.61 (0.46–0.75)
0.67 (0.55–0.79)
0.73 (0.62–0.83)
0.73 (0.63–0.82)
0.69 (0.58–0.79)
0.69 (0.58–0.80)
0.64 (0.52–0.76)
0.66 (0.55–0.75)
AUC (95% CI)