Grouping: arrange baseline spectra into blocks that share a scale

Inspect supported layout
row context + shape

→

One correlation
V[row, channel, p]

→

Separate classes
auto / cross; valid / no-valid

→

Order baseline IDs
amplitude or other key

→

Split into B × F blocks
independent scale + bits

Illustration below: one valid cross-correlation class; toy amplitudes, B = 2 and F = 4

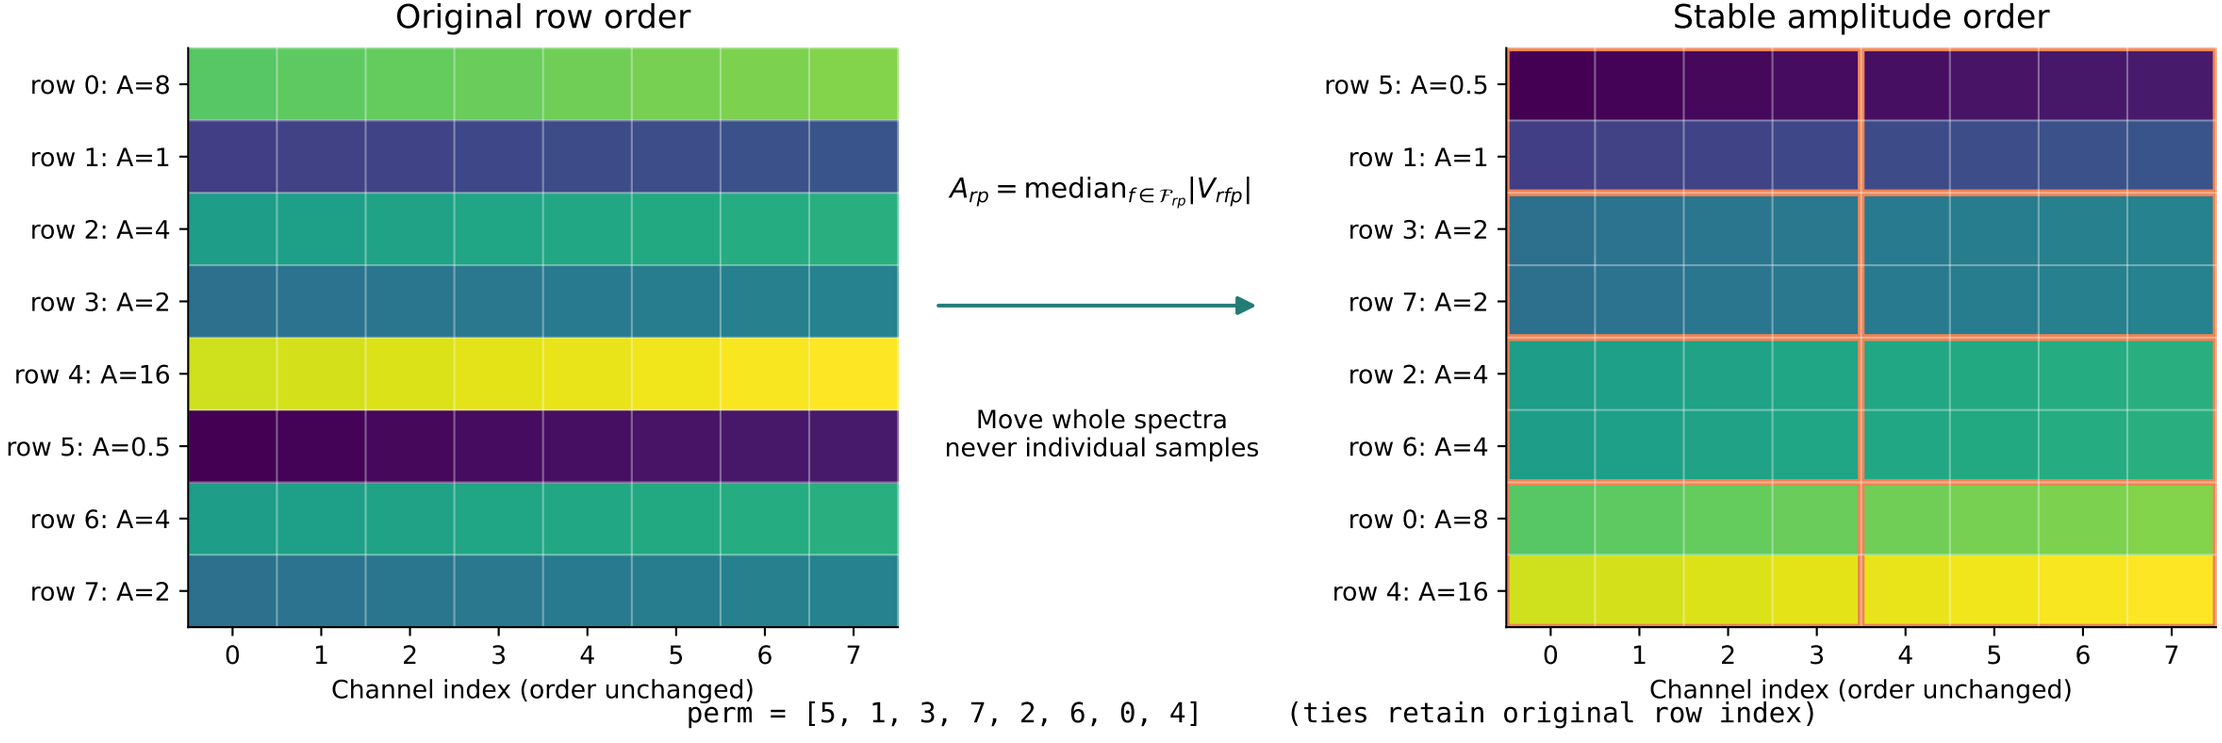

`perm = [5, 1, 3, 7, 2, 6, 0, 4]` `(ties retain original row index)`

Store perm + group boundaries + segment edges. Restore: $\hat{V}[\text{perm}[j], f, p] = \text{decoded}[j, f, p]$.
UVW, original row keys, channel/product order, flags and weights remain exact by default.