

The Universal Short Graph Language


Introducing the \square language

Laurent Fournier – lfournie@rockwellcollins.com

[KADN-]*

August 1, 2012

1 Introduction

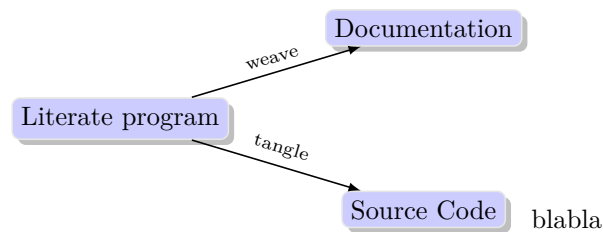

Blabla intro with diagram:

2 Parser

```

1  __RE_U__ = r '''      # RegExp
2      (? :              # Three basic tokens :
3      ([{ }])           # (1) Block
4      /
5      (\#[^\n]*)        # or (2) Line comment
6      /                 # or (3) NODE :
7      (?=[^\s<\-=>])    # Not empty token
8      (?:(\w{1,10})|)    # Name
9      (?:(\w)|)         # Type pre
10     ((%s)(.+?)\6/[^\[\]]+\]\]/\([^\)]+\)\)/) # Content
11     (\w|)              # Type post
12     (?:(\.[\w{1,20}|\*)|) # Port
13     /                  # or (4) ARC :
14     ([<\-=>])          # Head
15     (?:(\W\d_)|)       # Type pre
16     ((%s)(.+?)\15/[^\[\]]+\]\]/\([^\)]+\)\)/) # Content
17     (?:(\W\d_)|)       # Type post
18     ([<\-=>])          # Tail
19 )''' % (__delimiter__, __delimiter__)
  
```

The end of the document

*the first five characters of the base64 encoding of the SHA1 digest of the attached source files.