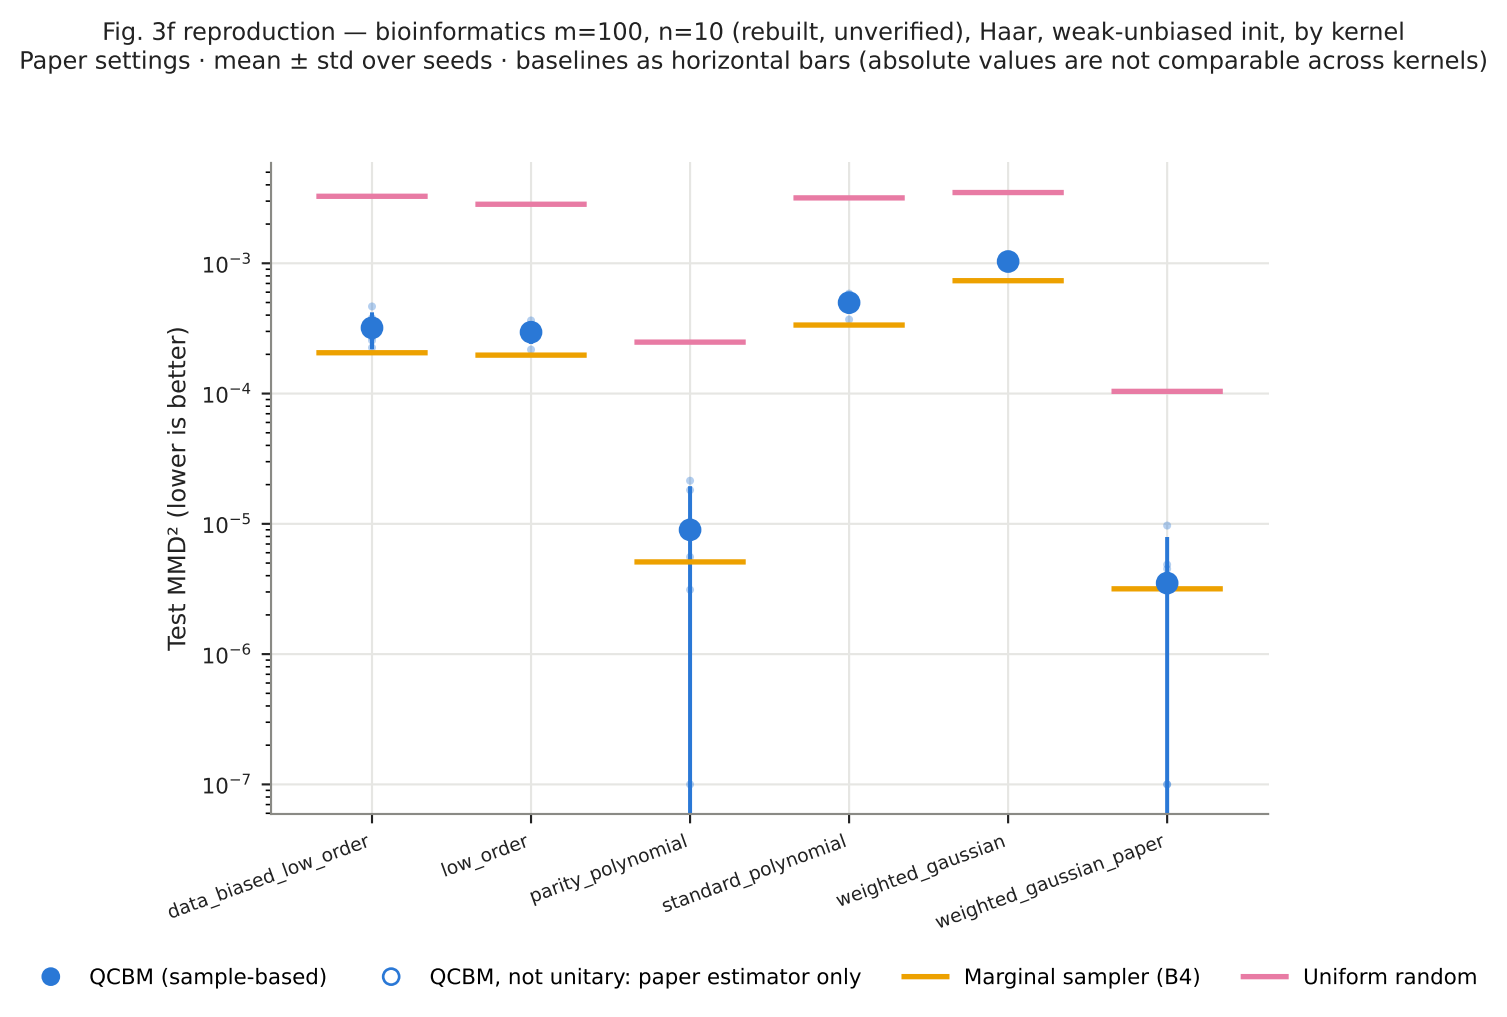
Fig. 3f reproduction — bioinformatics m=100, n=10 (rebuilt, unverified), Haar, weak-unbiased init, by kernel
Paper settings · mean ± std over seeds · baselines as horizontal bars (absolute values are not comparable across kernels)
Test MMD² (lower is better)
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
data_biased_low_order
low_order
parity_polynomial
standard_polynomial
weighted_gaussian
weighted_gaussian_paper
QCBM (sample-based)
QCBM, not unitary: paper estimator only
Marginal sampler (B4)
Uniform random