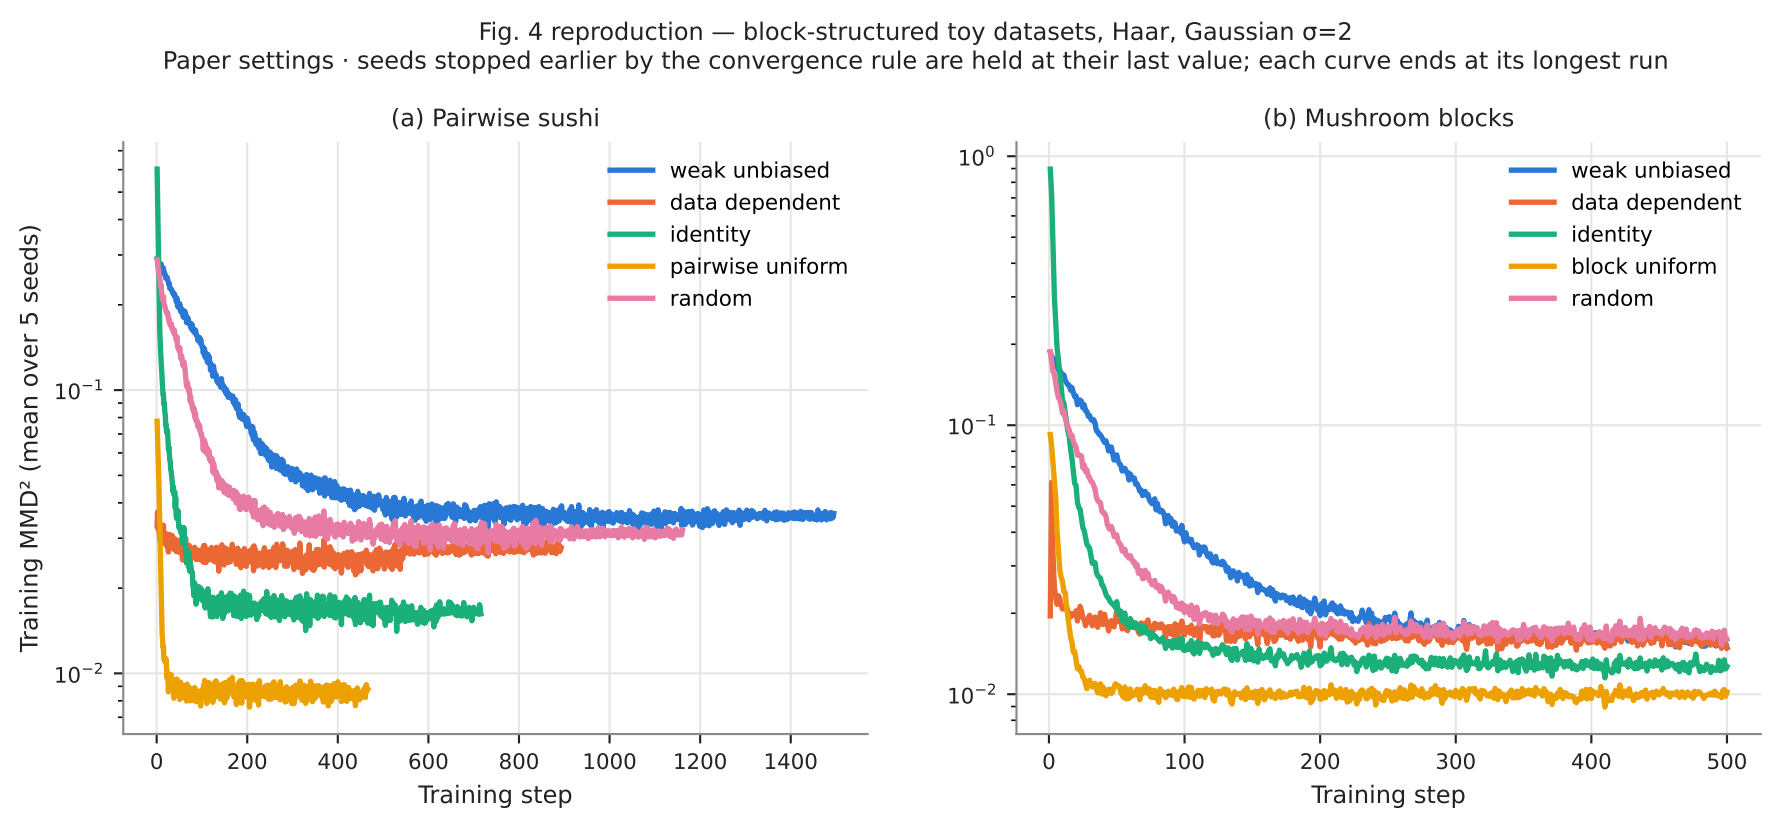

Fig. 4 reproduction — block-structured toy datasets, Haar, Gaussian σ=2
Paper settings · seeds stopped earlier by the convergence rule are held at their last value; each curve ends at its longest run
(a) Pairwise sushi
(b) Mushroom blocks
Training MMD² (mean over 5 seeds)
Training step
Training step
weak unbiased
data dependent
identity
pairwise uniform
block uniform
random
10^{0}
10^{-1}
10^{-2}
0
100
200
300
400
500
600
800
1000
1200
1400