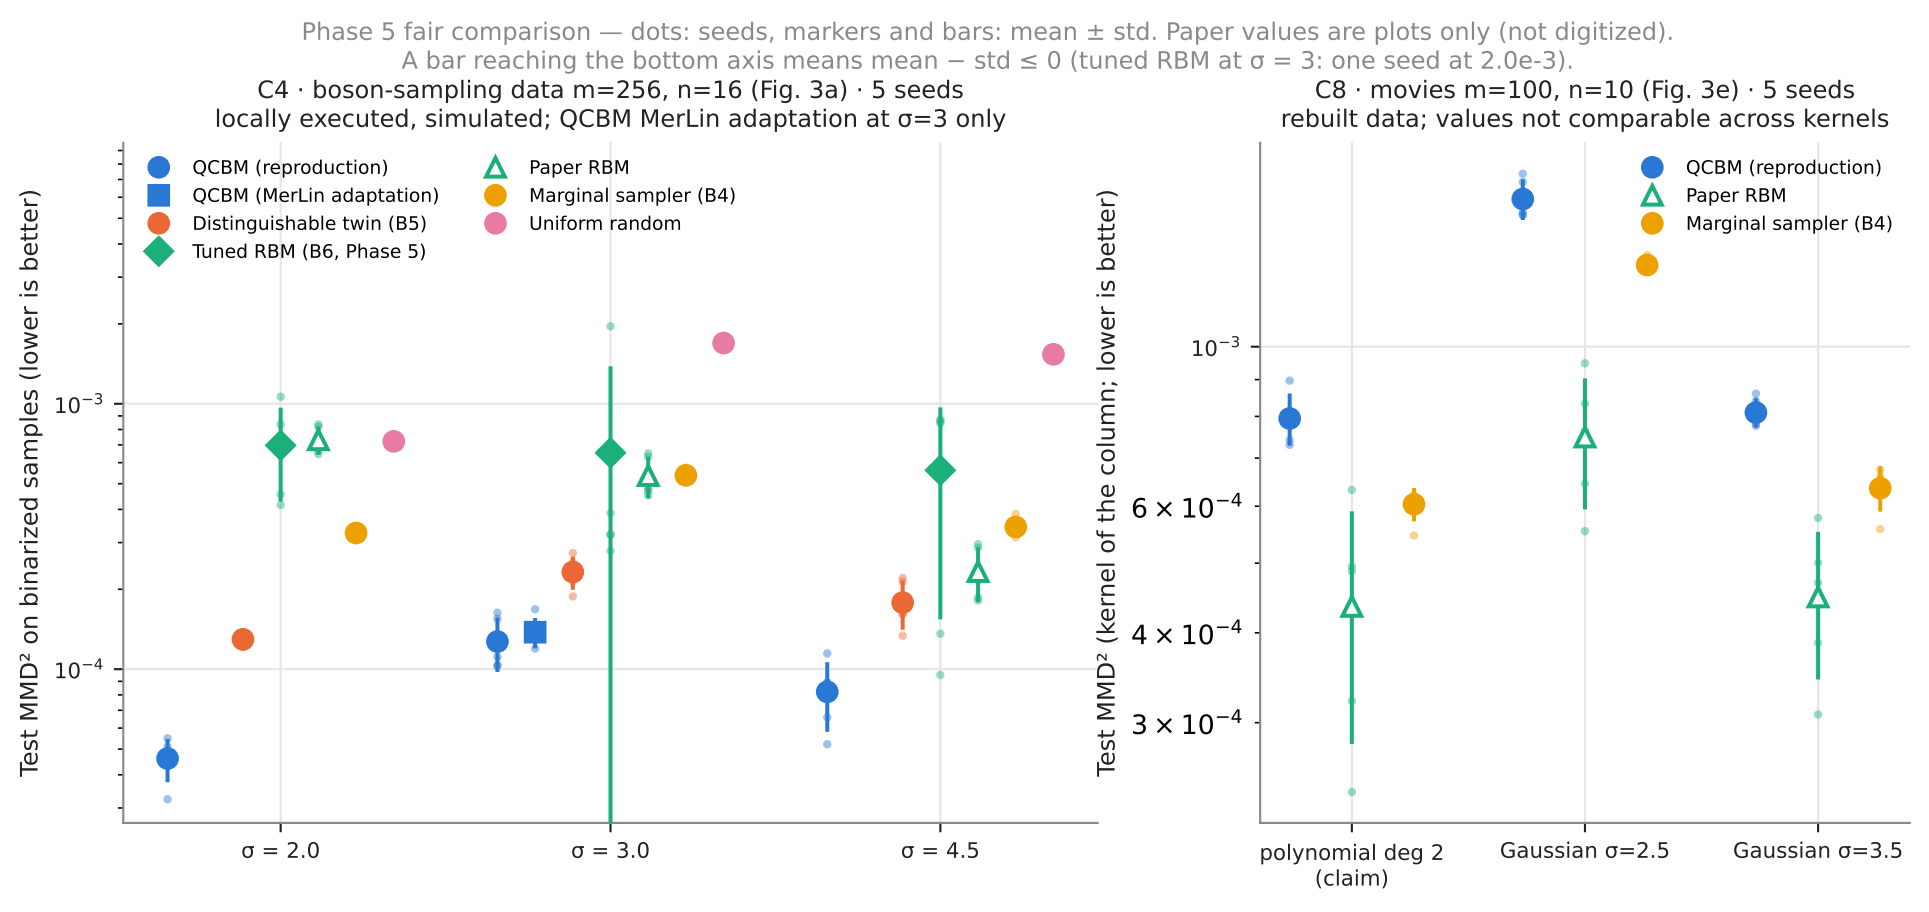
Phase 5 fair comparison — dots: seeds, markers and bars: mean ± std. Paper values are plots only (not digitized).
A bar reaching the bottom axis means mean − std ≤ 0 (tuned RBM at σ = 3: one seed at 2.0e-3).
C4 · boson-sampling data m=256, n=16 (Fig. 3a) · 5 seeds
locally executed, simulated; QCBM MerLin adaptation at σ=3 only
QCBM (reproduction)
QCBM (MerLin adaptation)
Distinguishable twin (B5)
Tuned RBM (B6, Phase 5)
Paper RBM
Marginal sampler (B4)
Uniform random
Test MMD² on binarized samples (lower is better)
10^{-3}
10^{-4}
σ = 2.0
σ = 3.0
σ = 4.5
C8 · movies m=100, n=10 (Fig. 3e) · 5 seeds
rebuilt data; values not comparable across kernels
QCBM (reproduction)
Paper RBM
Marginal sampler (B4)
Test MMD² (kernel of the column; lower is better)
10^{-3}
6×10^{-4}
4×10^{-4}
3×10^{-4}
polynomial deg 2
(claim)
Gaussian σ=2.5
Gaussian σ=3.5