


(a) QAE — p=0.05, k_{max}=2

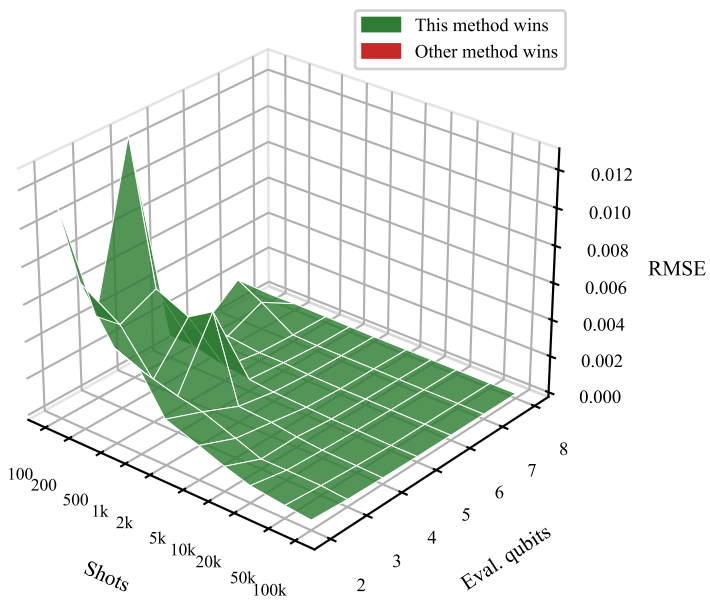


(b) Classical MC — p=0.05, k_{max}=2

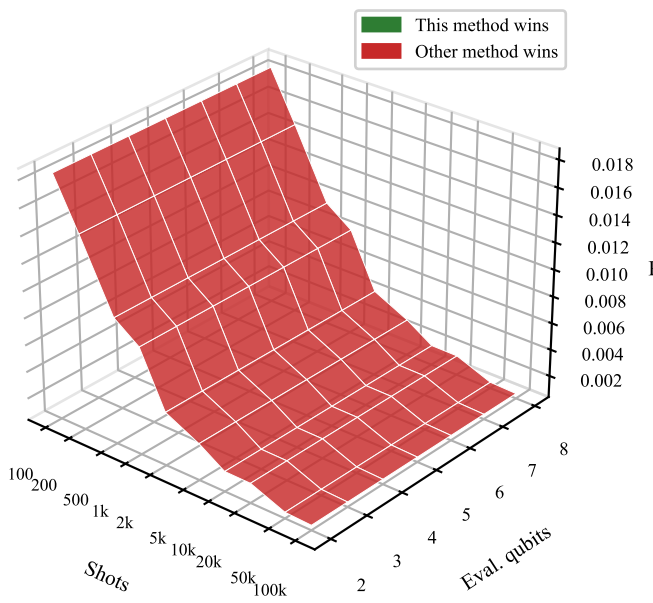


(c) QAE — p=0.1, k_{max}=1

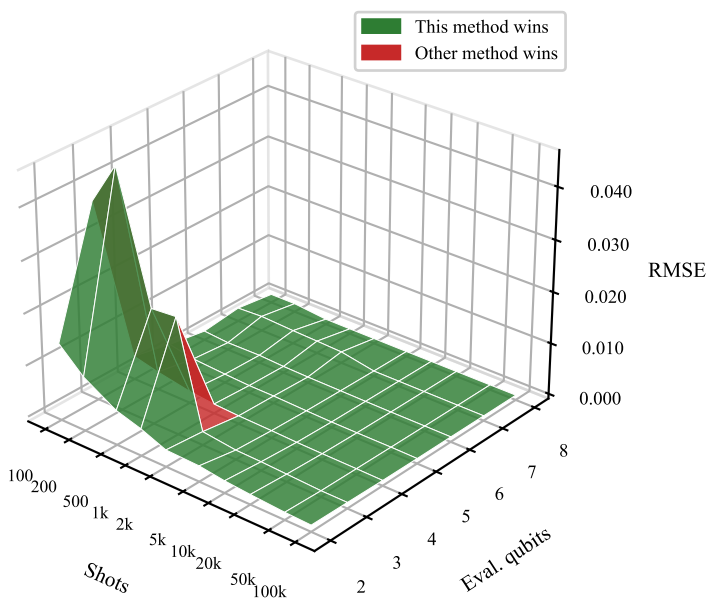


(d) Classical MC — p=0.1, k_{max}=1

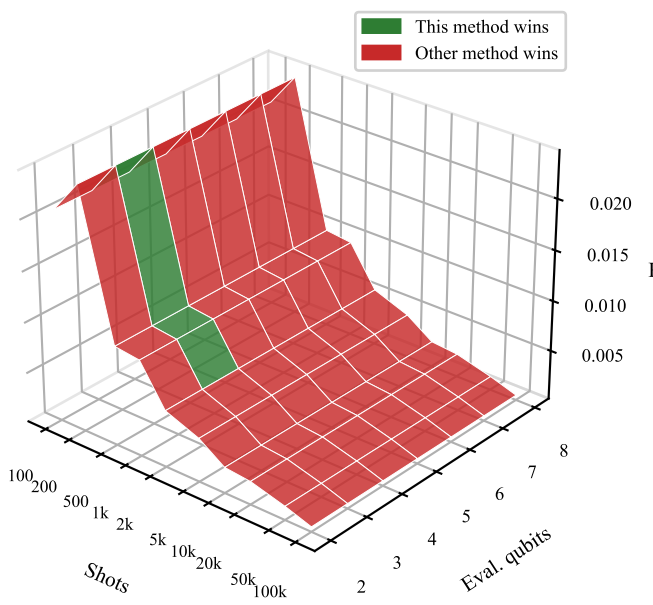


(e) QAE — p=0.25, k_{max}=0

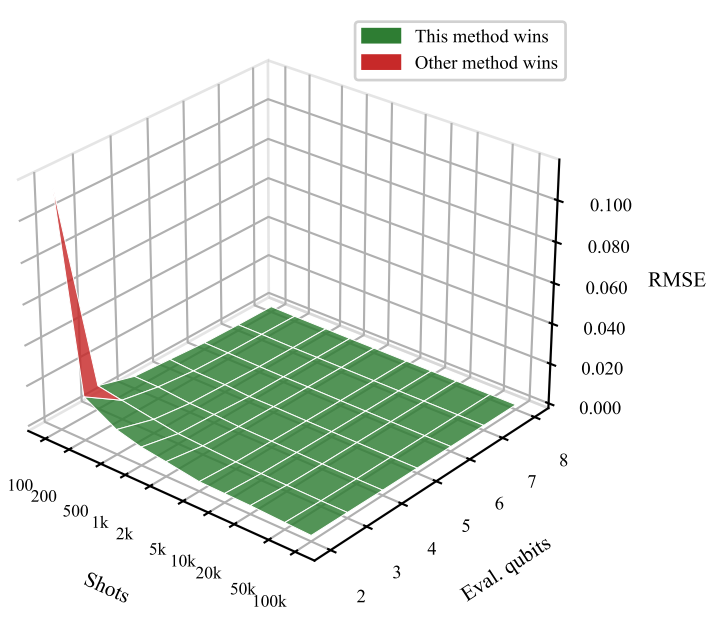

(f) Classical MC — p=0.25, k_{max}=0

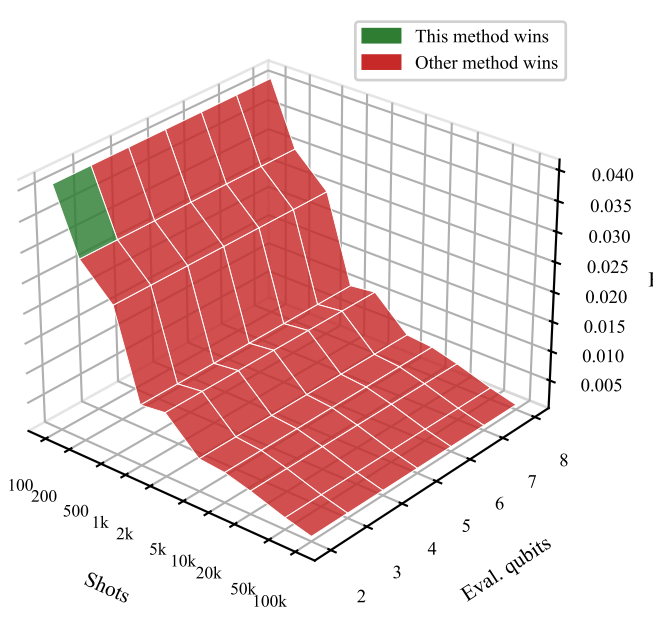

(g) QAE — p=0.5, k_{max}=0

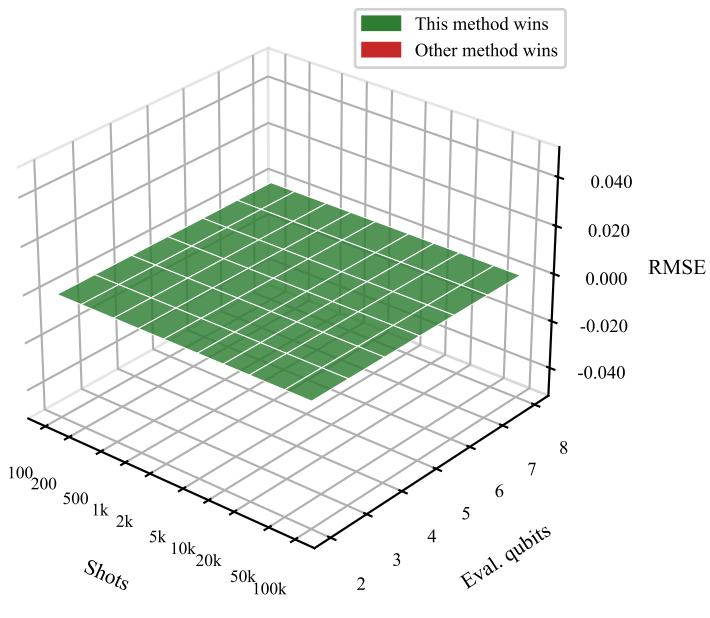

(h) Classical MC — p=0.5, k_{max}=0

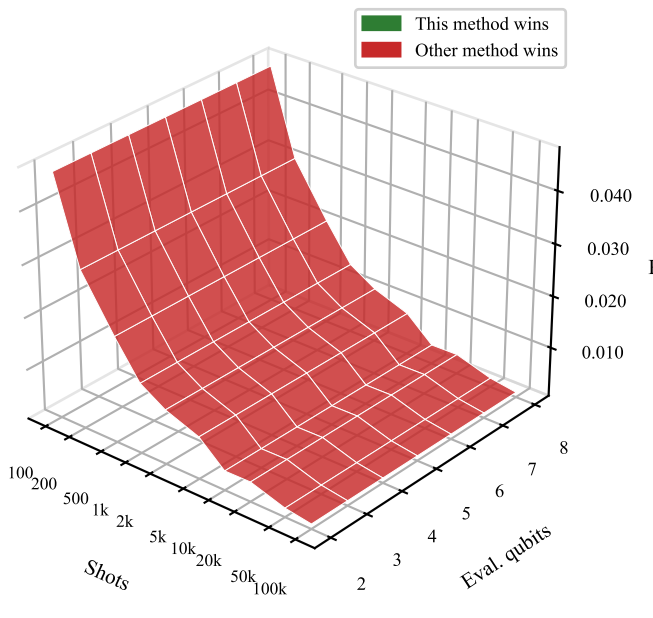


Figure 2. RMSE surfaces for QAE (canonical) and Classical MC across p values, shots, and evaluation qubits (n_{reps}=20). Green: that method achieves lower RMSE. Red: other method wins. k_{max} = maximum safe Grover iterations. Shots axis is $\log_{10}$-scaled.