



6th November, 2024

Head of Quality,
Safarilink Aviation Limited,
P.O Box 5616-00506,
Nairobi.

RE: MAINTENANCE PROCEDURES MANUAL AMENDMENT ISSUE 3 REVISION
0 DATED 17th OCTOBER, 2024

We acknowledge receipt of your online application Ref; KCAA/115///2024/51310 and letter Ref. SA/QAM/24-06 dated 29th September 2024 and Maintenance Procedures Manual (MPM) amendments referenced above for approval.

The Authority hereby APPROVES this document by stamping on the List of Effective Pages. One copy is returned to Safarilink Aviation Limited and the other is retained by the Authority.

Note; Approval of Maintenance Procedures Manual by KCAA on 7th November, 2024 supersedes all others.

Amendments to the approved MPM (introduced by the Authority, operator and any other party) shall be subjected to the same approval procedures before being incorporated to the document.

For any queries do not hesitate to contact the Authority.

Joseph K. Chebungei
Director Corporate Services
FOR: DIRECTOR GENERAL



Safarilink

Your wings to the beach and bush

MAINTENANCE PROCEDURES MANUAL

SL/MPM/001 Issue:03 Rev:0

KENYA AEROSPACE LTD HANGAR.

WILSON AIRPORT,

P.O. BOX 5616 - 00506

NAIROBI, KENYA

COPY NUMBER: 2

ASSIGNED TO :

CENTRAL LIBRARY

Issue Date 17th Oct 2024

THIS PAGE IS INTENTIONALLY LEFT BLANK


Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	1

0.1 MANUAL APPROVAL

Development

Prepared By: - Head of Base Maintenance


Name: William Mwasitigadi Sign: [Signature] Date: 17/10/2024



Internal Approval


Format Checked By: - Head of Quality

Name: KAZUNGU KEA Sign: [Signature] Date: 17/10/2024



Manual Endorsed By: - Accountable Manager

Name: ALEX AUGOI Sign: [Signature] Date: 17/10/2024



KCAA Approval

Manual Approved By: -

Name: Sign: Date: Stamp:



TO: HEAD OF QUALITY KENYA AEROSPACE LTD HANGAR, WILSON AIRPORT, P.O. BOX 5616-00506, NAIROBI, KENYA		Requester's Details.			
		Name:			
		Company/ Department:			
		Email address and phone number			
Date					
Manual/ Publication Information					
Name/Description					
Manual Reference #					
Manual Rev. # and date					
Applicability (Model/series etc)					
Media Type: please tick one or more as applicable: ✓		Paper	CD/ DVD	Cloud	Website (specify)
Change Request Details					
Section Title (Heading level 1)			Subsection (Heading level 2)		
Reference data			Reason for change		
*Description of Change Request.					
Change Accepted.	MO: YES/ NO		QA: YES/ NO		
Remarks					

Records of Revisions

Issue #	Revision #	Date of Revision	Date Inserted	Inserted by
1	0	Nov 2017	Nov 2017	<i>BMM</i>
2	0	06 Sept 2019	06 Sept 2019	<i>HOBM</i>
2	01	23 rd May 2022	23 rd May 2022	HOQ
3	00	17 Oct 2024	17 Oct 2024	<i>HOBM</i>

Records of Temporary Revisions

TR #	Section	Page/s	Date of Revision	Date Inserted	Sign	Date Removed	Sign

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	5

Manual Table of Content

FRONT MATTER:

0.1	<u>MANUAL APPROVAL</u>	1
	<u>MANUAL CHANGE REQUEST FORM</u>	2
	<u>RECORDS OF REVISIONS</u>	3
	<u>RECORDS OF TEMPORARY REVISIONS</u>	4
	<u>MANUAL TABLE OF CONTENTS</u>	5
0.2	<u>LIST OF EFFECTIVE PAGES</u>	8
0.3	<u>ASSOCIATED COMPANY DOCUMENTS AND REFERENCES</u>	13
0.4	<u>DISTRIBUTION LIST</u>	14
0.5	<u>REVISION HIGHLIGHTS</u>	15
0.6	<u>LIST OF ABBREVIATIONS</u>	16

PART 1: MANAGEMENT

1.1	<u>CORPORATE COMMITMENT STATEMENT</u>	1
1.2	<u>MANAGEMENT PERSONNEL</u>	3
1.3	<u>DUTIES AND RESPONSIBILITIES OF MANAGEMENT PERSONNEL</u>	6
1.4	<u>AMO MANAGEMENT ORGANIZATION CHART</u>	14
1.5	<u>LIST OF CERTIFYING PERSONNEL</u>	16
1.6	<u>MANPOWER RESOURCES</u>	18
1.7	<u>FACILITIES DESCRIPTION</u>	22
1.8	<u>SCOPE OF WORK</u>	32
1.9	<u>NOTIFICATION PROCEDURE TO THE AUTHORITY REGARDING CHANGES TO THE ORGANIZATION’S ACTIVITIES/APPROVAL/LOCATION/PERSONNEL</u>	38
1.10	<u>MANUAL AMENDMENT</u>	41

PART 2: MAINTENANCE PROCEDURE

2.1	<u>SUPPLIER EVALUATION PROCEDURE</u>	1
2.2	<u>ACCEPTANCE/INSPECTION OF INCOMING COMPONENTS AND MATERIALS FROM OUTSIDE CONTRACTORS</u>	6
2.3	<u>STORAGE, TAGGING AND RELEASE OF AIRCRAFT COMPONENTS AND MATERIALS</u>	12
2.4	<u>ACCEPTANCE OF TOOLS AND EQUIPMENT</u>	19
2.5	<u>CALIBRATION OF TOOLS AND EQUIPMENT</u>	23
2.6	<u>USE OF TOOLING AND EQUIPMENT BY STAFF</u>	27
2.7	<u>CLEANLINESS STANDARDS</u>	30
2.8	<u>MAINTENANCE INSTRUCTIONS AND RELATIONSHIP TO AIRCRAFT/AIRCRAFT COMPONENT MANUFACTURERS’ INSTRUCTIONS INCLUDING UPDATING AND AVAILABILITY TO STAFF</u>	32
2.9	<u>REPAIR PROCEDURES</u>	36
2.10	<u>AIRCRAFT MAINTENANCE PROGRAM COMPLIANCE</u>	40
2.11	<u>AIRWORTHINESS DIRECTIVES</u>	42

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	6

<u>2.12</u>	<u>OPTIONAL MODIFICATION PROCEDURE</u>	<u>43</u>
<u>2.13</u>	<u>MAINTENANCE DOCUMENTATION IN USE AND COMPLETION OF SAME.....</u>	<u>45</u>
<u>2.14</u>	<u>TECHNICAL RECORD CONTROL.....</u>	<u>49</u>
<u>2.15</u>	<u>RECTIFICATION OF DEFECTS ARISING DURING BASE MAINTENANCE</u>	<u>53</u>
<u>2.16</u>	<u>RELEASE TO SERVICE PROCEDURES.....</u>	<u>55</u>
<u>2.17</u>	<u>RECORDS FOR THE AIR CARRIER OPERATOR</u>	<u>61</u>
<u>2.18</u>	<u>REPORTING OF DEFECTS TO THE AUTHORITY/OPERATOR/MANUFACTURER</u>	<u>63</u>
<u>2.19</u>	<u>RETURN OF DEFECTIVE AIRCRAFT COMPONENTS TO THE STORE.....</u>	<u>69</u>
<u>2.20</u>	<u>DEFECTIVE COMPONENTS TO OUTSIDE CONTRACTORS</u>	<u>71</u>
<u>2.21</u>	<u>CONTROL OF COMPUTER MAINTENANCE RECORD SYSTEM.....</u>	<u>73</u>
<u>2.22</u>	<u>REFERENCE TO SPECIFIC MAINTENANCE PROCEDURES</u>	<u>75</u>
<u>2.23</u>	<u>CONTROL OF MAN HOURS PLANNING VERSUS SCHEDULED MAINTENANCE WORK.....</u>	<u>77</u>
<u>2.24</u>	<u>DUPLICATE INSPECTION</u>	<u>79</u>
<u>2.25</u>	<u>PROCEDURE TO DETECT AND RECTIFY MAINTENANCE ERRORS.....</u>	<u>85</u>
<u>2.26</u>	<u>SHIFT/TASK HANDOVER PROCEDURES</u>	<u>87</u>
<u>2.27</u>	<u>PROCEDURE FOR NOTIFICATION OF MAINTENANCE DATA INACCURACIES AND AMBIGUITIES TO THE TYPE CERTIFICATE HOLDER.....</u>	<u>89</u>
<u>2.28</u>	<u>TECHNICAL PLANNING PROCEDURES.....</u>	<u>91</u>
PART L2: ADDITIONAL LINE MAINTENANCE AND PROCEDURES		
<u>L2.1</u>	<u>LINE MAINTENANCE CONTROL OF AIRCRAFT COMPONENTS, TOOLS AND EQUIPMENT.....</u>	<u>1</u>
<u>L2.2</u>	<u>LINE MAINTENANCE PROCEDURES RELATED TO SERVICING/FUELING/DE-ICING</u>	<u>2</u>
<u>L2.3</u>	<u>LINE MAINTENANCE CONTROL OF DEFECTS AND REPETITIVE DEFECTS.....</u>	<u>4</u>
<u>L2.4</u>	<u>COMPLETION OF TECHNICAL LOG</u>	<u>6</u>
<u>L2.5</u>	<u>POOLED PARTS AND LOANED PARTS.....</u>	<u>6</u>
<u>L2.6</u>	<u>RETURN OF DEFECTIVE PARTS REMOVED FROM AIRCRAFT</u>	<u>6</u>
<u>L2.7</u>	<u>CONTROL OF CRITICAL TASKS.....</u>	<u>6</u>
<u>L2.8</u>	<u>GROUND RUNNING AND TAXIING</u>	<u>7</u>
<u>L2.9</u>	<u>AIRCRAFT JACKING</u>	<u>7</u>
<u>L3.0</u>	<u>MAINTENANCE PERFORMANCE STANDARDS:</u>	<u>7</u>
PART 3: QUALITY SYSTEM PROCEDURES		
<u>3.1</u>	<u>QUALITY AUDIT OF ORGANIZATION PROCEDURES</u>	<u>1</u>
<u>3.2</u>	<u>QUALITY AUDIT OF AIRCRAFT.....</u>	<u>7</u>
<u>3.3</u>	<u>QUALITY AUDIT REMEDIAL ACTION PROCEDURES.....</u>	<u>9</u>
<u>3.4</u>	<u>CERTIFYING STAFF QUALIFICATION AND TRAINING PROCEDURES</u>	<u>11</u>
<u>3.5</u>	<u>CERTIFYING STAFF RECORDS</u>	<u>15</u>
<u>3.6</u>	<u>QUALITY AUDIT PERSONNEL</u>	<u>17</u>
<u>3.7</u>	<u>QUALIFYING INSPECTORS</u>	<u>19</u>
<u>3.8</u>	<u>QUALIFYING MECHANICS/TECHNICIANS.....</u>	<u>31</u>
<u>3.9</u>	<u>EXEMPTION PROCESS CONTROL</u>	<u>33</u>
<u>3.10</u>	<u>CONCESSION CONTROL FOR DEVIATION FROM PROCEDURES</u>	<u>35</u>

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	7

<u>3.11</u>	<u>QUALIFICATION PROCEDURE FOR SPECIALIZED ACTIVITIES</u>	37
<u>3.12</u>	<u>CONTROL OF MANUFACTURER’S WORKING TEAMS</u>	39
<u>3.13</u>	<u>MISSING TOOL POLICY</u>	41
<u>3.14</u>	<u>HANGAR INCIDENTS / OCCURRENCES</u>	43
<u>3.15</u>	<u>QUALITY WORK INSTRUCTIONS</u>	45
<u>3.16</u>	<u>ONE OF CERTIFICATION APPROVAL</u>	47
<u>3.17</u>	<u>CONTROL AND DISPOSAL OF CONTAMINATED FLUIDS</u>	49
<u>3.18</u>	<u>DRUG AND ALCOHOL TESTING AND REPORTING</u>	51
<u>3.19</u>	<u>COMPETENCE ASSESMENT OF PERSONNEL</u>	53
PART 4: DOCUMENTATION		
<u>4.1</u>	<u>CONTRACTED AIR OPERATORS</u>	1
<u>4.2</u>	<u>AIR OPERATORS PROCEDURES AND PAPERWORK</u>	3
<u>4.3</u>	<u>AIR OPERATOR RECORD COMPLETION</u>	5
PART 5: APPENDICES		
<u>5.1</u>	<u>SAMPLE DOCUMENTS</u>	1
<u>5.2</u>	<u>LIST OF SUBCONTRACTORS</u>	3
<u>5.3</u>	<u>LIST OF LINE MAINTENANCE STATIONS</u>	5

Issue No. 3

SAFARILINK

Part 0

Revision No. 0

MAINTENANCE PROCEDURES
MANUAL

Section LP

Issued 17 Oct 2024

Leading Pages

Page 8

0.2 List of Effective Pages

Part	Page	Issue	Rev	Date	Part	Page	Issue	Rev	Date
Part 0					1	13	3	0	17 Oct-24
Section LP					Section 1.4				
0	1	3	0	17 Oct-24	1	14	3	0	17 Oct-24
0	2	3	0	17 Oct-24	1	15	3	0	17 Oct-24
0	3	3	0	17 Oct-24	Section 1.5				
0	4	3	0	17 Oct-24	1	16	3	0	17 Oct-24
0	5	3	0	17 Oct-24	1	17	3	0	17 Oct-24
0	6	3	0	17 Oct-24	Section 1.6				
0	7	3	0	17 Oct-24	1	18	3	0	17 Oct-24
0	8	3	0	17 Oct-24	1	19	3	0	17 Oct-24
0	9	3	0	17 Oct-24	1	20	3	0	17 Oct-24
0	10	3	0	17 Oct-24	1	21	3	0	17 Oct-24
0	11	3	0	17 Oct-24	Section 1.7				
0	12	3	0	17 Oct-24	1	22	3	0	17 Oct-24
0	13	3	0	17 Oct-24	1	23	3	0	17 Oct-24
0	14	3	0	17 Oct-24	1	24	3	0	17 Oct-24
0	15	3	0	17 Oct-24	1	25	3	0	17 Oct-24
0	16	3	0	17 Oct-24	1	26	3	0	17 Oct-24
0	17	3	0	17 Oct-24	1	27	3	0	17 Oct-24
0	18	3	0	17 Oct-24	1	28	3	0	17 Oct-24
0	19	3	0	17 Oct-24	1	29	3	0	17 Oct-24
0	20	3	0	17 Oct-24	1	30	3	0	17 Oct-24
0	21	3	0	17 Oct-24	1	31	3	0	17 Oct-24
0	22	3	0	17 Oct-24	Section 1.8				
Part 1					1	32	3	0	17 Oct-24
Section 1.1					1	33	3	0	17 Oct-24
1	1	3	0	17 Oct-24	1	34	3	0	17 Oct-24
1	2	3	0	17 Oct-24	1	35	3	0	17 Oct-24
Section 1.2					1	36	3	0	17 Oct-24
1	3	3	0	17 Oct-24	1	37	3	0	17 Oct-24
1	4	3	0	17 Oct-24	Section 1.9				
1	5	3	0	17 Oct-24	1	38	3	0	17 Oct-24
					1	39	3	0	17 Oct-24
Section 1.3					1	40	3	0	17 Oct-24
1	6	3	0	17 Oct-24					
1	7	3	0	17 Oct-24					
1	8	3	0	17 Oct-24	Section 1.10				
1	9	3	0	17 Oct-24	1	41	3	0	17 Oct-24
1	10	3	0	17 Oct-24	1	42	3	0	17 Oct-24
1	11	3	0	17 Oct-24	1	43	3	0	17 Oct-24
1	12	3	0	17 Oct-24	1	44	3	0	17 Oct-24

APPROVED
KENYA CIVIL AVIATION AUTHORITY
AIRWORTHINESS DIVISION
Date: 07/11/2024 Signature: 

SL/MPM/001 ISSUE:03 REV:0

Issue No. 3

SAFARILINK

Part 0

Revision No. 0

MAINTENANCE PROCEDURES
MANUAL

Section LP

Issued 17 Oct 2024

Leading Pages

Page 9

Part	Page	Issue	Rev	Date	Part	Page	Issue	Rev	Date
Part 2					Section 2.8				
Section 2.1					2	32	3	0	17 Oct-24
2	1	3	0	17 Oct-24	2	33	3	0	17 Oct-24
2	2	3	0	17 Oct-24	2	34	3	0	17 Oct-24
2	3	3	0	17 Oct-24	2	35	3	0	17 Oct-24
2	4	3	0	17 Oct-24					
2	5	3	0	17 Oct-24	Section 2.9				
Section 2.2					2	36	3	0	17 Oct-24
2	6	3	0	17 Oct-24	2	37	3	0	17 Oct-24
2	7	3	0	17 Oct-24	2	38	3	0	17 Oct-24
2	8	3	0	17 Oct-24	2	39	3	0	17 Oct-24
2	10	3	0	17 Oct-24	Section 2.10				
2	11	3	0	17 Oct-24	2	40	3	0	17 Oct-24
Section 2.3									
2	12	3	0	17 Oct-24	Section 2.11				
2	13	3	0	17 Oct-24	2	41	3	0	17 Oct-24
2	14	3	0	17 Oct-24	2	42	3	0	17 Oct-24
2	15	3	0	17 Oct-24					
2	16	3	0	17 Oct-24	Section 2.12				
2	17	3	0	17 Oct-24	2	43	3	0	17 Oct-24
2	18	3	0	17 Oct-24	2	44	3	0	17 Oct-24
Section 2.4									
2	19	3	0	17 Oct-24	Section 2.13				
2	20	3	0	17 Oct-24	2	45	3	0	17 Oct-24
2	21	3	0	17 Oct-24	2	46	3	0	17 Oct-24
2	22	3	0	17 Oct-24	2	47	3	0	17 Oct-24
Section 2.5					2	48	3	0	17 Oct-24
2	23	3	0	17 Oct-24	Section 2.14				
2	24	3	0	17 Oct-24	2	49	3	0	17 Oct-24
2	25	3	0	17 Oct-24	2	50	3	0	17 Oct-24
2	26	3	0	17 Oct-24	2	51	3	0	17 Oct-24
Section 2.6					2	52	3	0	17 Oct-24
2	27	3	0	17 Oct-24					
2	28	3	0	17 Oct-24	Section 2.15				
2	29	3	0	17 Oct-24	2	53	3	0	17 Oct-24
Section 2.7					2	54	3	0	17 Oct-24
2	30	3	0	17 Oct-24					
2	31	3	0	17 Oct-24					



SL/MPM/001 ISSUE:03 REV:0

Issue No. 3

SAFARILINK

Part 0

Revision No. 0

MAINTENANCE PROCEDURES
MANUAL


Section LP

Issued 17 Oct 2024

Leading Pages

Page 10

Part	Page	Issue	Rev	Date	Part	Page	Issue	Rev	Date
Section 2.16					Section 2.24				
2	55	3	0	17 Oct-24	2	79	3	0	17 Oct-24
2	56	3	0	17 Oct-24	2	80	3	0	17 Oct-24
2	57	3	0	17 Oct-24	2	81	3	0	17 Oct-24
2	58	3	0	17 Oct-24	2	82	3	0	17 Oct-24
2	59	3	0	17 Oct-24	2	83	3	0	17 Oct-24
2	60	3	0	17 Oct-24	2	84	3	0	17 Oct-24
Section 2.17					Section 2.25				
2	61	3	0	17 Oct-24	2	85	3	0	17 Oct-24
2	62	3	0	17 Oct-24	2	86	3	0	17 Oct-24
Section 2.18					Section 2.26				
2	63	3	0	17 Oct-24	2	87	3	0	17 Oct-24
2	64	3	0	17 Oct-24	2	88	3	0	17 Oct-24
2	65	3	0	17 Oct-24	Section 2.27				
2	66	3	0	17 Oct-24	2	89	3	0	17 Oct-24
2	67	3	0	17 Oct-24	2	90	3	0	17 Oct-24
2	68	3	0	17 Oct-24	Section 2.28				
Section 2.19					2	91	3	0	17 Oct-24
2	69	3	0	17 Oct-24	2	92	3	0	17 Oct-24
2	70	3	0	17 Oct-24	Section L2				
Section 2.20					2	1	3	0	17 Oct-24
2	71	3	0	17 Oct-24	2	2	3	0	17 Oct-24
2	72	3	0	17 Oct-24	2	3	3	0	17 Oct-24
Section 2.21					2	4	3	0	17 Oct-24
2	73	3	0	17 Oct-24	2	5	3	0	17 Oct-24
2	74	3	0	17 Oct-24	2	6	3	0	17 Oct-24
Section 2.22					2	7	3	0	17 Oct-24
2	75	3	0	17 Oct-24	2	8	3	0	17 Oct-24
2	76	3	0	17 Oct-24	Part 3				
Section 2.23					Section 3.1				
2	77	3	0	17 Oct-24	3	1	3	0	17 Oct-24
2	78	3	0	17 Oct-24	3	2	3	0	17 Oct-24
					3	3	3	0	17 Oct-24
					3	4	3	0	17 Oct-24
					3	5	3	0	17 Oct-24
					3	6	3	0	17 Oct-24

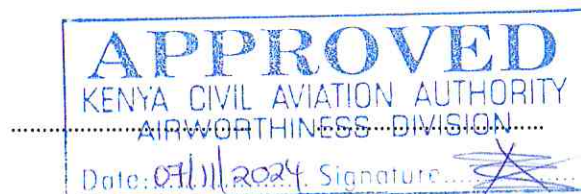

SL/MPM/001 ISSUE:03 REV:0

Issue No. 3

SAFARILINK

Part 0

Revision No. 0

MAINTENANCE PROCEDURES
MANUAL

Section LP

Issued 17 Oct 2024

Leading Pages

Page 11

Part	Page	Issue	Rev	Date
Part 3				
Section 3.2				
3	7	3	0	17 Oct-24
3	8	3	0	17 Oct-24
Section 3.3				
3	9	3	0	17 Oct-24
3	10	3	0	17 Oct-24
Section 3.4				
3	11	3	0	17 Oct-24
3	12	3	0	17 Oct-24
3	13	3	0	17 Oct-24
3	14	3	0	17 Oct-24
Section 3.5				
3	15	3	0	17 Oct-24
3	16	3	0	17 Oct-24
Section 3.6				
3	17	3	0	17 Oct-24
3	18	3	0	17 Oct-24
Section 3.7				
3	19	3	0	17 Oct-24
3	20	3	0	17 Oct-24
3	21	3	0	17 Oct-24
3	22	3	0	17 Oct-24
3	23	3	0	17 Oct-24
3	24	3	0	17 Oct-24
3	25	3	0	17 Oct-24
3	26	3	0	17 Oct-24
3	27	3	0	17 Oct-24
3	28	3	0	17 Oct-24
3	29	3	0	17 Oct-24
3	30	3	0	17 Oct-24
Section 3.8				
3	31	3	0	17 Oct-24
3	32	3	0	17 Oct-24

Part	Page	Issue	Rev	Date
Section 3.9				
3	33	3	0	17 Oct-24
3	34	3	0	17 Oct-24
Section 3.10				
3	35	3	0	17 Oct-24
3	36	3	0	17 Oct-24
Section 3.11				
3	37	3	0	17 Oct-24
3	38	3	0	17 Oct-24
Section 3.12				
3	39	3	0	17 Oct-24
3	40	3	0	17 Oct-24
Section 3.13				
3	41	3	0	17 Oct-24
3	42	3	0	17 Oct-24
Section 3.14				
3	43	3	0	17 Oct-24
3	44	3	0	17 Oct-24
Section 3.15				
3	45	3	0	17 Oct-24
3	46	3	0	17 Oct-24
Section 3.16				
3	47	3	0	17 Oct-24
3	48	3	0	17 Oct-24
Section 3.17				
3	49	3	0	17 Oct-24
3	50	3	0	17 Oct-24
Section 3.18				
3	51	3	0	17 Oct-24
3	52	3	0	17 Oct-24



Part 0

Section	LP
---------	----

Page 12

Part	Page	Issue	Rev	Date
Section 3.19				
3	53	3	0	17 Oct-24
3	54	3	0	17 Oct-24
3	55	3	0	17 Oct-24
3	56	3	0	17 Oct-24
3	57	3	0	17 Oct-24
3	58	3	0	17 Oct-24
3	59	3	0	17 Oct-24
3	60	3	0	17 Oct-24
Part 4				
Section 4.1				
4	1	3	0	17 Oct-24
4	2	3	0	17 Oct-24
Section 4.2				
4	3	3	0	17 Oct-24
4	4	3	0	17 Oct-24
Section 4.3				
4	5	3	0	17 Oct-24
4	6	3	0	17 Oct-24
Part 5				
Section 5.1				
5	1	3	0	17 Oct-24
5	2	3	0	17 Oct-24
Section 5.2				
5	3	3	0	17 Oct-24
5	4	3	0	17 Oct-24
Section 5.3				
5	5	3	0	17 Oct-24

[illegible]

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	13

0.3 Associated Company documents and references

- 1) Maintenance Training Manual REF: SL/MTM/001
- 2) Security Manual
- 3) SMS manual REF: SL/SMSM/2021
- 4) Sample Forms: SLFORMS-001
- 5) Quality Manual. SL/QMSM/2023
- 6) Operator's AMPs and MCM

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	14

0.4 Distribution List

MANUAL No	MANUAL HOLDER	FORMAT
1.	KCAA	Hard Copy
2.	Central library	Soft Copy
3.	Accountable Manager	Soft Copy
4.	Head of Base Maintenance	Hard Copy

The Head of Quality, Head of Line Maintenance, Head of Workshop, Head of Safety, All staff, outstations and clients/customers shall access this manual through the Central library copy.

[illegible]

0.6 List of Abbreviations

AD	Airworthiness Directive
ADD	Acceptable (or Allowable) Deferred Defect
AIC	Aeronautical Information Circular
AM	Accountable Manager
AME	Aircraft Maintenance Engineer
AMEL	Aircraft Maintenance Engineers License
AMM	Approved Maintenance Manual
AMO	Approved Maintenance Organization
AO or QO:	Both used interchangeably; Audit organization or Quality Organization
AOC	Air Operator Certificate
ATA	Air Transport Association
ATO or ETO:	Approved Training Organization/Endorsed Training Organization
ATTC	Approved Technical Training Center
HOBM	Head of Base Maintenance
C of A	Certificate of Airworthiness
C of F F	Certificate of Fitness for Flight
C of R	Certificate of Registration
CAR	Corrective Action Report
Cat A	Airframe
Cat C	Engines
Cat R	Radio
Cat X	Electrical, Instruments, Autopilot and Compass
CMM	Component Maintenance Manual
CMO	Contracted Maintenance Organization
CRS	Certificate of Release to Service
CSN	Cycles Since New
Doc	Document
HOQ	Head of Quality
DTR	Daily Technical Report
ESD	Electrostatic Sensitive Device
FAA	Federal Aviation Administration
FARs	Federal Aviation Regulations
FIFO	First in-First out
GE	Ground Equipment

GRN	Goods Received Note
INOP	Inoperative
IPC	Illustrated Parts Catalogue
JARs	Joint Airworthiness Requirements
KCAA	Kenya Civil Aviation Authority
KCARs	Kenya Civil Aviation Regulations
LEP	List of Effective Pages
LLPs	Life Limited Parts
HOLM	Head of Line Maintenance
LRU	Line Replaceable Unit
MEL	Minimum Equipment List
MO	Manual Owner: The author of a company document/ manual. The person required by the CAA to write the manual
MPM	Maintenance Procedures Manual
MPM	Maintenance Procedures Manual
NB	Note/ Important
NDT	Non-Destructive Testing
OEM	Original Equipment Manufacturer
PMA	Parts Manufacturer Approval
HOS	Head of Safety
Qty	Quantity
QWI	Quality Work Instruction
SB	Service Bulletin
SRM	Structural Repair Manual
STC	Supplemental Type Certificate
TR	Temporary Revision.
TSN	Time Since New
TSO	Time Since Overhaul
WTR	Without Type Rating
MCM	Maintenance Control Manual
AMP	Aircraft Maintenance Program
KAH	Kenya Aerospace LTD Hangar

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	18

Interpretation/Definitions:

1. “acceptable” means the Authority has reviewed the method, procedure, or policy and has neither objected to nor approved its proposed use or implementation;
2. “accountable manager” means the manager who has corporate authority for ensuring that all maintenance activities required by the owner or operator of an aircraft are financed and carried out to the standard required by the Authority;
3. “aeronautical product” means any aircraft, engine, propeller, or subassembly, appliance, material, part, or component to be installed thereon;
4. “aircraft” means any machine that can derive support in the atmosphere from the reactions of the air, other than the reactions of the air against the earth’s surface;
5. “aircraft component” means any assembly, item component, part of an aircraft up to and including a complete powerplant or any operational or emergency equipment;
6. “aircraft type” means all aircraft of the same basic design;
7. “airframe” means the fuselage, booms, nacelles, cowlings, fairings, airfoil surfaces (including rotors but excluding propellers and rotating airfoils of a powerplant), and landing gear of an aircraft and their accessories and controls
8. “airworthiness data” means any information necessary to ensure that an aircraft or aircraft component can be maintained in a condition such that airworthiness of the aircraft, or serviceability of operational and emergency equipment, as appropriate, is assured;
9. “AMO” means Approved Maintenance Organization; “AOC” means Air Operator Certificate;
10. “appliance” means any instrument, mechanism, equipment, part, apparatus, appurtenance, or accessory, including communication equipment, that is used or intended to be used in operating or controlling an aircraft in flight, is installed in or attached to the aircraft, and is not part of an airframe, powerplant, or propeller;
11. “approved by the Authority” means approved by the Authority directly or in accordance with a procedure approved by the Authority;
12. “approved data” means technical information approved by the Authority;
13. “approved continuous maintenance program” means a maintenance program approved by the State of Registry;
14. “approved maintenance organization” means an organization approved to perform specific aircraft maintenance activities by the Authority;
15. “approved standard” means a manufacturing, design, maintenance, or quality standard approved by the Authority;

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	19

16. “article” means any item, including but not limited to, an aircraft, airframe, aircraft engine, propeller, appliance, accessory, assembly, subassembly, system, subsystem, component, unit, product, or part;
17. “Authority” means the Kenya Civil Aviation Authority;
18. “calibration” means a set of operations, performed in accordance with a definite documented procedure, that compares the measurement performed by a measurement device or working standard for the purpose of detecting and reporting or eliminating by adjustment errors in the measurement device, working standard, or component tested;
19. “certificate of release to service” means a document containing a certification that inspection and maintenance work has been performed satisfactorily in accordance with the methods prescribed by the Authority;
20. “certifying staff” means personnel authorized by the approved maintenance organization in accordance with a procedure acceptable to the Authority to certify aircraft or aircraft components for release to service;
21. “composite” means structural materials made of substances, including, but not limited to, wood, metal, ceramic, graphite, boron, epoxy, plastic, fiber-reinforced built- in strengthening agents that may be in the form of filaments, foils, powders, or flakes, of a different material;
22. “composite structure” means a type of aircraft structure made of plastic resins reinforced with strong light weight filaments;
23. “computer system” means any electronic or automated system capable of receiving, storing, and processing external data, and transmitting and presenting such data in a usable form for the accomplishment of a specific function;
24. “Contracting State” means a state that is signatory to the Convention on International Civil Aviation Organization
25. “facility” means a physical plant, including land, buildings, and equipment, which provides the means for the performance of maintenance, preventive maintenance, or modifications of any article;
26. “housing” means buildings, hangers, and other structures to accommodate the necessary equipment and materials of a maintenance organization that-
27. provide working space for the performance of maintenance, preventive maintenance, or modifications for which the maintenance organization is certificated and rated;
28. assembly, and testing;

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	20

29. provide structures for the proper protection of aircraft, airframes, aircraft engines, propellers, appliances, components, parts, and subassemblies thereof during disassembly, cleaning, inspection, repair, modification; and
30. Provide for the proper storage, segregation, and protection of materials, parts, and supplies.
31. “Inspection” means the examination of an aircraft or aircraft component to establish conformity with a standard approved by the Authority;
32. “Limited –Rating” Rating issued to an AMO for the performance on particular makes and models of sub parts of the airframes, power plants, propellers, radios, instruments, accessories, and/or parts”
33. “Maintenance” The performance of tasks required to ensure continuing airworthiness of an aircraft including any one combination or combination of overhaul, inspection, replacement, defect rectification and the embodiment of a modification or repair
34. “major modification” In respect of an aeronautical product for which a type certificate has been issued, a change in the type design that has an appreciable effect, or other than a negligible effect, on the mass and balance limits, structural strength, engine operation, flight characteristics, reliability, operational characteristics, or other characteristics or qualities affecting the airworthiness or environmental characteristics of an aeronautical product.
35. “minor modification”. A modification other than a major modification
36. “maintenance” means tasks required to ensure the continued airworthiness of an aircraft or aircraft component including any one or combination of overhaul, repair, inspection, replacement, modification, and defect rectification;
37. “major modification” means a type design change not listed in the aircraft, aircraft engine, or propeller specifications that might appreciably affect the mass and balance limits, structural strength, performance, powerplant operation, flight characteristics, or other qualities affecting airworthiness or environmental characteristics, or that will be embodied in the product according to non-standard practices;
38. “major repair” means a repair of an aeronautical product that might appreciably affect the structural strength, performance, powerplant, operation flight characteristics, or other qualities affecting airworthiness or environmental characteristics, or that will be embodied in the product using non-standard practices;
39. “Modification” means a change to the type design of an aircraft or aeronautical product which is not a repair;

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	21

40. “overhaul” means the restoration of an aircraft or aircraft component using methods, techniques, and practices acceptable to the Authority, including disassembly, cleaning, and inspection as permitted, repair as necessary, and reassembly; and testing in accordance with approved standards and technical data, or in accordance with current standards and technical data acceptable to the Authority, which have been developed and documented by the State of Design, holder of the type certificate, supplemental type certificate, or a material, part, process, or appliance approval under Parts Manufacturing Authorization (PMA) or Technical Standard Order (TSO);
41. “powerplant” means an engine that is used or intended to be used for propelling aircraft, and it includes turbo, superchargers, appurtenances, and accessories necessary for its functioning, but does not include propellers;
42. “Preventive maintenance” means simple or minor preservation operations and the replacement of small standard parts not involving complex assembly operations;
43. “quality system” means documented organizational procedures and policies: internal audits of those policies and procedures: management review and recommendation for quality improvement.”
44. “rating” means an authorization entered on, or associated with a license or certificate and forming part thereof, stating special conditions, privileges or limitations pertaining to such license or certificate;
45. “Specific operating provisions” The Authorizations, Conditions and limitations associated with the maintenance organization and subject to the conditions in the maintenance procedures manual.
46. “State of Design” means the Contracting State which approved the original type certificate and any subsequent supplemental type certificates for an aircraft, or which approved the design of an aircraft or aircraft component or appliance;
47. “State of Manufacture” means the Contracting State, under whose authority an aircraft was assembled, approved for compliance with the type certificate and all supplemental type certificates, test flown and approved for operation; the State of Manufacture may or may not also be the State of Design; and
48. “State of Registry” means the Contracting State on whose registry an aircraft is registered.

Issue No.	3	SAFARILINK	Part	0
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	LP
Issued	17 Oct 2024	Leading Pages	Page	22

Citation

These Regulations may be cited as the Civil Aviation (Approved Maintenance Organization) Regulations, 2018.

Application

These Regulations shall apply to all persons operating or maintaining aircraft registered in Kenya wherever they may be.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.1
Issued	17 Oct 2024	Corporate Commitment by the Accountable Manager	Page	1

1.1. CORPORATE COMMITMENT STATEMENT

This manual and all other associated manuals define the organization's procedures upon which Safarilink operating under the Kenya Civil Aviation (Approved Maintenance Organization) Regulations. These procedures are approved by the undersigned and must be complied with, as applicable; to ensure that all the maintenance work carried out by Safarilink is to approved standards thus ensuring the safety of its operation.

Safarilink will ensure that all relevant employees adhere to these Procedures in performance of their duties.

The Accountable Manager hereby commits to ensure that activities are sufficiently funded and that qualified personnel will be employed; adequate facilities will be provided, and that parts & materials will be sourced to enable the provision of a high standard of work that exemplifies safety.

The Accountable Manager shall ensure that senior management provides effective leadership which aims at the continuous improvement of the commitment processes by:

1. Communicating the importance of meeting customer, statutory, and company requirements.
2. Establishing company policies and objectives.
3. Conducting management reviews.
4. Ensuring the availability of resources and information necessary to support the company operations and monitoring of these processes.

The Accountable Manager hereby acknowledges that these procedures do not override the necessity of complying with any new or amended regulations promulgated by the Kenya Civil Aviation Authority (KCAA).

It is understood by the Accountable Manager that the KCAA will approve this organization being satisfied that the procedures are strictly adhered to. The KCAA reserves the right to suspend, vary or revoke the approval of the organization if there is evidence that procedures are not followed and thus standards are not upheld.



Mr. Alex Avedi
Accountable Manager



Dated.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.1
Issued	17 Oct 2024	Corporate Commitment by the Accountable Manager	Page	2

THIS PAGE IS INTENTIONALLY LEFT BLANK

1.2 Management Personnel

The following table lists the management personnel of the Safarilink.

No.	Name of personnel	Position
1.	Alex Avedi	Accountable Manager
2.	Kazungu Kea Mwangolo	Head of Quality
3.	William Mlati Mwashighadi	Head of Base Maintenance
4.	Francis Muriuki Ngari	Head of Workshop
5.	Smith Harun Kipchumba	Head of Line Maintenance
6.	Bruce Mukabi	Head of Safety

Bio Data of Management Staff as above shall be submitted to KCAA and Safarilink shall ensure any revision (changes) to these positions are communicated to KCAA in writing.

1.2.1 Accountable Manager

The Accountable Manager will ensure that adequate resources are made available to facilitate the activities of the approved maintenance organization and to the standards acceptable to the Authority. The Accountable Manager shall establish and promote the safety and quality policy.

1.2.1.1 Qualification.

1. A background in the aviation management.
2. Knowledge of the Civil Aviation Act, the Civil Aviation Regulations and other materials published by the Authority that are applicable to aircraft maintenance; and
3. Thorough knowledge of Safarilink maintenance procedures.

Note:

The Accountable Manager shall notify the Authority when he/she delegates part of his/her responsibility in writing to another person in a management position within the organization.

1.2.2 Head of Base Maintenance

Is responsible for the general administration of the maintenance department and ensures that all maintenance work performed in the Hangar is done in accordance with current regulations and the requirements herein set in the maintenance procedures manual.

The Head of Base Maintenance shall report to the Accountable Manager for all maintenance activities performed in the hangar.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.2
Issued	17 Oct 2024	Management Personnel	Page	4

1.2.2.1 Qualifications.

1. Be a licensed Maintenance Engineer with appropriate ratings for which the AMO has applied for or is approved.
2. Have at least five (5) years' experience in maintaining the same category of aircraft including one (1) year as a certifying staff for the most complex or largest aircraft applied for in the AMO.
3. Have received Type training on every aircraft maintained within the approved scope of the Approved Maintenance Organization; and
4. Have attended a Management or Supervisory course recognized by Authority.

1.2.3 **Head of Line Maintenance**

Is responsible for the general administration of the maintenance carried out on the Line and ensures that all maintenance work performed is in accordance with current regulations and the requirements herein set in the maintenance procedures manual.

The Head of Line Maintenance shall report to the Accountable Manager for all maintenance activities performed outside the Hangar.

1.2.3.1 Qualification

1. Be a licensed maintenance engineer with appropriate ratings for which the AMO has applied for or is approved; and
2. Have at least five (5) years' experience in maintaining the same category of aircraft including one (1) year as a certifying staff for the most complex or largest aircraft applied for in the AMO.
3. Have attended management or supervisory course recognized by the Authority.

1.2.4 **Head of Quality**

Shall be responsible for the overall quality system within the maintenance organization. The Head of Quality shall monitor the AMO's compliance with, and the adequacy of, procedures required to ensure safe operational practices throughout the organization.

The primary role of the Head of Quality is to verify, by monitoring activity in the field of maintenance, Personnel training and ground operations, that the standards required by the company, and any additional requirements defined by the Authority are being carried out under the supervision of the nominated AMO post-holder's.

The Head of Quality shall report to the Accountable Manager for all AMO Quality matters.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.2
Issued	17 Oct 2024	Management Personnel	Page	5

1.2.4.1 Qualifications

1. A licensed Maintenance Engineer
2. Have at least five (5) years' experience in the field of aircraft maintenance of which (3) years should have been acquired in a Quality Department.
3. Must have successfully completed training in Quality Management course recognized by the Authority.

1.2.5 **Head of Safety**

The head of safety shall be responsible for the implementation and maintenance of an effective Safety Management System.

1.2.5.1 Qualifications

1. A technically qualified person in the field of aircraft maintenance or flight operations
2. At least (5) years' experience in the field of aircraft maintenance or flight operations
3. Must have successfully completed training in Safety Management Systems course recognized by the Authority.

1.2.6 **Head of Workshop**

Shall be responsible for ensuring that all work on aircraft components in the workshop and any corrective action resulting from quality compliance monitoring is performed to required standards.

The Head of Workshop shall report to the Accountable Manager for all AMO workshop matters.

1.2.6.1 Qualifications of Head of Workshop

1. Be a licensed Maintenance Engineer
2. OEM training on components capability applied for
3. At least (5) years' experience in maintaining components for the same category of aircraft including 1 year in the capacity of returning components to service.
4. Have attended Management or Supervisory course recognized by the Authority.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	6

1.3 DUTIES AND RESPONSIBILITIES OF MANAGEMENT PERSONNEL

1.3.1 Responsibilities of the Accountable Manager

1. The Accountable Manager shall responsible for the overall administration of Safarilink.
2. The Accountable Manager shall ensure that all maintenance activities are financed and carried out to the required standard.
3. Shall appoint qualified post holders.
4. Shall ensure that the audit reports are acted upon and the quality system is constantly evaluated to maintain the published standards.
5. When authorized by the Authority, the Accountable Manager may delegate all or part of his responsibility in writing to another person within the management structure.
6. The Accountable Manager of Safarilink shall not serve in a similar position in any other AMO, unless approved by Authority
7. Shall establish and promote the safety and quality policy.

1.3.1.1 Delegation of Duties

The Accountable manager may delegate his/her duties in writing to one of the AMO management personnel.

1.3.2 Responsibilities of the Head of Quality

1. Be responsible for monitoring the AMO's compliance with the current regulations and coordinating the activities required to meet the standards.
2. Shall be directly responsible to the Accountable Manager with respect to all Quality matters.
3. Shall have access to all parts of the company and necessary sub-contractor organizations.
4. Shall be responsible for the Maintenance Procedures Manual and make amendments where necessary.
5. Shall be responsible for calling for Audit Evaluation meetings.
6. The Head of Quality will periodically review the quality management system to ensure that it is suitable to support the high operational standards required.
7. Shall be the liaison and focal point representative for the Company with KCAA.
8. Shall ensure that the audit schedule meets all necessary internal and external audit requirements and that it shall be conducted on a 12-month rolling period.
9. Shall be responsible for compiling departmental audit checklists.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	7

10. Shall carry out or nominate the company auditors to effect regular audits as required by the audit schedule.
11. Is responsible for the follow up of audit findings and ensures that all responsible managers comply with deficiencies in the shortest time possible.
12. Shall complete operational audits as a means of achieving effective management of safety and quality functions.
13. Shall ensure that all third-party contractors have a current contract with the company that includes or references measurable specifications that can be monitored by the company to ensure requirements that affect the safety and/or security of the operations is being fulfilled.
14. Shall ensure that all audit reports are filed appropriately once closed and shall ensure that they are kept, together with all forms and correspondence about the quality audit, for inspection for not less than 3 years following the audit.
15. Shall follow the Safety and Security policies and programs established with Safarilink.
16. Additionally, the following documents shall be kept by the Head of Quality for a period of not less than 3 years:
 - a. Audit schedules.
 - b. Quality Inspection and audit reports.
 - c. Response to findings.
 - d. Corrective action reports.
 - e. Follow – up and closure reports, and.
 - f. Audit evaluation reports.

1.3.2.1 Delegation of Duties

In absence of the Head of Quality, the Quality Officer shall be delegated the duties of the office.

1.3.3 Responsibilities of the Head of Base Maintenance

1. Shall be directly responsible to the Accountable Manager reporting regularly on hangar maintenance performance and fleet availability status.
2. Shall facilitate training of maintenance personnel in the proper work procedures and practices to be followed
3. Shall ensure that all licenses and documentation of the Maintenance Department are in accordance with the Authorities requirements
4. Shall supervise the general Administration of the Maintenance Department, to ensure its efficient running by defining and deploy technical staff and available resources.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	8

5. Shall ensure that all required spare parts required for the correspondent work pack are available / ordered in a reasonable time frame.
6. Shall ensure that maintenance is carried out on time and to approve standards, by ensuring adequate tooling and equipment are available appropriate to the maintenance tasks being performed by the AMO
7. Shall oversee training of maintenance personnel to ensure that personnel are conversant with proper work practices and procedures.
8. shall develop and put in place a training program with focus for present and future needs.
9. Shall liaison with government bodies that concern operations of the maintenance department
10. Shall ensures that all defect correction is in accordance with approved standards
11. Shall ensures that maintenance is carried out in accordance with the Approved Maintenance Schedule or Program.
12. Shall ensures compliance with continued airworthiness requirements
13. Shall ensure that all maintenance performed is in accordance with the MPM or current instructions
14. Shall Monitor all contracted Maintenance to ensure that they are performed in accordance with the arrangement in-force
15. Shall ensure that personnel observe safety precautions at the workplace to prevent injury to staff and damage to aircraft and equipment.
16. Shall ensure that personnel comply with the appropriate manuals, KCAA regulations and manufacturer's recommendations,
17. Shall ensure all hangar and shop equipment and tools are in a serviceable working condition
18. Shall ascertain that all necessary maintenance entries on maintenance forms and work orders used are executed correctly
19. Shall ensure the maintenance premises are in a clean and orderly manner
20. To review all base maintenance work packages so as to check their completeness in accordance with the established standards set in of this manual.
21. Shall follow the Safety and Security policies and programs established with Safarilink.

1.3.3.1 Delegation of Duties

In absence of the Head of Base Maintenance, the Head of Line Maintenance shall be delegated the duties of the office.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES	Section	1.3
		MANUAL		
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	9

1.3.4 Responsibilities of the Head of Line Maintenance

1. Shall be directly responsible to the Accountable Manager reporting regularly on the line maintenance department performance and fleet availability status.
2. To maintain and ensure currency of all required technical data in the stations.
3. To ensure all tools and test equipment used for work on operator's aircraft undergo regular checks and calibration as called for.
4. To ensure that all required spare parts required for the correspondent work pack are available / ordered in a reasonable time frame.
5. To ensure that no un-documented or bogus parts are installed in any aircraft released under this approval.
6. To conduct final inspection of all aircraft and record results;
7. To ensure availability of serviceable aircraft to match contractual obligations.
8. To ensure proper tagging and identification of parts in forward storage.
9. To monitor MEL/CDL restricted items to ensure timely closure.
10. To review all incoming line stations, work packages so as to check their completeness in accordance with the established standards set in this manual.
11. Shall follow the Safety and Security policies and programs established with Safarilink.

1.3.4.1 Delegation of Duties

In the absence of the Head of Line Maintenance, the Head of Base Maintenance shall be delegated the duties of the office.

1.3.5 Responsibilities of the Head of Workshop.

Shall be responsible for ensuring that all work on aircraft components in the workshop and any corrective action resulting from quality compliance monitoring is performed to required standards.

1. Shall be directly responsible to the Accountable Manager reporting regularly on workshop maintenance performance.
2. Shall in liaison with Base & Line Maintenance Managers facilitate training of maintenance personnel in the proper work procedures and practices to be followed.
3. Shall ensure that all workshop licenses and documentation are in accordance with the Authorities requirements
4. Shall ensure that all required spare parts required for the correspondent workshop tasks are available / ordered in a reasonable time frame.
5. Shall ensure that maintenance is carried out on time and to approve standards, by

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	10

ensuring adequate tooling and equipment are available appropriate to the maintenance tasks being performed by the AMO

6. Shall oversee training of maintenance personnel to ensure that personnel are conversant with proper work practices and procedures.
7. Shall ensures that all defect correction is in accordance with approved standards
8. Shall ensures that maintenance is carried out in the workshop is in accordance with the respective Approved Maintenance Program and Component Maintenance Manual.
9. Shall in liaison with Base & Line Maintenance Managers Monitor all contracted Maintenance to ensure that they performed in accordance with the arrangement in force
10. Shall ensure that all personnel observe laid out workshop safety precautions to prevent injury to staff and damage to equipment.
11. Shall be the overall in charge and responsible for the calibrated tools/equipment and shall ensure that all are calibrated in a timely manner.
12. Shall ensure that personnel comply with the appropriate manuals, KCAA regulations and manufacturer's recommendations,
13. Shall ensure all hangar and shop equipment and tools are in a serviceable working condition
14. Shall ensure the workshops are in a clean and orderly manner
15. Shall review all workshop maintenance work packages to check on their completeness in accordance with the established standards set in of this manual.
16. Shall follow the Safety and Security policies and programs established with Safarilink.

1.3.5.1 Delegation of Duties

In absence of the Head of Workshop, the Head of Base/Head of Line Maintenance shall be delegated the duties of the office.

1.3.6 Responsibilities of the Head of Safety.

1. Shall be directly responsible to the Accountable Manager with respect to all Safety matters.
2. Shall establish, maintain and promote Safety Management System at Safarilink. Organization.
3. Shall ensure that Safarilink remains in conformance with the defined company rules, applicable laws and regulations with regard to safety.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	11

4. Shall be responsible of prevention of accident/incidents on proactive basis, accident /incident investigation services and promotion of general safety culture and awareness in Safarilink.
5. Shall be responsible for conducting investigations into incidents, serious incidents and accidents involving company equipment and personnel.
6. Shall be responsible for coordinating with KCAA and establishing the mandatory occurrence reporting System
7. Shall be responsible for liaising with all Departmental heads on Safety and assisting them in risk management within their respective areas of responsibilities.
8. Shall as Chairman of the Safarilink Safety Review Committee convene its periodic meetings and accurately record the proceedings of such meetings.
9. Shall ensure dissemination of Safety related information to relevant personnel /departments in the AMO and to external safety agencies.
10. Shall ensure carrying out regular safety gap analysis, spot check inspections and conduct annual overall Safety assessment of the AMO functionalities.
11. Shall conduct annual periodic review of Safarilink Safety management System manual for its adequacy and currency.
12. Shall establish a non-punitive confidential hazard reporting system enabling staff to communicate significant safety concerns.

1.3.6.1 Delegation of Duties

In absence of the Head of Safety, the Safety Officer shall be delegated the duties of the office.

1.3.7 Additional post holders:

1.3.7.1 Duties of the Quality Control Officer

1. To ensure that all tools and test equipment used for work on Operator's aircraft undergo regular checks and calibration as called for.
2. To ensure that no un-documented or bogus parts are installed in any component or articles released by the Company.
3. To conduct the preliminary, hidden damage, in-progress and final inspection of all components processed under the Safarilink approval and record such results.
4. To ensure proper tagging and identification of parts in storage.
5. To maintain a filing system of completed work orders, inspection sheets and other relevant documents in such a manner that the file pertaining to an item required, inspected, overhauled or modified can easily be identified for reference.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	12

6. To maintain up to date all mandatory maintenance records that are to be kept in the Maintenance Technical Records Department for work done on behalf of the Operator/Customers.
7. To ensure that a training program for all certifying engineers is maintained to a level that supports present and future requirements.
8. To ensure that there is an Authorization roster in place and all inspection authorizations are valid and all Company Approvals are kept up to date. Ensure that sound engineering practices and quality control procedures are followed, and that entries on work sheets and work orders have been duly signed off by those responsible upon completion of each job.

1.3.7.2 Delegation of duties

In the absence of the Quality control officer, the Head of Base/Line Maintenance shall be delegated his duties.

1.3.7.3 Duties of the Safety Officer

- 1 Implement Safety Management System.
- 2 Arrange the collation and dissemination of relevant safety information, bulletins, publications, etc., to the Company personnel concerned, maintenance personnel.
- 3 Ensure that the scale, type and condition of safety equipment carried on Company aircraft complies with the requirements of current legislation.
- 4 Monitor Company maintenance procedures to ensure that the highest standards of safety are maintained.
- 5 Keep under constant review improvements in safety equipment, procedures and training and make recommendations as necessary.
- 6 Liaise as necessary with the Safarilink corporate Head of Safety in relation to services providers, such as ATC, fire service, police, and security organizations.
- 7 Investigate any maintenance accident/incident or un-serviceability affecting the safety of persons or Equipment and make recommendations; to this end he/she will have access to Company Accident/incident Reports, technical log entries and Voyage Reports having a flight safety connotation.
- 8 Attend as an observer, any maintenance inquiry into accidents, incidents or operational matters concerning safety.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.3
Issued	17 Oct 2024	Duties and Responsibilities of Management Personnel	Page	13

- 9 Maintain, in the Company's interest, contact with Authority, other Company's
- 10 Attend Safety meetings and review boards to discuss matters arising from quality and safety audits.

1.3.7.4 Delegation of Duties


In absence of the Safety officer, the Head of Safety, shall be delegated the duties of the office.

1.3.7.5 Duties of the Quality Officer.

- 1 Providing information and advice to the Head of Quality and other postholders including the Accountable Manager on matters relating to quality, airworthiness and safe operation of the maintenance organization.
- 2 Promoting quality awareness within the AMO and providing internal training to auditors when required.
- 3 Planning of assigned Audits, producing reports about non- conformities and results of the audits.
- 4 Supporting the involved manager in the evaluation of non-conformities and in the analysis and verification of the possible corrective actions applied.
- 5 Ensuring that quality standards and procedures in conducting audits are met.
- 6 Developing, reviewing and amending of audit checklists using appropriate manuals and regulatory materials available.
- 7 Coordinating through the Head of quality all aspects of the organizations QMS, including initiating corrective actions when necessary, providing quality root cause analysis reports on periodic basis, linking up Quality management system with other departments and collection of required data.
- 8 Ensuring that quality -related documentation and records are available and up to date.
- 9 Ensuring Quality departmental targets are achieved.

1.3.7.6 Delegation of Duties.

In absence of the Quality officer, the Head of Quality, shall be delegated the duties of the office.

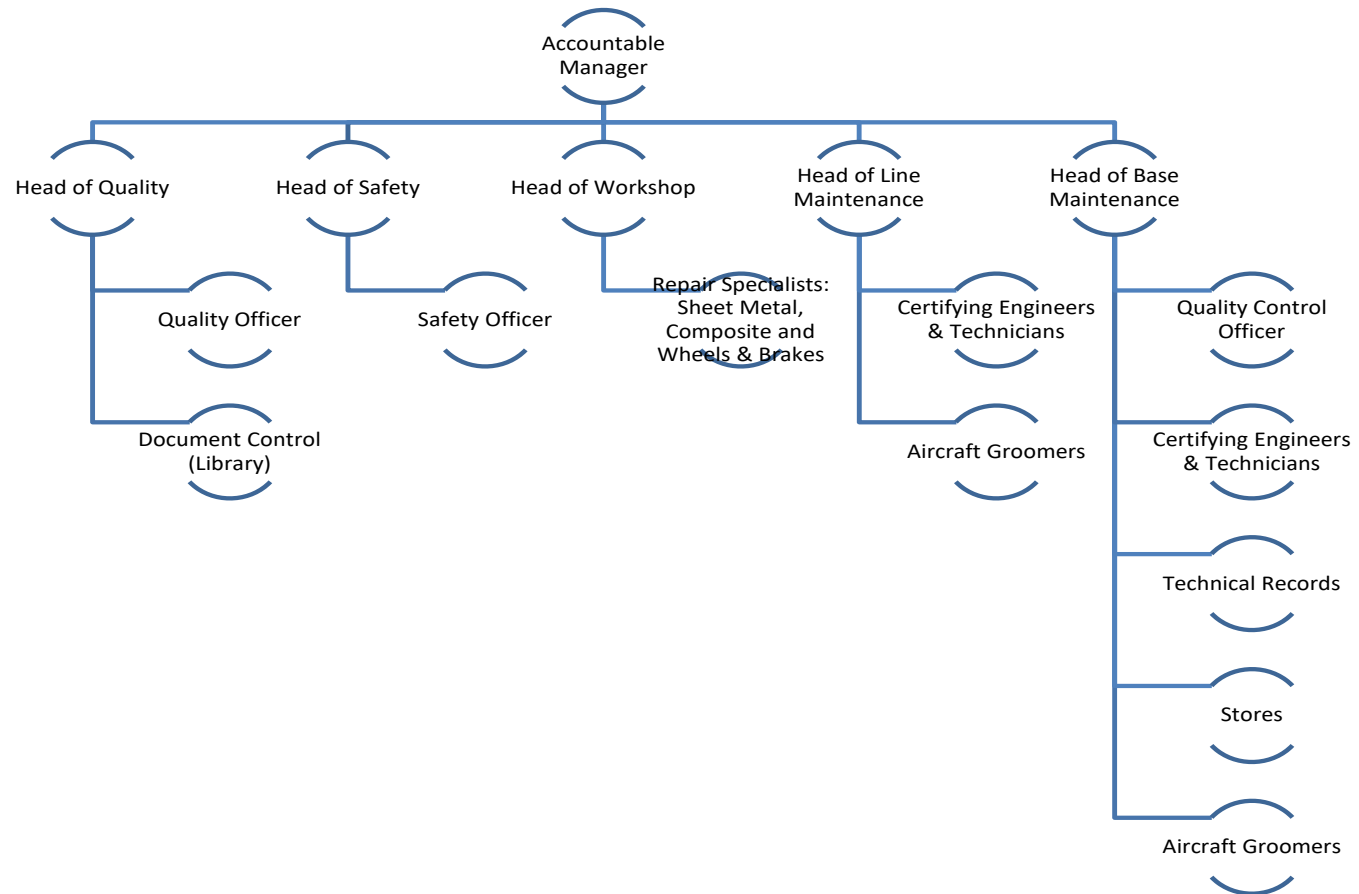

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.4
Issued	17 Oct 2024	Management Organizational Chart	Page	15

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.5
Issued	17 Oct 2024	List of Certifying Staff	Page	16

1.5. LIST OF CERTIFYING PERSONNEL.

Certifying staff are the personnel who are authorized, by Safarilink in accordance with the procedure acceptable to the authority, to certify aircraft or aircraft components for release to service. Certifying staff shall be identified, by their unique numbered stamps that are square in shape.

A current List of Certifying Staff (Form QAM/54) is held on file in the Quality Department and controlled / updated as required by the Head of Quality.

(Kindly refer to control form QAM/54 for details of the Certified staff listing)

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.5
Issued	17 Oct 2024	List of Certifying Staff	Page	17

THIS PAGE IS INTENTIONALLY LEFT BLANK

1.6. MANPOWER RESOURCES

General Policy

The official language to be used for communication in Safarilink shall be English.

The Head of Base Maintenance shall maintain a man-hour plan to ensure that adequate manpower is available to complete the required maintenance actions within the rest and duty limitations per Regulation 22 & 25 of Civil Aviation (Approved Maintenance Organization) Regulations.

The number of man-hours dedicated to the performance of the Maintenance Tasks within Safarilink is as follows:

Description	Number	Hours Per Month
Accountable Manager	1	170
Head of Quality	1	170
Head of Line Maintenance	1	170
Head of Base Maintenance	1	170
Head of Workshop	1	170
Head of Safety	1	170
Technical Stores	3	510
Certifying Engineer	7	1190
Licensed Engineer	4	680
Technicians	18	3060
Certifying Technician	1	170
Quality officer	1	170
Technical records	4	680
Groomers & Ground support	5	850
Painters	1	170
Total Man Hours	50	8500

Quality monitoring compliance functions relating to man hours will be sufficiently monitored by the Head of Base Maintenance to meet the requirement of rest and duty limitations for persons performing Maintenance functions.

1.6.1. Rest and Duty Time

The number of man-hours dedicated to the performance of Maintenance Tasks within Safarilink shall be governed as follows:

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.6
Issued	17 Oct 2024	Manpower Resources	Page	19

1. Personnel will not be assigned to perform maintenance functions on an aircraft unless that person has had a minimum rest period of eight hours prior to the beginning of duty.
2. Personnel will not be assigned to perform maintenance functions on an aircraft for more than twelve consecutive hours of duty.
3. In situations involving unscheduled aircraft unserviceability, a person performing maintenance functions on an aircraft may stay on duty for:
 - i. Up to sixteen consecutive hours; or Twenty hours in two consecutive days. After which, the person performing maintenance functions on an aircraft shall have a mandatory/undisrupted rest period of ten hours.
 - ii. Safarilink will relieve the person performing maintenance functions from all duties for twenty-four consecutive hours during any seven consecutive day periods.

1.6.2. Shift Roster

Safarilink shall operate a Shift Roster covering two (2) shifts. The shift rotation is as follows:

1. Morning Shift
 - a. Shift coverage is from 0600Hrs to 1500Hrs.
 - b. Shift runs for 5 days, Monday to Friday.
 - c. Personnel have Rest Period from Friday at 1500Hrs through to Monday Afternoon at 1200Hrs, when starting Afternoon Shift.
2. Afternoon Shift
 - a. Shift coverage is from 1200Hrs to 2100Hrs.
 - b. Shift runs for seven (7) days from Monday Afternoon through to Sunday Afternoon.
 - c. Afternoon Shift covers the Weekend operations.

NOTE: Safarilink does not ordinarily carry out night maintenance. In the event that such work will be required, the Head of Base Maintenance will seek night operation Authorization (Given that Wilson Airport only operates from 0630 – 2200 Hrs.) and Head of Quality shall come up with guidance in the form of a Quality work instruction.

1.6.3. Human Factors

To ensure optimum personnel performance through the proper adaptation of personnel with their dynamic surroundings all maintenance personnel shall;

- I. Be required to attend an accredited Human Factors course, which shall be considered valid for two years after course completion.

Issue No.	3	SAFARILINK	Part	1
Revision No.	00	MAINTENANCE PROCEDURES MANUAL	Section	1.6
Issued	17 Oct 2024	Manpower Resources	Page	20

- II. All maintenance personnel shall be required to attend an accredited First Aid course, which shall be considered valid for two years after course completion.
- III. All maintenance personnel shall be required to attend an accredited Fire Fighting course, which shall be considered valid for two years after course completion.

1.6.4. Drugs and Alcohol Testing and Reporting

1. Safarilink may subject its personnel to Drug and Alcohol test, if it is deemed to be in the best interest of safety.
2. Safarilink will dismiss from its employment any person found to be under the influence of Drugs or Alcohol while on duty.

Note:

Also refer to Safarilink Drug and Alcohol Policy, which can be found on file in the Safety and Security Department. Nevertheless, the Civil Aviation Regulations Approved Maintenance Organization Regulation number 46 must, be adhered to.

1.6.5. Psychoactive Substances

Any Person employed by Safarilink whose function is critical to personnel/equipment safety will not engage in any kind of problematic use of substances (un- prescribed drugs) and will not undertake any maintenance function while under the influence of any psychoactive substances by reason of which human performance is impaired.

Issue No.	3	SAFARILINK	Part	1
Revision No.	00	MAINTENANCE PROCEDURES MANUAL	Section	1.6
Issued	17 Oct 2024	Manpower Resources	Page	21

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.7
Issued	17 Oct 2024	General Description of the Facilities at Each Address Intended to be Approved	Page	22

1.7. FACILITIES DESCRIPTION

Safarilink's main facility is situated at Wilson Airport, Nairobi, Kenya. The offices and hangar for Safarilink are situated at Kenya Aerospace Hangar, Wilson Airport Plot No LR. 209/1196. The location contains the following offices: Head of Base Maintenance,

- 1) Head of Line Maintenance,
- 2) Head of Quality,
- 3) Quality & Safety Officer,
- 4) Technical Records Office,
- 5) Library,
- 6) Stores,
- 7) Workshops.

Safarilink Aviation is the main lease holder of the hangar building.

Safarilink has in place sufficient housing, facilities, and tooling arrangements in place to ensure adequate coverage of all Planned and Un-Planned Maintenance work. Thus, ensuring highest level of Maintenance and protection against adverse weather conditions.

The Kenya Aerospace LTD hangar can accommodate two of the largest aircraft in the fleet the DHC 8-300 and two of the smallest aircraft in the fleet the C208B at the same time.

Office accommodation apportioned by Safarilink is appropriate for the management of planned work including maintenance management the management of quality, planning, and technical records.

Maintenance will only be carried out at locations listed on the Safarilink AMO Certificate and on aircraft and / or aircraft components for which it is rated. Safarilink can maintain any aircraft for which it is rated at any location subject to the need for such maintenance arising from unserviceability, in support of the contracted Air Operator Certificate Holder.

The workshops have been segregated from the hangar area to prevent environmental and work area contamination. The workshops are sufficient in size to carry out said Maintenance and is well protected against environmental contamination. Sufficient Storage Facilities is available on the hangar floor for equipment, tools, materials, and temporary storage of parts during Maintenance Events.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.7
Issued	17 Oct 2024	General Description of the Facilities at Each Address Intended to be Approved	Page	23

Bonded, Quarantine, Goods Inwards & Goods Outwards Store for Safarilink is in the Kenya Aerospace LTD Hangar.

All Maintenance Staff have controlled access to Technical Data for Fleet maintained by Safarilink. All data is in soft copy, located on individual Aircraft Manufacturers Website. In addition, they also have access to Company Manuals through the Company Library Maintenance Server.

Office space and access to Desk Top Computer(s) is provided to Maintenance Staff and is more than adequate for completion of Aircraft Documentation and Self Study of Maintenance Instruction.

Should an Air Operator Certificate holder request maintenance support from Safarilink, outside the locations which are on the Safarilink Approval Certificate, the following procedure shall apply:

- a. Safarilink must be rated to maintain the aircraft.
- b. Technical Data must be available to complete maintenance at the location.
- c. All applicable tools and equipment must be made available at the location.
- d. Air Operator Certificate holder location in the operation provisions is approved by the Authority.
- e. Certificate of Release is issued in terms with limitations of Safarilink Approved Maintenance Organization.

The Safarilink Hangar together with office accommodation are kept clean to ensure effective and comfortable working environment. For this purpose, cleaning staff are employed to clean Hangar and Offices daily. There is sufficient ventilation in the hangar to maintain temperatures at a comfortable level.

Safarilink endeavors to keep airborne contamination to a minimum and not allow this to reach a level in work area where visible aircraft or component surface contamination is evident.

Noise levels are not permitted to rise to the point of distracting personnel from carrying out inspection tasks and where it is impractical to control the noise source, Safarilink will ensure such personnel will be provided with the necessary safety equipment to stop the excessive noise causing distraction during inspection tasks.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.7
Issued	17 Oct 2024	General Description of the Facilities at Each Address Intended to be Approved	Page	24

Where a maintenance task requires the application of specific environmental conditions different from those specified in this part of the manual, such specific conditions shall be observed as specified in the approved maintenance instructions.

Where the working environment for maintenance deteriorates beyond an unacceptable level, with respect to temperature, moisture, hail, ice, snow, wind, light, dust, or other airborne contamination, Safarilink will suspend the maintenance or inspection tasks until satisfactory conditions are re-established.

For maintenance actions where dust or other airborne contamination results in visible surface contamination, all Susceptible systems shall be sealed until acceptable conditions are re-established.

Safarilink has sufficient aircraft access equipment and inspection platforms or docking such that the aircraft can be properly inspected.

Safarilink owns and has access to the tooling and equipment required to carry out all maintenance actions authorized in the Safarilink scope as described in this part of the manual. The Authority may exempt Safarilink from possessing specific tools and equipment for maintenance and repair of an aircraft or aircraft component specified in the Approved Maintenance Program. Safarilink maintains a Library consisting of but not limited to the following Maintenance documents:

- a) Civil Aviation Regulations for Approved Maintenance Organizations
- b) Associated advisory material.
- c) Airworthiness Directives
- d) Manufactures' maintenance manuals
- e) Repair manuals.
- f) Supplementary Inspection Documents
- g) Service Bulletins
- h) Service Letters
- i) Service Instructions
- j) Modification leaflets
- k) Aircraft maintenance program
- l) NDT manual
- m) Airworthiness notices issued by the authority.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.7
Issued	17 Oct 2024	General Description of the Facilities at Each Address Intended to be Approved	Page	25

Safarilink personnel have access to the facility as required, 24 hours / day, 7 days / week. The Authority has unlimited access to Safarilink and contracted Maintenance facility at all times to determine compliance with the Regulations.


1.7.1. Office Accommodation and Equipment

The Accountable Manager shall ensure that adequate resources are made available to facilitate the activities of the approved maintenance organization and to the standards acceptable to the Authority.


The office equipment shall be adequate to support and enhance management of the organization. Such equipment includes: -

1. Office computers
2. Telephones
3. Fax Machines
4. Photocopying and printing machines
5. Filing cabinets and
6. Other ancillary office equipment and furniture

Bonded, Quarantine, Goods Inwards & Goods Outwards Store for Safarilink is in the Kenya Aerospace LTD Hangar.

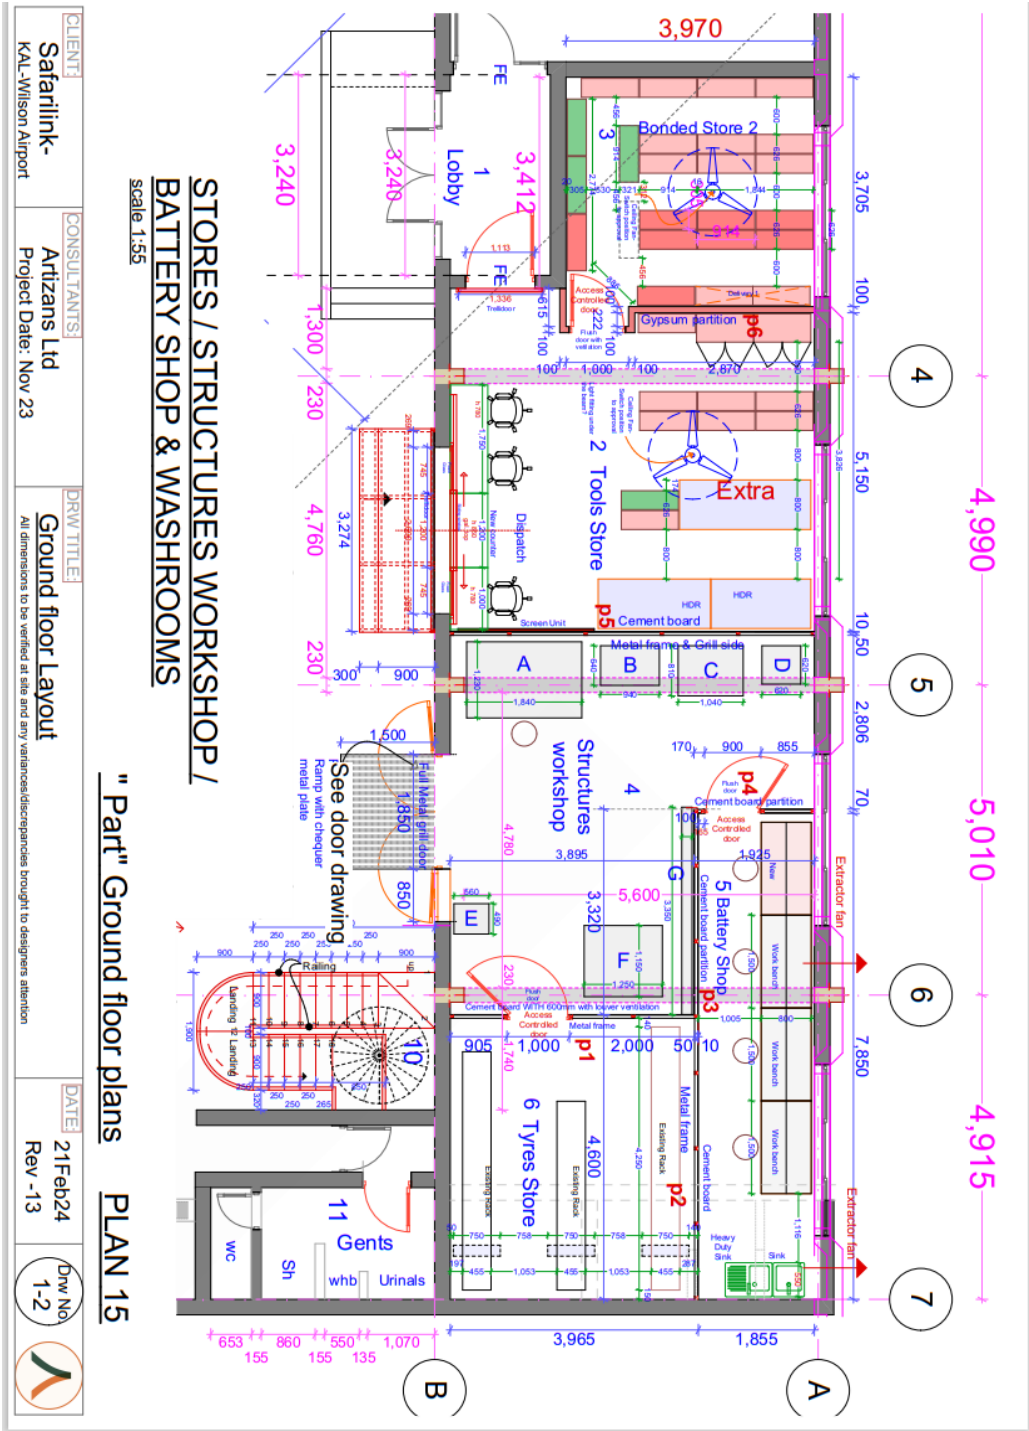

Flammables Storage.

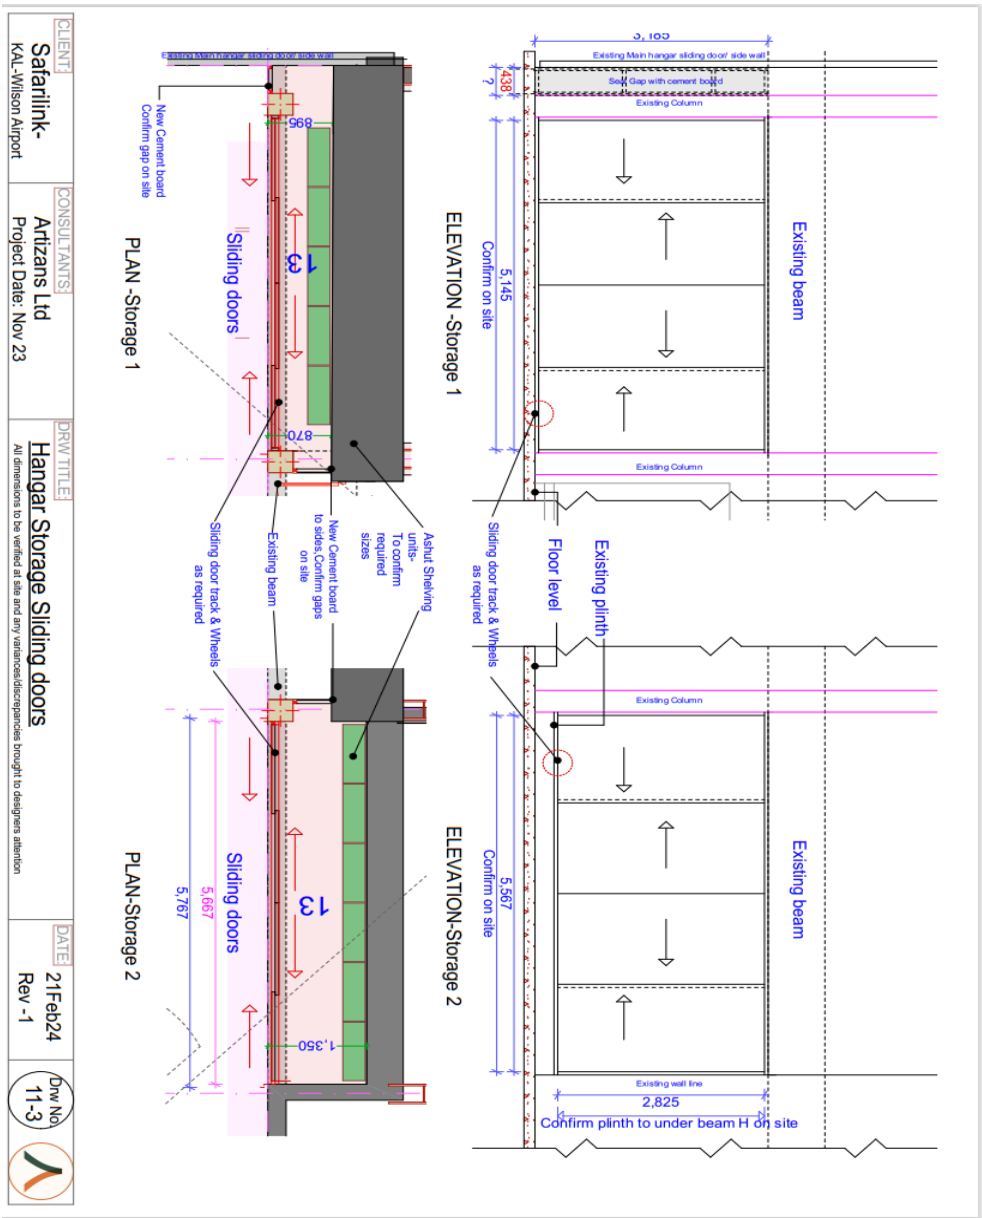

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.8
Issued	17 Oct 2024	Organization's Intended Scope of Work	Page	32

1.8. SCOPE OF WORK

Safarilink Aviation shall not operate as an Approved Maintenance Organization without or in violation of an Approved Maintenance Organization Certificate issued under the Kenya Civil Aviation Regulations.

The Safarilink Approved Maintenance Organization Certificate and Specific Operating Provisions is displayed in prominent place that allows its view/scrutiny by the public and Authority.

Safarilink Aviation as an embedded, but independent AMO will only perform maintenance, preventative maintenance, or modifications on an aircraft, airframe, engine, propeller, appliance, component for which it is rated as indicated on its Specific Operating Provisions.

Specific Operating Provisions shall contain—

- (a) a certificate number specifically assigned to the AMO;
- (b) class or limited ratings issued in detail, including special approvals and limitations issued;
- (c) date issued or revised; and
- (d) signatures of the Accountable Manager and Authority

Safarilink Aviation will maintain an aircraft or aircraft component for which it is approved when all necessary housing, facilities, equipment, tools, material, approved technical data and certifying staff are available.

Note: Safarilink shall not advertise as a certified maintenance organization unless its Approved Maintenance certificate issued by the Authority is valid. In addition to which the Approval certificate shall be clearly indicated and shall not make any statement, either in writing or orally, about itself that is false or is designed to mislead any person.

The Safarilink certificate shall be valid for twelve months from the date of issue or renewal, unless a shorter period is specified by the Authority or-

- i. The Authority amends, suspends, revokes or otherwise terminates the certificate.
- ii. Safarilink surrenders it to the Authority; or
- iii. Safarilink suspends operations for more than 180 continuous days.

Safarilink shall upon the unlikely event of suspension or revocation of the certificate return the certificate to the Authority.

Safarilink shall make an application for renewal of the AMO certificate in a form prescribed by the Authority at least sixty days (60) before the certificate expires.

In the unlikely event that Safarilink request for renewal of its Approved Maintenance certificate after its expiry, Safarilink shall meet all the application requirements required by the Authority of a new Approved Maintenance Organization.

Prior to any addition or request for change of the current approved Safarilink Rating on its Specific Operating Provision/Capability list an internal Self-evaluation (Form: QAM/059) shall be carried out, to justify the application. The self-evaluation must be signed by the Accountable Manager and must be retained on file by the Quality office.

1.8.1. Scope of work approved to be done on fleet.

Safarilink can perform the following maintenance work as approved by the Authority.

ITEM	C208 Series	Dash 8-100 Series	Dash 8-200 Series	Dash 8-300 Series
Pre-flight inspection	✓	✓	✓	✓
Post-flight	✓	✓	✓	✓
Daily	✓	N/A	N/A	N/A
50Hr/12 Day Check	N/A	✓	✓	✓
Unscheduled inspection including LRU replacements	✓	✓	✓	✓
100Hr Checks	✓	N/A	N/A	N/A
200Hr Checks: Doc OA up to and including Doc 26	✓	N/A	N/A	N/A
Out of Phase, 500Hr Checks up to and including A9	N/A	✓	✓	✓
Heavy Checks Doc MA up to and including Doc MK	✓	×	×	×
C-Checks 40000 Cycles Inspection	N/A	✓	✓	✓

✓ Means work is approved to be carried out.

× Means work not yet approved to be carried out.

N/A Means Not Applicable.

This scope includes following maintenance checks are carried out on the type of aircraft and related components: -

1. Modifications as approved by the Authority.
2. Unscheduled maintenance tasks within the limitations of the approved Specific Operating Provisions.
3. All other non-specialized actions.

1.8.2. Scope of work approved to be done on Engines and APU's

Engine Type	Aircraft Type	Powerplant Build-up	Scheduled inspections including LRU replacement	Borescope inspection	Hot Section Inspection and Repair
PT6A-114A series	Textron/Cessna 208	✓	✓	✓	✓
PT6A-140 series	Textron/Cessna 208 EX	✓	✓	✓	✓
PW120/120A series	Dash 8-100 Series	✓	✓	✓	×
PW121 series	Dash 8-100 Series	✓	✓	✓	×
PW123 series	Dash 8-200/300 Series	✓	✓	✓	×
T40C7B/D series	Dash 8-100/300 Series	✓	✓	✓	×

✓ Means work is approved to be carried out.

× Means work not yet approved to be carried out.

N/A Means Not Applicable

This scope includes following maintenance checks are carried out on the type of aircraft and related components: -

1. Scheduled maintenance tasks as described in the appropriate and current Approved Maintenance Programs.
2. Modifications as approved by the Authority.
3. Unscheduled maintenance tasks within the limitations of the approved Specific Operating Provisions.
4. All other non-specialized actions.

1.8.3. Scope of work approved to be done on Propellers.

Propeller Type	Aircraft Type	Removal & Installation	LRU replacement	Minor Inspection	Dynamic Balancing	Field Repair	Overhaul
3GFR34C700 Series	Textron/Cessna 208	✓	✓	✓	✓	✓	N/A
HC-B3TN-3AF/T1 series	Textron/Cessna 208 EX	✓	✓	✓	✓	✓	N/A
4HFR34C778/102BHA-series	Textron/Cessna 208 EX	✓	✓	✓	✓	✓	N/A
14SF Series	Dash 8-100/200/300 Series	✓	✓	✓	✓	✓	N/A

✓ Means work is approved to be carried out.

× Means work not yet approved to be carried out.

N/A Means Not Applicable

This scope includes following maintenance checks are carried out on the type of aircraft and related components: -

1. Scheduled maintenance tasks as described in the appropriate and current Approved Maintenance Programs.
2. Unscheduled maintenance tasks within the limitations of the approved Specific Operating Provisions.
3. All other non-specialized actions.

1.8.4. Scope of Work for Wheels & brakes Workshop

Brakes Make/Description	Brakes Model/Part No.	Scheduled /Un-Scheduled Checks	Build up/Assembly/Disassembly	Inspection	Testing	Repair	Overhaul
Brake Assembly/Goodrich	2-1517-x	✓	✓	✓	✓	✓	✓
Brake Assembly/Goodrich	2-1565-x	✓	✓	✓	✓	✓	✓
Brake Assembly/Goodrich	2-1599	✓	✓	✓	✓	✓	✓

BrakeAssembly/ Goodrich	2-1466-x	√	√	√	√	√	√
BrakeAssembly/ Cleveland	030- 182XX	√	√	√	√	√	√
Wheel Assy/Goodrich	3-1480-x	√	√	√	√	√	√
Wheel Assy/Goodrich	3-1435-x	√	√	√	√	√	√
Wheel/ Goodrich	3-1442	√	√	√	√	√	√
Wheel/ Goodrich	3-1448	√	√	√	√	√	√
Wheel/Cleveland	040- 17900	√	√	√	√	√	√
Wheel/ Cleveland	40-177	√	√	√	√	√	√

- ✓ Means work is approved to be carried out.
× Means work not yet approved to be carried out.
N/A Means Not Applicable.

This scope includes following maintenance checks are carried out on the type of wheels & Brakes and related Parts/components: -

1. Modifications as approved by the Authority.
2. Unscheduled maintenance tasks within the limitations of the approved Specific Operating Provisions.
3. All other non-specialized actions.

1.8.5. Scope of Work for Battery Workshop

Battery Make/ Description	Battery Model/ Part No	Inspection	Cap test	Top Charge	Replace Of Components	Data download	Defect rectification
Battery/Gill	7638-44	√	√	√	√	√	√
Battery/Concorde	RG380E/44X	√	√	√	√	√	√
Battery/Concorde	RG380E/60X	√	√	√	√	√	√
Battery/Hawker	9750W0370-x	√	√	√	√	√	√

Power Supply/Grimes	60-5025-X	√	√	√	√	N/A	√
Power Supply/Grimes	60-3844-X	√	√	√	√	N/A	√

- ✓ Means work is approved to be carried out.
 × Means work not yet approved to be carried out.
 N/A Means Not Applicable.

This scope includes following maintenance checks are carried out on the type of Battery and related Parts/components: -

1. Modifications as approved by the Authority.
2. Unscheduled maintenance tasks within the limitations of the approved Specific Operating Provisions.
3. All other non-specialized actions.

1.8.6. Capability List

Except for the functions that are contracted out, Safarilink shall provide equipment and material to ensure that the functions listed as appropriate to the class or limited rating held or applied for, are performed as required: and shall be signed by the Accountable Manager and the Authority.

Safarilink has a capability list approved by the authority and shall be retained for a period of two years.

The Head of Base Maintenance/ Head of Workshop shall perform the self-evaluation to determine the availability of facilities, equipment, material, technical data, processes, housing and trained personnel to perform the work on the article. Where positive determination is made, the article may be listed on the capability list and signed by the accountable manager. A list of copies of the additional articles on capability list shall be sent to the Authority.

The capability list shall be available in the Safarilink premises for inspection by the public and the Authority while the self- evaluation must be available in the premises for inspection by KCAA.

Safarilink shall retain the capability list and self- evaluation for two years from the date accepted by the accountable manager.

Refer to Safarilink Capability list **(QAM/53)**.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.9
Issued	17 Oct 2024	Notification Procedure to the Authority Regarding Changes to the Organization's activities/Approval/Location/Personnel	Page	38

1.9. NOTIFICATION PROCEDURE TO THE AUTHORITY REGARDING CHANGES TO THE ORGANIZATION'S ACTIVITIES/APPROVAL/LOCATION/PERSONNEL

1.9.1. Notification of Changes

Safarilink will notify the Authority of any proposal to carry out any changes to enable the Authority to determine compliance with the Civil Aviation (Approved Maintenance Organization) Regulations, and to amend, if necessary, the approved maintenance organization certificate.

1.9.2. Changes requiring authority Approval.

Safarilink will not effect changes to the following without prior approval from the Authority: -

- i. The name of the approved maintenance organization (AMO),
- ii. The location of the AMO,
- iii. Additional locations of the AMO,
- iv. The Accountable Manager,
- v. Any of the management personnel specified in the MPM 1.2
- vi. The facilities, equipment, tools, material, procedures, work scope and certifying staff that could affect the approval certificate or Specific Operating Provisions.
- vii. The ratings are held as per the AMO specific operating provisions.

Safarilink knows an application for the amendment of its existing AMO certificate shall be made to the authority in accordance with the guidelines given in the advisory circular AC-AWS006A section 4.0 – Application for additional rating to the existing AMO approval.

Safarilink accepts that the approval may be suspended by the Authority if changes in the items above have been made without notifying the Authority.

1.9.3. Operation during changes

Safarilink understand that in the event it requests for any changes under AMO regulation 10 (3) the Authority may prescribe the conditions under which the AMO may operate during the changes.

1.9.4. Suspension or revocation

Upon suspension or revocation of the certificate the certificate will be returned to the authority.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.9
Issued	17 Oct 2024	Notification Procedure to the Authority Regarding Changes to the Organization's activities/Approval/Location/Personnel	Page	39

1.9.5. Renewal of certificate

Safarilink will apply for renewal of the approved maintenance organization certificate at least 60 days before the certificate expires. If a request for renewal is made after the expiry of the approved maintenance organization certificate, Safarilink will meet the initial application requirements provided for in the Civil Aviation (Approved Maintenance Organization) Regulation.

1.9.6. Continued validity of approval.

Safarilink accepts that, unless the approved organization certificate has previously surrendered, superseded, suspended, revoked, or has expired, the continued validity of the certificate depends on its remaining in compliance with the Civil Aviation (Approved Maintenance Organization) Regulation, and granting the Authority access to the organizations facilities to determine continued compliance with the Regulation.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.9
Issued	17 Oct 2024	Notification Procedure to the Authority Regarding Changes to the Organization's activities/Approval/Location/Personnel	Page	40

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.10
Issued	17 Oct 2024	Manual Amendment Procedures	Page	41

1.10. MANUAL AMENDMENT

All issued amendments in this Manual shall be in accordance with and will not be less Restrictive than the following regulatory documents:

1. The Civil Aviation (Approved Maintenance Organization) Regulation,
2. The Civil Aviation (Airworthiness) Regulation,
3. The Civil Aviation (Instrument and Equipment) Regulation,
4. The Civil Aviation (Safety Management) Regulation.
5. The Authority's Aeronautical Information Circular,
6. KCAA A and B Notices
7. Any other respective publications by the Authority,

No amendment in this manual shall be made to allow its interpretation to be misconstrued by its holders, thus preventing them from taking actions essential to or in the best interest of the safety.

Amendments to this Maintenance Procedures Manual must be approved by the Authority.

The Authority shall determine the form and manner of an application to amend this Maintenance Procedures Manual.

1.10.1. Definitions

Revision:

- a) This refers to a comprehensive change to the document which may be occasioned by a major change in regulations or processes.
- b) Revisions due to typo and font errors do not require KCAA approval.

Temporary Revision (TR)

- a) This is an amendment required to effect an immediate or urgent change and is internally approved by the Head of Quality
- b) The temporary amendment shall be valid until the next review of the manual when it shall be presented for KCAA for approval as a (permanent) revision, nevertheless a TR shall not be used for more than 6 months.

The temporary amendment page (yellow in color) shall be filed before and/ or facing the affected page/ section as directed on the transmittal page by the manual owner.

1.10.2. General

The manual holder shall be responsible for the continued revision of this manual, ensuring it is kept current with national and international standards and recommended practices. The Head of Quality shall keep surveillance over the process and be responsible for the process of submission to KCAA. It is the responsibility of the manual holder to keep this manual up to date always with the ongoing changes issued to him/her. The date of issue should be checked

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.10
Issued	17 Oct 2024	Manual Amendment Procedures	Page	42

against the current list of effective pages to confirm currency before new or revised page is inserted.

1.10.3. Amendment Proposals

The Head of Quality is responsible for any amendments and revisions of the MPM, as well as for the submission to the Accountable manager or designate for approval of proposed.

Amendments. However, any manual user may propose a change using manual change request form number SL/QMS/08 Form found in File SL Form 001.

First Scenario: The manual owner identifies a change, makes the change which could be a TR or a Revision- depending on the change and the urgency. He / she then passes it over for approval as stipulated in this manual.

Second Scenario: On identifying a need for change, the manual user shall fill the Manual Change Request Form and forward it to the Manual Owner. Who shall evaluate the validity and practicality of the proposed Manual change request.

All approved amendment proposals shall be distributed by the library using manual transmittal form number SL/QMS/07 Form found in File SL Form 001

1.10.4. Document Production/ Revision Procedure

The Head of Base Maintenance shall be responsible for the control and continued amendment of this manual ensuring it is kept current with national and international standards and recommended practices.

- a) The Head of Base Maintenance /designate shall compile the revisions ensuring that they are in compliance with KCAR'S.
- b) Each page shall be identified by appropriate section number, Revision/ TR Number as well as the date of issue.
- c) A list of effective pages and the applicable date shall be tabulated.
- d) Every revision issue shall be accompanied with a transmittal letter/ notice.
- e) Each effective change shall be identified with a vertical line at the side of the paragraph/ passage except in the case the entire manual being revised.
- f) This manual shall then be forwarded to the Kenya Civil Aviation Authorities for a final approval through the quality department.

1.10.5. Responsibility to the Authority Approvals

The Head of Quality or designate, shall be responsible for notifying the Kenya Civil Aviation Authority of proposed changes or revisions/amendments of this MPM for acceptance and approval by the Authority before incorporation.

1.10.6. List of Effective Pages

A list of effective pages has been provided for this Maintenance Procedures Manual and lists every page number, revision number and the date the revision was effected. Any changes on these Maintenance Procedures Manual shall require an updated list of effective pages showing the page No. of the affected page, revision number and the date it was effected.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.10
Issued	17 Oct 2024	Manual Amendment Procedures	Page	43

1.10.7. Identification of Changes

Any amendments / revisions or changes on this Maintenance Procedures Manual shall be annotated by means of a vertical bar on the left-hand outer edge of the respective page as indicated on the left of this paragraph.

1.10.8. Manual Control and Distribution

Safarilink Aviation Maintenance Procedures Manual has a distribution list. Each copy within the organization has a manual control number and the library is responsible for maintaining the currency of every copy in conformance with the current requirements and regulations.

The library is responsible for ensuring every revision issue reaches the manual holder, while the manual holder is responsible for ensuring that the revisions are inserted into the manual.

1.10.9. Document Holder Action

The document holder has the responsibility to ensure that the manual is in the latest amendment state.

- 1) On receipt of the amendment bundle, check the transmittal notice to know the nature of changes.
- 2) Confirm the status of the amended list of effective pages to be in line with the document status i.e. revision/ revision/ date.
- 3) If permanent amendment, remove the pages replaced by the amendment and insert amended pages as instructed in the transmittal notice.
- 4) Discard the pages removed, to avoid further use.
- 5) If temporary amendment (yellow pages) file in front of the affected page until, it is replaced later with a permanent amendment as instructed in the transmittal notice.
- 6) Complete and sign the manual control sheet and return to the Librarian.
- 7) Complete and sign the record of revision table at the front part of this manual.
- 8) Amendment of electronic documents shall be done by revision and replacement of the electronic document with a copy from the library. The superseded document shall be removed from the library drive and stamped superseded together with the completed manual control sheet for disposal.

Issue No.	3	SAFARILINK	Part	1
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	1.10
Issued	17 Oct 2024	Manual Amendment Procedures	Page	44

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.1
Issued	17 Oct 2024	Supplier Evaluation	Page	1

2.1. SUPPLIER EVALUATION PROCEDURE.

2.1.1. Supplier Control

Safarilink purchasing policy requires that supplies are only obtained from sources acceptable to the Kenya Civil Aviation Authority and have been audited by the Safarilink Quality system.

- a) **Standard parts** for use on an aircraft, engine, or aircraft component. These are parts specified in the manufacturer's illustrated parts catalogue and/or the maintenance data. Standard parts have a part number (but do not have a serial number) and conform to a national/international specification; parts such as diodes, nuts, bolts, split pins.

These parts can only be accepted with a statement of conformity (to specification), and packaging should be marked with the specification and where appropriate the batch number.

An EASA Form 1, or equivalent USA 8130/Canadian or acceptable airworthiness document, is not normally issued with such parts and none should be expected.

- b) **Raw and Consumable Material** for use during maintenance. All material must be accompanied by documentation clearly relating to the material and containing a 'conformity to specification' statement, plus both the manufacturing and supplier source.

Consumable parts such as lubricants, compounds, paints, sealants etc., and raw materials e.g. metals, plastics, wood, fabric etc., can only be accepted with a statement of conformity (to specification). Packaging should be marked with the specification and, where appropriate, the batch number.

An EASA Form 1, or equivalent USA 8130/Canadian document, is not normally issued with such parts and none should be expected.

- c) **New Components** must be accompanied by the appropriate release document of the country of origin of the part. It should be released in accordance with the CAA requirements of the country of manufacture.

- d) **Used Components** - If the component is not new (i.e. a 'used' component) it will fall into one of two categories: -

- i. Safarilink Component returning from external maintenance – KCAA class 2 CRS, EASA Form 1, FAA Form 8130-3, or the Canadian equivalents is required.
- ii. A component that Safarilink has bought, leased or 'borrowed' that is new to the company. Release documentation is the same as that for a returning Safarilink component (see above) but the component's Airworthiness Directive (AD), Service Bulletin (SB) and Modification status must be established to the satisfaction of Safarilink. (i.e. its standard must be compatible with existing Safarilink aircraft).

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.1
Issued	17 Oct 2024	Supplier Evaluation	Page	2

Caution 1: - A customer whose aircraft or component is being maintained by Safarilink may supply their own parts for use by Safarilink. These components must be released to Safarilink in the manner described above (new or used).

2.1.1.1. Supplier Selection and Approval

Safarilink demands that aircraft/component maintenance and their spares are obtained from:

- a) Airframe/Engine/Component Manufacturers
- b) Manufacturer appointed distributors.
- c) Suppliers approved by the Head of Quality, Safarilink.
- d) KCAA Approved companies

Addresses of the Manufacturers and their approved distributors are listed in Vendor Information Manuals issued by the Aircraft manufacturers.

Suppliers are recommended for approval by stores procurement once they give the following information:

- a) Certificates of Approvals
- b) Audit reports from current customers.

The Head of Quality evaluates the submitted information and may carry out site inspections before approving the supplier. Approvals are given in writing and the company details are added to the list of approved suppliers.

No PMA parts shall be used on any Safarilink aircraft or aircraft component unless the Head of Quality or the aircraft manufacturer or state of design gives prior approval for specific limited parts.

Supplier's approvals are reviewed from time to time and their approvals validated based on the Quality Audits and the assessment as per MPM 2.1.1.2 & 2.1.1.3. If a one-off approval is needed stores procurement will apply to the Head of Quality for the approval, who will evaluate the request and provide or deny the approval based on the criteria provided for approving suppliers.

2.1.1.2. Approved Suppliers

A list of approved suppliers, document reference **SL/VENDOR LISTING/001** is maintained by stores procurement and copies provided to the Head of Quality. The list is constantly updated as the need arises, but at least once every two years.

An electronic copy of this list can be found in the computerized inventory system, accessed by authorized users.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.1
Issued	17 Oct 2024	Supplier Evaluation	Page	3

2.1.1.3. Monitoring of Suppliers

Any supplier who supplies parts which are not as per the purchase order will be suspended and removed from the suppliers list for a period of one year. After this one-year period, they may be allowed to re-apply for a new evaluation. The Head of Quality shall have sole authority to vet, suspend or remove any supplier from the list.

Variations from purchase order and other reasons which shall lead to suspension include:

- a) Defective parts
- b) No or wrong paperwork.
- c) P/N variance with paperwork
- d) Inadequate packaging
- e) Quality variance with order
- f) Other reported discrepancies
- g) Tampering with original P/N

During the one-year suspension period, an investigation shall be done by the Head of Quality to decide the required action. Reasons shall be recorded and filed in the respective supplier audit file. The Head of Quality may perform an on-site audit as part of the investigation if need be.

2.1.1.4. Auditing of Suppliers

The Head of Quality shall carry out audits of suppliers and maintain records of all audits performed as described in the audit program Ref No.: QAM/22.

The audits are carried out in accordance with the requirements of the MPM and are performed on site. Only suppliers that are used by Purchasing and Logistics are audited.

The following areas shall be covered during the audit:

- General Details
- Current Approval Status
- Quality/Inspection Staff
- The Quality system
- Sources of parts and materials
- Records

2.1.2. System for Placing Orders

The stores' procurement is responsible for the procurement of aircraft parts and materials. The following necessitates procurement of aircraft parts and materials:

- Initial provisioning of new stock items
- Replenishment of stock items
- Specific requirements such as SB's, AD's, engineering orders etc.
- Rectification of defects
- Scrap of components

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.1
Issued	17 Oct 2024	Supplier Evaluation	Page	4

To provide a high level of service, the Procurement officer has to ensure that the materials purchased meet the required specifications and are delivered at the right price and on time.

Various techniques like standardization and variety reduction, bulk order or quality discount, annual rate, deferred delivery, value analysis and other methods will be made whenever possible to reduce cost and enhance service.

Since purchasing is an expenditure activity, sufficient care will be taken to prevent unauthorized purchase. Authorization to purchase is by means of the following steps:

- Authorization of replenishment on shortage requisitions
- Authorization of purchase order
- Authorization of invoice

Invoices received from the suppliers / vendors are only authorized for payment if the supplier / vendor has complied with the terms of the contractual agreement.

The purchase order is the official contract between Safarilink and the supplier for the supply of the goods and / or services.

2.1.3. Control of Sub-Contractors

It is the responsibility of the Head of Base Maintenance to negotiate contracts for the supply of sub-contracted maintenance in consultation with the Head of Quality and Procurement officer.

All subcontractors used by Safarilink shall comply with KCAA maintenance requirements and must have the necessary approval to demonstrate this. Any maintenance agreement made with any person or organization to perform some work on behalf of Safarilink must clearly define the scope of the work to be carried out and the contracted company must strictly adhere to it.

Sub-Contractors must obtain clearance and approval from Safarilink before carrying out any structural Repairs work on its aircraft. In the case of Base Aircraft maintenance Safarilink personnel will oversee all work performed by sub-contractors to ensure that all work packages are duly completed and signed off by trained and certified personnel.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.1
Issued	17 Oct 2024	Supplier Evaluation	Page	5

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.2
Issued	17 Oct 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	6

2.2 ACCEPTANCE/INSPECTION OF AIRCRAFT COMPONENTS AND MATERIALS FROM OUTSIDE CONTRACTORS

2.2.1 COMPONENT/MATERIAL ACCEPTANCE PROCEDURES - GENERAL

Incoming parts are received by the stores clerk and entered in a computerized system. The system auto generates batch numbers. Batch numbers are not repeated, however, parts received on the same certificate are allocated the same batch number.

Accompanying documents are inspected and compared with the order and if satisfactory, the consignment is opened for physical inspection. Inspection of parts must be done by a qualified person, preferably an engineer who understands the implications of accepting parts which are compliant.

2.2.2 INSPECTION OF INCOMING MATERIALS

All incoming aircraft material and parts undergo acceptance inspection. The receiving inspector ensure that all the incoming parts have the required certification documentation and traceability.

The stores personnel verify that the accompanying certificates and documents contain the correct details of the part supplied. The accompanying certificates must be EASA Form One, FAA 8130-3 or equivalent, and/or a statement of conformity or certification test results for hardware and raw materials. Components from Safarilink workshops to stores will have an accompanying CRS/serviceable label.

Parts are inspected for:

- a) Correct Supply sources
- b) Correct documentation
- c) Correct parts
- d) Parts physical appearance
- e) Correct Quantity
- f) Correct Price
- g) Proper / recommended packing
- h) Traceability record for used or surplus parts.

The parts that meet the above requirements are passed for final inspection and clearance.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.2
		MANUAL		
Issued	17 Oct 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	7

When satisfied that the material and documentation meet the requirements, the Inspector appends his Inspection Stamp, signature, and date on the accompanying certificates.

The Inspector ensures that parts are repacked appropriately for storage.

If discrepancies are found, then the part is rejected and taken to the Goods Receiving Quarantine Cage.

The Receiving Goods Inspectors are given the necessary initial and continuation training to enable them to deliver their duties efficiently and safely. All their training records and qualifications are kept in the Head of Quality's office.

2.2.2.1 Documentation

All documents received are filed by batch numbers. The batch numbers and order numbers are written on the documentation. The order is filed separately, and the batch number is written against the part number on the order.

Documents shall be verified and examined for proper and adequate information. This includes serviceable part tags, Airworthiness release certificates, vendor/manufacture approvals, data certification and statements, overhaul, repair work records/documents, shelf-life information, calibration, and functional test data.

2.2.3 ACCEPTANCE OF COMPONENTS FROM INTERNAL SOURCES

2.2.3.1 Components from Aircraft Workshops

A class 2 CRS indicating work performed and approved serviceable condition shall accompany all parts and materials received from local workshops.

The Stores clerk process the part once satisfied that all the details pertaining to the incoming part are correct. This includes visual inspections.

2.2.3.2 Aircraft Components Drawn but Not Used

Serviceable Aircraft components drawn from bonded stores and not used on aircraft are returned to the Goods Inwards Section with the original certificates, issuing pick slip and a certified label.

For parts drawn as kits, the unused items are returned to stores with a copy of the original certificate, issuing pick slip and a certified label stating that the items were not fitted or used.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.2
Issued	01 Aug 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	8

The pick slip shall accompany the units with other original certificates and the certified label shall be filed according to batch filing system.

The Engineer returning the part to Stores must ensure that the spare is recorded in a register and handed over to the Store clerk under signature for accountability purposes. The collected parts from the Maintenance area by the Store clerk must be acknowledged in Stores under signature and the parts tracking system updated accordingly.

2.2.3.3 Components Removed Serviceable from Aircraft

Components removed from the aircraft as serviceable include:

- Items removed before life expiry
- Components removed for staggering purposes
- Components cleared as serviceable through the Hold Procedure
- Components removed during Hangar checks to facilitate access and safe keeping and
- Items removed during re-configurations

Components removed as serviceable from aircraft must have a Serviceable label before, they can be accepted into Stores and reasons for removal must be clearly indicated on the paperwork and in the computerized system.

2.2.3.4 Components “On Hold” (The Hold Procedure)

The purpose of this procedure is to enable holding of components removed during troubleshooting pending defect investigation and return to service if the original aircraft defect persists.

It is company policy that unconfirmed defective parts are placed on hold pending defect investigation to reduce “No Fault Found” shop reports. An on-hold register shall be kept for the parts on hold.

When a component is kept on “Hold”, the technician/ engineer shall provide the Part number, Serial number, Aircraft Type and Registration, Position of component in the aircraft and the reason for holding the component by completing the Hold Label. The components shall be transferred to Stores (Quarantine) as soon as possible.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.2
Issued	01 Aug 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	9

Authorized certifying engineers shall review the defect after each flight, daily, and record the reporting date and the sector. The period for tracking the defect is six sectors or three days flying program whichever is earlier.

For the aircraft that have Central Maintenance Computer (CMC) the data of the component shall be used for all removed rotatables whenever the “HOLD” system is used. If the snag persists, the component is deemed serviceable and returned to store.

The store personnel shall notify the Head of Line Maintenance at least once a week, regarding the components on “HOLD” stating the prescribed period of limit written on the label.

If the snag does not reappear within the tracking period, the component is deemed unserviceable and the Head of Line or certifying engineer in liaison with stores will raise an unserviceable tag or repair label.

When the prescribed period of “HOLD” is achieved and it can be proved that changing this item has not cured the defect, the Holding tag shall be signed by an authorized certifying engineer, listing the work to be carried out to return the item to service, e.g., visual inspection, cleaning, testing etc.

The item(s) may then be returned for crediting to stores, provided any consumed life is clearly annotated on the Holding tag. Completed Holding tags are to be retained in stores.

2.2.4 REJECTION PROCEDURE FOR INCOMING PARTS

Parts that do not satisfy all the requirements in Section 2.2.1 are rejected. Rejection Note issued on materials not meeting the requirements and the Provisioning Section is advised.

When incoming spares or materials are not acceptable by the Inspector, the word ‘REJECTED’ shall be written on the accompanying documentation. The inspector shall enter a brief reason for rejection and then put his signature and a date on it. The inspection personnel will not stamp on the shipping documentation. Rejected parts will be isolated from other parts and returned to

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.2
Issued	01 Aug 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	10

vendor or disposed in any other applicable way.

For parts being returned to the supplier, the Procurement officer is responsible for contacting the supplier. These parts are stored in the Goods Inwards Quarantine Section until ready for dispatch. The Inspector will raise a Rejection Note. A Materials Return Order (MRO) or Return Materials Authorization (RMA) is required for the return parts and materials prior to the dispatch of the goods.

Upon receipt of the MRO/RMA, the stores clerk is informed to dispatch the goods to the supplier. A delivery note is to be filled stating the system and details of the MRO/RMA are put on the delivery note.

The rejection of incoming parts will result in the supplier being allotted penalty points. For more information about monitoring of suppliers refer to MPM 2.1.1.3

2.2.4.1 Quarantine Stores

Quarantine Stores is a secure and restricted part of the store where spares awaiting disposition are kept. One half houses the in-coming components while the other half houses the out-going components (for repair/overhaul). Parts removed from the aircraft are forwarded to the Quarantine stores for recording and onward transfer to the overhaul or repair agencies which could be Safarilink workshops or external agencies. Precision tools being withdrawn from service are also held in the Quarantine Stores before being sent to appropriate calibration Centers.

Bulky items like Engines or aircraft windshields are kept in other designated and secure storage areas but the paperwork processed in the Quarantine store in the same way as for other components which have physically passed through the Quarantine area.

The stores clerk keeps a record of all goods received and where destined to for ease of tracking.

Aircraft components and parts that are to be shipped out of the country are properly packaged and shipped in suitable containers that should protect them from damage during transportation. When specified by the OEM, ATA-300 or equivalent containers shall be used.

2.2.4.2 Inspection and Identification of Components before Installation

Safarilink ensures that any new or used part is subjected to an inspection stage before installation. The inspection should establish full compliance with the

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.2
Issued	01 Aug 2024	Acceptance/Inspection of Incoming Components and Materials from Outside Contractors	Page	11

relevant manufacturing data, and the part should be unambiguously identified as fit for use by stating conformity to the approved data conforming to a recognized national or international standard.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	12

2.3 STORAGE, TAGGING AND RELEASE OF AIRCRAFT COMPONENTS AND MATERIALS TO AIRCRAFT MAINTENANCE

2.3.1 STORAGE AND DANGEROUS GOODS HANDLING

2.3.1.1 General

- Storage facilities are provided for parts, equipment, tools and materials. Storage conditions provide for the security of serviceable parts, segregation of serviceable parts from unserviceable parts, and for prevention of deterioration of and damage to stored items.
- Storage facilities for serviceable aircraft components are clean, well- ventilated and maintained at an even dry temperature to minimize the effects of condensation. Both manufacturer and standard recommendations are followed for specific aircraft components. Storage racks provide sufficient support for large aircraft components so that the component is not distorted. All aircraft components, wherever practicable, remain packaged in protective material to minimize damage and corrosion during storage.
- All substances classified as dangerous goods shall be stored separately and warning signs shall be displayed as appropriate. All personnel shall be provided with PPE when handling dangerous goods. Eye wash stations / fresh water sources are sufficiently available in the event of spillage. Environmental issues shall be observed during disposal of dangerous goods. Refer to the current IATA Dangerous Goods regulations manual.

Safarilink Engineering requires that bonded, incoming quarantine, outgoing quarantine, flammable, and tool stores must be kept distinctly separate. This applies to both in-house and contracted maintenance organizations.

2.3.1.2 Secure Storage Areas

Aircraft spares are housed in secure storage areas in the following locations:

- a) Main bonded store, Ground Floor KAH.
- b) Hangar tool store/mini-bonded/quarantine, Ground Floor KAH.
- c) Flammable and tyre store, Ground Floor KAH.

The stores personnel shall ensure all storage areas are maintained clean and well-ventilated and that equipment is in good working order. Sensitive parts and equipment, such as O-rings, Electrostatic Sensitive Devices, oxygen bottles and other high-pressure system components, must be properly packaged and identified before being stored to protect them from damage and/or contamination. Flammable, toxic, or volatile materials must also be properly identified and stored.

2.3.1.3 Security

The secure stores are restricted areas and only authorized personnel are allowed entry. It is the responsibility of the Store personnel for ensuring the stores are always closed. A list of authorized personnel is kept at each entrance into the respective stores. The Head of Quality is responsible for maintaining the list.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	13

2.3.1.3 Binning of Parts and Materials

Serviceable Label (Form: MP/005) accompany parts released to the bonded store from Goods Receiving section.

The Stores personnel verify that the appropriate label is attached to the part(s) and material prior to binning in the bonded store.

The stores personnel also ensure that all parts and materials being binned in stores are properly packaged and sealed. Any packages found open shall be returned to the incoming receiving area to ensure that items in the package have not been tampered with and comply with the attached label.

2.3.1.4 Transfer of Components Between stores

Parts are transferred from the Main bonded store to the mini-bonded/line store to replace components that have been consumed. A delivery note/requisition note shall be used for this transfer: it is to be signed by the receiver and the copy is returned to stores.

2.3.2 SYSTEM OF CONTROL FOR SHELF LIFE AND MODIFICATION STANDARD

2.3.2.1 Shelf Life Control

Shelf-life limited parts and materials shall be properly identified with the expiry date on computerized system for shelf-life control. The labels shall clearly indicate the expiry date.

Computerized system monthly reports are used to ensure timely removal of the materials with expiring shelf life from stores. Such materials shall be passed to the Quarantine stores awaiting shelf life extension or disposal. The Procurements officer shall be responsible for ensuring that items are replenished, and appropriate stock levels are maintained.

The Procurement Officer is to seek shelf-life extension from the OEM (if required). The approval will be filed with the original certificate. Shelf-life extension shall be sought for any items whose shelf life can be extended.

2.3.2.2 Modification Standard

The HOBM shall evaluate manufacturer's recommendations. Once a decision is made to modify the components, embodiment instructions will be raised. The applicable component will be sent for embodiment and upon receipt, embodiment status shall be recorded in computerized system.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	14

2.3.3 TAGGING/LABELING SYSTEM

2.3.3.1 Serviceable/Repairable Components

Rotable/Repairable serviceable components are tagged with the internal Serviceable Label (Form: MP/005). The approving certificate number is printed on the Serviceable Label (Form: MP/005) for tracking purposes. Information on the label includes part number, serial number, batch number, supplier, order number and shelf life expiry date, if applicable.

The Serviceable and Unserviceable component in Quarantine Storages or Racks in Workshops, Quarantine Stores, Hangars or Line Stations must be demarcated and clearly identified to avoid any possibilities of mix ups.

2.3.3.2 Serviceable Consumable Parts and Materials

Consumable serviceable parts and materials are tagged with the internal Serviceable Label (Form: MP/005). Information on the label includes part number, quantity, batch number, supplier, order number and shelf life expiry date, if applicable.

2.3.3.3 Unserviceable Components

All unserviceable components shall be tagged with Unserviceable tag (MP/006) or Repairable tag (Form MP/008) and kept/stored separate from serviceable parts. Information on the label includes part number, serial number, aircraft /component removed from, reason for removal, date and signature of the Engineer.

2.3.3.4 Scrapped Components

All scrapped components shall be tagged with scrap Label (Form MP/007). Information on the label includes part number, serial number, aircraft/component removed from, and reason for removal, date and signature of the Engineer.

2.3.3.5 Robbery of Items from Aircraft or Components

When a part is removed from an aircraft, assembly in stock or component and not replaced immediately, a Shortage Label (Form MP/010) is attached. Information on the label includes details of the part robbed and the authorizing Engineer. For items removed from the aircraft the relevant information is entered in the aircraft tech log and/or non-routine cards. For part(s) removed from an assembly or component in stores, the Stores clerk and Procurement officer shall be informed.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.3
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	15

The HOBM/HOLM shall ensure that Maintenance planning incorporates the task of calling for installation of the removed part(s) as soon as the part(s) is/are available. If the part is to be fitted in another Aircraft, then the part numbers of the two components must be confirmed to be the same. The stores clerk shall maintain a list of all items removed from assemblies and shall provide monthly updates to the HBM and Procurement officer on all shortage labels (Form MP/010) in the Stock Room.

2.3.4 COMPONENTS “ON HOLD”

Components that are removed during troubleshooting pending defect investigation and yet the original aircraft defect persists are to be classified as unconfirmed defective parts are to be placed on hold pending defect investigations.

Safarilink shall raise a Holding Tag (Form MP/009) for such parts before delivering them to stores to be placed under quarantine. Safarilink shall notify the operator to monitor/review the defect after each flight daily. If the defect persists, the component is to be deemed serviceable and returned to the bonded store with an appropriate serviceable tag or class 2 CRS. If the defect does not reappear within the tracking period, the component is deemed unserviceable and tagged with an appropriate a repairable tag for stores to coordinate its next course of action.

2.3.5 ACCESS PANELS AND or PARTS REMOVED DURING SCHEDULED AND UNSCHEDULED MAINTENANCE’

All panels and or parts removed during scheduled/unscheduled maintenance with the intention of being installed back on to the aircraft which they originally came from shall be placed on a bench or stand with a placard. The placard shall include the wording: **ACCESS PANELS/COWLINGS REMOVED AS SERVICEABLE TO FACILITATE ON-GOING MAINTENANCE, TYPE OF CHECK, JOB NUMBER AND THE AIRCRAFT REGISTRATION.** This is to ensure that parts and or panels can be identified by all maintenance personnel immediately. If the aircraft maintenance lasts for more than two weeks, all parts and components shall be tagged with a parts removal tag (Form MP/012). The details of the part number, serial number, item description, job number and name of the person who removed that part and the aircraft registration it is to be fitted back on to.

2.3.6 ISSUING OF COMPONENTS TO THE MAINTENANCE PROCESS

Physical issuing of aircraft spares takes place at the Hangar floor store counter and issuing done through the computerized parts tracking system

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	16

Engineers raise requisition in written and/or on computerized system directly from their workstations. Information on works order, part number, reason for requirement, quantity

deferred defect number, priority, date and time of requisition are input into the system. Where the stocked quantity will satisfy the requirement, a Picking Slip is printed at the store. This Pick Slip shows all the information pertaining to the requisition as well as the available stock, the batch numbers and bin locations. This information is used by the Stores clerk to ensure that FIFO is applied when issuing stock. The Pick Slip is printed in duplicate.

Before issuing a rotatable part, the Stores personnel confirms a Serviceable Label (Form: MP/005)/release certificate is attached to the item. The Store personnel then completes and signs the issue section of the Pick Slip, enters the transaction into computerized system and delivers the part and one copy of the pick slip to the user, once the below details have been recorded on the Pick Slip.

- a) Batch/Serial Number issued (as applicable)
- b) Name of issuing Stores Personnel
- c) Name and Staff Number of User

2.3.7 FREE-ISSUE DISPENSING OF STANDARD PARTS

Free-issue parts are available from the Hangar, Workshops. These are clearly identified, segregated and controlled by the designated officer in the respective areas. All free issue dispensing parts shall be costed to a general works order that shall be divided between the aircraft to distribute the costs.

2.3.8 DISPOSAL OF UNSALVAGEABLE COMPONENTS

The scrapped component/part must be defaced/ deformed and sent to Stores. A list of all scrapped components showing their part numbers and serial numbers must always be kept for a minimum period of seven years. Defacing of components/parts may be accomplished through one or a combination of the following procedures but not limited to any of them:

- a) Grinding
- b) Burning
- c) Removal of a major lug or other integral feature
- d) Permanent distortion of parts
- e) Cutting a hole with a cutting torch or saw
- f) Melting or
- g) Sawing into many small pieces
- h) Marking with red paint/dye
- i) Cartridges and pressurized parts are handed over to approved disposal agents.
- j) The scrap list is forwarded to the HOBM and Procurement Officer to organize for replacement of the scrapped part. The HOBM is also to inform the Technical Records of the scrappage, so that they update their records accordingly. An entry is made in the scrap book.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	17

2.3.9 PERPETUAL STOCK TAKING

The purpose of the perpetual stock taking is to ensure that all parts stocked in the bonded store are counted at least every six months and checked in computerized system to ensure that the data is correct.

2.3.9.1 Procedure

Computerized system random stock checking option is used to carry out perpetual stock taking of all the parts. The system ensures that no part is counted twice until all the parts have been counted at least once. The system generates a checklist for the stores personnel to use. The system randomly selects part numbers and prints the complete contents of the bin location for each part number selected.

The Verification section uses the list to confirm the contents of each bin location and record their findings on the checklist.

2.3.9.2 Documentation

All documents relating to the Perpetual Stock Taking are filed in a logical manner and kept under lock and key.

2.3.9.3 Adjustments to Computerized System

Any discrepancies found is investigated together with the HOBM and Procurement officer and a report compiled. The report contains:

- Details of part, i.e. part number, description and location
- Details of part as per computerized system, i.e. batch number, serial numbers (for rotables) and qty (for consumables)
- Details of part as per findings, i.e. batch number, serial numbers (for rotables) and qty (for consumables)
- Results from investigating discrepancy
- Recommendation to correct discrepancy
- “Cost” of adjustment

2.3.9.4 Reports

Reports are produced every last Friday of the month and distributed to the HOBM and Procurement officer. The reports indicate the number of discrepancies found against the number of parts checked. This is a summary of the Error Reporting Sheets.

A graphical representation is also included to monitor the trend and is historical.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.3
		MANUAL		
Issued	17 Oct. 2024	Storage, Tagging, and Release of Aircraft Components and Materials to Aircraft Maintenance	Page	18

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.4
Issued	17 Oct 2024	Acceptance of Tools and Equipment	Page	19

2.4 ACCEPTANCE OF TOOLS AND EQUIPMENT.

2.4.1 CONTROL OF EQUIPMENT AND TOOLS

Safarilink controls all applicable tools, equipment, and test equipment used during production or for making a finding of airworthiness.

Safarilink ensures that all applicable tools, equipment, and test equipment used during production or for making a finding of airworthiness are calibrated to ensure correct calibration to a standard acceptable to the Authority and traceable to national or international Standards.

2.4.2 EQUIPMENT AND TOOL AVAILABILITY

Safarilink has available the necessary equipment, tools, and material to perform the approved scope of work, and these items are under the full control of Safarilink. The Head of Workshop keeps a record of all equipment and frequently evaluates their number. The Stores personnel keeps a record of tools and aircraft parts and components and ensure adequate numbers are in stock. The equipment and tools are made available always except in the case of any tool or equipment that is so rarely needed that its permanent availability is not necessary.

For specific tools and equipment necessary for maintenance of an aircraft or aircraft component specified in the Safarilink certificate and whose permanent availability is not necessary, the HOBM evaluates and advises the procurement officer to arrange for their temporary acquisition. These then fall under full control of Stores for the period they are needed to perform required maintenance or repairs.

Note - The Authority will not amend the approval to delete the aircraft or aircraft component on the basis that it is a temporary situation and there is a formal agreement from the approved maintenance organization to re-acquire tools, equipment, or other items before performing any maintenance or repair).

Safarilink has sufficient aircraft access equipment and inspection platforms or docking to ensure that an aircraft is properly inspected. The number is frequently reviewed depending on the fleet and their status. The Head of Base Maintenance keeps a record of aircraft docking platforms & steps for maintenance schedule & their status report

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.4
Issued	17 Oct 2024	Acceptance of Tools and Equipment	Page	20

2.4.3 PROCESS OF ACCEPTANCE

The Stores Receiving Inspector shall perform an administrative inspection and ensure that all measuring & test equipment have a valid calibration certificate.

Each tool requiring control and does not have a serial number shall be assigned a serial number registration and marking.

Inspection shall be done in accordance with the manufacturers or designers' specification, maintenance manual and/or approved test schedule. Each precision tool and measuring & test equipment will be inspected to ensure conformity to specification, drawings, sizes, materials, and skill. Tools are then sent to the appropriate Tools Store.

Tools and equipment are also registered in a computerized system and tools store register.

The store personnel are responsible for accepting and issuing tools from the Tools Store.

2.4.4 ALTERNATIVE TOOLS AND EQUIPMENT

Where the manufacturer specifies a tool, equipment, or test equipment, that tool, equipment, or test equipment will be used unless the manufacturer has identified the use of an equivalent.

However, a tool, equipment, or test equipment other than those recommended by the manufacturer may become acceptable, based on a program which includes:

- o a description of the procedures used to establish the competence of personnel that make the determination of equivalency of tools, equipment, or test equipment.
- o conducting and documenting the comparison made between the specification of the tool, equipment or test equipment recommended by the manufacturer and the equivalent tool, equipment, or test equipment proposed.
- o ensures that the limitations, parameters, and reliability of the proposed tool, equipment, or test equipment are equivalent to the manufacturer's recommended tools, equipment, or test equipment; and
- o ensures that the equivalent tool, equipment, or test equipment can

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.4
Issued	17 Oct 2024	Acceptance of Tools and Equipment	Page	21

perform the appropriate maintenance function, all normal tests, or calibrations, and checking all parameters of the aircraft or aircraft component undergoing maintenance or calibration.; and the approved maintenance organization shall have full control of the equivalent tool, equipment, or test equipment through an ownership, lease or other legal arrangement.

- o If alternate equipment is to be used, its equivalence to the original equipment, as recommended by the OEM, must be determined. The supplier of the alternate equipment must demonstrate that it is an acceptable alternative.

Safarilink in consultation with the user, must ascertain that the alternate equipment equals the original with respect to form, fit and function.

2.4.5 ENGINEERS TOOL KITS

Safarilink will supply its personnel with standardized tool-controlled toolboxes: as such no one will be allowed to use their own personal tool kits to work on aircrafts.

Tool Checks are to be carried out daily when toolboxes have been drawn from the tool store and when the toolboxes are being returned to stores.

Tool Check record sheets (MP/019B) are to be completed for this purpose.

All Safarilink tools and equipment have been scribed/engraved to show their unique assigned asset number. In an event none exists, this should be brought to the attention of stores personnel and the tool/equipment returned immediately to stores.

Each toolbox shall have an inventory listing and a specific box tool control sheet MP/021 to allow the toolbox assignee to lend tools to a colleague when necessary. No tools or equipment shall be lent to an external person without stores approval/delivery note.

At the end of the day's work, tool reconciliation shall be carried out by both the toolbox assignee(lender) and borrower, and any shortages shall be reported to the store's personnel, HOLM, HOBM, HOW and HOQ. MPM part 3.13 missing tool policy shall be affected. Any unserviceable tool or equipment shall be tagged with an unserviceable tag and withdrawn from usage to quarantine.

Precision tools and equipment drawn from stores shall have an accompanying calibration status document.

A tool store board (shadow board) is provided with at the tool store to supplement for any additional single-issue tool that may be required.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.4
Issued	17 Oct 2024	Acceptance of Tools and Equipment	Page	22

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.5
Issued	17 Oct 2024	Calibration of Tools and Equipment	Page	23

2.5 CALIBRATION OF TOOLS AND EQUIPMENT.

2.5.1 CALIBRATION

Safarilink has a procedure to inspect or service and, where appropriate, send out for calibration tools, equipment, and test equipment on a regular basis and indicate to users that an item is within any inspection or service or calibration time limit.

A register is maintained by stores for all calibrated tools, equipment, and test equipment together with a record of calibrations and standards used. The Head of Base Maintenance shall be overall responsible for all calibrated tools held by Safarilink.

Inspection, service, or calibration on a regular basis is in accordance with the equipment manufacturers' instructions except where Safarilink can show by results that a different time is appropriate in a case and is acceptable to the Authority.

(Note 1: CALIBRATION STANDARDS - In the case of foreign manufactured tools, equipment, and test equipment, the standard provided by the country of manufacture may be used).

(Note 2: CALIBRATION STANDARDS – Removal of a standard (primary, secondary or transfer standard) used for calibration, may not under any circumstances, be removed from the calibration section for use during maintenance.

2.5.2 IDENTIFICATION

A clear system of labelling all tooling and testing equipment is used, to give information on when such tooling, equipment and test equipment is not to be used for product acceptance or for making a finding of airworthiness and when the next inspection or service or calibration is due,

2.5.3 ELECTRO-STATIC DISCHARGE (ESD) MATS

Electro- Static Discharge (ESD) mats shall be handled like calibrated tooling.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.5
Issued	17 Oct 2024	Calibration of Tools and Equipment	Page	24

2.5.4 REQUIREMENTS

Inspection of calibration standards shall be contracted to manufacturers, approved vendors, national calibration centers except those that can be calibrated in-house where allowed by the manufacturer.

2.5.5 CALIBRATION CONTROL

Calibration work is done in the dedicated calibration centers. The calibration center shall use an identification system that shows the validity of tooling and test equipment in relation to the next inspection date. Calibration stickers are used to indicate the date of calibration, the date due for next calibration and the center that carried out the calibration.

A Computerized System is used to control the periodic calibration of all relevant tooling and equipment and workshop register acts as back-ups. This system produces lists of tools and equipment due for calibration within the required time scale. These lists are sent to the relevant Sections to enable them to identify and send the tools and equipment to stores for forwarding to the designated calibration centers.

Upon receipt of the calibrated unit, Goods Inwards shall verify the calibration certificate and forward the unit to the relevant user/tools store with copies of the certificates and results.

2.5.6 CALIBRATION EXEMPTION

Extension on the due date of tools and equipment is not allowed. If due to unforeseen circumstances, an extension is necessary, a request shall be made to the Head of Quality with clearly stated reasons by filling concession form QAM/32.

After evaluation, the Head of Quality may grant a maximum 5% extension on the due date. This will be identified by attaching a new calibration sticker to the subject tool or equipment quoting the details of the concession.

2.5.7 INSPECTION INTERVAL REQUIREMENT FOR PRECISION TOOLS, MEASURING AND TEST EQUIPMENT

Stores in conjunction with the HOW, HOLM and HOBM shall establish the inspection intervals considering:

- The equipment manufacturers' instructions
- The type of precision tool and equipment

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.5
Issued	17 Oct 2024	Calibration of Tools and Equipment	Page	25

- The stability characteristics of precision tools and test equipment
- The required accuracy
- The conditions and frequency of use

If the manufacturers' instructions are not available, the inspection interval for measuring equipment and tools will be one year.

2.5.8 RECORDS OF CALIBRATION, INSPECTION AND TESTS

Safarilink keeps all records of calibrations and the standards used for calibration of its tools and equipment.

To attest accomplishment of specialized calibration, inspection, testing, repair overhaul and maintenance of precision tools and measuring test equipment, specific notation will be made on the worksheet/calibration certificates.

Calibration certificates are maintained on all precision and test equipment to properly identify each piece of equipment and /or for references to its calibration. The Calibration certificates include for each individual piece of precision tool, measuring and test equipment, at least the following data:

- Manufacturers name
- Model number.
- Serial number
- Company registration number
- Calibration date
- Method used for calibration.
- The part number and serial number of the standard used to perform the calibration.
- Results and corrections made.
- Next calibration due date
- Dates and persons performing calibration, inspection, testing or maintenance.

All original certificates and calibration results shall be kept in stores and retained for at least two years after the tool has been scrapped.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.5
Issued	17 Oct 2024	Calibration of Tools and Equipment	Page	26

2.5.9 REJECTING AND REMOVING TOOLS AND MEASURING TEST EQUIPMENT

Tools and measuring equipment may be rejected or removed for reasons of unsatisfactory calibration results, replacement, redundancy, and non-repair ability. The calibration center shall be responsible for recommending withdrawal of the unit from use.

Tooling no longer required will be withdrawn from service and marked unserviceable and destroyed.

2.5.10 PERSONAL CALIBRATED TOOLS

Safarilink does not allow use of personal precision tools.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.6
Issued	17 Oct 2024	Use of Tooling and Equipment by Staff (including alternate tools)	Page	27

2.6. Use of Tooling and Equipment by Staff (including alternate tools)

2.6.1. Objective

The objective of this procedure is to describe all management procedures for tooling / equipment, distribution and return of the tooling / equipment after use.

2.6.2. Issue of tools.

Tools are kept in Tool Stores under the responsibility of the store personnel. All tools issued and returned are signed 'OUT' and 'IN' in the Tools Stores Register by both the Stores Personnel and the Engineer. Reconciliation of tools shall be carried out at the end of the day and any shortages shall be reported to the Head of Base Maintenance.

2.6.3. Determining Tool Serviceability Prior to Issue

The store personnel are responsible for ensuring that all tools kept in the tool store are serviceable and in good condition. Before any tool is issued, the store personnel must ascertain that the calibration sticker is on and not expired prior to issue. The receiving staff must also check the condition of the tool before accepting. Tools will be issued with the deviation tolerances/calibration certificate, where applicable. Any tool not in conformity with the requirements shall be withdrawn from service, tagged unserviceable and forward to the Quarantine store.

2.6.4. Training and control of personnel in the use of tools and equipment [records of training]

Training of personnel in the use of tools is covered during the maintenance indoctrination training and OJT. For special tools and equipment, training is provided by the vendors/manufacturers. The Head of Base/Line is responsible for organizing training. Records of the personnel trained are kept by the Head of Quality.

2.6.5. Loan Tool/ Equipment Control

1. Safarilink AMO may borrow tools/ equipment for a short period of time if they are required and Safarilink- owned tools/ equipment are unserviceable, under repair or waiting for calibration.
2. In addition, Safarilink AMO may also not own all the tools/ equipment required to perform infrequent unscheduled maintenance tasks but may avail such tools/ equipment by borrowing as the need arises.
3. For all line maintenance (scheduled and unscheduled), the Maintenance Planner and Stores Personnel shall review and ensure that all tools/

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.6
Issued	17 Oct 2024	Use of Tooling and Equipment by Staff (including alternate tools)	Page	28

equipment required are available before the commencement of the intended maintenance task.

4. Where the tools/ equipment is not available, the Head of Base/Line Maintenance will loan the required tools/ equipment from an approved vendor.
5. The loaned tools/ equipment must undergo receiving inspection before use.

2.6.6. Control of Alternate Tools

Where alternate tools are used, they will be those recommended by the OEM. The usage of those tools will be as per the data provided by the OEM thus a demonstration may be necessary if it is being used for the first time. Any use of alternate tools shall be indicated in the maintenance documentation.

2.6.7. Personal [own] instrument / tool control

Personal tools shall not be allowed in the Safarilink Hangar.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.6
Issued	17 Oct 2024	Use of Tooling and Equipment by Staff (including alternate tools)	Page	29

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.7
Issued	17 Oct 2024	Cleanliness Standards of Maintenance Facility	Page	30

2.7 CLEANLINESS STANDARDS OF MAINTENANCE FACILITIES

The Safarilink maintenance facilities shall be cleaned continuously. Deep cleaning is also carried out during the weekends to maintain the required cleanliness standards.

2.7.1 “FOREIGN OBJECT” EXCLUSION PROGRAM.

All objects, waste parts and material are collected and put in containers provided and strategically positioned in every working area.

Engine ground run areas are regularly inspected. Prior to an engine ground run the area is ensured to be free of items likely to cause foreign object damage. In the extended apron and airport areas, Kenya Airports Authority is responsible for cleanliness.

Safarilink aircraft on long term storage are fitted with the appropriate covering blanks to prevent foreign object ingress into the engines, Pitot-Static probes, and static ports.

2.7.2 CLEANING PROGRAM – INDIVIDUAL RESPONSIBILITIES AND TIMESCALES

Each controlling engineer is responsible for the cleanliness and housekeeping in his/her section.

The Head of Base Maintenance shall be responsible for the enforcement of aircraft and hangar related cleanliness standards.

The Head of Quality shall be responsible for developing and implementing a review schedule to monitor compliance with cleanliness procedures on an on-going basis.

2.7.3 WASTE MATERIAL DISPOSAL

All maintenance areas are provided with waste disposal dustbins and fluids/chemicals containers.

Waste and disposal of materials used in assisting in aircraft maintenance is done in accordance with the laid down NEMA regulations i.e. oils and all flammable fluids are put in containers and delivered to suppliers who dispose the same whereas rags and combustibles material are kept in containers and disposed at designated areas within the airport. Further details refer Waste Management Regulations and Safarilink Health Safety & Environment Manual.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.7
Issued	17 Oct 2024	Cleanliness Standards of Maintenance Facility	Page	31

As described above, the waste containers shall be disposed of as follows:

1. Waste oil and fuel to be disposed in the clearly labeled drum,
2. Flammable rags to be disposed in labeled red bin,
3. Metal and wood waste to be disposed in a labeled yellow bin,
4. General wastes e.g. paper/foams will be disposed of in labeled green bins.

Safarilink shall not dispose of any waste on a public highway, street road, and recreational areas or in any public place. Waste shall be disposed of in designated areas. All waste generated shall be collected, segregated, and disposed in the manner described in the Waste Management Regulations and Safarilink Health Safety & Environment Manual.

Safarilink shall ensure that such waste is transferred to a person who is licensed to transport and dispose of such waste in a designated area as provided by the local authority.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.8
Issued	17 Oct 2024	Maintenance Instructions and Relationship to Aircraft/Aircraft Component Manufacturers’ Instructions Including Updating and Availability to Staff	Page	32

2.8 Maintenance Instructions and Relationship to Aircraft/Aircraft Component Manufacturers’ Instructions Including Updating and Availability to Staff

Safarilink must and does hold for use during maintenance, airworthiness data appropriate to support the maintenance work performed on the aircraft or aircraft component from the Authority, the design organization or any other approved design organization in the State of Manufacture or State of Design, as appropriate. Safarilink monitors the amendment status of all data and maintains a check that all amendments are being received.

2.8.1 Objectives

This chapter describes how Safarilink AMO receives, amends (as applicable) and distributes all necessary airworthiness data for aircraft, engine and component maintenance and outlines the applicability of regulatory data related to aviation maintenance and standard practices.

2.8.2 Required Airworthiness Data

The materials required to be held includes, (but may not be limited to) -

- the Civil Aviation Regulations,
- associated advisory material.
- airworthiness directives.
- manufacturers' maintenance manuals.
- repair manuals.
- supplementary structural inspection documents.
- service bulletins.
- service letters.
- service instructions.
- modification leaflets.
- aircraft maintenance programme.
- NDT Manual; and
- Airworthiness Notices issued by the Authority.

(Note - The Authority may classify data from another authority or organization as mandatory and may require Safarilink to hold such data).

2.8.3 Modification of Airworthiness Data

Modification of maintenance instructions by an approved Maintenance Organization is prohibited, except where the modification results in an equivalent or improved standard. (Maintenance instruction means an instruction on how to carry out a maintenance task).

Where Safarilink modifies airworthiness, data specified in part 2.8.2 above to a format or presentation more useful for its maintenance activities, then the company shall submit to the KCAA an amendment to the maintenance procedure manual for any such proposed modifications for acceptance.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.8
Issued	17 Oct 2024	Maintenance Instructions and Relationship to Aircraft/Aircraft Component Manufacturers” Instructions Including Updating and Availability to Staff	Page	33

When transcribing maintenance instructions into work cards, engineering orders, work sheets etc. Safarilink must be able to show traceability of individual maintenance tasks to the manufacturer’s original, without degradation of the task content, for any instruction derived from the manufacturer-provided information.

Where manufacturer’s tasks have been sub-divided for ease of planning, accomplishment, human factors etc., the total task must accurately reflect the manufacturer’s intention. Transcription of maintenance data does not confer approval to carry out the engineering design of repairs and modifications.

The procedure should include paper/electronic traceability of the complete process from start to finish and ensure that the relevant maintenance instruction clearly identifies any changes.

2.8.4 Control of Information

All maintenance documentation is received and registered in the Technical Library. Initial issues are sent to the identified users and revisions are forwarded to the same destinations, as and when received. The Manual Feedback Form must be used to confirm delivery of the documents.

Online documents are accessed directly by the users and will not, therefore, be registered in the library. This is the case with most Component Maintenance manuals. It is the responsibility of the respective user to ensure that the data accessed is the latest version and to record this whenever such data is used for maintenance and certification (CRS) purposes.

The Supervisor, Technical Library must check the revision status of all documents registered in the library and issue the revision status to the manual holders. The status of revisions of the AMM, IPC, WDM, SSM, SRM, FIM/TSM, Engine Maintenance Manual and the Engine IPC are to be forwarded upon receipt of the updates.

2.8.5 Technical Information Amendment Procedures

All airworthiness data used by Safarilink is kept current and made available to all personnel who require access to that data to perform their duties. The Supervisor, Technical Library is responsible for the incorporation of amendments of manuals in the library.

Users and/or holders must return the Manual Feedback Form to the Supervisor Technical Library upon receipt of a technical document. They are also responsible for incorporation of amendments to their manuals.

Revisions of manuals received on soft copy are complete revisions and supersede previous revisions. The latter are withdrawn and destroyed.

2.8.6 Uncontrolled copies of Manuals

These are manuals that are not revised and not in use but can be used for reference only. These manuals are clearly segregated in a clearly identified area and marked “FOR REFERENCE ONLY”.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.8
Issued	17 Oct 2024	Maintenance Instructions and Relationship to Aircraft/Aircraft Component Manufacturers” Instructions Including Updating and Availability to Staff	Page	34

2.8.7 Company Technical Procedure/Instructions

All data is ordered based on the never-ending revision service to ensure that the latest revisions are available for use.

2.8.8 Awareness of Technical Publications, Instructions and Service Information

Airworthiness data must be, and is, made available in the work area in close proximity to the aircraft or aircraft components being maintained and for supervisors, mechanics, and certifying staff to refer to.

Where a computer system is used to maintain airworthiness data, the number of computer terminals is sufficient in relation to the size of the work programme to enable easy access, unless the computer system can produce paper copies.

Where a microfilm or microfiche reader printers are used to maintain airworthiness data, a similar requirement as specified above will apply.

Technical Library, HOQ, HOBM, HOLM, HOW conducts regular sessions on the use of the various manuals and technical publications with emphasis on the importance of the revision status. Personnel responsible for the various manuals are trained on the procedures of storing and revising the manuals.

2.8.9 Maintenance Documentation

All maintenance documents will indicate the revision status of the source document. This is to ensure that the personnel preparing the maintenance documents take the responsibility of using the latest revision data.

2.8.10 KCAA acceptance of organization’s transfer of airworthiness data

Use of Electronic data is acceptable, and this mode will be used. CD formats are the preferred option. However, an online platform or intranet platform can be used as well.

2.8.11 Review and identification of amendment status of maintenance instructions.

The document owner must check the validity of documents, on a regular basis, based on the supplier’s index or with other means as necessary. Microfilm print outs and photocopies of approved maintenance data may only be considered as approved data on the date of printing/copying or after checking the revision status of the original data.

2.8.12 Distribution of airworthiness data

Each maintenance area will be supplied with all the relevant airworthiness data to carry out the functions on which they hold approvals.

2.8.13 Incorporation of best practice and human factors principles

All Staff are trained in Human Factors and proper use of Manuals to minimize errors. Attention is given to manual revision status which must be checked before the use of any Manual.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.8
Issued	17 Oct 2024	Maintenance Instructions and Relationship to Aircraft/Aircraft Component Manufacturers” Instructions Including Updating and Availability to Staff	Page	35

2.8.14 Control of customer supplied maintenance data.

Customer supplied maintenance data must be registered in the Technical Library and forwarded to the user department. Refer to section 2.8.4. The copies are stamped ‘uncontrolled copy’ to show that the Safarilink Technical Library is not responsible for obtaining amendments. Customers are responsible for the revision of their manuals.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.9
Issued	17 Oct 2024	Repair Procedures	Page	36

2.9. REPAIR PROCEDURE

2.9.1. Objective

This chapter ensures that modifications/ repairs are strictly accomplished as per the data recommended by manufacturer or proposed by engineering organization and approved by KCAA

2.9.2. Company Policy

Maintenance and Repair of Aircraft, Aircraft Engines or Components is carried out in accordance with Manufacturer's Repair Manuals and the applicable operator's approved Maintenance Control Manual. Repairs may be carried out if within the company's capability. Design and approval of the repair of damage beyond the scope of the Repair Manual, or Safarilink competence, will be submitted to the manufacturer for approval and then to the KCAA. Such repairs may be carried out by appropriately approved organizations, or at Safarilink facility, with assistance from such organizations. No used life-limited part shall be installed in any Safarilink Aircraft unless the part meets the standard of Airworthiness applicable to the installation of life limited parts and its history/time consumed is confirmed from Technical Records.

2.9.2.1. Repair Orders

Repair orders are used to contract repairs of aircraft engines and components. Repair orders are raised by maintenance planning for both external sources of repair and Safarilink workshops.

2.9.2.2. Sources of Repair Approval

All repairs are carried out using approved data. Aircraft, aircraft engines and components manufacturers are contacted to assist in defining the repair and provide approval. The Head of Base Maintenance shall communicate and obtain the OEM. validation for the repairs beyond the applicable manuals.

2.9.3. Company Approval

Approval of repairs within the applicable manuals shall be the responsibility of the designated section. See section 2.9.2.2 for repairs not described in the applicable manuals.

2.9.3.1. Aircraft Repairs

All aircraft repairs shall be done in accordance with manufacturers' manuals and in consultation with the operator. All repairs must be carried out under the supervision of trained and appropriately approved Engineers who will make sure all procedures conform to the requirements of the necessary Technical Data. The repairs/overhaul are carried out using standards, methods, techniques, practices and testing standards acceptable to KCAA.

2.9.3.2. Aircraft Engine Repairs

Overhaul on Engines, auxiliary power units, various engine accessories and components may be performed, outside Safarilink AMO, at facilities/agents with which formal contracts have been entered. Such contracts are reviewed and changed as and when need arise. These facilities are

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.9
Issued	17 Oct 2024	Repair Procedures	Page	37

KCAA approved. The KCAA approval shall not be required where the repair station is the OEM or approved by the OEM.

2.9.3.3. Component Repairs

All repairs shall require a preliminary inspection to be carried out to determine the state of preservation and/or any defects on the units involved. The preliminary inspection shall be in accordance with the applicable maintenance manual.

A repair quote shall be provided by the repair station and shall include:

- a) Strip report of findings
- b) List of parts required for repair accomplishment
- c) Man-hours necessary to accomplish repair
- d) Estimated cost of repair (only for outsourced repair stations)

For local repairs, the Purchasing and Logistics section shall calculate the cost of the associated repair.

The estimate cost of repair is compared to the current market price of a readily available new or OHC unit.

If the repair cost is less than 60% of the current market value of a new or OHC unit, whichever is lower, the repair station is authorized to perform the repair.

Should the cost of the repair be more than 60%, next course of action shall be evaluated.

2.9.3.4. Major Repairs (or Modifications) Standards

Note: “**major modification**” means a type design change not listed in the aircraft, aircraft engine, or propeller specifications that might appreciably affect the mass and balance limits, structural strength, performance, powerplant operation, flight characteristics, or other qualities affecting airworthiness or environmental characteristics, or that will be embodied in the product according to non-standard practices;

“**major repair**” means a repair of an aeronautical product that might appreciably affect the structural strength, performance, powerplant, operation flight characteristics, or other qualities affecting airworthiness or environmental characteristics, or that will be embodied in the product using non-standard practices;

All repairs or modifications to an aircraft are made in compliance with the airworthiness requirements acceptable to the KCAA. Major repair or modification is carried out only in accordance with technical data approved by the Authority, and essential records supporting compliance with the airworthiness requirements are retained. Before any major modification or repair is done, operator shall make a formal approval request to KCAA by submitting KCAA Form AC-AWS0014, detailing -

- Supporting data from the State of Design;
- Reason for the repair or modification, and detailed description;
- A drawing list showing all the individual drawings and specifications which define the repair or modification, together with drawings and instructions necessary for the installation of the repair or modification;
- Submission of a Maintenance Schedule amendment (if necessary);

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.9
Issued	17 Oct 2024	Repair Procedures	Page	38

- Details of tests or other methods of meeting certification rules, such as flammability, carbon monoxide, and noise requirements;
- Details of any necessary tests or other methods of substantiating that the modification (or repair) complies with certification requirements;
- Details of any Flight Test requirements, in respect of performance, handling, radio operation etc.; and
- Any other factors affecting continued safety or airworthiness.

Upon completion of a major repair or modification, the Authority is notified by submitting KCAA Form AC-AWS0014A.

A copy of the completed form AC-AWS0014A together with the original of each certificate of release to service and copy of any specific maintenance data used for repairs or modifications carried out is to be provided to the operator.

Safarilink shall retain a copy of all detailed maintenance records and any associated maintenance data for two years from the date the aircraft or aircraft component to which the work related was released.

2.9.3.5. Minor Repairs (or Modifications) Standards

Note: “**minor modification**” means a modification other than a major modification;

“**minor repair**” means a repair other than major repair;

The Head of Base Maintenance shall be responsible for evaluating all the operator’s minor repair/modification work orders before embodiment in accordance with the manufacturer’s published procedures.

A class 3 CRS shall be issued for all minor repairs or modifications.

2.9.4. CONTROL SYSTEM FOR PARTS MANUFACTURE, PROCESSING AND INSPECTION

Manufactured parts shall be in accordance with approved engineering drawings.

The appropriate part number with the suffix “-XLK” will identify the part.

The final inspection will be carried out by an appropriately qualified Engineer who will issue the respective CRS.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.9
Issued	17 Oct 2024	Repair Procedures	Page	39

THIS PAGE IS INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.10
Issued	17 Oct 2024	Aircraft Maintenance Program Compliance	Page	40

2.10 AIRCRAFT MAINTENANCE PROGRAM COMPLIANCE

2.10.1 GENERAL

All aircraft maintained by Safarilink shall have an approved aircraft maintenance program which is in accordance with procedures acceptable to the Authority, that ensures that each aircraft is maintained in an airworthy condition, operational and emergency equipment necessary for flight are serviceable, and that the certificate of airworthiness for each aircraft remains valid.

It is the responsibility of the operator to develop, amend and submit for approval all applicable approved aircraft maintenance programs that are to be used by Safarilink.

It is the responsibility of the Head of Base Maintenance to ensure compliance with the operators approved aircraft maintenance program.

Where an operator's Maintenance Program is to be utilized by Safarilink, the Head of Quality shall obtain evidence of approval by the State of Registry Airworthiness Authority and to ensure the scope is within the organization approvals.

2.10.2 Approved Maintenance Program/ Schedule Annual Review.

Safarilink may on invitation by the contracted operator attend the Approved Maintenance Program/ Schedule review, so as to confirm the effectiveness of the Maintenance Program/ Schedule.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.11
Issued	17 Oct 2024	Airworthiness Directives Procedure	Page	41

2.11 AIRWORTHINESS DIRECTIVES PROCEDURE.

Airworthiness Directives (AD) consists of airworthiness requirements, which are mandatory for specific aircraft or aircraft parts. The AD's may be issued either by the Kenya Civil Aviation Authority or by the Regulatory Authority of the State of Manufacture.

2.11.1 OBJECTIVES

This chapter outlines Safarilink AMO's response to Airworthiness Directives (AD).

2.11.2 AD RESPONSE PROCEDURE

Safarilink shall through the Head of Base Maintenance carry out embodiment of AD's as per the work order instructions of the operator. Safarilink shall provide the operator with the embodiment instruction and any related data packs: of which Safarilink shall retain a copy.

2.11.3 RECORDS OF AD AND SB COMPLIANCE AND CERTIFICATION

Technical Records section is responsible for keeping a complete and up to date AD and SB compliance status file and the associated 'dirty fingerprint' sign offs.

2.11.4 REPETITIVE AD REQUIREMENTS

The repetitive ADs shall be controlled through the operator's Approved Maintenance Schedule.

The HOBM shall advise the operator of any terminating action applicable to repetitive AD's for the terminating action to be performed as necessary.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.11
Issued	17 Oct 2024	Airworthiness Directives Procedure	Page	42

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.12
Issued	17 Oct 2024	Optional Modification Procedure	Page	43

2.12 OPTIONAL MODIFICATION PROCEDURE.

Safarilink shall through the Head of Base Maintenance carry out embodiment of optional mod's as per the work order instructions of the operator. Safarilink shall provide the operator with the embodiment instruction and any related data packs: of which a Safarilink shall retain a copy.

2.12.1 CONTINUED AIRWORTHINESS INFORMATION

Safarilink shall through Technical Records provide the operator with the respective embodiment information, so that Continued Airworthiness as applicable can be incorporated into the operators Aircraft Maintenance Program.

For additional continued Airworthiness, the operator will communicate with OEMs on recurrent defects, malfunctions and other occurrences and shall advise Safarilink of the required corrective actions to be carried out, by means of a work order.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.12
Issued	17 Oct 2024	Optional Modification Procedure	Page	44

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.13
Issued	17 Oct 2024	Maintenance Documentation in use and Completion of the same	Page	45

2.13 MAINTENANCE DOCUMENTATION IN USE AND COMPLETION OF SAME.

2.13.1 GENERAL

Work to be accomplished is done in accordance with defined instructions provided by the manufacturer and operator, and all details of work carried out recorded in a form acceptable and approved by KCAA.

Safarilink shall not record in any required maintenance entry or form, an aircraft or aircraft component as being overhauled, unless the aircraft or aircraft component has been—

- a) disassembled, cleaned, inspected as permitted, repaired as necessary, and reassembled using methods, techniques, and practices acceptable to the Authority; and
- b) tested in accordance with approved standards and technical data, or in accordance with current standards and technical data acceptable to the Authority, which have been developed and documented by the holder of the type certificate, supplemental type certificate, or a material, part, process, or appliance manufacturing approval.

Safarilink shall not record in any required maintenance entry or form an aircraft or aircraft component as being rebuilt unless the aircraft or aircraft component has been disassembled, cleaned, inspected as permitted, repaired as necessary, reassembled and tested to the same tolerances and limits as a new item, using either new parts or used parts that conform to new part tolerances and limits.

If Safarilink performs an inspection and finds that the aircraft or component is not airworthy or does not meet the applicable type certificate data sheet, airworthiness directives or other approved data upon which the aircraft's airworthiness is reliant on: Safarilink shall give the operator a signed and dated list of such those discrepancies. Such an aircraft or component shall not be returned to service until such a time when the discrepancies have been rectified.

If the aircraft or component is found to be airworthy and approved for return to service after an inspection, Safarilink shall include a statement certifying that the aircraft has been inspected in accordance with the type of work and was determined to be in an airworthy condition.

2.13.2 WORKSHEETS FOR NON-ROUTINE TASKS

The bulk of non-routine tasks arise from the findings during the inspections at the checks. These are raised using the serialized task cards

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.13
Issued	17 Oct 2024	Maintenance Documentation in use and Completion of the same	Page	46

provided by the operator. A list of all non-routine task cards raised during the check is kept.

All the non-routine tasks carried out in line maintenance are to be recorded and signed-off in the operator's Aircraft Technical Log after rectification.

2.13.3 ASSEMBLY OF WORK PACKAGES FOR ISSUE TO MAINTENANCE ACTIVITY

The assembling of the work packages is the responsibility of the air operator's planning section.

The air operator's planning is to prepare the work-packages using the Approved Maintenance Program/ Schedule, the due AD's list, called out SB's and/or Engineering Orders and job cards from Technical Planning.

The check-deferred defects/tasks will also be included in the packages. The list of the required tooling, consumable materials and modification kits will be provided to the procurement officer.

After the work package is prepared, maintenance planning prepares all documentation related to the work package including the tally sheets. After a final check of the paperwork, the physical package is brought to Head of base/Line maintenance for schedule and unscheduled checks. production areas before the start of a check.

For contracted work, the operator is responsible for supplying the work packages, unless the task of making the work packages is also contracted to Safarilink. In the latter case, the operator must approve the Safarilink prepared work package.

The head of base/Line maintenance will carry out workflow control, manpower planning, inspection defect rectification, tool control, hangar final inspection and aircraft final release as per workflow control sheet form No: MP/003.

2.13.4 WORKSHEET/WORK CARD COMPLETION – MAINTENANCE SIGN-OFF

The appropriately approved Engineer shall sign the worksheet/work card upon completion after verification of the correct procedures and materials used. Safarilink shall ensure that all its engineers approving the return to service of an aircraft or aircraft component after any inspection performed make a maintenance record that contains the following information, as a minimum—

- a) Aircraft registration,
- b) Aircraft serial number
- c) date of inspection.
- d) aircraft total time and cycles in service.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.13
Issued	17 Oct 2024	Maintenance Documentation in use and Completion of the same	Page	47

- e) type/description of inspection and a brief description of the extent/completion of the inspection.
- f) entry identifying the inspection program accomplished or maintenance reference used to accomplish the task,
- g) details of calibrated tools (if used to accomplish the task)
- h) details of parts used to accomplish the task.
- i) details of the independent signatory/inspector (if applicable)
- j) Signature, authorization stamp held by the person approving return to service the aircraft or aircraft component.

2.13.5 ASSEMBLY OF COMPLETED WORK PACKAGE FOR CERTIFICATION

For hangar-planned maintenance, the responsibility for auditing the completed work package belongs to Head of Base maintenance who will then submit the package back to Technical records.

In line maintenance, the responsibility for auditing the completed work package belongs to the certifying engineer and/or contracted service providers. However, the Head of line maintenance is accountable.

In workshops, it is the responsibility of the Head of Workshop to compile the completed work package.

The completed package, with check summary of the outstanding tasks, if any, will be forwarded to the operator for re-planning and then forward back to Technical Records for records update and safe custody.

2.13.6 RECORDING OF TEST RESULTS AND DIMENSIONS

Relevant Work Instructions will contain work cards for recording the results and dimensions for comparison with the limits in relevant documents. Appropriate follow-up and corrections will be undertaken in cases where the dimensions are outside allowable operational limits.

2.13.7 CONTROL OF CUSTOMER SUPPLIED WORK CARD/ WORKSHEETS

All work cards/ worksheets supplied by the operator will be controlled through the Tally sheet supplied with the work packages.

All ADDs, and inspection findings will be entered in the non-routine and controlled through the non-routine cards tally sheet through the operator's approved sheets.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.13
Issued	17 Oct 2024	Maintenance Documentation in use and Completion of the same	Page	48

PAGE INTENTIONALLY LEFT BLANK

2.14 TECHNICAL RECORD CONTROL.

Safarilink records all details of work carried out on forms acceptable to the Authority. A copy of the certificate of release to service for all work carried out will be provided to the aircraft operator, together with the originals of any specific maintenance data used for repairs or modifications carried out.

2.14.1 RETENTION OF RECORDS.

During the period for which it is required under the Civil Aviation (Approved Maintenance Organization) Regulation to be preserved, Safarilink will not mutilate, alter, render illegible or destroy any records, or any entry made therein, required by or under the Civil Aviation (Approved Maintenance Organization) Regulation to be maintained, or knowingly make, or procure or assist in the making of, any false entry in any such record, or willfully omit to make a material entry in such record.

Safarilink Records are recorded in a permanent and indelible material.

Issuance of any certificate is done by authorized persons only. Before issue of any certificate or exemption, the person doing so must ensure that all statements in the certificate are correct and that he or she is qualified to issue that certificate.

Safarilink retains a copy of all detailed maintenance records and any associated maintenance data for two years from the date the aircraft or aircraft component to which the work relates was released from the approved maintenance organization.

However, Safarilink will retain records for the periods stated below: -

Nature of the Record	Nominated Retention Period
Workshop Records - Maintenance records for components released (CRS) from the company's approved workshops	Three Years - a minimum of three years after the signing of the certificate of release to service. Note 1. Individual Workshops may elect to retain records for longer periods - see below.
Technical Logs - Including ADD Records but not the Cabin Log	Three Years – thirty-six months after the date of the last entry;

Scheduled and Unscheduled Maintenance – work packages and Certificate of Release to service e.g. ‘C’ and ‘A’ Checks, Out-of-phase work, unscheduled maintenance arisings.	Three Years – thirty-six months after the issue of the Certificate of Release to service. Note - the period stated also caters for the KCAA requirement for retention for a minimum of two years after the signing of the certificate of release to service.
Technical Records - - The total time in service in hours, calendar time and cycles of the aircraft and all its life-limited components; and - The current status of compliance with all mandatory continuing airworthiness information; and - Details of modifications and repairs to the aircraft and its major components. - The time in service in hours, calendar time and cycles since last overhaul of the aircraft or those of its components subject to mandatory overhaul life; and - The current status of compliance with the maintenance program.	Ninety days after the unit (*) to which they refer has been permanently withdrawn from service. Note 2. (*) - The word ‘unit’ is interpreted to mean aircraft, engine or component. Note 3. These are ‘event’ details that would be retained in a Kardex or computer system that is kept up to date for the service life of the aircraft and is therefore current at the moment of final withdrawal from service. They should not be confused with the ‘compliance’ details which will reside in the Scheduled and Unscheduled maintenance records - see above.

2.14.2 SYSTEM FOR CONTROL, STORAGE AND RETRIEVAL

The following Documents are forwarded to the Technical Records for data collection and storage:

- Completed Aircraft Technical Logbooks,
- Hangar & Line Maintenance Check packages,
- Engine shop visits Reports.
- Component Workshop worksheets

(Copies of vendors Certificates such as EASA Form 1 or FAA form

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.14
Issued	17 Oct 2024	Technical Record Control	Page	51

8130 and equivalents are retained in the Stores with Batch number records)

The Aircraft / Component Hours and Cycles are to be provided by the operator.

All these records are labelled/catalogued and packaged for safe keeping in duly labelled shelves in the Technical Records Archives. The Binning and cataloguing method used makes it easy to retrieve the records when required.

The storage area is protected from fire, flood, theft and accessibility is limited to only the personnel working there or other appropriately authorized personnel such as auditors. This prevents the records from theft and or alteration.

The records captured through the Technical Records control system are protected by the company Backup system and second storage space in the server remote from the Records office. Refer MPM 2.21.3.

2.14.3 CONTROL OF ACCESS TO RECORDS

The Records are in safe custody of the Technical Records Officers and can be accessed through the computer system or on demand from the officers. Records in the computer system can only be amended by authorized persons and are read only by other users. The head of Technical Records approves access levels. Technical Records Office and Archive (offsite) are restricted areas and can be accessed by authorized personnel only. The head of Technical Records maintains an updated list of the authorized personnel.

2.14.4 RECORD-KEEPING SYSTEM

Record keeping, and updates is a continuous process. The following essential information / records are kept and tracked down in the Technical Records:

- Aircraft hours and cycles.
- Hours, Calendar and Cycles relating to CRS, C of A expiry (can be accessed from the Technical Records control database). The same applies to operational records e.g. Aircraft, Engines, and APU etc. total hours / cycles: where contracted by the operator.
- Maintenance checks Packages
- Aircraft, Engine and Propeller 'Logbooks'.
- Copies of 'Certificate of Release to Service' JAA, EASA Form 1, FAA form 8130.
- Component change record sheets
- Status of compliance with the maintenance program and all mandatory airworthiness information
- The ADs and SBs statement sign offs (Dirty fingerprints).

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.14
Issued	17 Oct 2024	Technical Record Control	Page	52

- Weight and balance records.
- Aircraft Damage Charts updated by Safarilink personnel.
- Life-limited Components
- Appropriate repair and modification record

2.14.5 ENGINES, APUs AND PROPELLERS

Engine and propeller logbooks shall be property of the operator. Safarilink will only maintain them if contracted to do so by the operator.

2.14.6 LOST OR DESTROYED RECORDS

Reconstruction of lost or destroyed records will only be done by use of the Technical Records control or by reference to other records which reflect the time in service, research of records maintained by repair facilities and reference to any relevant information.

When these have been fulfilled and record is still incomplete, a statement in record shall be made describing the loss and establishing the time in the service based on research and the best estimate of time in service.

The reconstructed records shall be submitted to KCAA for acceptance.

2.14.7 PROVISION OF RECORDS

In addition to the CRS, the operator will be given records as required by the relevant Authority.

2.14.8 TRANSFER TO ARCHIVES

Completed maintenance records are transferred to the Technical Records Archives for safekeeping for the defined retention periods. Safarilink in the interest of secure storage may subcontract its Archive functions.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.15
Issued	17 Oct 2024	Rectification of Defects Arising during Base Maintenance	Page	53

2.15 RECTIFICATION OF DEFECTS ARISING DURING BASE MAINTENANCE.

2.15.1 RECORDING AND SIGN-OFF OF BASE MAINTENANCE DEFECTS

Any defects found during base maintenance shall be recorded on the non-routine cards. Defects recorded will be rectified in accordance with the appropriate manuals or approved instructions.

Certifying engineers are charged with inspection responsibilities in the Hangar and they carry out inspection duties on day-to-day basis.

Should an approved rectification not be available, the operators Maintenance Planning will be contacted to obtain instructions or approval for the repair.

In case the repair is such that the operator's Maintenance Planning cannot decide on its own, the manufacturer will be contacted for support. The manufacturer will take care of an approval for the proposed repair or advise the method of the required repair.

2.15.2 CARRYING FORWARD DEFECTS TO FUTURE MAINTENANCE INPUTS

Planning and Technical Records ensures that full records are maintained and that deferred defects are properly tracked and planned for accomplishment.

Defects not rectified during base maintenance shall be carried forward and planned to be performed at the earliest opportunity in accordance with the operators approved Maintenance Control Manual.

If the defect is not performed due to workload, tool or material shortage, an entry shall be made on the check work order and indicated on the tally sheet. If the defect is an MEL item, an ADD shall be raised. The raised ADD is also put on the ADD monitor sheet in the tracking system.

This Sheet shall be made available to maintenance planning, Head of Quality and other relevant sections to view for planning and monitoring. Refer to operator's MCM.

The operators' Maintenance Planning will be responsible for deferring tasks. Tasks likely to have airworthiness implications or and if they involve Airworthiness Directive cannot be deferred.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.15
Issued	17 Oct 2024	Rectification of Defects Arising during Base Maintenance	Page	54

Carry forward items are documented and authorized by the Head of Quality in the Form Ref: MP/CF/01.

2.15.3 ANALYSIS OF DEFECTS AND RECTIFICATIONS

The Head of Quality shall map the defects against the task cards using the respective Maintenance Program/ Schedule.

The Head of Quality in liaison with the operators Maintenance Planning shall carry out analysis of the frequently reported defects and investigate their rectification procedures. The investigation report shall highlight the possible causes e.g. human factors, tooling, material or inspection method.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	55

2.16 RELEASE TO SERVICE PROCEDURE.

2.16.1 GENERAL

Safarilink shall ensure that the personnel utilized to perform maintenance on its aircraft and to issue the certificate of release to service are appropriately licensed/authorized.

A person whose function is critical to the safety of aviation (safety-sensitive personnel) must not undertake that function while under the influence of any psychoactive substance, by reason of which human performance is impaired.

A person referred to above must not engage in any kind of problematic use of substances.

A person signing a certificate of release to service must be qualified in accordance with the Civil Aviation (Personnel Licensing) Regulations as appropriate for the work performed and be acceptable to the Authority. The qualification procedure is as outlined in MPM Part 3.4.

Safarilink certifying staff issue certificate of release to service only when satisfied that all required maintenance of the aircraft or aircraft component has been properly carried out, in accordance with the procedures specified in this Maintenance Procedures Manual.

A certificate of release to service will contain-

- details of the maintenance carried out (when extensive maintenance has been carried out on an aircraft, it is acceptable for the certificate of release to service to summarize the maintenance as long as there is a cross-reference to the work-pack containing full details of maintenance carried out).
- the date the maintenance was completed (the date maintenance was carried out must include when the maintenance took place relative to any life or overhaul limitation in terms of date, flying hours, cycles, landings or some other relevant value as appropriate) and
- Safarilink authorization (approval) reference number and the identity of the certifying staff member issuing the certificate.
- reference to the data specified in the manufacturer's or operator's instructions or the aircraft maintenance program which itself may cross-refer to a manufacturer's instruction in a maintenance manual, service bulletin, or other maintenance-related document.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	56

A certificate of release to service is required-

- before flight at the completion of any package of maintenance scheduled by the approved aircraft maintenance program on the aircraft, whether such maintenance took place as base or line maintenance or not;
- before flight at the completion of any defect rectification, while the aircraft operates between scheduled maintenance; and
- at the completion of any maintenance on an aircraft component when off the aircraft.

Safarilink will issue a certificate of release to service for an aircraft component, which has been maintained off the aircraft. Another certificate of release to service is issued in respect of the component's correct installation on the aircraft. Where instructions include a requirement to ensure that a dimension or test figure is within a specific tolerance as opposed to a general tolerance, the dimension or test figure must be recorded unless the instruction permits the use of GO or NO GO gauges. It is not sufficient to state that the dimension or the test figure is 'within tolerance'. Dimensional information must be retained in the work- pack record.

A certificate of release to service contains the following statement- **"The undersigned certifies that the work specified was carried out in accordance with current regulations and in respect of that work the aircraft or aircraft component is considered ready for release to service."** The person issuing the certificate must use a full signature and certification stamp.

2.16.2 ISSUE OF CLASS 1 CRS AFTER SCHEDULED MAINTENANCE AND MAJOR MODIFICATIONS

For scheduled maintenance visits, Technical Records will issue routine and planned task cards. Non-routine defects arising from routine task cards are entered on non- routine task cards.

During the hangar visit, the progress of work is monitored through Tally Sheets of the routine and non-routine cards completion and certification. The check package tally sheet will be used at the completion of the work to verify that appropriate maintenance recording has been carried out and the work has been certified done. A specimen signature form for the personnel involved in the checks should be kept. At the end of the visit, a check summary is available with accomplished and deferred items.

Once the check documentation has been reconciled and if no discrepancies are

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	57

found, a final inspection statement is signed off by the appropriately authorized Quality Control Engineers in charge indicating approval to release to service. Prior to signing the Quality Control Engineers must ensure that all the tally sheets have been signed to avoid tasks being referred to hangar and or line maintenance. A Certificate of Release to Service (Form: SL/MCM/15) is then issued.

This CRS shall be issued in Triplicate, the original (Copy 1) shall be placed onboard the aircraft and Copy 2 shall be filed with the copy of the documentation within Technical Records. Copy 3 of CRS will be provided to the Operator.

2.16.3 ISSUE OF CLASS 3 CRS

A class 3 CRS (Form: SL/MCM/17) will be issued after it has completed an unscheduled inspection or minor modification on an operator's aircraft.

Where Safarilink is contracted to carry out an operator's line maintenance support, its authorized engineers shall certify all defects raised on the operator's.

Additionally, Safarilink will comply with each operator's unique maintenance documentation requirements as documented and approved in its Maintenance Control Manual. technical log.

2.16.4 ISSUE OF CRS WITH UNCOMPLETED WORK

Ideally all work should be completed before the issue of a CRS. Should some of the work not be completed, a CRS can still be issued provided the uncompleted work is deferred as per the allowed deferring procedures in section MPM 2.15.2.

2.16.5 ISSUE OF A ONE-OFF CERTIFICATION AUTHORIZATION CRS

One-off authorization may be granted solely for certification for unscheduled defect rectification at a location other than the Safarilink main base where no appropriate certifying staff are available or where there is no sub-contract arrangement for Line Maintenance.

When an aircraft is grounded at a location not having an appropriately approved or accepted KCAA Approved maintenance organization or in the case where no appropriately rated certifying staff is onboard, Safarilink may contract and issue a one-time AMO certification authorization

- i. to one of her employees holding equivalent type authorizations on aircraft of similar technology, construction and systems; or

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	58

ii. to any person that:

- Is employed by an organization approved under the appropriate national aviation authority of an ICAO member state and in accordance with its national regulation for the maintenance of that aircraft type.
- Has not less than 5 years maintenance experience.
- Is holding a valid ICAO aircraft maintenance license.
- Is rated for the aircraft type i.e. hold an authorization or equivalent issued by that organization for the purpose of certification of the defect rectification on the aircraft type.

The above evidence must be provided to the Head of Quality. The AMO undertaking the rectification, and the authorized reference Number must be quoted on the CRS. The Head of Quality shall apply for such one-off certification to KCAA for approval before any work is commenced.

In those situations where the requirement for a one-off authorization to issue a CRS for a task on an aircraft type for which the certifying staff does not hold a type-rated authorization, the following procedure shall be used:

- Flight crew shall communicate full details of the defect to Safarilink Head of Line Maintenance
- The Head of Line Maintenance assesses and accepts or rejects the One-off authorization request, where after they contact the Head of Quality.
- The Head of Quality evaluates the request and prepares a “One-off authorization Certifying Staff”.
- Prior to issuance of the release to service certification, the Head of Line Maintenance ensures that the one-off authorization holder signs off the detailed step by step worksheet when completing the work steps.
- The Head of Line Maintenance ensures that any maintenance performed under a one-off authorization, that could affect flight safety is re-checked at the home base.

In both above two scenarios for one-off authorization, the flight crew shall make a technical log entry stating the defect, the designated person shall rectify the defect and signs the technical log where appropriate, ensuring that his name and authorization number are clearly stated on the technical log. On aircraft return to main base, the stated defect and rectification shall be re-checked. Upon receipt of the documents, the Head of Quality shall seek approval from KCAA of such one-off authorization. The Head of Quality shall keep all records of one-off authorizations.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	59

2.16.6 COMPONENT RELEASE TO SERVICE: CLASS 2 CRS

All serviceable components released from Safarilink workshops for use within the company will have a Class 2 CRS (Form: SL/MCM/16).

Safarilink Workshop release to service shall only be carried out by duly authorized certifying personnel (ref MPM 3.7.1) or Authorized Aviation Repair Specialists (ref MPM 3.7.2).

2.16.7 CERTIFICATION AND IDENTITY OF QUALIFIED STAFF

The Engineer issuing the CRS must sign, stamp and date the release.

2.16.8 CROSS – REFERENCE TO WORK PACKAGES

All CRS must reference the appropriate/completed work package. If an inspection is conducted under an inspection program, the entry must identify the inspection program accomplished, and contain a statement that the inspection was performed in accordance with the inspections and procedures for that program.

2.16.9 RE-RELEASE OF COMPONENTS REMOVED SERVICEABLE FROM AIRCRAFT

An appropriately approved Engineer may re-certify a component with a serviceable label if the following conditions are met:

- The component cannot be related to any defect in the aircraft it was removed from, as determined by the Engineer,
- The return to stores action takes place promptly following removal of the part from the aircraft or, when the part was not used, or did not rectify a reported fault (and has therefore not been used) it is being immediately returned to stores,
- The component is in compliance with all known component AD's,
- The Engineer has visually inspected the component and has judged the physical condition of the component to be satisfactory.

The certifying Engineer must complete a serviceable tag giving all the details and certify the component prior to passing to Goods Inwards where the stores inspector will issue a certificate to pass the component to bonded stores. (refer to Hold Procedure MPM 2.2.3.4)

2.16.10 'DIS-APPROVING' RETURN TO SERVICE

If an aircraft or aircraft component, after any inspection performed by Safarilink, cannot be returned to service, an entry must be made in the maintenance record of that aircraft /equipment (e.g. the current work pack and

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.16
Issued	17 Oct 2024	Release to Service Procedure	Page	60

CRS or the Technical Log if the dis-approval takes place during line maintenance) containing the following information-

- the type and brief description of the extent of the inspection;
- the date of the inspection and aircraft total time in service;
- the authorized signature, the Safarilink (approval) certificate number, and kind (category and type) of certificate held by the person approving or disapproving for return to service the aircraft, airframe, aircraft engine, propeller, appliance, component part, or portions thereof;
- the reason for dis-approval.

If the aircraft is not approved for return to service because of needed maintenance, non-compliance with the applicable specifications, airworthiness directives, or other approved data, the following or a similarly worded statement—**“I certify that this aircraft has been inspected in accordance with (insert type of inspection) inspection and a list of discrepancies and non-airworthy items dated (insert date) has been provided for the aircraft owner or operator;”** must be used.

If the person performing any inspection finds that the aircraft is not airworthy or does not meet the applicable type certificate data sheet, airworthiness directives, or other approved data upon which that aircraft airworthiness depends, that person must give the owner or lessee a signed and dated list of those discrepancies.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.17
Issued	17 Oct 2024	Records for the Air Operator	Page	61

2.17 RECORDS FOR THE AIR CARRIER OPERATOR.

2.17.1 CONTRACTED RECORD KEEPING

This refers to operators that contract Safarilink to maintain their aircraft and associated component records. Safarilink shall maintain contracted record keeping while complying with the KCAA regulations and as per agreed Service Level Agreement.

2.17.2 ARRANGEMENTS FOR PROCESSING AND RETENTION OF OPERATOR'S MAINTENANCE RECORDS

Maintenance records of the operator shall be processed in accordance with the Service Level Agreement specifications.

The records shall be maintained for the period of the contract and upon contract expiry; copies of the records shall be retained for a further period of two years.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.17
Issued	17 Oct 2024	Records for the Air Operator	Page	62

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.18
Issued	17 Oct 2024	Reporting of Defects to the Authority/Operator/Manufacturer	Page	63

2.18 REPORTING OF DEFECTS TO THE AUTHORITY/OPERATOR/ MANUFACTURER.

2.18.1 INTRODUCTION

Safarilink has an operational reporting system implemented in its maintenance operations that encourages and facilitates feedback from personnel to report safety hazards, expose safety deficiencies and raise safety concerns: SMSPro. The system also includes analysis and management as necessary to address safety issues identified through the reporting system.

Through its safety department, Safarilink reports to the Authority, and to the aircraft design organization of the State of Design any identified condition that could present a serious hazard to the aircraft. Where Safarilink is contracted by an operator to carry out maintenance, it will report to the operator any condition affecting its respective aircraft or aircraft component.

All procedures detailed herein are further expounded in the Safarilink Safety Management Systems Manual (ref: SL/SMSM/).

2.18.2 METHODS OF REPORTING

All observed / reported occurrences using:

- i. Safarilink SMS Pro or,
- ii. KCAA e-Services domain MOR/VRS

2.18.3 PERSONS RESPONSIBLE FOR REPORTING

Safarilink maintenance personnel shall report occurrences when the aircraft is under their control on ground.

The Head of Quality shall report occurrence, which affect flight safety or reduce significantly the margin of safety to the Kenya Civil Aviation Authority, in liaison with the Head of Safety.

Safarilink will be responsible for reporting defects/incidents to the manufacturer, through Service Difficulty Reports.

2.18.4 Service Difficulty Reports (SDR) to KCAA/Authority/Operator

An SDR should be sent to the Authority when any faults, failure, malfunctions or defects and other occurrences on any aircraft which might cause adverse effects on the continued airworthiness of the aircraft. The following is a non-exhaustive list of occurrences that must be reported:

- a) Fires during flight whether the related fire warning system functioned properly;
- b) Fires during flight not protected by a related fire-warning system;
- c) False fire warning during flight;
- d) An engine exhaust system that causes damage during flight to the engine, adjacent structure, equipment, or components;

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.18
Issued	17 Oct 2024	Reporting of Defects to the Authority/Operator/Manufacturer	Page	64

- e) An aircraft component that causes accumulation or circulation of smoke, vapours, or toxic or noxious fumes in the crew compartment or passenger cabin during flight;
- f) Engine shutdown during flight because of flameout;
- g) Engine shutdown during flight when external damage to the engine or aircraft structure occurs;
- h) Engine shutdown during flight of more than one engine;
- i) A propeller feathering system that affect flow or causes hazardous leakage during flight;
- j) A fuel or fuel dumping system that affects fuel flow or causes hazardous leakage during flight;
- k) A landing gear extension or retraction, or opening or closing of landing gear doors during flight;
- l) Brake system components that result in loss of brake actuating force when the aircraft is in motion on the ground;
- m) Aircraft structure that needs major repair;
- n) Cracks, permanent deformation, or corrosion of aircraft structure, if more than the maximum acceptable to the manufacturer or the Authority;
- o) Aircraft components or systems that result in taking emergency actions during flight (except action to shut down an engine);
- p) Each interruption to a flight, unscheduled change of aircraft en-route, or unscheduled stop or diversion from a route, caused by known or suspected mechanical difficulties or malfunctions;
- q) Any abnormal vibrating or buffeting caused by a structural or system malfunction, defect or failure;
- r) A failure or malfunction or more than one attitude, airspeed or altitude instrument during a given operation of the aircraft;
- s) The number of engines removed prematurely because of malfunction, failure or defect, listed by make and model and the aircraft type in which it was installed;
- t) The number of propeller featherings in flight, listed by type of propeller and engine and aircraft on which it was installed; and

In addition to the reports required above, Safarilink should report any other failure malfunction or defect in an aircraft that occurs or is detected at any time, if the failure, malfunction or defect has endangered or may endanger the safe operation of the aircraft.

In case of doubt, the Head of Base Maintenance in liaison with the Head of Safety are authorized to decide, whether an event should be considered a technical incident.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.18
Issued	17 Oct 2024	Reporting of Defects to the Authority/Operator/Manufacturer	Page	65

2.18.5 KCAA Notifiable Occurrences:

A KCAA Occurrence Report will be sent to the Authority when any operational abnormalities, technical defects and routine reliability issues are dealt with. The following is a non-exhaustive list of occurrences that must be reported:

- a) Control of the Aircraft;
- b) Rejected take-off resulting from or producing a hazardous or potentially hazardous situation (e.g. At speeds close to, or above, V_1);
- c) Go around producing a hazardous or potentially hazardous situation;
- d) Unintentional significant deviation from intended track or altitude (more than 301ft), caused by a procedural, systems or equipment defect or human factor;
- e) Descent below decision height/ altitude or minimum descent height/ altitude in instrument landing conditions;
- f) Heavy landing, a landing deemed to need a “heavy landing check”;
- g) Unintentional contact with the ground, including touching down before the runway threshold;
- h) Over-running the ends or sides of the defined runway or landing strip;
- i) Significant inadvertent reduction in airspeed;
- j) Significant loss of control from a cause;
- k) Approach to, landing on, lining up on or taking off from a wrong runway or airfield;
- l) Occurrence of a “stick push” operation, other than for training or test purposes;
- m) Operation of any primary warning system associated with maneuvering of the aircraft e.g. Configuration warning, stall warning (stick shake), over speed warning etc. Unless;
 - i) The crew conclusively proved that the indication was false, at the time it occurred, or
 - ii) The indication is confirmed as false immediately after landing provided that, in either case, the false warning did not result in difficulty or hazard arising from the crew response to the warning;
- n) Reversion to manual control of powered primary controls, other than for training or test purposes;
- o) Loss or malfunction of any rotorcraft AUTO stabilizer mode;
- p) Inadvertent incorrect operation of any controls which resulted in, or could have resulted in, a significant hazard;
- q) A hazard or potential hazard which arises because of any deliberate simulation of failure conditions for training, system checks or test purposes;
- r) In flight fuel quantity critically low or exhausted;
- s) Significant fuel imbalance;
- t) Incorrect setting of an altimeter sub-scale or SSR code;
- u) Significant incorrect programming of navigation equipment;
- v) Flight at all levels, or on a route, different from that given;

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.18
Issued	17 Oct 2024	Reporting of Defects to the Authority/Operator/Manufacturer	Page	66

- w) Incorrect receipt or interpretation of RTF messages which resulted in, or could have resulted in, a significant hazard;
- x) GPWS warning when:
 - i) The aircraft comes into closer proximity to the ground than had been planned or anticipated; or
 - ii) The warning is experienced in IMC or at night and is established as having been triggered by a rate of descent; or
 - iii) The warning results from failure to select landing gear or land flap by the appropriate point on the approach; or
 - iv) Any difficulty or hazard arises or might have arisen because of crew response to the warning e.g. Possible reduced separation from other traffic. This could include warning of any Mode or Type I.e. Genuine, nuisance or false;
- y) GPWS alert when any difficulty or hazard arises, or might have arisen, because of a crew response to the alert;
- z) ACAS Resolution Advisory except for an unnecessary alert., e.g. When triggered by a high rate of climb/descent but standard separation not compromised;
- aa) Repetitive arising at an excessive frequency of a specific type of occurrence which in isolation would not be considered “Reportable”, e.g. A high frequency of:
 - i) Minor loading errors at an airfield;
 - ii) GPWS nuisance warnings at an airfield.

Note: in such cases it is expected that the reporter will send a single occurrence report together with the supporting evidence of high frequency and/or rate when it is considered that such a situation has been reached. Further reports should be sent if the situation remains unchanged.

2.18.6 Mandatory Reporting

Mandatory reports must be submitted to KCAA within:

- a) 24 hours in the case of an accident;
- b) 48 hours in the case of serious incidents; and
- c) 72 hours in the case of incidents and other safety related occurrences.

There are two types of mandatory occurrence reports that must be completed and sent to the Authority within 72 hours of the occurrence:

- Service Difficulty Report (KCAA e-Services domain MOR/VRS),
- Occurrence Report (KCAA e-Services domain MOR/VRS).

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.18
Issued	17 Oct 2024	Reporting of Defects to the Authority/Operator/Manufacturer	Page	67

Once the report(s) have been filled out by the individual he/she shall forward this to the Safety officer, who in liaison with the Head of Safety will send to the Authority and advise the reporter of the report(s) submission. If the report is not passed to the Authority and the individual is convinced that it should be, he/she has the right to report directly to the Authority. Both report forms can be found at each station throughout Safarilink.

2.18.7 Immediate Notifications

Reports that concern the following warrant immediate notification of KCAA by telephone:

- a) Primary structure failure;
- b) Control system failure;
- c) Fire in the aircraft;
- d) Engine structural failure; or
- e) Any other condition considered an imminent hazard to safety.

The report should follow the format of the Service Difficulty Report (SDR) and being of an alert nature, should have the following information when available and relevant;

- a) Aircraft owner's name and address;
- b) Whether accident or incident;
- c) Related service bulletins, service letters, airworthiness directive; and
- d) Disposition of the defective part.

The information contained in the report should be entered on the SDR form and sent in the normal manner to the Authority as soon as possible after the first report.

2.18.8 DEFECTS REPORTS BY CONTRACTORS AND LESSEES

Contractors / lessees must promptly advise the Head of Quality of any occurrence and investigate utilizing its own system, which must be monitored by the Head of Quality who must report to the Authority, operator and Manufacturer if not accomplished by the contractor / lessee.

Reports originating from subcontractors and lessees will be handled in the same manner as outlined in MPM 2.18.1.

2.18.9 RETENTION OF DATA

Reports must be retained for two years after the aircraft has been withdrawn from service.

2.18.10 REPORTABLE DEFECTS INVESTIGATION PROCEDURE AND FOLLOW UP SYSTEM

Safarilink shall investigate Technical defects/ incidents by collecting the relevant

data, e.g. incident reports, interviews, Aircraft systems operations and on-site area inspections. An appropriate procedure shall be adopted for each case under investigation. Once remedies/solutions are defined the Head of Quality will be informed and follow-up reports shall be made to ascertain the effectiveness of the corrective action.

2.18.11 Risk Assessment

To carry out a risk assessment, Safarilink will plot the results of each analyzed risk on the risk assessment matrix shown below. This will be done only by the Head of Safety. The location of the risk on the matrix will decide the priority of corrective actions.

Severity Probability	Catastrophic A	Hazardous B	Major C	Minor D	Negligible E
Frequent 5	5A	5B	5C	5D	5E
Occasional 4	4A	4B	4C	4D	4E
Remote 3	3A	3B	3C	3D	3E
Improbable 2	2A	2B	2C	2D	2E
Extremely Improbable 1	1A	1B	1C	1D	1E

Unacceptable risk
Acceptable with mitigation
Acceptable risk

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	2.19
		MANUAL		
Issued	17 Oct 2024	Return of Defective Aircraft Components to Store	Page	69

2.19 RETURN OF DEFECTIVE AIRCRAFT COMPONENTS TO STORE

2.19.1 LABELLING AND IDENTIFICATION

It is the responsibility of all Certifying Engineers to ensure that all unserviceable items are correctly labelled and identified prior to their return to stores.

The repairable tag or unserviceable tag must be correctly completed prior to acceptance by stores. The tag must have all fields completed as appropriate and must be signed by the certifying Engineer(s). All defective components are returned to stores tagged with a repairable tag/unserviceable tag. The details recorded on these tags must include:

- Component Description
- Part number
- Serial number (if applicable)
- Aircraft/component removed from
- Position on aircraft/component removed from
- Reason for removal or nature of defect
- Signature & Date
- Stamp of Engineer.

2.19.2 HANDLING AND MOVEMENT OF COMPONENTS

It is the responsibility of the Certifying Engineer to ensure that the part or component is handled and packaged in a manner like serviceable components before return to stores.

All defective components are routed to stores with the required label. Components shall be blanked as necessary and packed as per maintenance manual requirements for movement to stores.

Stores personnel will ensure that the unserviceable components are handled, packaged and transported in a manner like serviceable components to prevent further deterioration that might increase the cost, or even preclude repair. All parts received are entered into the computer system to enable tracking.

2.19.3 STORAGE OF DEFECTIVE COMPONENTS

Stores personnel are responsible for ensuring that all unserviceable components are correctly segregated and that all unserviceable items are correctly labelled prior to acceptance.

2.19.3.1 Unserviceable Parts

All unserviceable parts are shelved in their present state in dedicated storage racks, clearly marked for unserviceable parts. The parts are properly tagged, blanked and identified always as appropriate.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.19
Issued	17 Oct 2024	Return of Defective Aircraft Components to Store	Page	70

2.19.3.2 Scrapped Parts

All definitively scrapped parts are stored in a secured location within Safarilink stores. The accompanying unserviceable tag will have a secondary scrap tag attached to indicate the status. All data plates shall be removed when components are deformed in accordance with 2.3.8.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.20
Issued	17 Oct 2024	Defective Components to Outside Contractors	Page	71

2.20 DEFECTIVE COMPONENTS TO OUTSIDE CONTRACTORS

2.20.1 COMPANY POLICY

Maintenance of defective components is only allowed to be performed by approved organizations as described in MPM 2.1.

2.20.2 DISPATCH OF COMPONENTS FOR REPAIR/ OVERHAUL/ CALIBRATION.

The procurement officer in liaison with the Head of Quality and Head of Base Maintenance are responsible for identifying the approved repair vendor, with capability to handle the components. The components are properly packaged and accompanied by appropriate documents to the approved contractor according to the repair order. Appropriate documents include repairable label (Form MP/008), repair order and delivery note.

2.20.3 CONTROL OF DISPATCH, LOCATION AND RETURN

Control of dispatch is the responsibility of stores. The units are dispatched from the Goods Outwards section and returned components are received in Goods Inwards section of Technical Stores.

2.20.4 IDENTIFICATION OF REQUIRED WORK

Technical Records and/or Workshops will develop a work-scope by assessing reason for removal, total time and cycle since installation, history and previous known defects. Identification of applicable SB's, AD's, etc. is also carried out and included in the work-scope where applicable. Workshops can determine the work scopes for components removed for defects

2.20.5 RETURN OF UNSERVICEABLE LOAN PARTS

Any loaned parts being returned unserviceable to the loaner shall be accompanied with a unserviceable tag (Form MP/006) clearly indicating nature of defect.

2.20.6 REPAIR ORDERS DOCUMENTATION

Orders shall clearly indicate the work required as identified in MPM 2.20.4 to be performed in detail. Orders shall also indicate the required airworthiness release standard acceptable for return of the part, which will be an original FAA Form 8130-3 and/or original and/or EASA Form one together with strip and shop report. Copies of the orders remain with the selected address using either the company's or outside transport facilities.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.20
Issued	17 Oct 2024	Defective Components to Outside Contractors	Page	72

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.21
Issued	17 Oct 2024	Control of Computer Maintenance System	Page	73

2.21 CONTROL OF COMPUTER MAINTENANCE RECORDS SYSTEM

2.21.1 GENERAL

Safarilink Information Systems Department is responsible for the integrity, availability and security of the IT infrastructure, including IT network, the clients and servers, the applications and server rooms.

2.21.2 INFORMATION RETRIEVAL.

Information retrieval from the various computer systems is through networked computers and requires a login and password for access.

2.21.3 BACK-UP SYSTEMS AND SECOND SITE STORAGE

Safarilink Information Systems maintain a system back up on its secure servers and maintains cloud-based backup for the same.

2.21.4 SECURITY AND SAFEGUARD SYSTEMS

The user's level of access is based on the job requirements of the user and section. This is done by authorizations per person and/or by section. Each function is related to transactions necessary to perform the task. The user is controlled by login name and password.

New users are recommended by their respective Manager and actioned/activated by the IT Manager.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.21
Issued	17 Oct 2024	Control of Computer Maintenance System	Page	74

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.22
Issued	17 Oct 2024	Reference to Specific Maintenance Procedures	Page	75

2.22 REFERENCE TO SPECIFIC MAINTENANCE PROCEDURES

2.22.1 ENGINE RUNNING PROCEDURES.

For engine ground run procedures Safarilink authorized staff are to refer to applicable maintenance manuals. The parameters are to be recorded on the Safarilink Engine Ground Run record sheets. Personnel authorized to perform engine ground runs are internally trained and approved to perform the tasks.

2.22.2 AIRCRAFT TOWING

Only Trained and authorized personnel are to perform aircraft towing.

2.22.3 AIRCRAFT TAXIING PROCEDURES

Only Trained and authorized Safarilink personnel will perform aircraft taxiing.

2.22.4 HANDLING AND CONTROL OF WASTE MATERIALS

Waste materials will be controlled and handled as per the procedures in MPM 2.7.3.

2.22.5 SPECIAL FLIGHT/TEST FLIGHT CONDITIONS

Aircraft released to undertake Special flight/Test flight conditions, are to be released by a type- trained/approved 'A' and 'C' licensed Engineer as required by the Civil Aviation Regulations.

2.22.6 SCRAPPING OF PARTS

Refer to MPM 2.3.

2.22.7 WORKING AWAY FROM MAIN BASE/WORKSHOP

Should there be a need to carry out maintenance activities other than Transit and Daily checks, assistance will be sought from appropriate resources for approved work completion.

2.22.8 AIRCRAFT WEIGHING

The manufacturer determines the Weight and Centre of Gravity of an aircraft prior to delivery. Repeat determination of the Weight and the Centre of Gravity of the

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.22
Issued	17 Oct 2024	Reference to Specific Maintenance Procedures	Page	76

aircraft will be accomplished in accordance with the regulatory authority requirements as detailed in the operators Maintenance Control Manual.

2.22.9 C of A FLIGHT TEST

Test flights are performed for C of A renewal and/or maintenance requirements. For the C of A renewal test flights shall be performed in accordance with the schedule approved by the KCAA. Flight tests performed for maintenance requirements shall be as per the maintenance manuals.

2.22.10 ELECTROSTATIC DEVICES (ESD)

2.22.10.1 Program and Training on Electrostatic Sensitive Devices (ESD's)

All Technical stores and Maintenance personnel will be trained on ESD's and a record of Training maintained by the Head of Quality. Whenever they are handling ESD's, they should always use properly earthed straps to avoid damage to the equipment and storage of the components in ESD bags.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.23
Issued	17 Oct 2024	Control of Manhours Planning Versus Maintenance Work	Page	77

2.23 CONTROL OF MAN HOURS PLANNING VERSUS SCHEDULED MAINTENANCE WORK.

Safarilink is required by the Civil Aviation (Approved Maintenance Organization) Regulations, to have a production man-hours plan showing that it has sufficient man-hours for the intended work, to have man-hours plan that relate to the aircraft hangar visit plan, to regularly update the man hours plan and that work it performs on any aircraft registered outside Kenya is taken into account where that work impacts upon the production man-hours plan.

The Head of Base Maintenance (HOBM) is responsible for implementation of scheduled maintenance work packages provided by the operator, within agreed timelines. Operators are to provide the HOBM with forecasts with a window of three months to the planned activities for Base Maintenance on the operator's aircraft. In this forecast a projection of the man hours per check is to be indicated. In the weekly planning meeting the HOBM will highlight the work packages (including man hours) and their man hours requirements. Additionally, maintenance activities to be carried out at Line maintenance are planned and prepared by the Head of Line Maintenance. The Head of Line Maintenance will liaise with the operators to ensure compliance with the required maintenance tasks prior to aircraft departure.

2.23.1 COMPANY PLANNING vs. TIME AVAILABLE PROCEDURE

The work package's produced by Technical Records are to be summarized in a work order where the necessary man-hours required and the ground time available are indicated as well as the major tasks to be performed. Two (2) weeks before the start of an 'A' Check and seven (7) days before the start of a '100/200 hour' Check, Technical Records is to route the complete package to the Head of Base Maintenance.

The Head of Base Maintenance, together with the key certifying engineers, analyze the highlights and the work pack. Their findings on the work planned and the time available is discussed with operator to ensure that the work to be performed can be accomplished within the available time with the available resources, taking into consideration that personnel involved have the required rest and off-duty periods defined in the Civil Aviation (Approved Maintenance Organization) Regulations.

In cases of unscheduled maintenance, the manpower planning is also performed in a manner so as not to contravene the Civil Aviation (Approved Maintenance Organization) Regulations.

It is the responsibility of HOBM to bring any ad-hoc third-party work to the attention of Technical Records, so that work schedules can be adjusted as

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.23
Issued	17 Oct 2024	Control of Manhours Planning Versus Maintenance Work	Page	78

required.

Prior to the commencement of the maintenance, a signed contract shall be put in place and after that the operator's Planning section is to issue the complete Check Package/work order to Safarilink Technical Records through the Head of Base Maintenance.

2.23.2 COMPLEXITY OF WORK

Any special tasks called out in a work pack are to be indicated in the highlights of the work pack and evaluated by the Head of Base Maintenance.

Depending on the complexity of the work, Head of Base Maintenance ensures that all the necessary manpower, tools & equipment and materials are evaluated and made available at the required time.

2.23.3 ACCOUNT OF HUMAN PERFORMANCE LIMITATIONS

It is the responsibility of the controlling supervisor to ensure that human performance limitations are taken into consideration when accepting to perform a work pack within the given time in line with company regulations.

2.23.4 MANHOURS FOR QA MONITORING

It is the responsibility of the Head of Quality to ensure that the manhours required to perform quality monitoring compliance functions are enough to meet the same requirements for rest and duty limitations as those for persons performing maintenance functions.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.24
Issued	17 Oct 2024	Duplicate Inspection Procedure	Page	79

2.24 DUPLICATE INSPECTION

2.24.1 DUPLICATE INSPECTION PROCEDURE

The Duplicate Inspection consists of two separate and independent inspections of the same task performed by two different qualified personnel. They are required to undertake independent inspections of the whole task and refer to the relevant maintenance documents.

A duplicate Inspection is required following work on:

1. Flight Controls,
2. Power plant, and propeller control systems,
3. landing gear systems, which could affect flight safety.

A duplicate Inspection must be accomplished on all vital parts of the system, which have a direct impact on flight safety, that have been subjected to overhaul, repair, replacement, modification or adjustment after the work has been completed and before the first flight of the Aircraft.

An authorized Engineer, who will perform the initial inspection shall monitor or witness any critical step of a maintenance procedure, repair, replacement, modification, or adjustment to assess and verify the proper completion.

The initial and duplicate inspections shall include:

- a) A visual check of the correctness and security of installation of attaching fasteners, bolts and nuts.
- b) System integrity check. Checking of the correctness, smoothness of operation and movement of cable runs and linkages.
- c) Must take account of the full extent of the work undertaken and not simply the immediate area of disturbance.
- d) A visual check of applicable area and components on removal of any residual hardware.

It is a requirement that the person performing the second part of the inspection reviews the complete task against the approved technical data (e.g. MM, SB or as applicable to the task). At this stage the second inspector will thereby make an independent assessment of the entire scope of the inspection of the work performed. Should a Non-Routine card be raised for a defect that requires duplicate inspection, then a duplicate inspection requirement must be highlighted on the task and the Duplicate Inspection must be completed.

Hangar Maintenance Procedure

If disturbance of a control system is expected during planned maintenance, the Technical Records will ensure that all cards requiring control disturbance will carry a reference to the requirement for duplicate inspections. This pre-

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.24
Issued	17 Oct 2024	Duplicate Inspection Procedure	Page	80

identification does not, however, remove the responsibility of the Certifying Engineer to raise requirement for inspection as work progresses.

If because of a defect, a control system has to be disturbed, the engineer calling up the defect must also make an entry on the task/non-routine card to the effect that duplicate inspection is required.

Line Maintenance Procedure

All Duplicate Inspections must be recorded in the Aircraft Technical Logbook in the “Action Taken” part of the current log page.

2.24.2 CRITICAL TASK PROCEDURES AND CONTROL

2.24.2.1 Purpose

To minimize the possibility of an error being repeated in identical tasks that involve removal/installation or assembly/disassembly of several components of the same type fitted to more than one system, whose failure could have an impact on safety.

2.24.2.2 Definition

Critical: of the greatest importance to the way things might happen.

Maintenance tasks qualify to be classified as Critical Tasks, when all the following conditions apply simultaneously:

- The task involves physical maintenance activity system (e.g. removal & installation, (dis-)assembly, (dis-)connection, etc.) on a critical component or on the same aircraft,
- Tasks that involve physical maintenance activity to be done on more than one duplicate/identical/replicated system (e.g. left and right engine low pressure fuel filter replacement), by similar or different tasks, during the same maintenance visit.

2.24.2.3 Applicability

This procedure is applicable to all aircraft maintenance in accordance with the operator’s approved MCM.

2.24.2.4 Responsibility

The responsibility for the identification and control of critical tasks as defined in 2.24.2.2. is a collective responsibility. However, it is initiated by Technical Records and verified by the Head of Base Maintenance.

Notwithstanding, certifying staff must be able to recognize critical tasks to be

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.24
Issued	17 Oct 2024	Duplicate Inspection Procedure	Page	81

able to catch an oversight by Technical Records or the Head of Base Maintenance.

2.24.2.5 Requirements

Safarilink shall implement the following strategies to ensure avoid critical task (as defined in 2.24.2.2) maintenance errors:

- Staggering maintenance:

Safarilink shall notify the operator on the identification of critical tasks in its work order, to get authorization to stagger tasks to be carried out during the same Check. However, this does not eliminate the responsibilities and requirements of 2.24.2.4 and 2.24.2.5.

- Varying maintenance personnel.

Where multi-task maintenance during a single visit may be unavoidable. For example, multiple bird strikes that affect all engines may require both inspections and repair to be performed. Safarilink will utilize different personnel or teams to work on each engine of a multi-engine airplane to reduce errors during both tasks. This multiple-personnel approach increases the number of mental models available during maintenance that could help prevent redundant errors.

- Developing specific processes for multi-task maintenance.

At those times when multi-task maintenance may be required during one visit, Safarilink will request the operators to consider the following to help prevent error:

- i. Develop checklists that require additional scrutiny.
- ii. Require additional functional checks to ensure the integrity of the maintained systems.
- iii. Incorporate a nonrevenue flight into the check process after some maintenance actions.
- iv. Utilize procedures that encourage process thinking by Safarilink personnel that are to carry out the task. Usually if a mechanic develops a pattern of action associated with an activity, it is less likely that an error will occur. This pattern of action must be correct to prevent errors from becoming incorporated into normal processes/procedures.
- v. Provide a kit of parts for specific maintenance activities. For instance, if the engine requires an oil filter replacement, all the parts

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.24
Issued	17 Oct 2024	Duplicate Inspection Procedure	Page	82

that must be replaced can be included in a kit. Then, if O-rings remain in the kit after the task is complete, it should be obvious to maintenance personnel that the O-rings were not installed.

- Employing existing maintenance personnel expertise.

Safarilink will encourage the sharing of ideas between its personnel and those of the operator's maintenance planning department: to learn more about the different ways of reducing error.

- Educating maintenance personnel about critical systems.

Safarilink will ensure that its personnel have a better understanding of the respective aircraft it operates and the correlation/commonalities of the required inspection criteria. i.e. Though all airplane components are important, some components have greater influence on airplane flight safety than others. For instance, oil is necessary for any airplane engine to run. Thus, all the places where oil can leak become critical, especially those locations that are likely to require handling, such as oil fill covers, gearbox access covers, oil filters, chip detectors, and plugs.

- Using tools provided by airframe manufacturers and engine companies.

Aside from the physical tools utilized by Safarilink to actually carry out the raised tasks. Safarilink reach out to the manufacturers to seek out possible developed initiatives that have been developed as error prevention tools, which it will share with its personnel:

- i. Multi-task maintenance workbook. In joint development with engine manufacturers, this book will provide pictures of problem areas (engine locations where mistakes have occurred in the past), cues for avoiding problems, and rationale for why multi-engine maintenance events cause concern about safety of flight.
- ii. Multi-task maintenance decal/stamp. This decal will highlight the theme of reducing error and is designed for use in repair areas.
- iii. Service letters.

Note: Critical tasks might be prevented further during maintenance visits under control of the operator's production planning, by scheduling identical tasks into separate maintenance checks.

2.24.2.6Critical Task List

The critical tasks shall be identified on the respective Check work order that is to accompany the work sheet packages.

Safarilink will notify the operator to pay close attention to tasks that touch on the

following areas:

ATA	Description
21	Air conditioning
24	Electrical Power
26	Fire Protection
28	Fuel
29	Hydraulic power
30	Ice & Rain Protection
32	Landing Gear Systems
34	Navigation
36	Pneumatics
49	Auxiliary Power
61	Propeller Systems
71 - 80	Engines

This chapter 2.24.2 has been develop with great assistance/reference from

- i. Boeing 737-SL-05-004.
- ii. https://www.boeing.com/commercial/aeromagazine/aero_05/textonly/m02txt.html
- iii. Swedish Transport Agency, -Thomas Nicklasson presentation on Critical Tasks
https://www.transportstyrelsen.se/globalassets/global/luftfart/seminarier_och_information/seminarier-2016/luftvardighet-camo-och-145-verkstader/11b-critical-task-fpl.pdf

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.24
Issued	17 Oct 2024	Duplicate Inspection Procedure	Page	84

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.25
Issued	17 Oct 2024	Procedures to Detect and Rectify Maintenance Errors	Page	85

2.25 PROCEDURES TO DETECT AND RECTIFY MAINTENANCE ERRORS

2.25.1 AIMS AND OBJECTIVES OF MANAGEMENT SYSTEM

To encourage engineering personnel to report maintenance errors to the Head of Quality. The reports are to be analyzed and the outcome used to control and minimize the maintenance error reoccurrences to improve/maintain safety, reduce costs, increase reliability, passenger comfort.

2.25.2 ERROR REPORTING PROCEDURE

The Staff who discovers the maintenance error are advised to fill the Mandatory Occurrence Reporting (MOR) Form on SMSPro and address to Head of Quality. For follow-up of the error rectification.

2.25.3 ERROR INVESTIGATING PROCEDURE

The Head of Quality institutes investigations to establish causes of the error. He may appoint an appropriately constituted committee. The investigations are done by means of a confidential Maintenance Error Decision Aid (MEDA) report.

2.25.4 ERROR RECORDING PROCEDURE

Quality office shall record maintenance errors by fleet type and ATA chapter.

2.25.5 THE ANALYSIS OF THE DATA

Data is analyzed to identify the frequency of errors and highlight ATA chapters per fleet type with high frequency of errors.

2.25.6 MANAGEMENT ACTIONS IN RESPONSE TO OCCURRENCES

The Head of Quality shall convene meetings with relevant managers as required to formulate a plan of action to address the occurrence of the maintenance errors, e.g. integration into personnel Training and/or revision of procedures. The discovered error shall be investigated on similar fleet aircrafts to verify that the error has not been repeated.

2.25.7 FEEDBACK TO STAFF.

Occurrence findings are disseminated to the Technical personnel by means of staff meetings and staff notices.

2.25.8 SHARING INFORMATION FROM INVESTIGATIONS

Information from the investigations will be shared with the relevant bodies depending upon the required solution to avoid the future occurrence of the maintenance error.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.25
Issued	17 Oct 2024	Procedures to Detect and Rectify Maintenance Errors	Page	86

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.26
Issued	17 Oct 2024	Shift/Task Handover Procedures	Page	87

2.26 SHIFT/TASK HANDOVER PROCEDURES.

Safarilink operates shift patterns as required to support each operator's requirements. The Head of Base Maintenance and Head of Line Maintenance shall be in-charge of the shift and shall monitor the activities of the shift under their control up to the handover to the in-coming shift.

2.26.1 AIMS AND OBJECTIVES OF THE SHIFT HANDOVER.

This is to ensure that continuity is maintained during maintenance to ensure smooth operations by reducing errors due to lack of information.

2.26.2 PERSONNEL TRAINING ON SHIFT PROCESSES

All personnel involved in shift and task handover are trained on the necessity of the handover process and the information essential for a successful handover. Shift and task handover training procedures are included in aircraft documentation courses conducted induction of maintenance personnel. The controlling managers are responsible for OJT based prior to formal assignment.

2.26.3 SHIFTHANDOVERPROCESS

Personnel working on shift will through the person in charge of the shift, handover any outstanding issues to the incoming shift through the person in charge of the shift. The handover/takeover will clearly indicate the person handing over as well as the person taking over.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.26
Issued	17 Oct 2024	Shift/Task Handover Procedures	Page	88

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.27
Issued	17 Oct 2024	Procedures for Notification of Maintenance Data Inaccuracies and Ambiguities to the Type Certificate Holder	Page	89

2.27 PROCEDURE FOR NOTIFICATION OF MAINTENANCE DATA INACCURACIES AND AMBIGUITIES TO THE TYPE CERTIFICATE HOLDER.

2.27.1 DEFINITIONS OF MAINTENANCE DATA AMBIGUITIES.

Maintenance Data ambiguities refer to any data that is not sufficient to accomplish the task for which it is given as the reference. This could also include any cases where the instructions are not easy to understand, follow and/or could lead to misinterpretation.

There is maintenance data ambiguity when it is doubtful or has several meanings. In fault isolation, an ambiguity exists when the failure(s) in a system have not been localized to single diagnostic units.

Examples of maintenance data ambiguities exist in:

- Drawings (several drawings for the same part)
- Test results not as expected while the recommended procedures have been followed
- Wrong part identification
- Wrong test equipment

2.27.2 RESPONSIBLE PERSON FOR COORDINATING OF REPORTING AND REMEDIAL ACTIONS

Technical Records & Library is responsible for coordinating the reported data ambiguities and remedial actions.

2.27.3 METHOD OF INTERNAL REPORTING OF MAINTENANCE DATA AMBIGUITIES

The production unit that identifies the maintenance data ambiguity will report to the responsible manager, giving as much details as possible.

The responsible manager will forward all the details to Technical Records & Library and advise the technical team of the existing ambiguity.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.27
Issued	17 Oct 2024	Procedures for Notification of Maintenance Data Inaccuracies and Ambiguities to the Type Certificate Holder	Page	90

2.27.4 METHOD FOR EXTERNAL REPORTING OF MAINTENANCE DATA AMBIGUITIES TO THE AUTHORS OF THE DATA

Technical Records & Library is responsible for reporting any ambiguities to the authors of the data e.g. OEM and/or the aircraft manufacturer.

2.27.5 FEEDBACK TO STAFF AND IMPLEMENTATION OF TYPE CERTIFICATE HOLDER/MANUFACTURER CORRECTIONS.

Technical Records & Library will forward the original authors recommendations to the affected production unit, who will comply and advise of the results. The results report will lead to closure of the identified data ambiguity during an amendment.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.28
Issued	17 Oct 2024	Technical Planning Procedures	Page	91

2.28 TECHNICAL PLANNING PROCEDURES.

2.28.1 ESTABLISHMENT OF A CLEAR WORK ORDER OR CONTRACT

The Head of Base Maintenance is responsible for ensuring that a clear work order and/or contract is established prior to commencement of the scheduled maintenance.

2.28.2 MATERIAL, TOOLS AND EQUIPMENT AVAILABILITY ASSESSMENT

Once the work package is prepared, Technical Records in liaison with the HOBM will draw up a list of all the required materials, tools and equipment. These lists are to be forwarded to procurement officer for confirmation of availability three months in advance of a major check such as 'C' Checks and one month in advance of a minor check such as 'A' and '100/200 hour' Checks.

The procurement shall provide weekly updates on the material, tools and equipment availability to ensure that Maintenance Planning and Head of Base Maintenance are well informed.

2.28.3 PROCEDURES FOR ORGANIZING MAINTENANCE PERSONNEL AND PROVIDING ALL NECESSARY SUPPORT DURING MAINTENANCE

The Head of Base Maintenance is responsible for planning and organizing maintenance personnel.

During the maintenance, the Technical Records officers are readily available to provide any assistance or clarification. Additionally, Technical Records is responsible for the production of the daily works order progress report.

Procurement is to provide continuous updates on materials, tools and/or equipment availability.

2.28.4 CONSIDERATION OF HUMAN PERFORMANCE LIMITATIONS

It is the responsibility of the controlling manager to ensure that human performance limitations are taken into consideration when accepting to perform a work pack within the given time in line with company regulations.

2.28.5. PLANNING OF CRITICAL TASKS

Refer to MPM 2.24.2

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	2.28
Issued	17 Oct 2024	Technical Planning Procedures	Page	92

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	L2
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	1

L2.1 LINE MAINTENANCE CONTROL OF AIRCRAFT COMPONENTS, TOOLS AND EQUIPMENT

L2.1.0 Receiving inspection

Aircraft components, Tools, Spares and Equipment shall upon being received by the line engineer be inspected as set out in the MPM Part 2.2.

L2.1.1 COMPONENT / MATERIAL ACCEPTANCE

All components/materials are received at the main store. Any components/materials required for storage at line maintenance are transferred to the line maintenance stores as necessary. Refer MPM 2.3.1.4 for transfer of components between stores.

Refer to MPM L2.5 for loan/pool components.

L2.1.2 COMPONENTS REMOVED SERVICEABLE FROM AIRCRAFT

Refer to MPM 2.2.3.3.

L2.1.3 PROCEDURES FOR MAINTAINING SATISFACTORY STORAGE CONDITIONS

Refer to MPM 2.3.1.

L2.1.4 SYSTEM FOR CONTROL OF SHELF LIFE AND MODIFICATION STANDARD

Refer to MPM 2.3.2.

L2.1.5 TAGGING / LABELLING SYSTEM

Refer to MPM 2.3.3

L2.1.5.1 ISSUE OF COMPONENTS TO THE MAINTENANCE PROCESS

Refer to MPM 2.3.4.

L2.1.7 FREE-ISSUE DISPENSING OF STANDARD PARTS

Refer to MPM 2.3.5

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	L2
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	2

**L2.1.8 TOOLS AND TEST EQUIPMENT, SERVICEABLE AND
CALIBRATION PROGRAMME / EQUIPMENT REGISTER**
Refer to MPM 2.5

L2.1.8.1 IDENTIFICATION OF SERVICEABLE / CALIBRATION DUE DATES
Refer to MPM 2.5.

L2.1.9 Documentation

Refer to MPM 2.2

**L2.2 LINE MAINTENANCE PROCEDURES RELATED TO SERVICING/FUELING
/DE-ICING**

L2.2.1 Servicing

Servicing consists of cleaning, toilet and water servicing, lubrication, checking/replenishing required levels of fluids and oxygen & nitrogen pressure is carried out in accordance with procedures contained in the aircraft types Maintenance Manual, chapter 12, and – as far as applicable and needed.

Servicing can further be defined as cleaning / lubrication / replenishment of fluids, not involving disassembly.

Servicing shall be performed during scheduled tasks in accordance with Aircraft Maintenance Program.

Servicing can also be carried out during unscheduled tasks.

Work orders for servicing shall be initiated and stored by the Line engineer and copies forwarded the main maintenance base in Nairobi after completion.

All oil uplifts shall be recorded in the Aircraft's technical logbook

Due to the climatic conditions in Kenya there is no need for ground de-icing.

L2.2.2 Fueling

In Kenya field Stations fuel is obtained from established suppliers.

Fueling companies utilized are: Finejet, Gulf/Skytanking, Total & Vivo.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	L2
		MANUAL		
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	3

Fueling takes place using bowzers with both pressure and over-wing capability. Drum refueling shall only be carried out from sealed drums with valid retest certification: using certified/inspected pumps.

Fuel is called for by the operator and is to be supervised by the engineer or the captain.

Fueling or defueling is carried out in accordance with the procedures provided in chapter 12 of the Aircraft Maintenance Manual and the Operator's approved MCM.

The following precautions must be followed:

1. Fueling during thunderstorm or sandstorm activity is prohibited;
2. No smoking or any kind of open flame is allowed near the aircraft;
3. No fueling shall be carried out before a Fuel water test is carried out so as to prevent uplifting of contaminated fuel.
4. A suitable fire extinguisher shall be positioned in the immediate area of the aircraft and ensure the personnel involved in the fueling are familiar with its use;
5. The aircraft and the fuel tank shall be properly grounded;
6. Ensure electrical power is off except those required for monitoring the process;
7. Avoid carrying out any other functions i.e. any maintenance work, loading of cargo or passengers in the aircraft until the refueling process is completed;
8. Avoid fuel spillage as this will greatly increase fire hazards;
9. Electrically bond the fuel tank and the aircraft;
10. Carry out fueling in accordance with the procedures laid down in the relevant manufacturer's manuals.

L2.2.2.5De-Fueling

De-fueling of aircraft shall be restricted to a minimum and is done when necessary for any maintenance task or flight requirement. The process for de-fueling should be as follows:

1. Line engineer shall ensure that aircraft is parked outside.
2. The flight crew shall be notified of the de-fueling.
3. Aircraft should be de-fueled as per Aircraft Maintenance Manual.
4. The Line engineer shall ensure that all safety precautions are observed

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	L2
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	4

L2.3 LINE MAINTENANCE CONTROL OF DEFECTS AND REPETITIVE DEFECTS

L2.3.1 Rectification of defects

Aircraft operated by the operator will not be released for flight unless any raised defects has been rectified or deferred in accordance with the procedures contained in Safarilink Manuals.

All defects must be entered in the Aircraft Technical Log. Once the defect has been rectified, an entry or entries must be made in the Rectification Column, giving a concise and unambiguous description of the work carried out, including reference(s) to relevant procedures in the manufacturer's technical publications.

Rectification entries must be signed by the certifying engineer and a Certificate of Release to Service issued.

L2.3.2 MEL items

Should the line engineer find a defect that cannot be rectified but can be deferred in accordance with the MEL for the aircraft type, the line engineer must get in touch with the Head of Line Maintenance to discuss the problem and seek assistance on rectification of the defect.

The Head of Line Maintenance will also assist in assessing whether the defect can be deferred or if it must be rectified. During this period the aircraft must remain grounded.

L2.3.2.1 Rules for Deferring

1. Deferral of defects reported during line flight operations shall strictly be in accordance with the operator's MCM and Approved MEL.
2. All airworthiness defects that cannot be rectified and which are authorized by the Aircraft type approved MEL may be deferred by the line engineer. Such defects may only be deferred for the allowable time provided for in the MEL.
3. The Line engineer and the operator's Reliability Officer shall monitor and review deferred defects on a weekly/daily basis and shall instruct the Head of Line Maintenance on the priority of rectification thereof.
4. MEL can only be invoked if the defect is found within one hour prior to departure.
5. For items that may be deferred, but their lack thereof causes substantial depreciation of passenger and crew comfort, below levels that may be deemed unsustainable, the Head of Line /Head of Base Maintenance must be notified, to determine an agreed rectification period of the deferred defect.

L2.3.2.2 Extension of Deferred Defects

MEL extensions on behalf of the operator shall only be granted if Authorization from the Authority (KCAA) is sought prior.

L2.3.2.3 Conformity with MEL Provisions

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	L2
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	5

The line engineer releasing the aircraft will ensure that the necessary maintenance procedures are completed and certified in the techlog.

Certifying person will also ensure that necessary Placarding as given in the maintenance procedure of the MEL are completed and shall advise the pilot about the operational procedure to be complied with due to the MEL action.

L2.3.3 Repetitive defects

Safarilink shall request the operator to maintain the same cockpit and it will on its part maintain the same technical personnel for easier communication before departure and after arrival.

This means that there will be continuous awareness of technical status of the aircraft and that a repetitive nature of any defect is noted immediately.

Furthermore, maintenance details shall be communicated to the operators Reliability Engineer.

L2.3.3.1 Monitoring of Repetitive Defects

Safarilink shall classify a recurring defect as any defect that reoccurs more than three times on the same aircraft in the last 15 flight segments or appearing on three different aircrafts of the same type within the span of one-month period.

The line engineer shall advise the Head of Line Maintenance who shall then inform the operator who shall recommend removal the aircraft from service in order to conduct an investigation into the root cause of the defect taking into account the previous methods used to attempt to correct the defect.

The Investigation result of repetitive defect shall be used to educate/inform all maintenance Personnel through Work Instructions to prevent their re-occurrence.

L2.3.3.2Recurring Defect Control

The line engineer shall review the aircraft technical log sheet after each flight. The review shall concentrate on recurring snags and Un-serviceability’.

The line engineer shall record all defects reported per aircraft under their watch on to the maintenance task card tracking system.

The Head of Quality shall review the reliability report monthly and finally when the aircraft proceeds for its scheduled inspection for defect control, all pending defects shall be scheduled for maintenance by Technical Records.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	L2
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	6

L2.4 COMPLETION OF THE TECHNICAL LOG

The technical log shall be used and completed in accordance with the relevant procedures listed in operator's MCM.

L2.5 POOLED PARTS AND LOAN PARTS

Presently Safarilink is not making use of any pooling system.

There is no routine loan system in place with any of the aviation companies at Wilson, but when/if a part, needed to rectify a defect, and the part proves to be not available in the Safarilink Stores stock, but can be obtained with a local company in Nairobi, the line Engineer will contact the Head of Line Maintenance in order to arrange/process with the help of stores an ad-hoc loan agreement.

This agreement will also establish the way airworthiness and proper documentation of the part concerned is assured.

Nevertheless, the Head of Quality shall be made aware of such arrangements.

L2.6 RETURN OF DEFECTIVE PARTS REMOVED FROM AIRCRAFT

All unserviceable components removed from an aircraft shall be routed to the Quarantine storage with an unserviceable (form MP/006)/repairable (form MP/008)/Hold label (MP/009) attached to it, with the following information as minimum:

1. Part Number;
2. Description of unit;
3. Serial Number;
4. Aircraft Registration;
5. Removal Date & Aircraft hours and cycles at removal;
6. Reason for unserviceability;
7. Name and Signature of the engineer.

L2.7 CONTROL OF CRITICAL TASKS

Refer to MPM part 2.24.2 for this procedure

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES	Section	L2
		MANUAL		
Issued	17 Oct 2024	Additional Line Maintenance Procedures	Page	7

L2.8 GROUND RUNNING AND TAXIING

Engine ground runs - including taxiing, and if needed full power runs shall be carried out at the designated area and shall be carried out by an appropriately Authorized engineer.

If the Engineer is not duly authorized, the operator pilot-in-command will be requested to do the taxiing and/or ground running, with the engineer having prepared for the run, and giving clear instructions on its purpose and the required recordings.

Occasionally towing and push-back shall be outsourced at adhoc basis from applicable ground handling companies. Towing shall be carried out in accordance with the procedures described in the Aircraft Maintenance manual, paying attention to safety precautions.

L2.9 AIRCRAFT JACKING

During maintenance, it may be necessary to raise complete aircraft clear off the ground using jacks. In such a case the safety precautions laid out in the Applicable aircraft maintenance manual, shall be adhered to.

Main and nose landing gears may be raised individually to enable replacement of wheels/ brake units by using bottle or main jacks. However, when both the tires on same axle are deflated, main jacks may be used at appropriate wing jacking points if a bottle jack will not be sufficient.

It is the responsibility of the line engineer to ensure that correct jacking procedures given in the maintenance manual are followed.

L3.0 MAINTENANCE PERFORMANCE STANDARDS.

The Head of Quality is responsible for ensuring that any maintenance, preventive Maintenance, or modifications undertaken by Safarilink for any operator is performed in accordance with the operator's Maintenance control manual. For this purpose, the Head of Quality shall ensure that Safarilink is furnished with all its relevant manuals by the operator i.e. the approved Aircraft Maintenance Program and Maintenance Control Manual.

The Head of Quality shall also ensure that Safarilink has the latest editions of the manufacturer's service manuals, instructions, and service bulletins that relate to the articles that it maintains or Modifies. This will be achieved by ensuring that the manufacturer's subscription service is current and paid for to ensure constant supply of subscriptions.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	1

PART 3: QUALITY SYSTEM PROCEDURES

3.1 QUALITY AUDIT OF ORGANIZATION PROCEDURES

3.1.1 General Policy and Procedures.

The Head of Quality shall be responsible for the development and implementation of the AMO quality system.

The Head of Quality shall develop and implement a schedule for internal auditing of all the different systems, processes and procedures utilized by the Safarilink AMO. The AMO quality management system shall be carried out as per the procedures/standards/principles of the latest version/revision of the Safarilink Quality Management System (QMSM) manual approved by the Authority. These procedures establish maintenance procedures acceptable to the Authority to ensure good maintenance practices and compliance with all relevant requirements in these relevant civil aviation regulations, such that aircraft and aircraft components may be properly released to service. For detailed description of the Safarilink Quality Assurance System kindly refer to the Quality Manual.

For Quality Policy Refer to Quality Manual 2.3

For Quality Audit Procedures Refer to Quality Manual 3.5

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	2

3.1.2 **Management Review & Analysis**

The effectiveness of this Quality Management System is to be analyzed by Management of Safarilink.

Management personnel who shall attend review of QMS are:

- a) Accountable Manager
- b) Head of Quality
- c) Head of Base Maintenance
- d) Head of Line Maintenance
- e) Head of Workshop
- f) Head of Safety

For Management Review, refer to Quality Manual Chapter 5

All forms to be used in this part can be found in Quality Manual Chapter 9-Appendices.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	3

3.1.3 Internal Audit and Analysis System

An audit is a systematic and independent comparison of how maintenance is being conducted against how the published procedures & regulations say it should be conducted. Should the audit demonstrate non-conformities, i.e. events in which applicable requirements, procedures and standards have not been fulfilled, adequate corrective actions have to be defined and performed in due time.

For Internal and external Quality Auditing Refer to Quality Manual 3.3,3.4 & Quality Manual Chapter 9 for Quality Audit Schedule sample & Forms

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	4

3.1.4 **Company facility audits**

Non - compliances identified during audits are handled as per
Quality Audit Procedures: Refer to Quality Manual 3.5

3.1.5 **Scheduled Audits**

The Quality Audit Program/Schedule shall be approved by the Accountable Manager.

For Scheduled audits Refer to Quality Manual 3.5

3.1.5.1 **Scheduled Audits Deferral Procedures**

Refer to audit procedure included in section 3.5 of Quality Management Systems Manual QMSM.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	5

3.1.6 Vendors or Suppliers of Parts to Safarilink

Approved suppliers/ Vendor List is kept in Head of Quality office. Form QAM/40 is used for auditing Procurement department. In addition, not all suppliers can physically be audited due to the demographics of these facilities. However, Form QAM/12 or QAM/12A is posted / Emailed to these suppliers. Suppliers must complete mentioned form and supply copy of approval when returning audit form.

All suppliers of aircraft part and consumable items will be audited annually. Physical audits are not always possible and Safarilink will rely on information provided on Form QAM/12 or QAM/12A, supplied by these facilities during the annual review. This procedure applies to suppliers of all categories of aircraft parts and services. Where physical audits are carried out by the Head of Quality, Form QAM/12 or QMS/29 must be used.

No facilities that have not been approved by the Head of Quality will be used to supply any service to Safarilink. The Service Level Agreement's must make provision for Inspections to be carried out at any time by the Authority in terms of any Maintenance, Preventative Maintenance or Modifications carried out by the Contractor.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.1
Issued	17 Oct 2024	Quality Audit of Organization Procedures	Page	6

3.1.7 **Random Observation Audits**

Given that scheduled audits may not address all areas desired to ensure a consistent and effective Quality awareness within the AMO, the Head of Quality will carry out walk-around inspections to evaluate;

- i. AMO facility
- ii. How policies and procedures are implemented
- iii. Personnel standards & OJT's
- iv. Line and Base Aircraft Maintenance functions.

Reference can also be made to Quality Manual part 3.5.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.2
Issued	17 Oct 2024	Quality Audit of Aircraft	Page	7

3.2 Quality Audit of Aircraft.

The Head of Quality shall be responsible for the development and implementation of the internal audit system to ensure the airworthiness of the aircraft maintained and released by Safarilink meets the regulatory requirement.

Each aircraft maintained by Safarilink shall be subjected to this Audit program at least once every 12 months. The Head of Quality shall make his audit findings available to the Safarilink leadership team.

Refer to Quality Manual Chapter 3 & 4 for the Audit Program and processes.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.2
Issued	17 Oct 2024	Quality Audit of Aircraft	Page	8

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.3
Issued	17 Oct 2024	Quality Audit Remedial Action Procedures	Page	9

3.3 QUALITY AUDIT REMEDIAL ACTION PROCEDURES

3.3.1 General Policy and Procedures.

Non-compliance findings identified during an internal audit shall be actioned by the Department Manager within the stipulated time depending on the level of finding (finding classifications and follow-up procedure) of Audit completion and the nature of the rectification actions noted on the Non-Compliance form.

During any given Audit (other than the initial) the Non-Compliance findings of the most recent Audit shall be reviewed and the successful incorporation of rectification actions confirmed. A determination that rectification actions have not been incorporated or have not been successful shall result in a Non-Compliance finding.

For Quality Audit Remedial Action Procedures Refer to Quality Manual 3.5.12

Non-compliance findings identified during an internal audit shall be actioned by the Head of Base Maintenance.

3.3.2 Findings & Corrective Actions.

Refer to Quality Manual 3.5

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.3
Issued	17 Oct 2024	Quality Audit Remedial Action Procedures	Page	10

3.3.3 **Quality Meetings**

To ensure Quality compliance through all aspects of the organization, the Quality Manager or the Quality Control officer will report all noted non-compliances or Observation during the weekly Production/Planning Meeting.

This is to ensure that all Quality compliance efforts/Agenda are well known and supported by all key production personnel and communicated to the Accountable Manager.

3.4 CERTIFYING STAFF QUALIFICATION AND TRAINING PROCEDURES

3.4.1 Training Policy

Safarilink is committed to the enhancement of the knowledge base of its personnel to equip them with the most up to date technological and procedural information: details of which can be found in the approved Safarilink Maintenance Training Manual (ref: SL/MTM/001). The Head of Quality shall ensure that the curriculum and standards in the maintenance training program are followed.

The Head of Quality shall establish prequalification standards intended to ensure that the trainee has a reasonable chance of successfully completing the course. All trained personnel shall be examined at the completion of each training course. Training will also be arranged to accommodate continuation training.

3.4.2 Programs

Course	Time Period	Personnel Affected
Indoctrination Course	At employment	All staff
Maintenance Procedures & Standard Maintenance Practices	2 Years (Continuation)	All technical personnel
Aircraft Type Training	2 Years (Continuation)	Certifying Engineers
Human Factors	2 Years (Continuation)	All staff
Aircraft Run-up & Taxi	2 Years (Continuation)	Applicable Certifying Engineers
Safety Management Systems training	2 Years (Continuation)	All maintenance Staff
Management	When required	Management Staff
QMS and Auditing	When required	Quality personnel
Security awareness	When required	All staff
Specialized process training	When required	Relevant personnel
Dangerous goods	2 Years (Recurrent)	Stores Personnel

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.4
Issued	17 Oct 2024	Certifying staff Qualification and Training Procedures	Page	12

3.4.3 **Initial training.**

Initial training shall include instruction of the following subjects consistent with the specific employee position and assigned job activities:

1. Company Induction and Indoctrination
2. Maintenance Procedures Manual
3. Standard Aircraft Maintenance practices.
4. Line and Hangar safety.
5. Records and recordkeeping.
6. Materials and parts.
7. Test equipment, including ground support equipment.
8. Tools.
9. Aviation Security Training

3.4.4 **Continuation training.**

Maintenance personnel shall undergo recurrent training after every two years. The training will also include newly introduced procedures, equipment, and regulations.

3.4.5 **Remedial training.**

Safarilink shall provide remedial training to rectify an employee's demonstrated lack of knowledge or skill by providing information as soon as possible.

In some instances, remedial training may consist of an appropriately knowledgeable person reviewing procedures with an employee through on-the-job training.

Remedial training shall be designed to fix an immediate knowledge or skill deficiency and may focus on one individual. Successful remedial training shall show an individual what occurred, why it occurred, and in a positive manner, how to prevent it from occurring again.

Safarilink shall assess the competency of its employees for performing his or her assigned duties after completion of initial, recurrent, specialized, and remedial training. This assessment of competency shall be appropriately documented in the employee's training records and shall be done by any of the following methods, depending on the capabilities and experience of the employees:

- a. Written test.
- b. Completion of a training course.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.4
Issued	17 Oct 2024	Certifying staff Qualification and Training Procedures	Page	13

- c. Skill test.
- d. Group exercise.
- e. On the job assessment; or
- f. Oral examination in the working environment.

3.4.6 Records of Training

Records of all training for each member of staff shall be safely kept together with copies of testimonials and date of completion. Where recurrence training is essential, the due date of retraining shall be highlighted.

These records are available for the review of additional training needs for the personnel. The following information should be kept in the record:

- a. Name
- b. Date of birth
- c. Relevant qualification
- d. Experience
- e. Relevant training
- f. Continuation training
- g. Date of initial issue of authorization
- h. Date of expiry of authorization
- i. Stamp identification number
- j. Proof of relevant documents
- k. Copy of last issued license or authorization.

3.4.7 Verification of Training.

The records of training including the results are available for scrutiny by Authorized personnel, who may require assessing the post-training performance of the individual member of staff against the training report. From this exercise additional training may be recommended to certain personnel or the course content may be reviewed if considered inadequate.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.4
Issued	17 Oct 2024	Certifying staff Qualification and Training Procedures	Page	14

PAGE INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.5
Issued	17 Oct 2024	Certifying staff Records	Page	15

3.5 Maintenance and Certifying Staff Records.

A personnel file shall be held for each maintenance/ certifying staff member at the Head of Quality Office. A Summary of staff details, qualifications, Initial and Continuation training, including supporting documentations is placed on this file. For this summary, Form: QAM/54 is used. An Excel File shall also be used to allow easier and quicker overview of all Certifying personnel.

The Head of Quality shall review and update these records on a quarterly basis or whenever a staff member qualifications changes, for example attending Initial, Continuation training or an amendment to his Aircraft Maintenance Engineer License and / or change to his Company Authorization.

In addition, the Head of Quality must ensure all Certifying Staff Pocket License (QAM/54A) is current always.

This file shall contain at least:

- a. name;
- b. date of birth;
- c. basic training;
- d. type training;
- e. continuation training;
- f. experience;
- g. qualifications relevant to the approval;
- h. scope of the authorization(for certifying staff);
- i. date of first issue of the authorisation;
- j. expiration date of the authorisation, where appropriate; and
- k. identification number of the authorisation.
- l. a current CV showing relevant employment history and level of education.

All maintenance/ certifying staff training records shall be maintained on file for at least 2 years after the personnel has left the organization or upon withdrawal of the authorization. The staff may be given access to a copy of their record by the Head of Quality, on request.

Where maintenance/ certifying staff receive training related to the activities of Safarilink, which has been provided by an outside agency, proof of the satisfactory completion of such training shall be retained on the individual's training file. Such proof may consist of

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.5
Issued	17 Oct 2024	Certifying staff Records	Page	16

copies of diplomas, proof of attendance documentation or a copy of the agency's training record.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.6
Issued	17 Oct 2024	Quality Audit Personnel	Page	17

3.6 QUALITY AUDIT PERSONNEL.

3.6.1 Lead Auditor Responsibilities

For Lead Auditors Responsibilities Refer to Quality Manual 3.5. 6

3.6.2 Auditors

For Quality Auditors Refer to Quality Manual 2.8

3.6.3 Independence of Audit

For Quality Auditor's independence Refer to Quality Manual 2.8

3.6.4 Auditors Training

For Quality Auditor's Training Refer to Quality Manual 2.12

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.6
Issued	17 Oct 2024	Quality Audit Personnel	Page	18

PAGE INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	19

3.7 QUALIFYING INSPECTORS

3.7.1 Safarilink Engineer's Authorization

Safarilink shall have a training committee that constitutes but not limited to the following:

- a. Head of Quality
- b. Head of Base Maintenance
- c. Head of Line Maintenance

The committee shall examine written, practical and oral knowledge, experience and competence of skills of a Safarilink engineer to qualify for authorization to certify aircraft tasks. Form QAM/19 & Form QAM30 Certification Examination Report, shall be used to accomplish this requirement.

3.7.1.1 Scope of Authorization

The Quality department will issue authorizations to Kenyan AMEL holders.

For foreign AMEL holders, the Quality department will issue authorizations once their foreign AMEL have been validated by KCAA or if KCAA issue them with a supporting Authorization.

3.7.1.2 Authorization Privileges

The Inspection Categories making up of the types of authorizations to be granted by Safarilink fall within the following groups.

- I. General Inspections
- II. Certificate of Release to Service: Line, Base & Workshop
- III. Duplicate Inspections

All holders of authorization must always have all their valid records on file. Thus, said it is the responsibility of the authorization holder to inform the Head of Quality of any new or updated credentials attained.

3.7.1.3 General Inspections

I. Stockroom Receiving Inspection - SRI

May be granted to Certifying personnel with at least three years' experience in the field of Aircraft Maintenance

II. Airframe/Engine Inspection - AEI

May be granted to either.

1. Holders of KCAA AME licenses in 'A' or 'C' or international equivalent.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	20

III. Avionics Inspection - AVI

1. May be granted to holders of KCAA AMEL in 'X' or 'R' or international equivalent.

IV. Certificate of Release to Service

▪ Line Maintenance - LFI

May be granted to Persons who have met the requirements set forth for an Authorization Holder. This type of authorization shall be limited to Line Maintenance only.

▪ Schedule Maintenance Inspections - HFI

May be granted to persons who have met the requirements set forth for an Authorization Holder and are at the time of the Scheduled Maintenance Inspection nominated by the Head of Base Maintenance, with supporting Training documented.

▪ Workshop Inspections - WI

May be granted to persons who have met the requirements set forth for an Authorization Holder or holders of a KCAA issued Specialist Approval, with supporting Training documented.

V. Duplicate Inspections -DI

May be granted to.

1. Persons who have CRS Authorization
2. Persons who have passed training procedures in Duplicate Inspection procedures, recommended by the Line/Head of Base Maintenance, and approved by Head of Quality.

3.7.2 Authorization Codes

All authorizations issued by the Head of Quality shall have Grants with the codes listed below.

Airframes

AC208 – Textron/Cessna 208 Series

AD100 – Dash 8 100

AD 200 – Dash 8 200

AD300 – Dash 8 300

Taxi

TC208 – Textron/Cessna 208 Series

TD100 -Dash 8 100

TD300 - Dash 8 300

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	21

Engines

EPT – PT6A Engine Series (PT6A-114, PT6A-114A)
EP12 – PWC 120/121/123 Engine Series
EP40 – PT6 140Engine Series
EH100 – HS APU – Dash 8 100 series
EH200 – HS APU – Dash 8 200 series
EH300 – HS APU – Dash 8 300 series
ER100 – Engine Ground Run – Dash 8 100 series
ER200 – Engine Ground Run – Dash 8 200 series
ER300 – Engine Ground Run – Dash 8 300 series
ER208 – Engine Ground Run – Cessna Caravan 208 series

Avionics

XE – Electrical
XI – Instruments
XAP – Autopilot
XR – Radio
XC – Compass Compensation

Work Shops

WB – Brakes
WX – Avionics
WN – Non-Destructive Testing
WS – Sheet Metal
WU – Upholstery
WW – Wheels

Inspections

SRI – Stockroom Receiving Inspection
AEI – Airframe/Engine Inspection
AVI – Avionics Inspection
DI – Duplicate Inspection
BO – Borescope Inspection
HFI – Hangar Final Inspection / CRS
LFI – Line Final Inspection / CRS

3.7.2.1 Authorization Grants

This section is used to show a record of the types of authorization granted to the individual but limited to the capability/scope list for which the individual is trained on. Explanation by example.

An individual that has both A&C on the dash 8 aircraft and can also carry out engine run and can start the associate APU he/she would have the following codes:

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	22

AD100, EP12, EH100 and ER100

The codes are grouped as per the headings listed under authorization codes.

Workshop type authorization shall be issued, but limited to Components that are on the capability/scope list for which the individual is trained on.

Example 1

An individual that is authorized to carry out sheet metal work on Dash 8-100, Textron/Cessna 208 etc. aircraft he/she would have the following code: WS - And in the Appendix we would list the particular aircraft type e.g. WS-AD100/WS-AC208

3.7.3 **Safarilink Engineers' /Technicians' Record of Experience**

All maintenance personnel shall be required to maintain an updated record of experience (Work Experience Logbook: Ref Form QAM/058), that shall be used by the Quality Department or Authority to substantiate/justify Authorization/Dispensation approval.

Such a logbook shall be inspected by the Head of Quality every three months.

It shall be the responsibility of the logbook holder to ensure that their logbook is current and regularly inspected (every three months) by the Head of Quality.

3.7.4 **Certifying Staff Qualifications**

Individuals granted the authority to sign a Certificate of Release (certifying staff) shall:

- a) Have at least 3 years documented experience performing line and base maintenance actions on the type of aircraft maintained by Safarilink.
- b) Be a holder of a valid aircraft maintenance engineers license: categories A, C/ X or R
- c) Demonstrate the ability to read, speak, write, and understand the English language in accordance with the language proficiency requirements and be able to interpret technical reports and maintenance publications and carryout technical discussions in the English language.
- d) Have attained an approved and current type training, for the Authorization sought and have the current type endorsed on his/her license, or as provided under KCARs.
- e) Comply with the knowledge, experience and competency requirements prescribed for the rating sought.
- f) Shall have a current, updated, and inspected Maintenance personnel Record of experience. Logbook: Ref form QAM/058.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	23

- g) Pass all the prescribed examinations for the Authorization sought within twelve months. (Examination may be administered verbally, in written or practically, and the applicant graded using form/s (QAM/19, QAM/30)
- h) Current and documented training in Human Performance Factors.
- i) Safarilink Licensed Engineers will always be in physical possession of Company Certification Approval Document or available at Work Site. (Form: QAM/54A)

3.7.5 Assessment of personnel

- 1) Once an applicant meets all the requirements set above, application will be initiated by.
- 2) The applicant filling an Authorization application form QAM/19.
- 3) The applicant shall present copies of current, updated, and inspected Maintenance personnel Record of experience. Logbook: Ref form QAM/58
- 4) The applicants' training profile will be evaluated before recommendation for examination by the committee.
- 5) The applicant will be reviewed by the committee established under this section using form/s QAM/19 or QAM/30, to verify their technical/legislative/ procedural competency.
- 6) An applicant who fails their first attempt will have to wait 3 months before they can re-apply for the authorization. Applicants who fail their 2 attempts will have to wait 1 year before being to apply for the Authorization sought.
- 7) A successful applicant will be granted a company authorization booklet QAM/54A, that will state their Authorization Scope and Limitations.
- 8) A successful applicant will be added to the certifying staff listing QAM/54 and their file updated in the Quality Department to reflect the same.

3.7.6 Issue/Extension of Authorization

The Head of Quality shall issue Authorization:

- 1) Based on the committee recommendation. An Internal Authorization Certification QAM/54A shall be issued to those qualifying and acceptable to the company established standard.
- 2) The authorization shall state the full identity of the holder, extent of authorization privileges, any necessary restrictive/prohibitive conditions and expiry date.
- 3) The grants in the certificate shall be stamped, signed and dated by Head of Quality.
- 4) The certifying staff shall sign the booklet declaring they have read and understood the privileges stated and must have it in their possession whilst on duty.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	24

- 5) A stamp shall be issued bearing a number assigned to the specific authorized personnel and shall be in the person's possession always whilst on duty.
- 6) The Head of Quality or designate shall give any necessary final instructions by verbal or written means prior to the authorized person appending their signature to the certificate as stated.
- 7) The certifying staff shall be issued a controlled stamp by the Head of Quality, using Form MP/027. The unique stamp and signature shall be used as staff identifier.

3.7.7 Validity of Authorization

The Authorization shall be issued to be valid for:

- 1) Twenty-four months; or
- 2) The duration stated on the AMEL or KCAA validation.
- 3) The duration shall additionally be limited by the currency of the type training listed.
The Head of Quality may extend validity up to the planned training, if not more than 3 months away.

3.7.8 Revocation of Authorization

The Authorization may be withdrawn or revoked by Head of Quality when:

- 1) If deemed to be in the interest of safety,
- 2) The holder has left employment of Safarilink.
- 3) When the holder is in serious breach of Regulations or company procedures for release to service.
- 4) When the type of equipment has been retired from the fleet.
- 5) If the authorization holder's type training is deemed to be not current in accordance with company procedures
- 6) Holder exhibits careless practices that result in abuse, distortion, or loss of authorization stamp and/or certificate.
- 7) A holder refuses to produce the authorization booklet or stamp when requested by a KCAA Inspector or any member of the internal or external Audit team.
- 8) A holder has "loaned out" their stamp for illegal use by other persons.
- 9) If the authorization holder's license ceases being valid

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	25

3.7.9 **Authorization Certificate control**

Previously issued certificates that have been withdrawn or revoked shall be kept safe for a minimum period of two years.

3.7.10 **Authorization stamp control**

- 1) The Head of Quality shall keep a list of certifying staff and the stamp number they hold.
- 2) When a stamp/ Authorization has been withdrawn due to holder leaving Safarilink, the stamp shall be kept in quarantine for a minimum period of 24 months before reissue.
- 3) If a stamp is declared lost, the number shall be withdrawn from the register and the previous owner granted another stamp of the same number but bearing suffix 'R', showing that it is a replacement.
- 4) If the lost stamp is found, following investigation the previous owner shall be granted the former stamp after a period of 24 months quarantine.
- 5) A previously issued authorization stamp can be issued to another qualified staff member when the quarantine period has elapsed.
- 6) All stamps under quarantine shall be recorded in a file and kept locked up for the duration of the period.

3.7.11 **Certifying Staff Qualification and Training**

The Head of Base Maintenance, shall ensure that all certifying staff receive training regarding:

- a) Technical matters related to Safarilink's scope.
- b) Regulatory matters and company maintenance procedures and policies.
- c) Human factors.
- d) Safety Management Systems Awareness.

Records shall be kept of all company training given to certifying staff maintenance personnel. These records shall indicate:

- a. The date on which the training was given.
- b. The recipient's name.
- c. A description of the subject of the training session and its duration.
- d. The signature of the recipient acknowledging receipt of the training.
- e. The name of the individual presenting the material.

A Training Record shall be used to record training given by the company.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	26

An individual's training record shall be readily available to that person upon request. Whenever an individual move into a certifying staff position, they shall receive the necessary initial training to familiarize them with their post, the responsibilities thereof and relevant company policies and procedures.

All certifying staff shall receive regular update training on company procedures and policies, technical theory and maintenance practices relevant to their duties.

The Head of Base Maintenance shall ensure that all maintenance personnel receive at least 8 hours of update training in each calendar year. This training may take the form of:

- a. "In house" company seminars and/or "hands on" training sessions.
- b. KCAA sponsored information sessions.
- c. Recurrent training Courses offered by Manufacturers or other Training Organizations approved by the Authority.

Findings within the company's Head of Quality Program or changes to regulations and procedures shall necessitate additional training. The Head of Base Maintenance shall ensure that maintenance personnel receive additional training as required. This training may take the form of:

- a) "In house" company sessions and/or "hands on" training sessions.
- b) KCAA sponsored information sessions.
- c) Training courses offered by manufacturers or other training organizations.

3.7.12 Continuation training.

Maintenance personnel shall undergo recurrent Manufacturer training and will be inform of the initial syllabus every two years from date of completion the same manufacturer training. The training will also include newly introduced procedures, equipment and regulations.

The training program, training facilities and the curriculum to train certifying staff shall be approved by the Authority.

The Training Program submitted to the Authority shall include-

1. details of the number of personnel who will receive initial training to qualify as certifying staff over specified time periods; and
2. For maintenance personnel and certifying staff of the AMO, training in knowledge and skills related to live performance including coordination with other maintenance personnel and flight crew.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	27

All trained personnel shall be examined at the end of each training course.

All certifying staff of Safarilink shall undergo initial training that cover-

- a. Basic engineering theory relevant to the scope of work performed by the AMO;
- b. Specific information on the actual aircraft type on which the person is intended to become a certifying person including the impact of repairs and system or structural defects; and
- c. Company procedures relevant to the certifying staff's tasks.

All certifying staff of Safarilink who have undergone initial training shall undertake continuation training in changes in Safarilink procedures and changes in the standard of aircraft or aircraft component maintained

The training program, training facilities and the curriculum to train certifying staff of Safarilink shall be approved by the Authority

3.7.13 **Recommendation of Candidates**

1. Responsibility

The Head of Base Maintenance 's immediate responsibility regarding certification held by a person under his control is as follows:

- a) Suitability of candidate to hold certification.
- b) Recommendation of candidate.

2. Recommendation

For a candidate to be recommended, the following requirements must be met:

- a. Candidate must have completed an approved course and passed relevant examinations.
- b. Has successfully passed an internal examination to conclude satisfactory knowledge of Safarilink Maintenance Procedures, Manufacturers Manual, and KCAA Regulations as applicable. A minimum pass mark of 75% is required.
- c. Before recommendation candidate must comply with the minimum experience, knowledge and competence requirements as specified in the KCAR's – Personnel Regulations.
- d. Must satisfy the Certification Board of his / her competency.

3. Chairman for Oral Certification Examination

The chairman for all oral certification examinations will be the Head of Quality.

- a) The committee members shall consist of a minimum of the following:
 - i. Chairman (Head of Quality)
 - ii. Head of Base Maintenance

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	28

- iii. Head of Line Maintenance and/or Head of Workshop
 - b) The Chairman will record names of board members and questions posed to the candidate. Examination results / endorsements on Form QAM/19 or QAM/30 of Certification oral examination will be retained. Head of Quality is responsible for personnel certification records.
 - c) Examination will consist of an oral, written and /or practical question directly related to certification.
- 4. Examination Pass Mark and Penalties (Oral)
 - a) The pass mark for the examination is 75 %
 - b) Should a candidate receive a mark between 60-74%, a re-examination would be considered.
 - c) If candidate has obtained less than 60 %, he / she will be required to wait a minimum of 3 months.
- 5. Administrative Control

The Head of Quality will be responsible for the following:

 - a) All administrative functions regarding certification, including issuing / Renewal of Company Internal Authorization
 - b) Maintaining an adequate record system for issued company Authorizations.
 - c) Confirming candidate complies with the KCAA Regulations as stated in KCAR's.
- 6. Monitoring Standards

The Head of Quality will be responsible for ensuring that certification system is adequate in terms of the KCAA Regulations and that adequate standards are maintained.
- 7. Re-instating of Certificate of Authority

Certificate of Authority will be re-instated when the individual has demonstrated his / her ability to the board or passed a re-certification examination successfully.
- 8. Competency Review of Certifying Staff
 - a) Review will take place annually. For this purpose, Form: QAM/19 and or QAM/30 shall be completed.
 - b) The Head of Quality will send copies of Authorization Certificates to the Head of Base Maintenance.
 - c) The Head of Base Maintenance must satisfy himself that the certificate holder is exercising or likely to exercise privileges granted to him / her in a manner prescribed in the Maintenance Procedures Manual.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	29

- d) The Head of Base Maintenance must advise Head of Quality of necessary amendments and recommend new or Refresher Courses.
- e) The Head of Quality must ensure that Authorization certificates held by Safarilink personnel are always valid and amended after any revisions to the MPM pertaining to certification.

9. Engineers and Mechanics Review

- a) The Head of Base Maintenance shall review the status of training for Engineers and Mechanics. During this process he shall determine the current competency of these staff members, considering the following:
 - i. Record of OJT.
 - ii. Courses attended.
 - iii. Check if target has been met in terms of Training Program set out, and if not furnish details.
 - iv. Recommend further training.
 - v. Either Form: QAM/19, QAM/30 or QAM/52 shall be used or completed for this purpose.

3.7.13.1 Renewal of authorization certificate

The Head of Quality shall renew the Authorization based on the following requirements being met.

- 1) The Authorization holder will make an application for renewal on form QAM19 (Authorization application Form) this will be done two weeks prior to expiry of the Internal Authorization Certification QAM/54A.
- 2) The Authorization holder will attach copies of evidence of practice and execution of Authorization privileges as is indicated on part 3.7.1.2.
- 3) The copies to affirm the above requirement will not be less than three, at least one copy for each consecutive month.
- 4) The applicant shall submit a current, updated, and inspected maintenance personnel record of experience. Logbook: Ref form QAM/058.

NB. – All certifying engineers will be required to comply with items 1,2,3 and 4 above.

- All certifying engineers who are also NPH's will be required to comply with items 1,2,3 above.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.7
Issued	17 Oct 2024	Qualifying Inspectors	Page	30

3.7.13.2 Limitations to Authorizations privileges.

This section is used to list the conditions under which a certifying staff will be limited in exercising the authorization privileges granted.

- 1) Where AMEL has expired, the certifying staff shall forthwith NOT exercise ICA rights. (And the stamp shall be handed back to quality office)
- 2) Where an Authorization Certificate booklet QAM54A expires, the certifying staff shall be handed back to quality office)
- 3) Where the Human Factors course has expired, the certifying staff shall not exercise ICA rights.
- 4) Where an Aircraft Type course has expired, the certifying staff shall Not exercise ICA rights on the subject category granted on the aircraft.
- 5) One shall Not exercise ICA rights if he knows or is known to be working under the influence of alcohol, drugs, or any other psychoactive substances and for such (All authorization privileges will forthwith be withdrawn.)
- 6) Where a concession period has elapsed, the certifying staff shall NOT exercise ICA rights on subject category granted.

Issue No.	03	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.8
Issued	17 Oct 2024	Qualifying Mechanics	Page	31

3.8 QUALIFYING MECHANICS/TECHNICIANS.

For the purposes of this section a ‘Mechanic/Technician’ shall be defined as an individual who:

1. Cannot sign a Release to Service statement for an aircraft or component maintained by Safarilink but can sign-off and stamp work he/she has done, after which it must be certified/released by an authorized certifying engineer.
2. Carries out line and base maintenance actions under the supervision of a certifying staff member.
3. Mechanics shall be assessed for competency by “on the Job” evaluation or examination relevant to their role within Safarilink before Un- Supervised work is allowed. Mentioned training / examination shall be recorded and kept on mechanic’s training file. QAM/52a, b, c, d shall be used for this purpose.
4. Mechanics /Engineers must be able to carry out Maintenance tasks to the Standard as per Maintenance Data supplied and report any anomalies to be rectified to re-establish the Maintenance Standard

A Mechanic shall meet the following requirements:

- a. Demonstrate the proper use of generic hand tools.
- b. Familiarity with basic aircraft systems.
- c. An understanding of the hazards inherent with aircraft maintenance activities.
- d. Possess acceptable written, reading and oral communication skills in the English language.
- e. Demonstrated familiarity with aircraft maintenance support equipment commensurate with their duties.

Note: all work done by a mechanic/technician, shall be identified by their own unique numbered circular shaped stamps.

Issue No.	03	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.8
Issued	17 Oct 2024	Qualifying Mechanics	Page	32

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.9
Issued	17 Oct 2024	Exemption Process Control	Page	33

3.9 EXEMPTION PROCESS CONTROL.

This procedure is used in case there is need or reason to deviate from a requirement or a part thereof in which case an approval from the KCAA will be required.

Safarilink may apply to the KCAA for an exemption from any of Civil Aviation Regulations as provided for in Approved Maintenance Organization regulations 39 and 40. The application for an exemption will be submitted at least sixty days in advance of the proposed effective date.

The application shall be accompanied by a fee specified by the Authority, for technical evaluation. The application for exemption will contain the following details:

- a) citation of the specific requirement from which the applicant seeks exemption
- b) an explanation of why the exemption is needed;
- c) a description of the type of operations to be conducted under the proposed exemption;
- d) the proposed duration of the exemption;
- e) an explanation of how the exemption would be in the public interest, that is, benefit the public as a whole;
- f) a detailed description of the alternative means by which the applicant will ensure a level of safety equivalent to that established by the regulation in question;
- g) a review and discussion of any known safety concerns with the requirement, including information about any relevant accidents or incidents of which the applicant is aware of; and
- h) Where Safarilink seeks emergency processing, the application shall contain supporting facts and reasons why the application was not filed within the time specified, and the reasons it is an emergency

The Head of Quality will compile the above details and forward to the KCAA for approval before any work begins. The Head of Quality shall maintain a list of all exemptions.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.9
Issued	17 Oct 2024	Exemption Process Control	Page	34

Note:

1. In addition to the above stated items a request for an exemption shall contain the applicant's-
 - name;
 - physical address and mailing address;
 - telephone number;
 - fax number, if available; and
 - email address, if available.
2. The Authority may deny an application if it finds that Safarilink has not justified the failure to apply for an exemption in the time specified (at least sixty days in advance of the proposed effective date).

Form QAM/24, QAM/24B shall be used for this purpose.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.10
Issued	17 Oct 2024	Concession Control for Deviation from Organization Procedures	Page	35

3.10 CONCESSION CONTROL FOR DEVIATION FROM ORGANIZATION PROCEDURES.

Deviation from these procedures shall be approved by the Head of Quality.

The deviation when approved shall be promulgated by the Head of Quality including all the conditions and limitations attached.

3.10.1 Definitions

3.10.1.1 *Concession:* Written Authority obtained from the Head of Quality; to deviate from a specific procedure defined in organizational procedures documents. **The concession process shall not be applicable to any matters touching on regulatory requirements.**

3.10.1.2 *Deviation:* is classified as major deviations in case of direct impact on the approval scope of work such as:

- a. Staff's Qualification
- b. Inadequate facilities
- c. Non-listed sub-contractors
- d. Not limited to the above

3.10.2 Deviation Control Process

Deviation control process consists of:

- a. Deviation identification (justifications and reference to explanatory documents)
- b. Deviation memo completion to be given to Head of Quality.
- c. Deviation analysis and classification (minor or major) by the Head of Quality

3.10.3 Concession Control for Deviation from Organization Procedures

1. The procedure mentioned below concerns all deviations from:
 - a. Associated procedures
2. The Head of Quality is responsible for the concession process.

The concessions shall be endorsed as follows:

- a. Management deviations shall be endorsed by the Accountable Manager,
- b. Procedure deviations shall be endorsed by the Manager responsible for the process.
- c. Quality deviations shall be endorsed by the Head of Quality.

All concessions will be transmitted to the Head of Quality who will:

- a. Verify the completion and the content of the concession,

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.10
Issued	17 Oct 2024	Concession Control for Deviation from Organization Procedures	Page	36

- b. Verify proper deviation implementation after approval,

3.10.4 Concession Request and Approval Procedures.

The procedure mentioned above will be initiated by:

1. Identification of the deviation after which the applicant makes entries of the concession aspects on Form QAM/24B (Concession application and approval form)
2. Form QAM/24B is then submitted to the process owner for endorsement, review acceptance or rejection of subject of concession request.
3. Form QAM/24B is finally submitted to the Head of quality/Quality assurance manager for review and approval.
4. A concession shall be valid for a maximum duration of 3 months from the time of issue.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.11
Issued	17 Oct 2024	Qualification Procedures for Specialized Activities	Page	37

3.11 QUALIFICATION PROCEDURE FOR SPECIALIZED ACTIVITIES

3.11.1 Safarilink Aviation Repair Specialist Authorization

Safarilink Aviation Repair Authorizations shall be granted upon verification of the written, practical and oral knowledge, experience and competence requirements as dictated in 3.7.1.

3.11.1.1 Scope of Aviation Repair Specialist Authorization.

The Quality department will make applications for individuals deemed able by the workshop manager to hold a repair specialist authorization, for repair works performed in Safarilink workshops.

Safarilink will ensure that all its applicants for an aviation repair specialist authorization are:

- (i) at least twenty-four years of age;
- (ii) demonstrate the ability to read, speak, write, and understand the English language and interpret technical reports and maintenance publications and carry out technical discussions in the English language;
- (iii) be specially qualified to perform maintenance on aircraft or aircraft components appropriate to the job for which the aviation repair specialist is designated (workshop tasks);
- (iv) have at least eighteen months of practical experience in the procedures, practices, inspection methods, materials, tools, machine tools, and equipment generally used in the maintenance duties of the specific job for which the person is designated (workshop tasks); or have completed formal training acceptable to the Authority and specifically designed to qualify the applicant for the repair specialist approval

3.11.1.2 Aviation Repair Specialist Authorization Privileges & limitations.

- i. Safarilink aviation repair specialist authorization holders shall within the rating issued to Safarilink be limited to the specific job for which they are employed to perform, supervise or approve for return to service.
- ii. Safarilink aviation repair specialist authorization holders in respect of airframe, engine, avionics or other systems shall not be issued with an authorization for purposes of circumventing the process of obtaining an aircraft maintenance engineer license (AMEL).
- iii. Safarilink aviation repair specialist authorization holders may perform or supervise the maintenance, preventive maintenance or alteration of aircraft, airframes, engines, propellers, appliances, components and parts appropriate to the designated specialist area for which the aviation repair specialist is authorized and/or rated, provided they remain Safarilink employees.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.11
Issued	17 Oct 2024	Qualification Procedures for Specialized Activities	Page	38

- iv. Safarilink aviation repair specialist authorization holders shall not perform or supervise duties unless the aviation repair specialist understands the current instructions as published by Safarilink and the instructions for continued airworthiness, which relate to the specific task being performed.
- v. Safarilink aviation repair specialist authorization holders shall keep their authorization within their immediate area of work (applicable workshop) and shall present it for inspection upon the request of the Authority or any other person authorized by the Authority.

All Safarilink aviation repair specialist authorization holders must have all their valid records on file always. Thus, said it is the responsibility of the authorization holder to inform the Head of Quality of any new or updated credentials attained.

3.11.1.3 General Aviation Repair Specialist Inspections

I. Certificate of Release to Service: Class 2

▪ Workshop Inspections - W

May be granted to persons who have met the requirements set forth for an Authorization Holder or holders of a KCAA issued Aviation Repair Specialist Approval, with supporting documented Training.

3.11.2 Specialized Contractors

Safarilink shall contract suitably rated outside agencies to carry out specialized activities outside its approved Specific Operating Provisions as required. These facilities will be agencies approved by the KCAA (refer to subcontractor/service level providers file). The Head of Quality shall be responsible for maintaining suitable oversight of these outside agencies to ensure that:

- a. Their ratings are valid.
- b. The quality of the work they perform meets the standard of Safarilink.
- c. Any documentation generated, relating to the work accomplished, is compatible with the processes and procedures of Safarilink.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.12
Issued	17 Oct 2024	O	Page	39

3.12 CONTROL OF MANUFACTURER’S AND OTHER MAINTENANCE WORKING TEAMS.

3.12.1 SOURCE OF WORK

Work arising because of structural failure detected on ground, major repair modifications or special maintenance action out of Safarilink capability shall be contracted to the OEM or relevant approved repair organization.

3.12.2 AUTHORISATION OF PERSONNEL

Safarilink policy is to subcontract work beyond its scope to approved companies and all work carried shall be done in accordance with manufacturer’s manuals and or recommendations. Safarilink will verify the individual’s approvals, as necessary.

3.12.3 SYSTEM CONTROL OF MATERIAL, WORKING INSTRUCTION AND PROCEDURES

All materials used must have part and batch numbers indicated and certificates issued for the same.

All work instructions and procedures shall be carried out in accordance with the manufacturers manuals/recommendations and signed for as required.

3.12.4 CONTROL OF DOCUMENTATION – DRAWINGS, MODIFICATION & REPAIR INSTRUCTION

The maintenance documents to be used shall be provided by Safarilink. The drawings, modifications and repair instructions will be developed and agreed prior to the start of the work. These documentations shall be quoted in the relevant signoffs.

3.12.5 CERTIFICATION OF REPAIR, REPLACEMENT, MODIFICATION, OVERHAUL AND INSPECTION

KCAA approval of the contracted organization shall be sought and the contracted organization shall carry out certification of repair, replacement, modification, overhaul and inspection and there after issue the appropriate CRS.

3.12.6 ENVIRONMENTAL CONDITIONS

Prior to the commencement of the task, Safarilink and the contracted organization shall carry out an audit of the facility where the task shall be performed before the task is started. This is to ensure that the work performed is carried out under the recommended environmental conditions.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.12
Issued	17 Oct 2024	O	Page	40

3.12.7 FINAL CERTIFICATION BY THE COMPANY.

The contracted organization shall carry out the task under the approval of the contracting organization and shall sign all the maintenance laid down in the contract upon satisfactory completion of the work package as laid down in the contract which will form the information as part, to release the aircraft.

Safarilink authorized Engineer/s shall sign the final CRS.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.13
Issued	17 Oct 2024	Missing Tool Policy	Page	41

3.13 MISSING TOOL POLICY.

Missing tools must be reported to Head of Quality without delay. Form QAM/28 must be completed.

Where aircraft maintenance was carried out, the aircraft must not be released until a thorough inspection of the area worked on is conducted. This is to ensure no tools were left in mentioned areas, as this could result in a serious incident or aircraft system failure.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.13
Issued	17 Oct 2024	Missing Tool Policy	Page	42

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.14
Issued	17 Oct 2024	Hangar Incidents/Occurrences	Page	43

3.14 HANGAR INCIDENTS / OCCURRENCES.

All hangar/workshop Accidents / Incidents and unusual Occurrences which may affect safe operation of personnel, aircraft, engine, propeller, component or equipment must be reported to Head of Safety /Safety officer.

SMSPro shall be used for this reporting. This will ensure occurrences are properly investigated and effective preventative measures are implemented

The Head of Safety /Safety officer and Head of Quality must ensure all such Accidents / Incidents and unusual Occurrences are documented and registered in an Accident / Incident and Occurrences Report and Register and posted on company SMSPro.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.14
Issued	17 Oct 2024	Hangar Incidents/Occurrences	Page	44

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.15
Issued	17 Oct 2024	Quality Work Instructions	Page	45

3.15 QUALITY WORK INSTRUCTIONS.

Quality Work Instructions (QWI), shall be generated by, Head of Base Maintenance /Head of Quality, Head of Workshop and Head of Line Maintenance

These notices are used to disseminate information to technical staff about creating a safe and reliable Maintenance Organization.

When a QWI has been generated, all pertinent information is denoted on the notice. Any supporting documentation, i.e., Service Bulletins etc. shall be attached to the notice. QWI is then routed through the Maintenance Department for their perusal and confirmatory signatures.

The Head of Base/Line Maintenance must ensure all staff under his/her control read and sign QWI. Completed signature sheet shall be returned to Head of Base Maintenance /Head of Quality, thereby ensuring all staff have read and understood the QWI.

Notices normally cover the following areas, but not limited:

- a) Any unacceptable maintenance practices noticed during audits
- b) Fleet inspections – when a problem is identified on an aircraft that could influence the reliability of the rest of the fleet. Mentioned inspections is scheduled via Maintenance Planning
- c) Reminder of incidents, and causes thereof
- d) Industry news which is pertinent to Maintenance
- e) Audit Report Results
- f) Change to company Procedures
- g) Temporary Revisions
- h) Service Bulletins
- i) Service Letters

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.15
Issued	17 Oct 2024	Quality Work Instructions	Page	46

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.16
Issued	17 Oct 2024	One-off Certification Approval	Page	47

3.16 ONE-OFF CERTIFICATION APPROVAL.

Refer to MPM 2.16.5

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.16
Issued	17 Oct 2024	One-off Certification Approval	Page	48

THIS PAGE IS INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.17
Issued	17 Oct 2024	Control and disposal of Contaminated Fluids	Page	49

3.17 CONTROL AND DISPOSAL OF CONTAMINATED FLUIDS.

Safarilink will only use approved contractors for disposal of these fluids. Under no circumstances will fluids be intermixed. The Contractor is contacted on Ad-hoc basis when containers are full and requires to be emptied. The Contractor must supply a “disposal certificate” on each occasion when containers are emptied. Further details refer to the Waste Management Regulations and Safarilink Health Safety and Environmental Manual.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.17
Issued	17 Oct 2024	Control and disposal of Contaminated Fluids	Page	50

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.18
Issued	17 Oct 2024	Drug and Alcohol Testing and Reporting	Page	51

3.18 DRUG AND ALCOHOL TESTING AND REPORTING.

Any Safarilink staff who perform any function requiring an authorization may be tested for drug or alcohol usage. Through the company's contracted facility, the Company will carry out adhoc tests to ensure that all personnel who perform any function requiring an authorization are not doing so under the influence of alcohol, drugs or any other psychoactive substances. In case of any occurrence of an authorized person being found to have been working under the influence of the stated substances, the company will institute disciplinary action in accordance with the company's rules and regulations.

KCAA can test any authorized person for drug and alcohol if they wish to, provided they are accompanied by appropriate company safety personnel. Where KCAA or any person authorized by KCAA wishes to test a Safarilink certification staff for the percentage by weight of alcohol in the blood, or for the presence of narcotic drugs, marijuana, or depressant or stimulant drugs or substances in the body, and that staff-

- i. refuses to submit to the test; or
- ii. having submitted to the test, refuses to authorize the release of the test results, the Authority may suspend or revoke the certificate or authorization issued by the Authority.
- iii. In determining whether to suspend or revoke the authorization of Safarilink the Authority shall consider all relevant factors, including-
- iv. whether Safarilink had knowledge of the drug or alcohol use;
- v. whether Safarilink encouraged the person to refuse the drug or alcohol test;
- vi. whether Safarilink dismissed the person who failed or refused the drug tests; or
- vii. the position that person held within the company.

The Authority may suspend or revoke the certificate or authorization of Safarilink if the company refuses to dismiss from its employment a person convicted as above. The Authority shall require Safarilink to show cause why that certifying staff should not be dismissed from the employment of Safarilink. A member of certifying staff who is convicted, whether in or outside Kenya, for any offence relating to the growing, processing, manufacture, sale, disposition, possession, transportation, or importation of narcotic drugs, marijuana, or depressant or stimulant drugs or substances, shall be dismissed from the employment of Safarilink.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.18
Issued	17 Oct 2024	Drug and Alcohol Testing and Reporting	Page	52

PAGE INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	53

3.19 COMPETENCE ASSESSMENT OF PERSONNEL

3.19.1 Additional Manpower

- **Technical Records - Planning officer**

The Maintenance Planner shall report to the Head of Base Maintenance

Qualification

1. High School graduate
2. Certificate or diploma in aeronautical engineering
3. Be a holder of a Maintenance planning course/certificate
4. Computer literate
5. Excellent written and oral communication skills

Duties and Responsibilities are as follows:

1. Planning the control and implementation of Work Packages, Maintenance Schedules, Airworthiness Directives, Service Bulletins, Special inspections and Routine Maintenance
2. Capture all Maintenance Transactions on the Tracking system
3. Remain conversant with the requirements of Maintenance Procedures Manual, KCAR's and Airworthiness Notices.
4. Carryout timely Maintenance Forecasting
5. Control of component movement on aircrafts
6. Control Maintenance Scheduling
7. Control all KCAA requirements with regards to C of A renewals
8. Maintain/Update Technical Library and Technical Data Holding List
9. Any other reasonable tasks allocated to by the Head of Base Maintenance.
10. Shall follow the Safety and Security policies and programs established by Safarilink.

Delegation of Duties and Responsibilities.

When the Planning officer is unable to perform his / her duties, for whatever reason, the responsibilities, duties and authority, of the Planning officer, will be performed by, the Technical Records officer.

- **Technical Records Officer**

The Technical Records officer shall report to the Head of Base Maintenance.

Qualification;

1. High School graduate
2. Certificate or diploma in aeronautical engineering
3. Be a holder of a Maintenance planning course/certificate
4. Computer literate
5. Excellent written and oral communication skills

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	54

Duties and Responsibilities are as follows:

1. Maintenance development of Work Packages, Airworthiness Directives, Service Bulletins, Special inspections and Routine Maintenance tasks
2. Capture all Maintenance Transactions on the Tracking system
3. Remain conversant with the requirements of Maintenance Procedures Manual, KCAR's and Airworthiness Notices.
4. Control flow of all work packs within the Maintenance Department
5. Control of component movement on and off aircrafts
6. Control all KCAA requirements with regards to C of A renewals
7. Ensure aircraft/propeller/engine logbooks are completed on a daily basis and ensure entries are certified by appropriately rated engineers where necessary.
8. Control filing of aircraft documents in archives
9. Control all general defects and trend/reliability data capturing
10. Shall follow the Safety and Security policies and programs established by Safarilink.

Delegation of Duties and Responsibilities.

When the Technical Records officer is unable to perform his / her duties, for whatever reason, the responsibilities, duties and authority, of the Technical Records officer, will be performed by, the Planning officer.

- **Stores and Procurement officer**

The stores and procurement officer reports to the Head of Base Maintenance.

Responsibilities:

1. Procuring Aircraft materials, other materials & services from Local & International suppliers
2. Request for quotation, placing orders, invoice controlling, supplier management & closing purchasing orders.
3. Purchase and expedite spares and components from approved suppliers to meet customer's turnaround time
4. Execute & vet contracts and service agreements between suppliers and Safarilink
5. Negotiate in pricing for all purchase orders and contracts
6. Review key supplier performance as a continuous check to ensure quality from suppliers
7. Carry out cost savings and process improvement initiatives
8. Liaise with suppliers on discrepancies
9. Update supplier delivery status
10. Continually source for competitive vendors to reduce cost and delivery lead time
11. Maintain approved vendor listing
12. Responsible for purchasing of indirect materials

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	55

13. Prepare documents for cargo clearance
14. Ensuring purchasing functions and activities are performed in accordance with company specifications, procedures and policies
15. Work closely with logistic employees and other departments of the organization
16. Shall follow the Safety and Security policies and programs established by Safarilink.

Qualifications

1. High school graduate
2. Certificate or Diploma in Aviation/Supply Chain/Logistics/Business administration
3. At least 3 years of experience in purchasing within the Aviation Industry
4. Preferably possess some technical knowledge related to Aviation Industry
5. Excellent organizational skills, project management skills and ability to multi-task
6. Strong analytical skills with excellent attention to detail
7. Possess proficient computer skills
8. Strong negotiation skills
9. Team player

Delegation of Duties and Responsibilities.

When the stores and procurement officer is unable to perform his / her duties, for whatever reason, the responsibilities, duties and authority, of the procurement officer, will be performed by, the stores clerk.

- **Stores clerk**

The stores clerk reports to the stores and procurement officer.

Responsibilities:

1. To ensure inventory control including security of parts.
2. To prepare monthly reports on parts used per aircraft.
3. To initiate purchase requests.
4. To raise repair orders for parts going to approved repair facilities.
5. To carry out initial inspection of all parts received for transit damage and for proper documentation.
6. To maintain an accurate record of documents relating to stock received.
7. To check whether the appropriate documents contain any note or limitations (such as modification standards, life limitation for re-inspection, lubrication or retirement from service).
8. To maintain the Bonded and Quarantine Stores in a clean and orderly state.
9. To ensure that all parts placed in the Bonded Stores do not in any way deteriorate and that they are easily identifiable.
10. To maintain satisfactory climatic conditions (temperature and humidity) in the Bonded Stores.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	56

11. To report to the Head of Base/Line maintenance any unsatisfactory storage conditions of parts or deterioration of any parts held in stock.
12. To maintain an accurate shelf-life record of components.
13. To ensure security of the Quarantine Stores.
14. Identify and reduce non-moving stock
15. Review provision stock/materials and monitor inventory level
16. Record purchases and sales in the inventory system
17. Shall follow the Safety and Security policies and programs established by Safarilink.

Qualifications

1. High School Graduate
2. Hold a Certificate or Diploma in Aviation/Supply Chain/Logistics/Business administration
3. Computer literate
4. Excellent written and oral communication skills
5. At least two years' experience in an aircraft technical stores or Maintenance spares parts facility.
6. Must be a person of integrity, a team player and have effective communication skills.

Delegation of Duties and Responsibilities.

When the Stores clerk is unable to perform his / her duties, for whatever reason, the responsibilities, duties and authority, of the Stores clerk, will be performed by, the stores and procurement officer.

• Crew Chief/Check Supervisor

Shall be a certifying engineer designated by the Head of Base Maintenance to oversee the actual daily running and completion of a particular/selected Scheduled Aircraft Maintenance/Checks.

Responsibilities:

1. Shall liaise with the Head of Base Maintenance to ensure that adequate manpower is available during the Check
2. Shall liaise with the Head of Base Maintenance to ensure that the required spare is available/ordered on time to ensure timely completion of the check.
3. May authorize approval of parts drawn from stores, that are to be used during the check and return any surplus of the same to stores.
4. Shall liaise with the Head of Base Maintenance to ensure that the assigned work package is appropriately signed and check for completion before its submission to Maintenance planning.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	57

5. Shall liaise with the Head of Base Maintenance to ensure that all personnel performing maintenance are in compliance with the set Duty time and Rest Limitations.
6. Shall follow the Safety and Security policies and programs established by Safarilink.

Qualifications

The Crew chief shall primarily be a Certifying Staff appointed by the Head of Base Maintenance based on their on-job performance and effectiveness.

- **Document Control Officer**

The Document control Officer is tasked to ensure that all document control functions in the QMS implementation and operation of the organization's quality management system (QMS) are adequately performed. The Document Control Officer reports directly to the Head of Quality.

Responsibilities of Document Control Officer

1. Ensuring that all data received from third party suppliers e.g., manual subscriptions (Bombardier and Textron manuals) or equivalent systems, etc., is acted upon as necessary in a timely manner and circulated as required.
2. Assisting in buildup of personnel files and maintaining the records on files.
3. Updating manuals and associated revision records as appropriate.
4. Being responsible for archiving hard copy records and data the back up of electronic data and records in accordance with KCAA regulations and/or company practices.
5. Assisting the Head of Quality in carrying out both internal and external audits and ensuring all aspects of the documents by Safarilink meet the requirements of KCAA and other external auditors.
6. Carrying out any other tasks as may be reasonably requested by Head of Quality or Accountable Manager.
7. Ensuring shared network drives are up to date with current documents.
8. Distribution of compliance manuals.

Minimum qualification of Document Control Officer.

1. Proven exposure to Quality Assurance.
2. QMS course or equivalent qualification.
3. Technical experience.
4. Computer Skills.
5. Knowledge of KCAR's
6. Through familiarity with the aeronautical rules and regulations.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	58

- **Aircraft Groomer's**

Grooming staff are under the direct control of the Head of Base or Head of Line Maintenance and their primary duties are:

1. Ensure aircraft are cleaned, both internally and externally
2. Only use approved cleaning agents to clean aircraft interior and exterior
3. Ensure hangar area is always clean
4. Ensure maintenance equipment and vehicles are kept clean at all times
5. Ensure offices tearoom and ablution blocks are cleaned daily
6. Ensure all equipment and consume-able items used are stored at the end of the shift
7. Any other tasks reasonable allocated to them by the Head of Base or Head of Line Maintenance
8. Shall follow the Safety and Security policies and programs established by Safarilink.

3.19.2 Personnel to be assessed

The competence of personnel of an approved maintenance organization involved in maintenance shall be established in accordance with a procedure and to a standard acceptable to the Authority.

The referenced procedure requires amongst others that planners and technicians are assessed for competence by 'on the job' evaluation and/or by examination relevant to their job role within the organization before unsupervised work is permitted. A record of the qualification and competence assessment shall be kept. Basically, the assessment shall establish that:

- a. Planners can interpret maintenance requirements into maintenance tasks and have an appreciation that they have no authority to deviate from the aircraft maintenance program.
- b. New employees can demonstrate knowledge of appropriate maintenance organization procedures relevant to their roles.

3.19.3 Assessment procedures – training, qualifications, supervision, assessors

Planners, supervisors, and certifying staff are assessed to ensure that they demonstrate knowledge of Safarilink procedures as an AMO relevant to their particular role. The Head of Base Maintenance evaluates planners on their duties through yearly appraisals and organizes for courses to ensure that they interpret maintenance requirements into maintenance tasks and have an appreciation that they have no authority to deviate from the aircraft maintenance program.

The Certification Authorization two-yearly renewal process is the company's primary means of establishing and controlling the on-going competence of certifying staff, as required by Civil Aviation Authority.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	59

For other staff engaged in maintenance-related duties, an evaluation will be made at the same intervals. Since this period coincides with the frequency of continuation training, the two subjects are joined to provide a combined focus for action.

The Manager making the renewal recommendation fulfils the role of ‘Assessor’, to determine the individual’s continuing competence. Competence also includes the person’s compliance with his/her Duties and Responsibilities.

Responsible Managers, Lead Engineers etc., in association with the Head of Quality (responsible for re-issue of Certification Authorization), utilize the following information as the basis for their assessments: -

- The scope of a current Maintenance Engineer’s License, (if relevant)
- Evidence of training in respect of aircraft type, system or function etc., which forms part of the person’s duties and responsibilities (See Engineering Training Procedures),
- Evidence of Continuation Training, (See Engineering Training Procedures),
- Maintenance Experience Records - Individual records of maintenance tasks that have been accomplished under supervision, and subsequently without direct supervision (in addition to those tasks which are carried out under supervision, it is only necessary to record tasks on a sufficient number of occasions to demonstrate currency with the task/type.
- The results of evaluation of the individual’s performance.

Note 1. Evaluations may also occur in an informal fashion, as the need arises throughout the period between reviews, but should be reiterated at the two-yearly stage.

Note 2. Evaluation is a two-way process and it is particularly important that the process should provide an avenue for the individual to make known to his/her Manager any areas of his/her duties in which it is felt that additional training or experience are required. The individual must also be accorded the opportunity to voice any misgivings or problems experienced with their duties and responsibilities, or their working practices.

Note 3. The evaluation is aimed solely at establishing competence from the point of view of Civil Aviation Authority. It asks, in effect, “is the person concerned fully able to perform the maintenance-related duties allocated to them and, if not,

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	60

what can be done to ensure that said person becomes fully effective”. Typical outcomes could include additional training, targeted further experience, job restructuring or re-deployment.

3.19.4 Management competence assessment

Competence is established by means of relevant qualifications and experience, together with a regular managerial assessment of the abilities of the individual and continuation training. Assessment may comprise an examination, or the results of a relevant training course, or on-the-job evaluation. Each job is provided with a specific or general job description.

Management competence assessment is performed annually by the Accountable Manager.

3.19.5 Assessment records

The assessment records of each authorized person (in the form of the initial issue of Certification authorization records, and the two-yearly Renewal records) are kept for at least two years after the certifying person has ceased employment with Safarilink, or withdrawal of the authorization, whichever is the sooner.

Persons authorized to access the system are maintained at a minimum to ensure that records cannot be altered in an unauthorized manner or that such confidential records become accessible to unauthorized persons.

Issue No.	3	SAFARILINK	Part	3
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	3.19
Issued	17 Oct 2024	Competence Assessment of Personnel	Page	61

PAGE INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	4
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.1
Issued	17 oct 2024	Contracted Air Operators	Page	1

PART 4: DOCUMENTATION.

4.1 CONTRACTED AIR OPERATORS

Safarilink (AMO) presently has been contracted by Safarilink (AOC) which operates scheduled domestic and regional services from Nairobi – Wilson airport.

Safarilink (AMO) is responsible for all the maintenance of the Aircraft/Engines operated by the Safarilink (AOC). The current fleet of aircraft in operation with the airline are:

1. Dash 8-300 series
2. Dash 8-200 series
3. Dash 8-100 series
4. Textron/Cessna 208 series

Issue No.	3	SAFARILINK	Part	4
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.1
Issued	17 oct 2024	Contracted Air Operators	Page	2

THIS PAGE IS INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	4
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.2
Issued	17 Oct 2024	Air Operator Procedures and Paperwork	Page	3

4.2 AIR OPERATOR PROCEDURES AND PAPERWORK

4.2.1 MAINTENANCE PLANNING AND CONTROL

- a) Scheduled Maintenance is coordinated between the Head of Base Maintenance. and the Technical planning section of the operator.
- b) Scheduled inspections are closely monitored by both parties, and when a maintenance check is imminent a mutually convenient date for the input is arranged between both parties taking into consideration hangar availability and operational commitments.

4.2.2 SERVICES PROVIDED BY SAFARILINK

Safarilink will issue a Certificate of Release to Service (CRS) following all maintenance.

The CRS will form part of the Maintenance Statement made by Safarilink to record the maintenance which has been completed and will include the date/hours/cycles as appropriate of the next scheduled maintenance input, together with any tasks which are required to be carried out during the intervening period.

Unless already included in the aircraft's log books (aircraft, engine & APU) or by completion of the Technical Log Sector Record Page for the previous flight, or by the provision of the Maintenance Statement, Safarilink will communicate the following information to the operator: -

- A Certificate of Release to Service,
- A Flight Test Report (if appropriate),
- A list of modifications embodied (if any have been accomplished),
- A list of repairs (if any have been accomplished),
- A list of Airworthiness Directives which have been accomplished (if any), and
- A general summary of the maintenance which has been accomplished (Maintenance Visit Report)

Safarilink will ensure that all 'out-of-phase' tasks and defects reported by the operator are rectified and certified or are deferred in accordance with the provisions of the operator's Minimum Equipment List for the subject aircraft, and the operator's approved method of use of the Technical Log.

Issue No.	3	SAFARILINK	Part	4
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.2
Issued	17 Oct 2024	Air Operator Procedures and Paperwork	Page	4

4.2.3 OPERATORLIAISON.

It is the responsibility of the Head of Quality to ensure that regular review is made of the maintenance agreement, maintenance schedule(s), maintenance findings (including defect assessment, reliability reporting and modification status) and operational findings. He/She, through the Head of Base Maintenance., will assess all relevant information and where necessary amend working / operational practices, aircraft maintenance schedules with the express purpose of continually improving the standard of maintenance of the aircraft under Safarilink control.

4.2.4 MAINTENANCE AGREEMENT

If maintenance is carried out by any other approved organization other than Safarilink the scope of work undertaken on behalf of the Operator will be outlined in an agreement signed by both parties. The scope of work will complement the operator's maintenance procedures manual as required to ensure the safe operation of airworthy aircraft. Prior to the commencement of any work there must be a signed agreement with the contractor that specifies among other things the needed maintenance requirements and the tasks to be performed, service level agreements etc.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.3
Issued	17 Oct 2024	Air Operator Record Completion	Page	5

4.3 AIR OPERATOR RECORD COMPLETION

- 4.3.1** Records completion and retention will be undertaken as required by the terms of the agreements drawn up between Safarilink and the individual Operators it is contracted to support.
- 4.3.2** Where contracted to do so, Safarilink will maintain the Operator's Maintenance Logbooks, aircraft records and Technical Logs in an accurate and up to date condition, in accordance with this MPM and the operator's Maintenance Control Manual.
- 4.3.3** Quality control of the operators' aircraft logs shall be the joint responsibility of the Operator and the Maintenance Organization. Each must ensure that their staff are adequately trained in the use and completion of the documentation.
- 4.3.4** Any corrections required are to be carried out clearly and shall be made to all copies of the subject sheets.

Changes made by an operator to the format of any of their documentation must be notified to the Head of Base Maintenance of this organization prior to being put into use allowing enough time for staff retraining/familiarization as required to ensure correct completion.

Issue No.	3	SAFARILINK	Part	2
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	4.3
Issued	17 Oct 2024	Air Operator Record Completion	Page	6

THIS PAGE IS INTENTIONALLY LEFT BLANK

Issue No.	3	SAFARILINK	Part	5
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	5.1
Issued	17 oct 2024	Appendices	Page	1

PART 5: APPENDICES.

5.1 Sample Documents and Forms

Description:

Maintenance Records are documents (in paper or in a computer based system) necessary to prove that all requirements have been met for the issuance of release to service certificate of aircraft or component at line and base maintenance.

These records contain information in controlling unscheduled and scheduled maintenance, basic details of maintenance carried out, sub-contractors' release documents, and in general any evidence to justify the work performed.

Company forms shall be controlled and revised by the Head of Base Maintenance in liaison with the Head of Quality. Current forms shall be availed to Technical Records Department through the company's "Main Server Network Drive".

For sample forms;

Ref to File: SL/FORMS/001

Issue No.	3	SAFARILINK	Part	5
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	5.1
Issued	17 oct 2024	Appendices	Page	2

THIS PAGE IS INTENTIONALLY LEFT BLANK

5.2 LIST OF SUBCONTRACTORS.

	Name	Scope
1.	Standard Aero Atlantic Inc P.O. Box 150 Hangar No.8, Slemon Park Summerside P.E.I Canada CIN 4P6 (K/AMO/F/10)	Engine repair RGB/PS Repair Modification Testing Hot section inspection Engine overhaul services Borescope Inspection
2.	Dathon Ace Limited P.O. Box 47720-00606 Nairobi (K/AMO/L/046)	Propeller repair Propeller overhaul Propeller balancing Line maintenance support Starter generator repair and support
3.	Hawk Aviation P.O. Box 3616-00506 Nairobi, Kenya (K/AMO/L/043)	Cessna 208 Base/Line Support Hangarage, Tools, Equipment's & Workshops, Weighing
4.	Aircare Avionics Communications ltd P.O. Box 27795-00506 Nairobi (K/AMO/L/028)	Category "R" Modifications, Scheduled and Unscheduled inspections, Repairs and Certification
5.	NDT Support Services P.O. Box 53144 Nairobi (K/AMO/L/066)	Fluorescent dye penetrant Magnetic particle Eddy current Ultrasonic
6.	Avionicare (EA) ltd P.O. Box 46858- 00100 Nairobi (K/AMO/L/014)	Maintenance Repair/overhaul and certification of Avionic systems Cat "X" & "R"
7.	Flightline Training Services P.O. Box 5344-00506 Nairobi	Aircraft Specialized Type Training
8.	Avioteq Precision Ltd P.O Box 3509-00506 Nairobi (KENAS/CL/32)	Calibration of Tools and Equipment
9.	Black Box Flight Data Systems P.O Box 47720-00100 Nairobi (K/AMO/L/059)	Specialized Maintenance Equipment. / Cat "R" FDR & CVR,

10	Aero Instruments Services Ltd P.o Box 48693-00100 Nairobi Kenya	Propeller repair Propeller overhaul Propeller balancing Line maintenance support Starter generator repair and support
11	Tailwind Solutions Ltd P.O Box 45472-00100 Naiobi Kenya (K/AMO/L/079)	Fluorescent dye penetrant Magnetic particle Eddy current Ultrasonic
12	Instrumentation Limited P.O Box 44356-00100 Nairobi Kenya (KENAS/CL/33)	Calibration of Tools and Equipment
13	George Mulinge Kyove P.O B0x 51694-00200 Nairobi	Ground Equipment Inspection Service provider
14	Caroline Wairimu Mutitu P.O Box 100870 Nairobi, Kenya	Waste Disposal
15	Avior Tech Services Limited P.O Box 6845-00100 Nairobi	Ground Handling Services.

Issue No.	3	SAFARILINK	Part	5
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	5.2
Issued	17 oct 2024	Appendices	Page	5

THIS PAGE IS INTENTIONALLY LEFT BLANK.

Issue No.	3	SAFARILINK	Part	5
Revision No.	0	MAINTENANCE PROCEDURES MANUAL	Section	5.3
Issued	17 oct 2024	Appendices	Page	5

5.3 LIST OF LINE STATIONS.

Safarilink currently only carries out maintenance at its main base, Wilson Airport, Nairobi and does not operate any Line Maintenance Stations.