

PostgreSQL Internals Through Pictures

BRUCE MOMJIAN



POSTGRESQL is an open-source, full-featured relational database. This presentation gives an overview of how POSTGRESQL processes queries.

<https://momjian.us/presentations>

Creative Commons Attribution License



Last updated: November, 2020

SQL Query

```
SELECT firstname  
FROM friend  
WHERE age = 33;
```

Query in Psql

```
test=> SELECT firstname  
test-> FROM friend  
test-> WHERE age = 33;  
      firstname
```

Sandy
(1 row)

Query Processing

```
test=> SELECT firstname  
test-> FROM friend  
test-> WHERE age = 33;
```

```
[ query is processed ]
```

```
      firstname
```

```
-----
```

```
Sandy
```


```
(1 row)
```

Query in Libpq

```
test=> SELECT firstname  
test-> FROM friend  
test-> WHERE age = 33;
```

```
Breakpoint 1, PQexec (conn=0x807a000,  
  query=0x8081200 "SELECT firstname\nFROM friend\nWHERE age = 33;")  
  at fe-exec.c:1195
```

Libpq

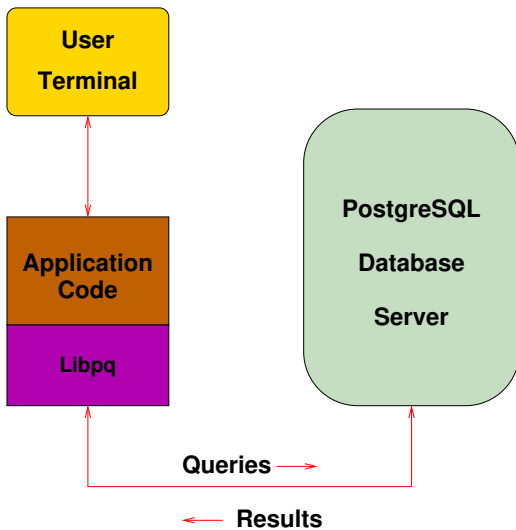

TCP/IP Packet

```
17:05:22.715714 family.home.49165 > candle.navpoint.com.5432: P 354:400(46)
ack 61 win 8760 <nop,nop,timestamp 137847 7276138> (DF)
```

0000:	00	d0	b7	b9	b6	c8	00	02	b3	04	09	dd	08	00	45	00	_____	_____E_
0010:	00	62	45	31	40	00	40	06	b1	fe	ac	14	00	02	a2	21	_bE1@_@_	_____!
0020:	f5	2e	c0	0d	15	38	1c	af	94	34	a8	1a	1e	39	80	18	_._____8_	_4____9_
0030:	22	38	19	d5	00	00	01	01	08	0a	00	02	1a	77	00	6f	"8_____	_____w_o
0040:	06	6a	51	53	45	4c	45	43	54	20	66	69	72	73	74	6e	_jQSELEC	T firstn
0050:	61	6d	65	0a	46	52	4f	4d	20	66	72	69	65	6e	64	0a	ame_FROM	friend_
0060:	57	48	45	52	45	20	61	67	65	20	3d	20	33	33	3b	00	WHERE ag	e = 33;_

Query Sent

Result Received

```
FindExec: found "/var/local/postgres/./bin/postgres" using argv[0]
DEBUG: connection: host=[local] user=postgres database=test
DEBUG: InitPostgres
DEBUG: StartTransactionCommand
DEBUG: query: SELECT firstname
           FROM friend
           WHERE age = 33;

[ query is processed ]

DEBUG: ProcessQuery
DEBUG: CommitTransactionCommand
DEBUG: proc_exit(0)
DEBUG: shmexit(0)
DEBUG: exit(0)
```


Query Processing


```
FindExec: found "/var/local/postgres/./bin/postmaster" using argv[0]
./bin/postmaster: BackedUpStartup: pid 3320 user postgres db test socket 5
./bin/postmaster child(3321): starting with postgres -dSP -F -dSP -v11072 -p test )
FindExec: found "/var/local/postgres/./bin/postgres" using argv[0]
DEBUG: connection: host=local user=postgres database=test
DEBUG: InitPostgres
DEBUG: StartTransactionCommand
DEBUG: query: SELECT first_name
FROM friend
WHERE age = 33;
DEBUG: parse tree: { QUERY :command 1 :utility <> :resultRelation 0 :into <> :isPortal false :isBinary false :isTemp false :hasAgg
n false :hasSublinks false :itable { RTE :relname friend :relid 26912 :subquery <> :alias <> :eref { ATTR :relname friend :attrs {
"first_name" :last_name" :city" :state" :age" }} :inh true :inFromCl true :checkForRead true :checkForWrite false :checkAsUser
r 0) :joinTree { FROMEXPR :fromlist { ( RANGELEAF 1 ) } :quals { EXPR :typeOld 16 :opType op :oper { OPER :opno 96 :opid 0 :opresu
lType 14 } :args { ( VAR :varno 1 :varattno 3 :vartype 23 :vartypmod -1 :varlevelsup 0 :varnoold 1 :varattno 3 ) } :CONST :consttype
23 :constlen 4 :constbyval true :constisnull false :constvalue 4 [ 33 0 0 0 ] }}} :rowMarks { } :targetList { ( TARGETENTRY :resdom
4 :RESDOM :resno 1 :resType 1042 :resTypmod 19 :resname first_name :reskey 0 :reskeyop 0 :resortgroupref 0 :resjunk false ) :expr { ( VAR :varno 1
:varattno 1 :vartype 1042 :vartypmod 19 :varlevelsup 0 :varnoold 1 :varattno 1 ))) :groupClause <> :havingQual <> :disj
unctClause <> :sortClause <> :limitOffset <> :limitCount <> :setOperations <> :resultRelations { } }
DEBUG: rewritten parse tree:
DEBUG: { QUERY :command 1 :utility <> :resultRelation 0 :into <> :isPortal false :isBinary false :isTemp false :hasAggs false :has
Sublinks false :itable { RTE :relname friend :relid 26912 :subquery <> :alias <> :eref { ATTR :relname friend :attrs {
"last_name" :city" :state" :age" }} :inh true :inFromCl true :checkForRead true :checkForWrite false :checkAsUser 0) :join
tree { FROMEXPR :fromlist { ( RANGELEAF 1 ) } :quals { EXPR :typeOld 16 :opType op :oper { OPER :opno 96 :opid 0 :opresu
lType 14 } :args { ( VAR :varno 1 :varattno 3 :vartype 23 :vartypmod -1 :varlevelsup 0 :varnoold 1 :varattno 3 ) } :CONST :consttype 23 :constle
n 4 :constbyval true :constisnull false :constvalue 4 [ 33 0 0 0 ] }}} :rowMarks { } :targetList { ( TARGETENTRY :resdom 4 :RESDOM :r
esno 1 :resType 1042 :resTypmod 19 :resname first_name :reskey 0 :reskeyop 0 :resortgroupref 0 :resjunk false ) :expr { ( VAR :varno 1
:varattno 1 :vartype 1042 :vartypmod 19 :varlevelsup 0 :varnoold 1 :varattno 1 ))) :groupClause <> :havingQual <> :disjunctClause
<> :sortClause <> :limitOffset <> :limitCount <> :setOperations <> :resultRelations { } }
DEBUG: plan: { SEQSCAN :startup_cost 0.00 :total_cost 22.50 :rows 10 :width 12 :optargetlist { ( TARGETENTRY :resdom 4 :RESDOM :resno
1 :resType 1042 :resTypmod 19 :resname first_name :reskey 0 :reskeyop 0 :resortgroupref 0 :resjunk false ) :expr { ( VAR :varno 1 :va
rattno 1 :vartype 1042 :vartypmod 19 :varlevelsup 0 :varnoold 1 :varattno 1 ))) :optqual { ( EXPR :typeOld 14 :opType op :oper { OPER
96 :opid 40 :opresulType 14 } :args { ( VAR :varno 1 :varattno 3 :vartype 23 :vartypmod -1 :varlevelsup 0 :varnoold 1 :var
attno 3 ) } :CONST :consttype 23 :constlen 4 :constbyval true :constisnull false :constvalue 4 [ 33 0 0 0 ] }}} :lefttree <> :right
tree <> :setplan 0 :loopleft 1 :initplan <> :nprn 0 :scanrelid 1 }
DEBUG: CommitQuery
DEBUG: CommitTransactionCommand
DEBUG: proc_exit(0)
DEBUG: show_exit(0)
DEBUG: exit(0)
./bin/postmaster: reaping dead processes...
./bin/postmaster: CleanupProc: pid 3320 exited with status 0
```

Query Processing


Pretty Output

```
FindExec: found "/var/local/postgres/./bin/postgres" using argv[0]
DEBUG: connection: host=[local] user=postgres database=test
DEBUG: InitPostgres
DEBUG: StartTransactionCommand
DEBUG: query: SELECT firstname
              FROM friend
              WHERE age = 33;
DEBUG: parse tree:
( QUERY
  ( :command 1
    :utility <>
    :resultRelation 0
    :into <>
    :isPortal false
    :isBinary false
    :isTemp false
    :hasAggs false
    :hasSubLinks false
    :rtable (
      ( RTE
        :relname friend
        :relid 26912
        :subquery <>
        :alias <>
        :eref
          ( ATTR
            :relname friend
            :attrs ( "firstname" "lastname" "city" "state" "age" )
          )
        :inh true
        :inFromCl true
        :checkForRead true
        :checkForWrite false
        :checkAsUser 0
      )
    )
  )
)
```

Backend Flowchart

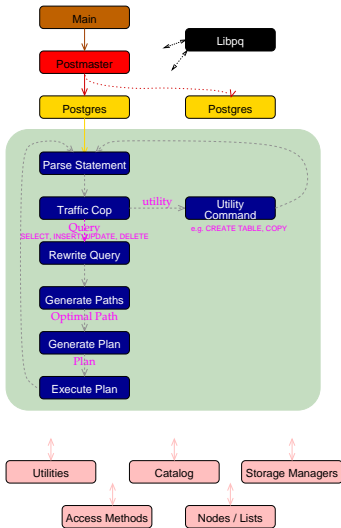

Backend Flowchart — Magnified

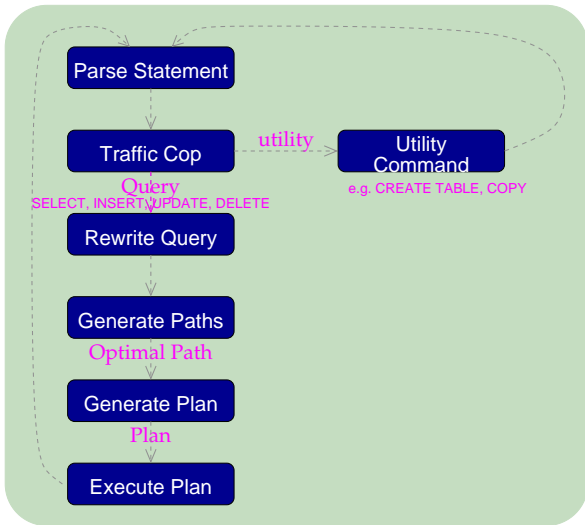

Scanner Identifier Rule

```
identifier      {letter}{letter_or_digit}*
{identifier}    {
    int i;
    ScanKeyword *keyword;

    for(i = 0; yytext[i]; i++)
        if (isupper((unsigned char) yytext[i]))
            yytext[i] = tolower((unsigned char) yytext[i]);
    if (i >= NAMEDATALEN)
    {
        elog(NOTICE, "identifier \"%s\" will be truncated to \"%s.%s\"",
            yytext, NAMEDATALEN-1, yytext);
        yytext[NAMEDATALEN-1] = '\0';
    }
    keyword = ScanKeywordLookup((char*)yytext);
    if (keyword != NULL) {
        return keyword->value;
    }
    else
    {
        yyval.str = pstrdup((char*)yytext);
        return IDENT;
    }
}
```

Scanner Numeric Rules

```
digit          [0-9]
letter         [\200-\377_A-Za-z]
letter_or_digit [\200-\377_A-Za-z0-9]

integer        (digit)+
decimal        (((digit)*\.(digit)+) | ((digit)+\.(digit)*))
real           (((digit)*\.(digit)+) | ((digit)+\.(digit)*) | ((digit)+) ([Ee][-+]? (digit)+))

{integer}      {
    char* endptr;

    errno = 0;
    yylval.ival = strtol((char *)yytext, &endptr, 10);
    if (*endptr != '\0' || errno == ERANGE)
    {
        yylval.str = strdup((char *)yytext);
        return FCONST;
    }
    return ICONST;
}

{decimal}      {
    yylval.str = strdup((char *)yytext);
    return FCONST;
}

{real}         {
    yylval.str = strdup((char *)yytext);
    return FCONST;
}
```

Scanner Output

```
--accepting rule at line 476 ("SELECT")
--accepting rule at line 254 (" ")
--accepting rule at line 476 ("firstname")
--accepting rule at line 254 ("\n")
--accepting rule at line 476 ("FROM")
--accepting rule at line 254 (" ")
--accepting rule at line 476 ("friend")
--accepting rule at line 254 ("\n")
--accepting rule at line 476 ("WHERE")
--accepting rule at line 254 (" ")
--accepting rule at line 476 ("age")
--accepting rule at line 254 (" ")
--accepting rule at line 377 ("=")
--accepting rule at line 254 (" ")
--accepting rule at line 453 ("33")
--accepting rule at line 377 ("; ")
--(end of buffer or a NUL)
--EOF (start condition 0)
```

SELECT Parser Action

```
simple_select: SELECT opt_distinct target_list
             into_clause from_clause where_clause
             group_clause having_clause
             {
               SelectStmt *n = makeNode(SelectStmt);
               n->distinctClause = $2;
               n->targetList = $3;
               n->istemp = (bool) ((Value *) lfirst($4))>val.ival;
               n->into = (char *) lnext($4);
               n->fromClause = $5;
               n->whereClause = $6;
               n->groupClause = $7;
               n->havingClause = $8;
               $$ = (Node *)n;
             }
```


SelectStmt Structure

```
typedef struct SelectStmt
{
    NodeTag      type;
    /*
     * These fields are used only in "leaf" SelectStmts.
     */
    List          *distinctClause; /* NULL, list of DISTINCT ON exprs, or
     *                               lcons(NIL,NIL) for all (SELECT
     *                               DISTINCT) */
    char          *into;           /* name of table (for select into table) */
    bool          istemp;         /* into is a temp table? */
    List          *targetList;     /* the target list (of ResTarget) */
    List          *fromClause;     /* the FROM clause */
    Node          *whereClause;    /* WHERE qualification */
    List          *groupClause;    /* GROUP BY clauses */
    Node          *havingClause;   /* HAVING conditional-expression */
    /*
     * These fields are used in both "leaf" SelectStmts and upper-level
     * SelectStmts. portalname/binary may only be set at the top level.
     */
    List          *sortClause;     /* sort clause (a list of SortGroupBy's) */
    char          *portalname;     /* the portal (cursor) to create */
    bool          binary;         /* a binary (internal) portal? */
    Node          *limitOffset;    /* # of result tuples to skip */
    Node          *limitCount;     /* # of result tuples to return */
    List          *forUpdate;      /* FOR UPDATE clause */
    /*
     * These fields are used only in upper-level SelectStmts.
     */
    SetOperation op;              /* type of set op */
    bool          all;            /* ALL specified? */
    struct SelectStmt *larg;      /* left child */
    struct SelectStmt *rarg;      /* right child */
    /* Eventually add fields for CORRESPONDING spec here */
} SelectStmt;
```

Parsing

```
Starting parse
Entering state 0
Reading a token: Next token is 377 (SELECT)
Shifting token 377 (SELECT), Entering state 15
Reading a token: Next token is 514 (IDENT)
Reducing via rule 534 (line 3430), -> opt_distinct
state stack now 0 15
Entering state 324
Next token is 514 (IDENT)
Shifting token 514 (IDENT), Entering state 496
Reading a token: Next token is 314 (FROM)
Reducing via rule 871 (line 5391), IDENT -> ColId
state stack now 0 15 324
Entering state 531
Next token is 314 (FROM)
Reducing via rule 789 (line 4951), -> opt_indirection
state stack now 0 15 324 531
Entering state 755
Next token is 314 (FROM)
Reducing via rule 760 (line 4591), ColId opt_indirection -> c_expr
state stack now 0 15 324
Entering state 520
Reducing via rule 693 (line 4272), c_expr -> a_expr
state stack now 0 15 324
Entering state 519
Next token is 314 (FROM)
Reducing via rule 833 (line 5183), a_expr -> target_el
state stack now 0 15 324
Entering state 524
Reducing via rule 831 (line 5171), target_el -> target_list
state stack now 0 15 324
Entering state 523
Next token is 314 (FROM)
Reducing via rule 518 (line 3382), -> into_clause
```

Scanning and Parsing

```
Starting parse
Entering state 0
Reading a token:
--(end of buffer or a NUL)
--accepting rule at line 476 ("SELECT")
Next token is 377 (SELECT)
Shifting token 377 (SELECT), Entering state 15
Reading a token:
--accepting rule at line 254 (" ")
--accepting rule at line 476 ("firstname")
Next token is 514 (IDENT)
Reducing via rule 534 (line 3430), -> opt_distinct
state stack now 0 15
Entering state 324
Next token is 514 (IDENT)
Shifting token 514 (IDENT), Entering state 496
Reading a token:
--accepting rule at line 254 ("\n")
--accepting rule at line 476 ("FROM")
Next token is 314 (FROM)
Reducing via rule 871 (line 5391), IDENT -> ColId
state stack now 0 15 324
Entering state 531
Next token is 314 (FROM)
Reducing via rule 789 (line 4951), -> opt_indirection
state stack now 0 15 324 531
Entering state 755
Next token is 314 (FROM)
```

List Structures

```
typedef struct List
{
    NodeTag      type;
    union
    {
        void      *ptr_value;
        int       int_value;
    }            elem;
    struct List *next;
} List;

#define      NIL            ((List *) NULL)

#define lfirst(l)          ((l)->elem.ptr_value)
#define lnext(l)           ((l)->next)
#define lsecond(l)         lfirst(lnext(l))

#define lfirsti(l)         ((l)->elem.int_value)

#define foreach(_elt_, _list_) \
    for(_elt_=(_list_); _elt_!=NIL; _elt_=lnext(_elt_))
```

List Support Functions

Function	Description
lfirst	returns value stored in List
lnext	returns pointer to next in List
foreach	loops through List
length	returns length of List
nth	returns nth element from List
makeList1	creates a new list
lcons	adds value to front of List
lappend	appends value to end of List
nconc	concatenates two Lists

There are versions of these functions for storing integers rather than pointers.

Range Table Entry Structure

```
typedef struct RangeTblEntry
{
    NodeTag      type;
    /* Fields valid for a plain relation RTE (else NULL/zero): */
    /*
    char      *relname;      /* real name of the relation */
    Oid        relid;        /* OID of the relation */
    /*
    * Fields valid for a subquery RTE (else NULL):
    */
    Query      *subquery;    /* the sub-query */
    /*
    * Fields valid in all RTEs:
    */
    Attr      *alias;        /* user-written alias clause, if any */
    Attr      *eref;        /* expanded reference names */
    bool      inh;          /* inheritance requested? */
    bool      inFromCl;     /* present in FROM clause */
    bool      checkForRead; /* check rel for read access */
    bool      checkForWrite; /* check rel for write access */
    Oid        checkAsUser;  /* if not zero, check access as this user */
} RangeTblEntry;
```

Var Structure

```
typedef struct Var
{
    NodeTag    type;
    Index      varno;          /* index of this var's relation in the range
                               * table (could also be INNER or OUTER) */
    AttrNumber varattno;       /* attribute number of this var, or zero for all */
    Oid         vartype;        /* pg_type tuple OID for the type of this var */
    int32       vartypmod;      /* pg_attribute typmod value */
    Index      varlevelsup;    /* for subquery variables referencing outer
                               * relations; 0 in a normal var, >0 means N
                               * levels up */
    Index      varnoold;        /* original value of varno, for debugging */
    AttrNumber varoattno;       /* original value of varattno */
} Var;
```

TargetEntry Structure

```
typedef struct TargetEntry
{
    NodeTag    type;
    Resdom     *resdom;          /* fjoin overload this to be a list?? */
    Fjoin      *fjoin;
    Node       *expr;
} TargetEntry;
```


Query Structure

```
typedef struct Query
{
    NodeType    type;

    CmdType     cmdType; /* select|insert|update|delete|utility */

    Node        *utilityStmt; /* non-null if this is a non-optimizable
                               * statement */

    int          resultRelation; /* target relation (index into rtable) */
    char         *into; /* portal (cursor) name */
    bool         isPortal; /* is this a retrieve into portal? */
    bool         isBinary; /* binary portal? */
    bool         isTemp; /* is 'into' a temp table? */

    bool         hasAggs; /* has aggregates in tlist or havingQual */
    bool         hasSubLinks; /* has subquery SubLink */

    List         *rtable; /* list of range table entries */
    FromExpr     *jointree; /* table join tree (FROM and WHERE clauses) */

    List         *rowMarks; /* integer list of RT indexes of relations
                              * that are selected FOR UPDATE */

    List         *targetList; /* target list (of TargetEntry) */

    List         *groupClause; /* a list of GroupClause's */

    Node         *havingQual; /* qualifications applied to groups */

    List         *distinctClause; /* a list of SortClause's */

    List         *sortClause; /* a list of SortClause's */

    Node         *limitOffset; /* # of result tuples to skip */
    Node         *limitCount; /* # of result tuples to return */

    Node         *setOperations; /* set-operation tree if this is top level
                                  * of a UNION/INTERSECT/EXCEPT query */
    List         *resultRelations; /* integer list of RT indexes, or NIL */

    /* internal to planner */
    List         *base_rel_list; /* list of base-relation RelOptInfos */
    List         *join_rel_list; /* list of join-relation RelOptInfos */
    List         *equi_key_list; /* list of lists of equijointed
                                  * PathKeyItems */
    List         *query_pathkeys; /* pathkeys for query_planner()'s result */
} Query;
```

Query Output

```
{ QUERY
:command 3
:utility <>
:resultRelation 1
:into <>
:isPortal false
:isBinary false
:isTemp false
:hasAggs false
:hasSubLinks false
:rtable (
  { RTE
:relname friend
:relid 26914
:subquery <>
:alias <>
:eref
  { ATTR
:relname friend
:attrs ( "firstname" "lastname" "city" "state" "age" )
  }

:inh false
:inFromCl false
:checkForRead false
:checkForWrite true
:checkAsUser 0
  }
)

:jointree
{ FROMEXPR
:fromlist <>
:quals <>
}

:rowMarks ()

:targetList (
  { TARGETENTRY
:resdom
  { RESDOM
:resno 1
:restype 1042
:restypmod 19
:resname firstname
:reskey 0
:reskeyop 0
```

Optimizer


- Scan Methods
- Join Methods
- Join Order

Scan Methods

- Sequential Scan
- Index Scan
- Bitmap Index Scan

Sequential Scan


Heap

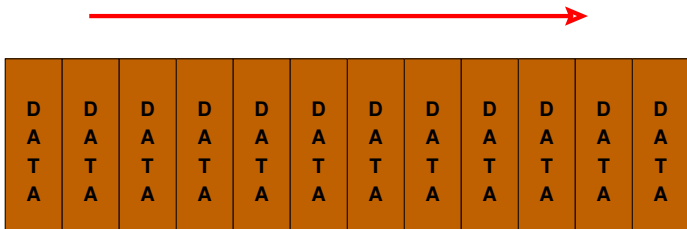

8K

BTree Index Scan

Index

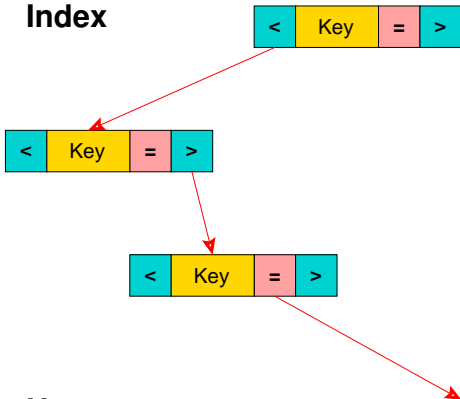

Heap

D	D	D	D	D	D	D	D	D	D	D	D
A	A	A	A	A	A	A	A	A	A	A	A
T	T	T	T	T	T	T	T	T	T	T	T
A	A	A	A	A	A	A	A	A	A	A	A

Bitmap Index Scan

Index 1 Index 2 Combined
col1 = 'A' col2 = 'NS' Index

0
1
0
1

&

0
1
1
0

=

0
1
0
0


Table
'A' AND 'NS'



Join Methods

- Nested Loop
 - With Inner Sequential Scan
 - With Inner Index Scan
- Hash Join
- Merge Join


Nested Loop Join with Inner Sequential Scan

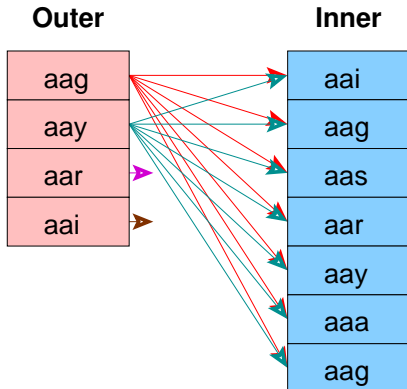

No Setup Required

Used For Small Tables


Nested Loop Join with Inner Index Scan

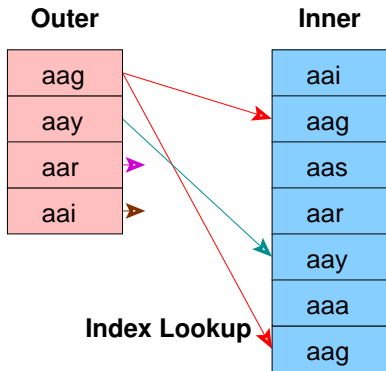


No Setup Required

Index Must Already Exist

Hash Join

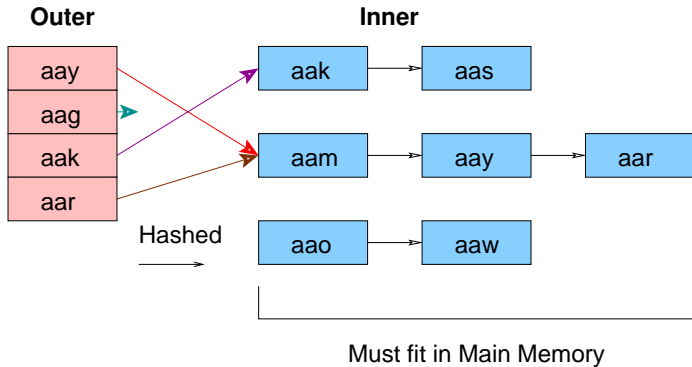

Merge Join

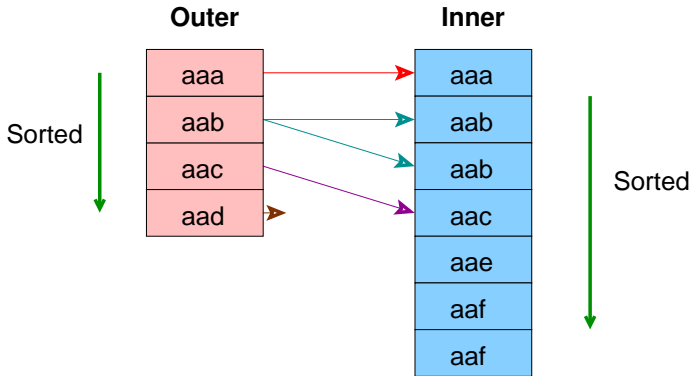

Ideal for Large Tables

An Index Can Be Used to Eliminate the Sort

Path Structure

```
typedef struct Path
{
    NodeTag      type;

    RelOptInfo *parent;      /* the relation this path can build */

    /* estimated execution costs for path (see costsize.c for more info) */
    Cost        startup_cost; /* cost expended before fetching any
                               * tuples */
    Cost        total_cost;   /* total cost (assuming all tuples
                               * fetched) */

    NodeTag      pathtype;    /* tag identifying scan/join method */
    /* XXX why is pathtype separate from the NodeTag? */

    List         *pathkeys;   /* sort ordering of path's output */
    /* pathkeys is a List of Lists of PathKeyItem nodes; see above */
} Path;
```

PathKeys Structure

```
typedef struct PathKeyItem
{
    NodeTag      type;

    Node         *key;           /* the item that is ordered */
    Oid          sortop;        /* the ordering operator ('<' op) */

    /*
     * key typically points to a Var node, ie a relation attribute, but it
     * can also point to a Func clause representing the value indexed by a
     * functional index. Someday we might allow arbitrary expressions as
     * path keys, so don't assume more than you must.
     */
} PathKeyItem;
```

RelOptInfo Structure

```
typedef struct RelOptInfo
{
    NodeTag    type;

    /* all relations included in this RelOptInfo */
    Relids     relids;          /* integer list of base relids (RT
                                * indexes) */

    /* size estimates generated by planner */
    double     rows;            /* estimated number of result tuples */
    int        width;           /* estimated avg width of result tuples */

    /* materialization information */
    List       *targetlist;
    List       *pathlist;       /* Path structures */
    struct Path *cheapest_startup_path;
    struct Path *cheapest_total_path;
    bool       pruneable;

    /* information about a base rel (not set for join rels!) */
    bool       issubquery;
    bool       indexed;
    long       pages;
    double     tuples;
    struct Plan *subplan;

    /* used by various scans and joins: */
    List       *baserestrictinfo; /* RestrictInfo structures (if
                                * base rel) */
    Cost       baserestrictcost;  /* cost of evaluating the above */
    Relids     outerjoinset;      /* integer list of base relids */
    List       *joininfo;         /* JoinInfo structures */
    List       *innerjoin;        /* potential indexscans for nestloop joins */

    /*
     * innerjoin indexscans are not in the main pathlist because they are
     * not usable except in specific join contexts; we have to test before
     * seeing whether they can be used.
     */
} RelOptInfo;
```

Three-Table Join Query

```
SELECT part.price  
FROM customer, salesorder, part  
WHERE customer.customer_id = salesorder.customer_id AND  
salesorder.part = part.part_id
```


Three-Table Join, Pass 1, Part 1

```
(2 3 ): rows=575 width=76
path list:
HashJoin rows=575 cost=3.57..41.90
  clauses=(salesorder.part_id = part.part_id)
    SeqScan(2) rows=575 cost=0.00..13.75
    SeqScan(3) rows=126 cost=0.00..3.26
Nestloop rows=575 cost=0.00..1178.70
  SeqScan(2) rows=575 cost=0.00..13.75
  IdxScan(3) rows=126 cost=0.00..2.01
Nestloop rows=575 cost=0.00..1210.28
  pathkeys=((salesorder.customer_id, customer.customer_id) )
  IdxScan(2) rows=575 cost=0.00..45.33
  pathkeys=((salesorder.customer_id, customer.customer_id) )
  IdxScan(3) rows=126 cost=0.00..2.01

cheapest startup path:
Nestloop rows=575 cost=0.00..1178.70
  SeqScan(2) rows=575 cost=0.00..13.75
  IdxScan(3) rows=126 cost=0.00..2.01

cheapest total path:
HashJoin rows=575 cost=3.57..41.90
  clauses=(salesorder.part_id = part.part_id)
    SeqScan(2) rows=575 cost=0.00..13.75
    SeqScan(3) rows=126 cost=0.00..3.26
```

Three-Table Join, Pass 1, Part 2

```
(1 2 ): rows=575 width=76
path list:
HashJoin rows=575 cost=3.00..40.75
  clauses=(salesorder.customer_id = customer.customer_id)
    SeqScan(2) rows=575 cost=0.00..13.75
    SeqScan(1) rows=80 cost=0.00..2.80
MergeJoin rows=575 cost=0.00..64.39
  clauses=(salesorder.customer_id = customer.customer_id)
    IdxScan(1) rows=80 cost=0.00..10.88
      pathkeys=((salesorder.customer_id, customer.customer_id) )
    IdxScan(2) rows=575 cost=0.00..45.33
      pathkeys=((salesorder.customer_id, customer.customer_id) )

cheapest startup path:
MergeJoin rows=575 cost=0.00..64.39
  clauses=(salesorder.customer_id = customer.customer_id)
    IdxScan(1) rows=80 cost=0.00..10.88
      pathkeys=((salesorder.customer_id, customer.customer_id) )
    IdxScan(2) rows=575 cost=0.00..45.33
      pathkeys=((salesorder.customer_id, customer.customer_id) )

cheapest total path:
HashJoin rows=575 cost=3.00..40.75
  clauses=(salesorder.customer_id = customer.customer_id)
    SeqScan(2) rows=575 cost=0.00..13.75
    SeqScan(1) rows=80 cost=0.00..2.80
```

Three-Table Join, Pass 2, Part 1

```
(2 3 1): rows=575 width=112
path list:
HashJoin rows=575 cost=6.58..68.90
  clauses=(salesorder.customer_id = customer.customer_id)
  HashJoin rows=575 cost=3.57..41.90
    clauses=(salesorder.part_id = part.part_id)
    SeqScan(2) rows=575 cost=0.00..13.75
    SeqScan(3) rows=126 cost=0.00..3.26
    SeqScan(1) rows=80 cost=0.00..2.80
HashJoin rows=575 cost=3.57..92.54
  clauses=(salesorder.part_id = part.part_id)
  MergeJoin rows=575 cost=0.00..64.39
    clauses=(salesorder.customer_id = customer.customer_id)
    IdxScan(1) rows=80 cost=0.00..10.88
    pathkeys=((salesorder.customer_id, customer.customer_id) )
    IdxScan(2) rows=575 cost=0.00..45.33
    pathkeys=((salesorder.customer_id, customer.customer_id) )
    SeqScan(3) rows=126 cost=0.00..3.26
HashJoin rows=575 cost=3.00..1205.70
  clauses=(salesorder.customer_id = customer.customer_id)
  Nestloop rows=575 cost=0.00..1178.70
    SeqScan(2) rows=575 cost=0.00..13.75
    IdxScan(3) rows=126 cost=0.00..2.01
    SeqScan(1) rows=80 cost=0.00..2.80
```

Three-Table Join, Pass 2, Part 2

```
MergeJoin rows=575 cost=0.00..1229.35
  clauses=(salesorder.customer_id = customer.customer_id)
    Nestloop rows=575 cost=0.00..1210.28
      pathkeys=((salesorder.customer_id, customer.customer_id) )
        IdxScan(2) rows=575 cost=0.00..45.33
          pathkeys=((salesorder.customer_id, customer.customer_id) )
            IdxScan(3) rows=126 cost=0.00..2.01
              IdxScan(1) rows=80 cost=0.00..10.88
                pathkeys=((salesorder.customer_id, customer.customer_id) )

cheapest startup path:
MergeJoin rows=575 cost=0.00..1229.35
  clauses=(salesorder.customer_id = customer.customer_id)
    Nestloop rows=575 cost=0.00..1210.28
      pathkeys=((salesorder.customer_id, customer.customer_id) )
        IdxScan(2) rows=575 cost=0.00..45.33
          pathkeys=((salesorder.customer_id, customer.customer_id) )
            IdxScan(3) rows=126 cost=0.00..2.01
              IdxScan(1) rows=80 cost=0.00..10.88
                pathkeys=((salesorder.customer_id, customer.customer_id) )

cheapest total path:
HashJoin rows=575 cost=6.58..68.90
  clauses=(salesorder.customer_id = customer.customer_id)
    HashJoin rows=575 cost=3.57..41.90
      clauses=(salesorder.part_id = part.part_id)
        SeqScan(2) rows=575 cost=0.00..13.75
        SeqScan(3) rows=126 cost=0.00..3.26
        SeqScan(1) rows=80 cost=0.00..2.80
```

Plan Structure

```
typedef struct Plan
{
    NodeTag      type;

    /* estimated execution costs for plan (see costsize.c for more info) */
    Cost          startup_cost; /* cost expended before fetching any
    * tuples */
    Cost          total_cost; /* total cost (assuming all tuples
    * fetched) */

    /*
    * planner's estimate of result size (note: LIMIT, if any, is not
    * considered in setting plan_rows)
    */
    double        plan_rows; /* number of rows plan is expected to emit */
    int           plan_width; /* average row width in bytes */

    EState        *state; /* at execution time, state's of
    * individual nodes point to one EState
    * for the whole top-level plan */

    List          *targetlist;
    List          *qual; /* implicitly-ANDed qual conditions */
    struct Plan   *lefttree;
    struct Plan   *righttree;
    List          *extParam; /* indices of _all_ _external_ PARAM_EXEC
    * for this plan in global
    * es_param_exec_vals. Params from
    * setParam from initPlan-s are not
    * included, but their execParam-s are
    * here!!! */
    List          *locParam; /* someones from setParam-s */
    List          *chgParam; /* list of changed ones from the above */
    List          *initPlan; /* Init Plan nodes (un-correlated expr
    * subselects) */
    List          *subPlan; /* Other SubPlan nodes */

    /*
    * We really need in some TopPlan node to store range table and
    * resultRelation from Query there and get rid of Query itself from
    * Executor. Some other stuff like below could be put there, too.
    */
    int           nParamExec; /* Number of them in entire query. This is
    * to get Executor know about how many
    * param_exec there are in query plan. */
} Plan;
```

Plan Output

```
DEBUG:  plan:
{ SEQSCAN
  :startup_cost 0.00
  :total_cost 22.50
  :rows 10
  :width 12
  :qptargetlist (
    { TARGETENTRY
      :resdom
        { RESDOM
          :resno 1
          :restype 1042
          :restypmod 19
          :resname firstname
          :reskey 0
          :reskeyop 0
          :ressortgroupref 0
          :resjunk false
        }
      :expr
        { VAR
          :varno 1
          :varattno 1
          :vartype 1042
          :vartypmod 19
          :varlevelsup 0
          :varnoold 1
          :varoattno 1
        }
      }
    )
  }
```

Plan Output — Three-Table Join

```
DEBUG:  plan:
{ HASHJOIN
  :startup_cost 6.58
  :total_cost 68.90
  :rows 575
  :width 112
  :qptargetlist (
    { TARGETENTRY
      :resdom
        { RESDOM
          :resno 1
          :restype 19
          :restypmod -1
          :resname relname
          :reskey 0
          :reskeyop 0
          :ressortgroupref 0
          :resjunk false
        }
      :expr
        { VAR
          :varno 65000
          :varattno 1
          :vartype 19
          :vartypmod -1
          :varlevelsup 0
          :varnoold 1
          :varoattno 1
        }
      }
    }
  }
```

Result Returned

```
test=> SELECT firstname
test-> FROM friend
test-> WHERE age = 33;

1: firstname (typeid = 1042, len = -1, typmod = 19, byval = f)
-----
1: firstname = "Sandy" (typeid = 1042, len = -1, typmod = 19, byval = f)
-----

      firstname
-----
Sandy
(1 row)
```


Statistics — Part 1

```
PARSER STATISTICS
system usage stats:
  0.000002 elapsed 0.000000 user 0.000001 system sec
  [0.009992 user 0.049961 sys total]
  0/0 [0/1] filesystem blocks in/out
  0/0 [0/0] page faults/reclaims, 0 [0] swaps
  0 [0] signals rcvd, 0/0 [2/2] messages rcvd/sent
  0/0 [2/6] voluntary/involuntary context switches
postgres usage stats:
  Shared blocks:      0 read,      0 written, buffer hit rate = 0.00%
  Local blocks:       0 read,      0 written, buffer hit rate = 0.00%
  Direct blocks:      0 read,      0 written
PARSE ANALYSIS STATISTICS
system usage stats:
  0.000002 elapsed 0.000001 user 0.000002 system sec
  [0.009993 user 0.049965 sys total]
  0/0 [0/1] filesystem blocks in/out
  0/0 [0/0] page faults/reclaims, 0 [0] swaps
  0 [0] signals rcvd, 0/0 [2/2] messages rcvd/sent
  0/0 [2/6] voluntary/involuntary context switches
postgres usage stats:
  Shared blocks:      1 read,      0 written, buffer hit rate = 96.88%
  Local blocks:       0 read,      0 written, buffer hit rate = 0.00%
  Direct blocks:      0 read,      0 written
```

Statistics — Part 2

```
REWRITER STATISTICS
system usage stats:
0.000002 elapsed 0.000000 user 0.000002 system sec
[0.009993 user 0.049968 sys total]
0/0 [0/1] filesystem blocks in/out
0/0 [0/0] page faults/reclaims, 0 [0] swaps
0 [0] signals rcvd, 0/0 [2/2] messages rcvd/sent
0/0 [2/6] voluntary/involuntary context switches

postgres usage stats:
Shared blocks:      0 read,      0 written, buffer hit rate = 0.00%
Local blocks:      0 read,      0 written, buffer hit rate = 0.00%
Direct blocks:     0 read,      0 written


PLANNER STATISTICS
system usage stats:
0.009974 elapsed 0.009988 user -1.999985 system sec
[0.019982 user 0.049955 sys total]
0/0 [0/1] filesystem blocks in/out
0/0 [0/0] page faults/reclaims, 0 [0] swaps
0 [0] signals rcvd, 0/0 [2/2] messages rcvd/sent
0/0 [2/6] voluntary/involuntary context switches

postgres usage stats:
Shared blocks:      5 read,      0 written, buffer hit rate = 96.69%
Local blocks:      0 read,      0 written, buffer hit rate = 0.00%
Direct blocks:     0 read,      0 written


EXECUTOR STATISTICS
system usage stats:
0.040004 elapsed 0.039982 user 0.000013 system sec
[0.059964 user 0.049970 sys total]
0/0 [0/1] filesystem blocks in/out
0/0 [0/0] page faults/reclaims, 0 [0] swaps
0 [0] signals rcvd, 0/2 [2/4] messages rcvd/sent
2/2 [4/8] voluntary/involuntary context switches

postgres usage stats:
Shared blocks:      2 read,      0 written, buffer hit rate = 83.33%
Local blocks:      0 read,      0 written, buffer hit rate = 0.00%
Direct blocks:     0 read,      0 written
```

File Structure

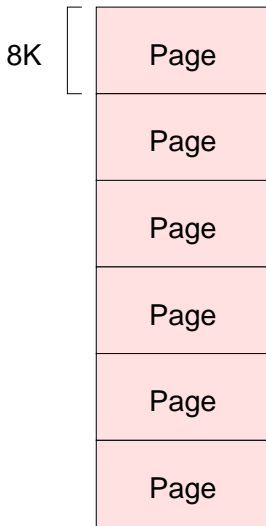

Page Structure

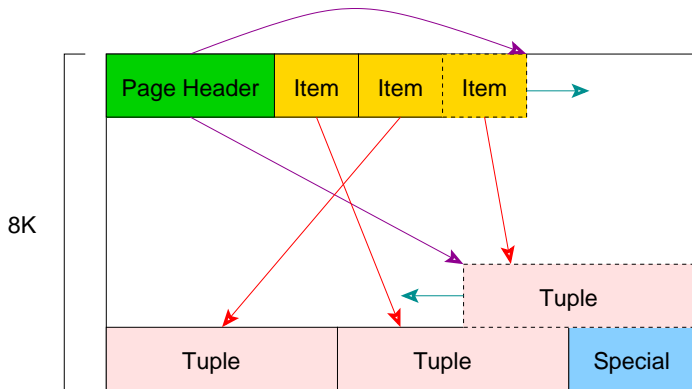


Heap Tuple Structure



OID – object id of tuple (optional)
xmin – creation transaction id
xmax – destruction transaction id
cmin – creation command id
cmax – destruction command id
ctid – tuple id (page / item)
natts – number of attributes
infomask – tuple flags
hoff – length of tuple header
bits – bit map representing NULLs
Attribute
Attribute

Index Page Structure

Internal



Leaf



Heap



Index Tuple Structure

tid - heap tuple id (page / item)

infomask - index flags

hoff - length of index tuple

key

subkey

Index Types (Access Methods)

- BRIN
- BTree
- Hash
- GIN
- GiST
- SP-GiST

Transaction Status

pg_xact

XID Status flags

028	0	0	0	1	0	0	1	0
024	1	0	1	0	0	0	0	0
020	1	0	1	0	0	1	0	0
016	0	0	0	0	0	0	1	0
012	0	0	0	1	0	1	1	0
008	1	0	1	0	0	0	1	0
004	1	0	1	0	0	0	0	0
000	1	0	0	1	0	0	1	0

Transaction Id (XID)

10 Committed

01 Aborted

00 In Progress

Tuple Creation XID: 15 Expiration XID: 27

xmin xmax

Multi-Version Concurrency Control

- Each query sees only transactions completed before it started
- On query start, PostgreSQL records:
 - the transaction counter
 - all transaction id's that are in-process
- In a multi-statement transaction, a transaction's own previous queries are also visible
- The above assumes the default *read committed isolation level*

MVCC Tuple Requirements

- Visible tuples must have a creation transaction id that:
 - is a committed transaction
 - is less than the transaction counter stored at query start *and*
 - was not in-process at query start
- Visible tuples must *also* have an expire transaction id that:
 - is blank *or* aborted *or*
 - is greater than the transaction counter stored at query start *or*
 - was in-process at query start

MVCC Behavior

Cre	40
Exp	

INSERT

Cre	40
Exp	47

DELETE

Cre	64
Exp	78

old (delete)

UPDATE

Cre	78
Exp	

new (insert)

UPDATE is effectively a DELETE and an INSERT.

MVCC Examples

Create-Only

Cre	30
Exp	
Cre	50
Exp	
Cre	110
Exp	

Visible

Invisible

Invisible

Sequential Scan

Snapshot

The highest-numbered committed transaction: 100

Open Transactions: 25, 50, 75

For simplicity, assume all other transactions are committed.

Create & Expire

Cre	30
Exp	80
Cre	30
Exp	75
Cre	30
Exp	110

Invisible

Visible

Visible



Internally, the creation xid is stored in the system column 'xmin', and expire in 'xmax'.

Snapshot Structure

```
typedef struct SnapshotData
{
    TransactionId xmin;           /* XID < xmin are visible to me */
    TransactionId xmax;          /* XID >= xmax are invisible to me */
    uint32         xcnt;          /* # of xact below */
    TransactionId *xip;           /* array of xacts in progress */
    ItemPointerData tid;          /* required for Dirty snapshot -( */
} SnapshotData;
```

Proc Structure

```
struct proc
{
    /* proc->links MUST BE FIRST IN STRUCT (see ProcSleep,ProcWakeup,etc) */

    SHM_QUEUE    links;          /* list link if process is in a list */

    SEMA         sem;            /* ONE semaphore to sleep on */
    int          errType;        /* STATUS_OK or STATUS_ERROR after wakeup */

    TransactionId xid;           /* transaction currently being executed by
                                * this proc */

    TransactionId xmin;          /* minimal running XID as it was when we
                                * were starting our xact: vacuum must not
                                * remove tuples deleted by xid >= xmin ! */

    XLogRecPtr    logRec;

    /* Info about lock the process is currently waiting for, if any. */
    /* waitLock and waitHolder are NULL if not currently waiting. */
    LOCK         *waitLock;      /* Lock object we're sleeping on ... */
    HOLDER       *waitHolder;    /* Per-holder info for awaited lock */
    LOCKMODE     waitLockMode;   /* type of lock we're waiting for */
    LOCKMASK     heldLocks;      /* bitmask for lock types already held on
                                * this lock object by this backend */


    int          pid;            /* This backend's process id */
    Oid          databaseId;     /* OID of database this backend is using */

    short        sLocks[MAX_SPINS]; /* Spin lock stats */
    SHM_QUEUE     procHolders;    /* list of HOLDER objects for locks held or
                                * awaited by this backend */
};
```


Lock Modes

Mode	Used
Access Share Lock	SELECT
Row Share Lock	SELECT FOR UPDATE
Row Exclusive Lock	INSERT, UPDATE, DELETE
Share Lock	CREATE INDEX
Share Row Exclusive Lock	EXCLUSIVE MODE but allows ROW SHARE LOCK
Exclusive Lock	Blocks ROW SHARE LOCK and SELECT...FOR UPDATE
Access Exclusive Lock	ALTER TABLE, DROP TABLE, VACUUM, and unqualified I

Lock Structure

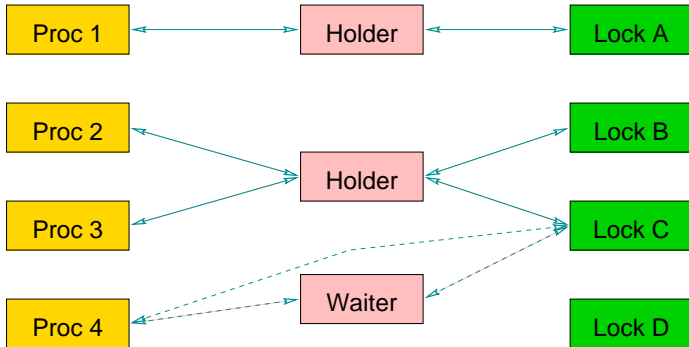

System Tables

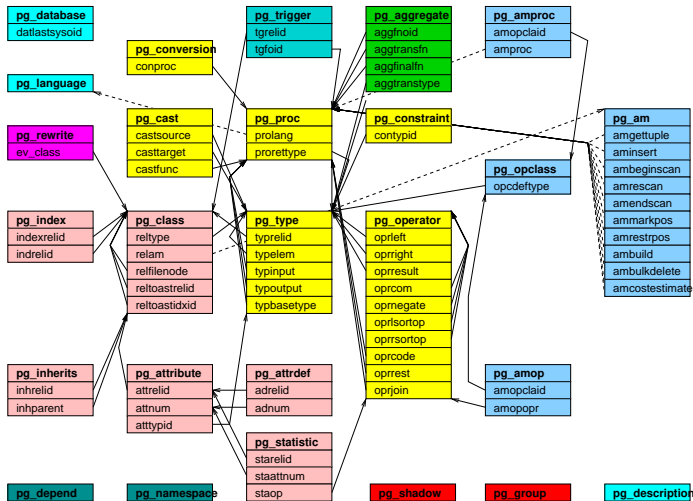

Modifying System Capabilities

- CREATE FUNCTION
- CREATE OPERATOR
- CREATE TYPE
- CREATE LANGUAGE

Caches

- System Cache
- Relation Information Cache
- File Descriptor Cache

Shared Memory

- Proc structure
- Lock structure
- Buffer structure
- Free space map

Shared Buffers

```
typedef struct sbufdesc
{
    Buffer    freeNext;        /* links for freelist chain */
    Buffer    freePrev;
    SHMEM_OFFSET data;        /* pointer to data in buf pool */

    /* tag and id must be together for table lookup to work */
    BufferTag tag;             /* file/block identifier */
    int       buf_id;          /* maps global desc to local desc */

    BufFlags  flags;           /* see bit definitions above */
    unsigned  refcount;        /* # of times buffer is pinned */

    slock_t   io_in_progress_lock; /* to block for I/O to complete */
    slock_t   cntx_lock;       /* to lock access to page context */

    unsigned  r_locks;         /* # of shared locks */
    bool      ri_lock;         /* read-intent lock */
    bool      w_lock;          /* context exclusively locked */

    bool      cntxDirty;        /* new way to mark block as dirty */

    BufferBlindId blind;        /* was used to support blind write */

    /*
     * When we can't delete item from page (someone else has buffer pinned)
     * we mark buffer for cleanup by specifying appropriate for buffer
     * content cleanup function. Buffer will be cleaned up from release
     * buffer functions.
     */
    void      (*CleanupFunc) (Buffer);
} BufferDesc;
```

Memory Routines

- `palloc()`
- `pfree()`
- `MemoryContext's`

Algorithms

Algorithm	Ordering	Lookup					
		Lookup by Order	Insert	Delete	Insert/Del Recent	Pointers per Entry	Resize Overhead
list	insert	$O(n)$	$O(1)$	$O(1)$	$O(1)$	1-2	no
array	insert	$O(1)$	$O(1)$	$O(n)$	$O(1)$	~ 0.5	yes
tree	key	$O(\log N)$	$O(\log N)$	$O(1)$		2	no
array	key	$O(\log N)$	$O(n)$	$O(n)$		~ 0.5	yes
hash	random	$O(1)$	$O(1)$	$O(1)$		~ 3	yes



<https://momjian.us/presentations>