



lambda_lasso = 30 — unit ball

Training accuracy (n = 1600)

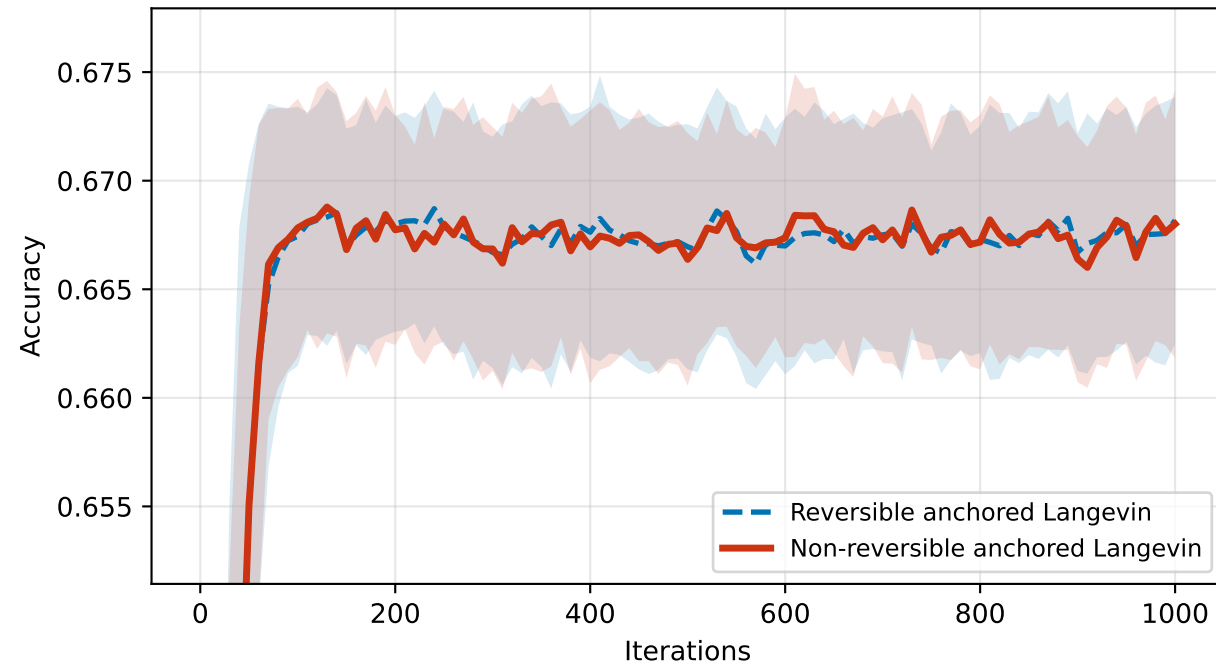

Test accuracy (n = 400)

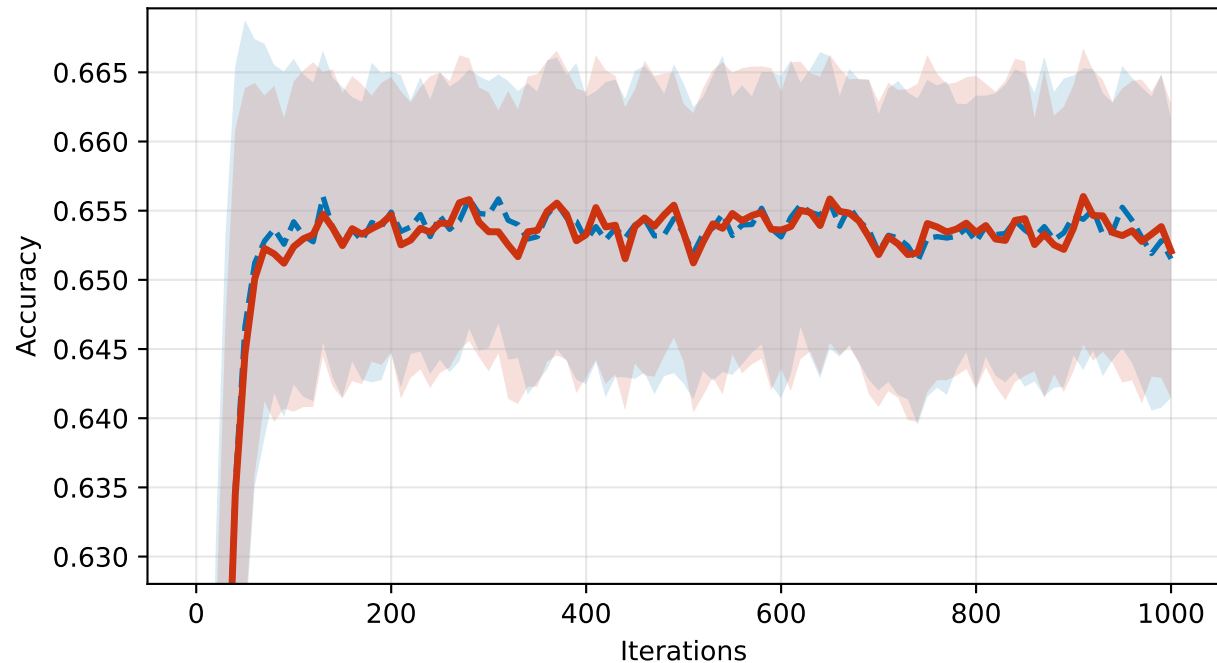

d = 9 (intercept + 8 slopes); constraint: unit ball, threshold 1; lambda_lasso = 30 with anchor delta = 0.02, so $a(w)$ in $[0.0082, 1]$;

EXACT gradient; eta = 0.0001; R = 100; iterations = 1000; block strengths $s = (3.0, 3.0, 3.0)$; alpha = 0 vs 1.

Lines are the across-replicate mean; bands are mean +/- 1 sample sd (ddof = 1) of single-iterate accuracy -- repeat-run variability, NOT confidence or credible intervals. Axis windowed on the plateau, not $[0, 1]$.