
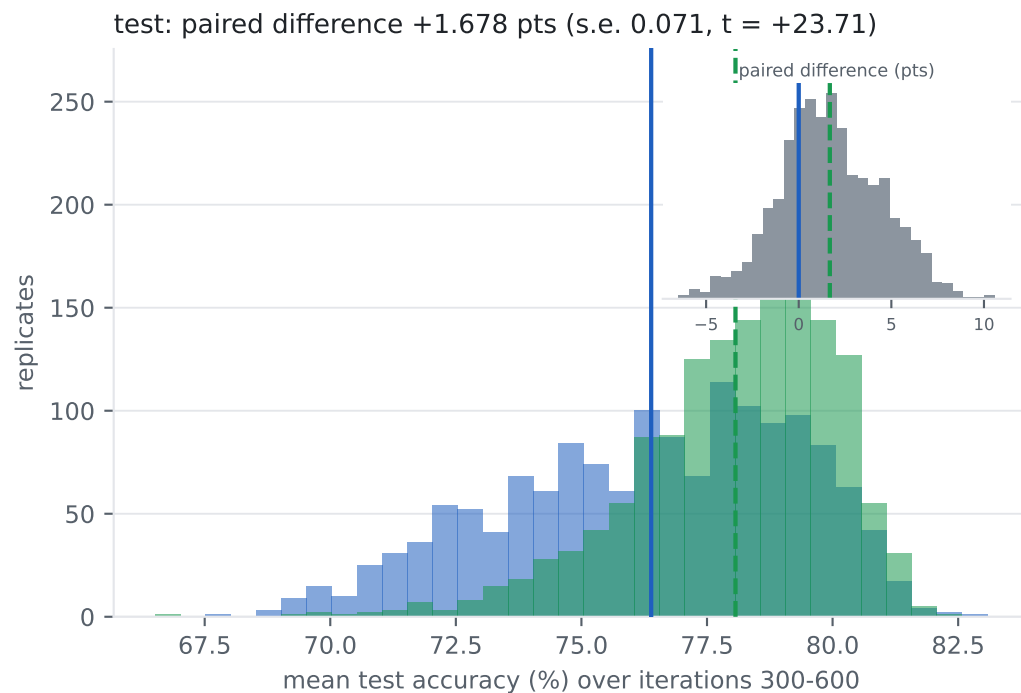


titanic_lp, $\eta = 3 \times 10^{-5}$, $s = (2, 2, 2)$: the post-burn-in estimator over 600 iterations

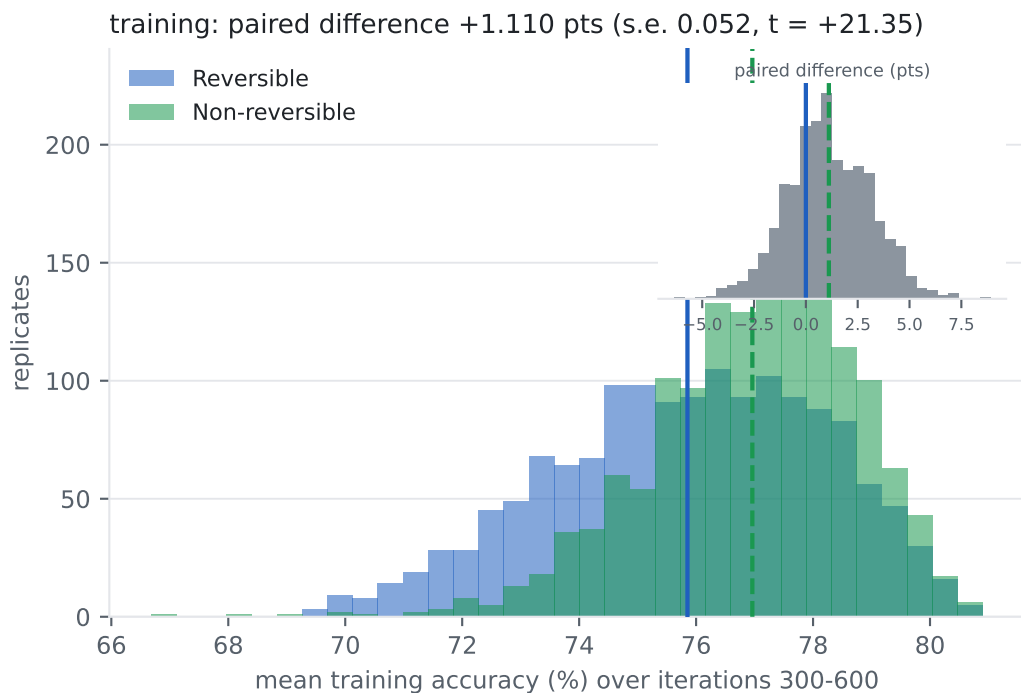

ALL RUNS STOPPED AT ITERATION 600 -- a truncation of the notebook's longer runs (identical W0 and Gaussian stream), not a separate experiment. $R = 1500$ coupled replicates, seed 5200. First half of each 600-step run discarded as burn-in (the declared 50%, so iterations 300-600). Each replicate contributes one number per panel: its accuracy averaged over the checkpointed post-burn-in states. The two arms share W0 and the Gaussian stream, so the difference is paired and the histograms overlap far more than the paired s.e. suggests -- the spread here is across replicates, the s.e. is across PAIRS. The vertical lines are the arm means. At 600 iterations the chains are much further from stationarity than in the notebook's 2000-step run, so this measures the transient, not the target.