



Auto Rename Tag

Jun Han | 23,967,921 installs | (210) | Free

Auto rename paired HTML/XML tag

Installation

Launch VS Code Quick Open (Ctrl+P), paste the following command, and press enter.

ext install formulahendry.auto-rename-tag

Copy

[More Info](#)

- Overview
- Version History
- Q & A
- Rating & Review

Auto Rename Tag

[Build Status](#)

Automatically rename paired HTML/XML tag, same as Visual Studio IDE does.

Sponsors



tabnine

Increase your coding productivity with Tabnine's AI code completions! Tabnine is a free powerful Artificial Intelligence assistant designed to help you code faster, reduce mistakes, and discover best coding practices - without ever leaving the comfort of VS Code.

Tabnine is trusted by more than a million developers worldwide. [Get it now.](#)



Eliminate context switching and costly distractions. Create and merge PRs and perform code reviews from inside your IDE while using jump-to-definition, your keybindings, and other IDE favorites.

[Learn more](#)



stepsize

Track and prioritise tech debt and maintenance issues, straight from your IDE. Bookmark code while you work, organise TODOs and share codebase knowledge with your team. [Try it out for free today.](#)



bloop.

Bored of trawling through the docs? Get JS and TS code examples from documentation and Open Source right in your IDE. [Learn more.](#)




Duckly

Easy pair programming with any IDE. Duckly enables you to talk, share your code in real-time, server and terminal with people using different IDEs. [Try it out for free.](#)

Book for VS Code

《[Visual Studio Code 权威指南](#)》：带你深入浅出 VS Code！

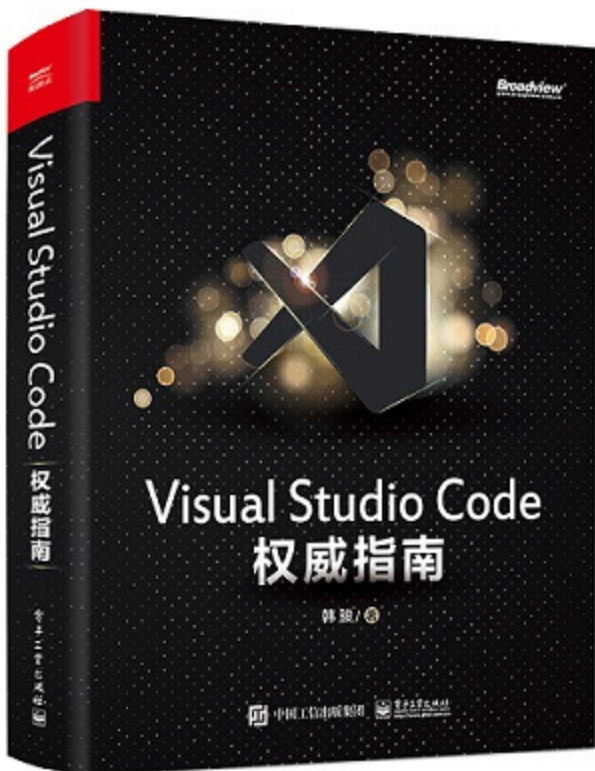


Contributors

Kudos to [@SimonSiefke](#) for rewriting the logic of this extension!

Features

- When you rename one HTML/XML tag, automatically rename the paired HTML/XML tag

Usages

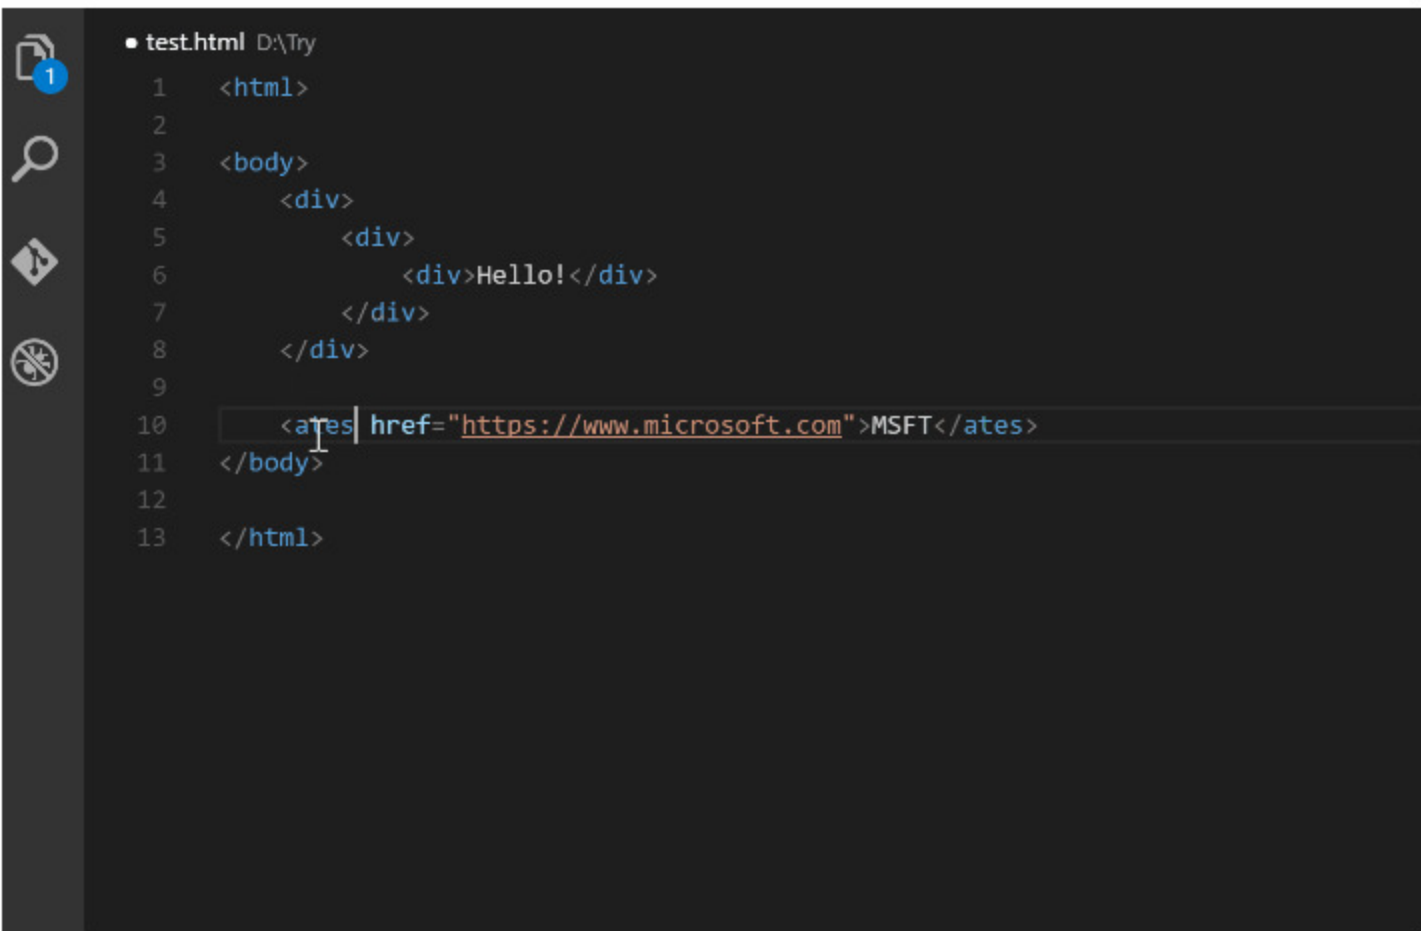

Configuration

Add entry into `auto-rename-tag.activationOnLanguage` to set the languages that the extension will be activated. By default, it is `["*"]` and will be activated for all languages.

```
{  "auto-rename-tag.activationOnLanguage": ["html", "xml", "php", "javascript"]}
```

The setting should be set with language id defined in [VS Code](#). Taking [javascript definition](#) as an example, we need to use `javascript` for `.js` and `.es6`, use `javascriptreact` for `.jsx`. So, if you want to enable this extension on `.js` file, you need to add `javascript` in `settings.json`.

Note

From 1.44, VS Code offers the built-in [auto update tags](#) support for HTML and Handlebars that can be enabled with the setting editor `.linkedEditing`. If this setting is enabled, this extension will skip HTML and Handlebars files regardless of the languages listed in `auto-rename-tag.activationOnLanguage`

Change Log

See Change Log [here](#)

Issues

Submit the [issues](#) if you find any bug or have any suggestion.

Contribution

Fork the [repo](#) and submit pull requests.

Categories

Programming Languages

Tags

AutoComplete

html

multi-root ready

rename

tag

xml

Works with

Universal

Resources

[Issues](#)

[Repository](#)

[Homepage](#)

[License](#)

[Changelog](#)

Project Details

[formulahendry/vscode-auto-rename-tag](#)

[8 Pull Requests](#)

[Last Commit: 4 years ago](#)

[476 Open Issues](#)

More Info

Version	0.1.10
Released on	7/3/2016, 10:34:28 AM
Last updated	2/8/2022, 1:22:48 PM
Publisher	Jun Han
Unique Identifier	formulahendry.auto-rename-tag
Report	Report a concern

