

Solution Review: Problem


Solution Review: Problem

Problem Challenge 3

Challenge 2

Challenge 3

Solution Review: Problem Challenge 1

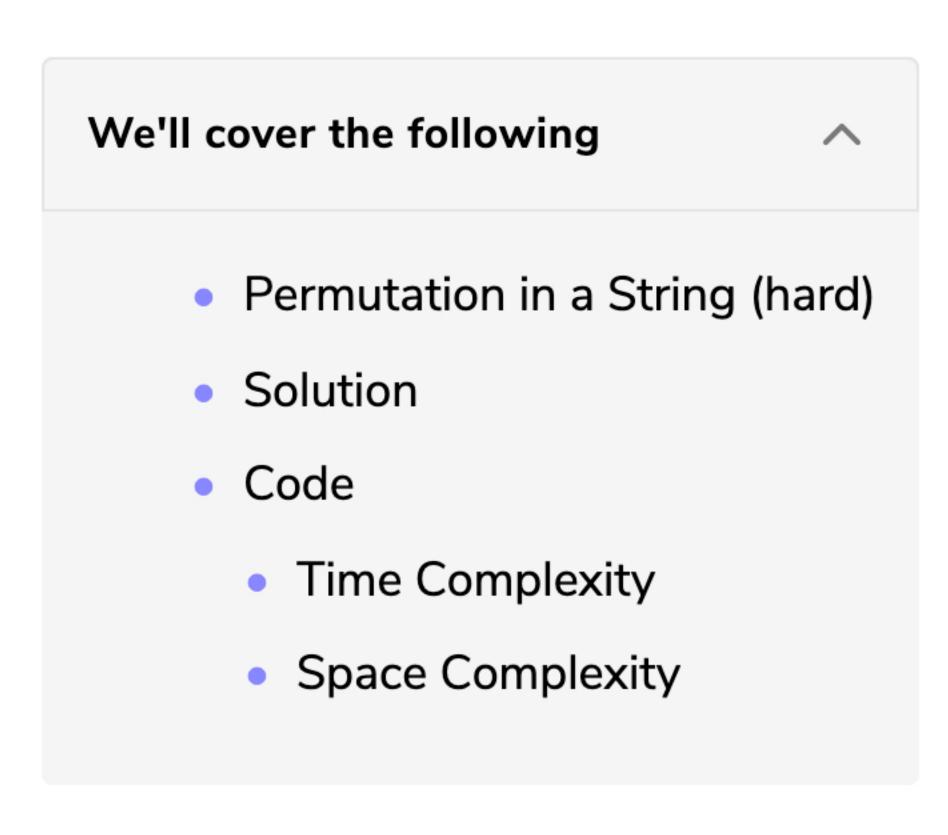

Permutation in a String (hard)

Given a string and a pattern, find out if the string contains any permutation of the pattern.

Permutation is defined as the re-arranging of the characters of the string. For example, "abc" has the following six permutations:

₩

? Ask a Question

- 1. abc
- 2. acb
- 3. bac
- 4. bca
- 5. cab
- 6. cba

If a string has 'n' distinct characters, it will have n! permutations.

Example 1:

```
Input: String="oidbcaf", Pattern="abc"
Output: true
Explanation: The string contains "bca" which is a permutation of the given pattern.
```

Example 2:

```
Input: String="odicf", Pattern="dc"
Output: false
Explanation: No permutation of the pattern is present in the given string as a substring.
```

Example 3:

```
Input: String="bcdxabcdy", Pattern="bcdyabcdx"
Output: true
Explanation: Both the string and the pattern are a permutation of each other.
```

Example 4:

```
Input: String="aaacb", Pattern="abc"
Output: true
Explanation: The string contains "acb" which is a permutation of the given pattern.
```

Solution

This problem follows the **Sliding Window** pattern, and we can use a similar sliding window strategy as discussed in Longest Substring with K Distinct Characters. We can use a HashMap to remember the frequencies of all characters in the given pattern. Our goal will be to match all the characters from this HashMap with a sliding window in the given string. Here are the steps of our algorithm:

- 1. Create a **HashMap** to calculate the frequencies of all characters in the pattern.
- 2. Iterate through the string, adding one character at a time in the sliding window.
- 3. If the character being added matches a character in the **HashMap**, decrement its frequency in the map. If the character frequency becomes zero, we got a complete match.
- pattern (i.e., total characters in the **HashMap**), we have gotten our required permutation. 5. If the window size is greater than the length of the pattern, shrink the window to make it equal to the

4. If at any time, the number of characters matched is equal to the number of distinct characters in the

pattern's size. At the same time, if the character going out was part of the pattern, put it back in the frequency **HashMap**.

Code

Here is what our algorithm will look like:

```
Python3
                      ⊗ C++
                                 JS JS
👙 Java
    import java.util.*;
                                                                                             ₽
    class StringPermutation {
      public static boolean findPermutation(String str, String pattern) {
       int windowStart = 0, matched = 0;
       Map<Character, Integer> charFrequencyMap = new HashMap<>();
       for (char chr : pattern.toCharArray())
         charFrequencyMap.put(chr, charFrequencyMap.getOrDefault(chr, 0) + 1);
      | · · / / · our · goal · is · to · match · all · the · characters · from · the · 'charFrequencyMap ' · with · the · current · window
     ···//·try·to·extend·the·range·[windowStart,·windowEnd]
      for (int windowEnd = 0; windowEnd < str.length(); windowEnd++) {</pre>
     char rightChar = str.charAt(windowEnd);
     if (charFrequencyMap.containsKey(rightChar)) {
    ·····//·decrement·the·frequency·of·the·matched·character
     charFrequencyMap.put(rightChar, charFrequencyMap.get(rightChar) - 1);
     if (charFrequencyMap.get(rightChar) == 0) // character is completely matched
             matched++;
20
       if (matched == charFrequencyMap.size())
     return true;
23
     24
           char leftChar = str.charAt(windowStart++);
     if (charFrequencyMap.containsKey(leftChar)) {
     if (charFrequencyMap.get(leftChar) == 0)
               ·matched--; ·//·before·putting·the·character·back, ·decrement·the·matched·count
Run
                                                                                 Save
                                                                                         Reset
```

Time Complexity

The above algorithm's time complexity will be O(N+M), where 'N' and 'M' are the number of characters in the input string and the pattern, respectively.

Space Complexity

The algorithm's space complexity is O(M) since, in the worst case, the whole pattern can have distinct characters that will go into the **HashMap**.

