


AS-10

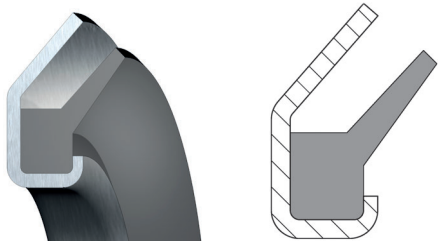

Description

- Axial seal consisting of metal case and elastomer seal
- Seal material: NBR, FKM
- Reinforcement plate material: JIS G3141 SPCC Galvanised + chromatised (CR VI free), corresponds to 1.0330 / AISI 1008

Function

The AS-10 is an axial rotary seal that is primarily intended for sealing against external contaminants such as dirt, liquids, swarf, etc. It protects radial shaft seals and bearings from abrasive ambient conditions. The reinforcement plate protects the elastomer seal from damage and ensures that the seal sits properly on the shaft.

Special properties

- Standard seal for compact installation
- The centrifugal effect of the metal ring provides additional sealing
- Low required surface quality of the shaft surface
- Centrifugal force reduces friction as the peripheral speed increases
- Good dynamic sealing effect
- Reliable design with a wide range of applications
- Simple installation, no axial stop required

Applications include:

- Wheel hubs
- Construction and agricultural machinery
- Pumps
- Drive technology
- Cardan shafts
- Transmissions
- Machine tools

Materials

NBR 70 black
FKM 70 brown

Usage parameters

NBR 70

Temperature: -40 °F to +212 °F NBR
Speed: Rotation up to 12 (20) m/s
Pressure: 0 MPa

Media:

- Plant-based and animal-based oils and greases
- Hydraulic oils (DIN 51524) HL, HLP
- Mineral oil-based lubricants
- Flame-resistant hydraulic fluids HFA, HFB, HFC
- Silicone oils
- Hot water up to approx. 176 °F
- Aliphatic hydrocarbons

FKM 70


Temperature: -22 °F to +356 °F FKM
Speed: Up to 12 (20) m/s
Pressure: 0 MPa

Media:

- Mineral oil-based oils and greases
- Synthetic oils and greases
- Aliphatic, aromatic and chlorinated hydrocarbons
- Hydraulic fluids HFD
- Fuels
- Non-polar solvents
- Plant-based and animal-based oils and greases
- Silicone oils and greases
- Ozone, weather, ageing, UV radiation

The maximum values given must not occur simultaneously!

Installation dimensions

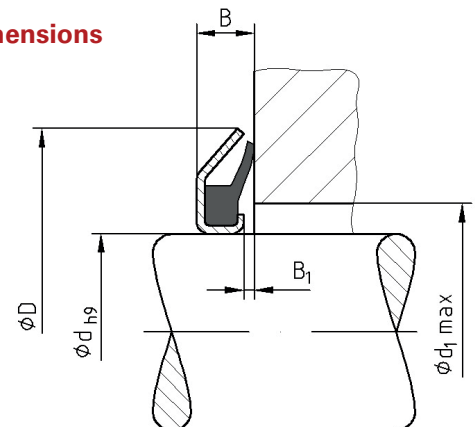

AS-10 Dimensions

Article No.	Ød	ØD	B	B ₁	material	Article No.	Ød	ØD	B	B ₁	material
111896	10	24	3,5	1,0	FKM	111917	45	62	4,5	1,0	FKM
134007	10	24	3,5	1,0	NBR	134021	45	62	4,5	1,0	NBR
53257	11	26	3,5	1,0	NBR	66297	48	65	4,5	1,0	NBR
111897	11	26	3,5	1,0	FKM	111918	48	65	4,5	1,0	FKM
66277	12	26	3,5	1,0	NBR	111919	50	70	5,5	1,0	FKM
111898	12	26	3,5	1,0	FKM	134022	50	70	5,5	1,0	NBR
111899	14	30	4	1,0	FKM	111920	52	72	5,5	1,0	FKM
134008	14	30	4	1,0	NBR	134023	52	72	5,5	1,0	NBR
111900	15	30	4	1,0	FKM	111921	55	75	5,5	1,0	FKM
134009	15	30	4	1,0	NBR	134024	55	75	5,5	1,0	NBR
111901	16	32	4	1,0	FKM	111922	58	78	5,5	1,0	FKM
134010	16	32	4	1,0	NBR	134025	58	78	5,5	1,0	NBR
66281	17	32	4	1,0	NBR	111923	60	80	5,5	1,0	FKM
111902	17	32	4	1,0	FKM	134201	60	80	5,5	1,0	NBR
111903	18	33	4	1,0	FKM	111924	62	82	5,5	1,0	FKM
134011	18	33	4	1,0	NBR	134026	62	82	5,5	1,0	NBR
111904	20	35	4	1,0	FKM	111925	65	85	5,5	1,0	FKM
134012	20	35	4	1,0	NBR	134027	65	85	5,5	1,0	NBR
66284	22	40	4	1,0	NBR	66305	68	88	5,5	1,0	NBR
111905	22	40	4	1,0	FKM	111926	68	88	5,5	1,0	FKM
111906	24	40	4	1,0	FKM	111927	70	90	5,5	1,0	FKM
134013	24	40	4	1,0	NBR	134202	70	90	5,5	1,0	NBR
111907	25	40	4	1,0	FKM	66307	72	92	5,5	1,0	NBR
134014	25	40	4	1,0	NBR	111928	72	92	5,5	1,0	FKM
66287	26	40	4	1,0	NBR	111929	75	95	5,5	1,0	FKM
111908	26	40	4	1,0	FKM	134028	75	95	5,5	1,0	NBR
111909	28	43	4	1,0	FKM	111930	78	98	5,5	1,0	FKM
134015	28	43	4	1,0	NBR	134029	78	98	5,5	1,0	NBR
111910	30	47	4,5	1,0	FKM	111931	80	100	5,5	1,0	FKM
134016	30	47	4,5	1,0	NBR	134030	80	100	5,5	1,0	NBR
111911	32	49	4,5	1,0	FKM	111932	85	105	5,5	1,0	FKM
134017	32	49	4,5	1,0	NBR	134031	85	105	5,5	1,0	NBR
111912	35	52	4,5	1,0	FKM	111933	90	110	5,5	1,0	FKM
134018	35	52	4,5	1,0	NBR	134032	90	110	5,5	1,0	NBR
111913	38	55	4,5	1,0	FKM	111934	95	115	5,5	1,0	FKM
134019	38	55	4,5	1,0	NBR	134033	95	115	5,5	1,0	NBR
111914	40	57	4,5	1,0	FKM	111935	100	120	5,5	1,0	FKM
134020	40	57	4,5	1,0	NBR	134034	100	120	5,5	1,0	NBR
66294	41	57	4,5	1,0	NBR	111936	105	125	5,5	1,0	FKM
111915	41	57	4,5	1,0	FKM	134035	105	125	5,5	1,0	NBR
66295	42	59	4,5	1,0	NBR	66316	135	159	6,5	1,0	NBR
111916	42	59	4,5	1,0	FKM	111937	135	159	6,5	1,0	FKM