

# Efficient Structure-aware OLAP Query Processing over Large Property Graphs

by

Yan Zhang

A thesis  
presented to the University of Waterloo  
in fulfillment of the  
thesis requirement for the degree of  
Master of Mathematics  
in  
Computer Science

Waterloo, Ontario, Canada, 2017

© Yan Zhang 2017

I hereby declare that I am the sole author of this thesis. This is a true copy of the thesis, including any required final revisions, as accepted by my examiners.

I understand that my thesis may be made electronically available to the public.

## Abstract

Property graph model is a widely used model for real life systems of graph structure like social networks, financial transaction networks ect. On-Line Analytical Processing(OLAP) provides an important tool for data analyses by allowing users to perform data aggregation through different combinations of dimentions. For instance, with a Q&A forum dataset, we may process queries like what is the average user’s age group by post score to study if there is a correlation between age and post quality. With a music industry dataset, we may process queries like what is total sales of records group by music company and year to study market activities.

State-of-art graph databases like neo4j do not have efficient support for OLAP aggregation queries. For instance, Neo4j processes each OLAP query in two steps. First expand nodes and edges to the query structure, and then perform aggregation. Even if a query is repeatedly executed for multiple times, in each round Neo4j still processes the query from scratch, without gaining any ”knowledge” from previous workload. When it comes to large property graphs, current graph databases’ efficiency is far from satisfaction. It is unacceptable for users to wait for hours for results of a single query.

We propose a system that greatly improves efficiency of OLAP over large property graphs. The idea is to smartly materialize some views(in main memory or hard disk) that a client was interested in based on a client’s previous workload. Hopefully such materialization can be used to accelerate future query processing.

We implemented our system on top of Neo4j and compared our system with orginal Neo4j system. We wrote some practical OLAP queries and randomly partition them into previous workload and future workload, and them executed future workload using both our system and Neo4j. Result shows that with an acceptable cost of memory or disk usage, we are able to improve OLAP processing efficiency by 10-30 times.

## **Acknowledgements**

I would like to thank Professor Tamer Ozsu and Dr. Xiaofei Zhang who made this thesis possible.

## **Dedication**

This is dedicated to my mother Limei Leng whom I love.

# Table of Contents

<b>List of Tables</b>	<b>ix</b>
<b>List of Figures</b>	<b>x</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Property Graph Model . . . . .	1
1.2 Graph OLAP . . . . .	3
1.3 Challenges on Graph OLAP . . . . .	4
1.4 Proposed Solution and Contributions . . . . .	4
<b>2 Background and Related Work</b>	<b>8</b>
2.1 More on Property Graph Model . . . . .	8
2.2 Graph OLAP . . . . .	8
2.3 Graph Databases . . . . .	13
2.4 Neo4j . . . . .	14
2.5 Graph Aggregation Paper Summary . . . . .	16
2.6 Graph Cube . . . . .	17
<b>3 Problem Definition</b>	<b>19</b>
3.1 Preliminaries . . . . .	19
3.1.1 Notation of Query . . . . .	19
3.1.2 Cuboid vs Substructures . . . . .	20
3.2 Problem Definition . . . . .	21

<b>4</b>	<b>Solution</b>	<b>22</b>
4.1	Solution Framework . . . . .	22
4.2	Partial Materialization . . . . .	23
4.2.1	Greedy Selection Framework . . . . .	25
4.2.2	Cuboid Planner . . . . .	27
4.2.3	Structure Planner . . . . .	32
4.2.4	ID and Property Selection . . . . .	34
4.3	Query Processing . . . . .	34
4.3.1	Substructure Selection . . . . .	36
4.3.2	Query Decomposition . . . . .	38
<b>5</b>	<b>Experiments</b>	<b>42</b>
5.1	Experiment Setup . . . . .	42
5.1.1	Datasets . . . . .	42
5.1.2	Query Workloads . . . . .	42
5.1.3	System Setting . . . . .	45
5.1.4	Neo4j Configuration . . . . .	45
5.2	Aspects of Interest . . . . .	45
5.3	Efficiency Test . . . . .	46
5.3.1	Neo4j BaseLine . . . . .	46
5.3.2	My System . . . . .	46
5.3.3	Frequency Threshold . . . . .	46
5.3.4	Memory Limit . . . . .	46
5.3.5	Selection Algorithms . . . . .	46
5.3.6	View Selection . . . . .	46
5.3.7	Decompose_Join . . . . .	46
5.4	Discussion . . . . .	46

<b>6 Conclusion</b>	<b>47</b>
6.1 Future Work . . . . .	47
6.2 Reflection on Neo4j . . . . .	48
6.2.1 Aggregation Size Estimation . . . . .	48
<b>References</b>	<b>50</b>
<b>APPENDICES</b>	<b>51</b>
<b>A PDF Plots From Matlab</b>	<b>52</b>
A.1 Using the GUI . . . . .	52
A.2 From the Command Line . . . . .	52



# List of Tables

# List of Figures

1.1	A simple property graph. . . . .	2
1.2	A snapshot of data graph containing User, Post and Tag. . . . .	3
1.3	Execution plans of Query #3 for first time and fifth time. . . . .	5
2.1	Structure of OLAP query. . . . .	11
2.2	Lattice(Cube) of attributes {A,B,C}. . . . .	12
2.3	A simple property graph. . . . .	13
2.4	Neo4j BOLT transport protocol. . . . .	15
4.1	Solution framework. . . . .	22
4.2	Substructure lattice. . . . .	33

# Chapter 1

## Introduction

This thesis addresses that OLAP over large property graph is important but current graph databases process graph OLAP in an overwhelmingly inefficient manner, and provides an end-to-end efficient solution for it.

### 1.1 Property Graph Model

We are living in an age with exponential growth of data, and a world that is more and more connected. When a user creates a new post not only a post is created, a "creates" connection between the user and the post is established as well. When the user tags the post with a tag, a "has tag" connection is built between the tag and the post. When a bank transfer happens, a "transfers" connection between two accounts is created. With the fast development of Web2.0 and Internet of Things(IoT), numerous connections of various kinds are created every second. As a result, massive amount of data of connected systems is generated at the same time.

Property graph is a widely used model for connected systems. A property graph is made of nodes, edges, and properties. Like general graph data models, nodes represent entities and edges represent relationships. For instance, Figure 1.1 is a property graph of an online Q&A forum named [www.StackExchange.com](http://www.StackExchange.com). It shows the connections of users (represented by red nodes) and posts (represented by blue nodes). Each arrow pointing from a user node and to a post node represents a "creates" connection. We can view "user creates post" connections clearly from the graph.

We will use a property graph of [www.StackExchange.com](http://www.StackExchange.com) throughout this thesis. We will call this graph "StackExchange graph".

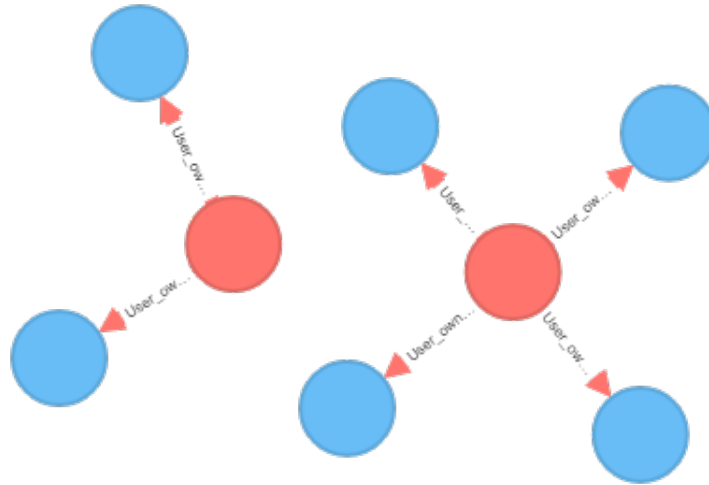


Figure 1.1: A simple property graph.

Besides nodes and edges, in property graph nodes and edges can have any number and type of properties.

For instance, in the exemplifying property graph, a User node may have properties like the users Age, Views, UpVotes etc(listed at the end of the picture). Notice that there is no restriction on what properties a User node can have. That is, any node or edge could be freely attributed with any type of property. This makes a property graph very flexible in terms of property attribution.

Property graph is an informative model as it contains not only nodes and edges, but properties of each individual node and edge as well. Let's look at Figure 1.2, which is a snapshot of property graph on [www.stackexchange.com](http://www.stackexchange.com). It contains:

Nodes: User(in red). Post(in blue). Tag(in green).

Edges: User\_owns\_Post(in red). Post\_hashtag\_Tag(in blue).

Properties: Users View, Posts Score, Tags Tagname ect.

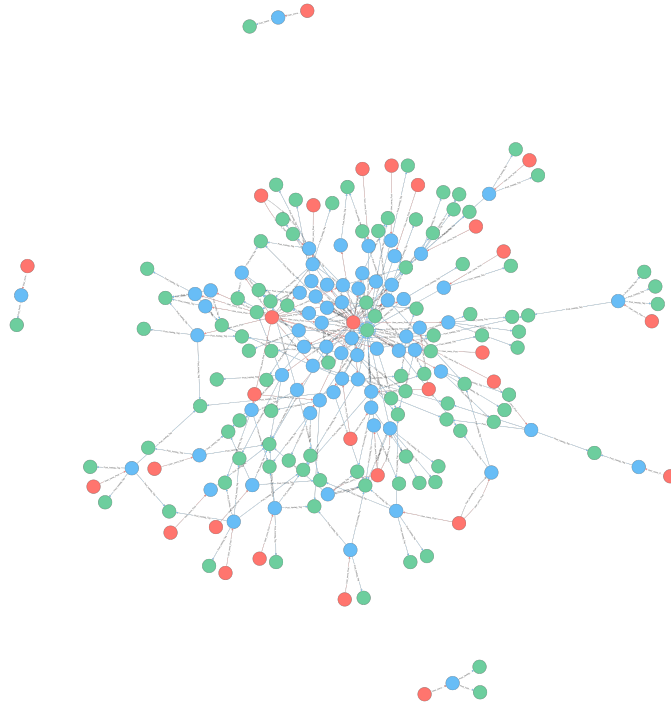


Figure 1.2: A snapshot of data graph containing User, Post and Tag.

## 1.2 Graph OLAP

From a property graph we can ask many interesting questions and queries. Among all kinds of queries, OLAP(Online analytical processing) queries play an important role in business analysis and decision marking.

For instance on "StackExchange graph" we may perform OLAP:

Query: Get average post score grouped by users upvotes.

to see if high upvotes of a user indicate a high-quality post. If the result is shows a significant correlation, we may use the authors upvotes as a factor to estimate the quality of his or her post when a post is freshly posted and score of the post has not been well voted been yet.

With a property graph dataset on music industry we may ask:

Query: Get total sum of music purchases by buyers at age 18-25 grouped by music company and month

to evaluate a company’s previous strategy in order to increase share of young people’s market.

Graph OLAP refers to such OLAP over property graphs. Graph OLAP provides an interactive and informative way to analyze property graphs from multiple dimensions and thus helps people find the hidden correlations, aggregated effects, regularities, tendencies and so on. As a matter of fact, graph OLAP has already played an important role in business analysis and decision making and it is an interesting research topic in database area.

### 1.3 Challenges on Graph OLAP

We know that Graph OLAP is important. However there are many challenges on this topic. One of the most challenging part is efficiency issue.

From an academic point of view, most of OLAP studies reside in traditional relational data models, whereas studies on efficient graph OLAP are not enough. What’s worse, current graph OLAP researches either focus on accelerating graph OLAP over a special subset of property graphs, or focus on general highlevel topics on graph OLAP other than the important issue of query efficiency improvement.

From a database point of view, state-of-art databases do not provide efficient support for graph OLAP, especially when it comes to large datasets. Graph databases are databases that specialize in storage and processing of property graphs. However current graph databases are not satisfactory in terms of OLAP processing efficiency over large property graphs(often with more than millions of nodes and edges). For instance, the above exempling OLAP query on StackExchange graph dataset(of roughly 45GB in size) takes Neo4j more than 2 hours to process. It is frustrating for users to wait for 2 hours or even more than a day for the result of one OLAP query as this would undermine interactivity which is one of the most best features of OLAP. Therefore we want to accelerate OLAP processing over large property graphs.

### 1.4 Proposed Solution and Contributions

We want to propose a system that supports efficient OLAP over large property graphs.

We found that current graph databases like Neo4j process each OLAP query in a naive manner: without using any information of previous queries. In an extreme case, even if we

executed a query again and again, execution plan for the query always stays the same and thus execution time does not improve.

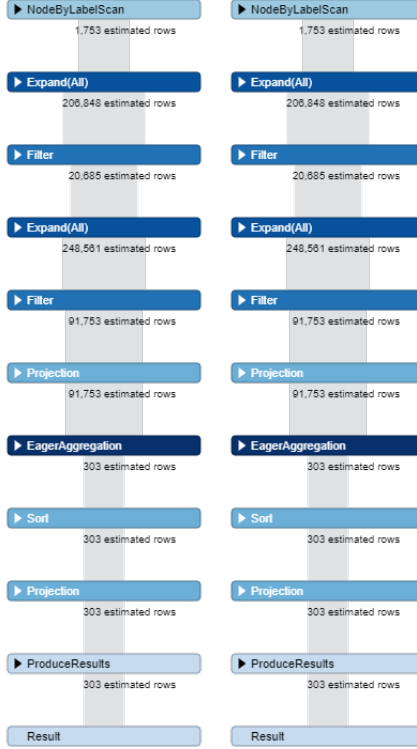


Figure 1.3: Execution plans of Query #3 for first time and fifth time.

This naive feature of always executing queries regardless of previous queries misses valuable information contained in previous workloads. In reality, most OLAP queries are conducted in a real-time manner. As a result, future queries are unknown before they arrive. However in reality a clients attention tends to reside in several particular structures and properties (closely related with the topics that the client is interested in). Within a specific time range, it is these "hot" structures that the client tends to repeatedly view in different dimensions. Therefore previous queries can be used as a good reference for understanding which structures and properties the clients are currently interested in.

For instance, suppose a client just executed the exempling four queries, here is what we can learn from these four previous workload:

Structure-wise: (User)-[creates]- $\downarrow$ (Post) is frequently queried. We can tell that client is interested in how "users creates posts". Thus it is reasonable to guess that the user is likely to issue OLAP queries involving (User)-[creates]- $\downarrow$ (Post) in following queries.

Property-wise: User.UpVotes, Post.Score, User.Age, Tag.TagName etc. More specifically,  $\downarrow$ UpVotes, Post.Score $\downarrow$  and  $\downarrow$ User.Age, Tag.TagName $\downarrow$  are frequent combinations. Thus it makes sense to guess that these property combinations are likely to appear together in future queries.

Intuitively, if we smartly select frequently queried structures and properties based on previous workload and materialize them, they might be covered in future queries and thus be used to accelerate processing.

A good analogy of this is establishment of materialized views in relational databases and processing queries directly on materialized views. In relational databases, we are allowed to build materialized views on structures and attributes that we are interested in. Hopefully when future queries come, we can faster process them using pre-materialized views. Unfortunately, current graph databases do not support similar operations.

Therefore we propose a system that realizes automatic and smart pre computation and materialization based on finished workload, and utilization of materialized result to facilitate faster future query processing.

There are two most important problems that we need to solve:

One key issue is smart selection of "materialized views". We need to select and pre-compute those that are most beneficial for future queries.

Another key issue is how to optimize a better execution plan for answering a future query efficiently using the precomputed materials.

We summarize major contributions of our work is as follows:

- We designed an end-to-end system that realizes structure-aware OLAP query processing on graph databases using precomputation based on previous workloads.
- We implemented our system on Neo4j.
- We proposed our algorithm for smart selection of structures and cuboids to be pre-computed.
- We suggested different ways for future query processing. We tested their performances and gave explanations on the performance differences.



The following contents are organized in this way: In part 2 we will discuss about related work. We will introduce pre-military knowledge about OLAP, graph databases, Neo4j; and provide a summary of how existing work solves OLAP queries. In part 3 we will explain our solution framework and system design in details. Part 4 is on experiments. We will talk about experiment design, followed by presentation of experimental results and discussions of results. Part 5 will talk about opening questions and future work.

# Chapter 2

## Background and Related Work

### 2.1 More on Property Graph Model

We have introduced about property graph model in Introduction part. We know that in property graph model, each node and edge could have arbitrary number and type of properties. A type of property is represented by

NodeType.PropertyType

For instance User.Age represents "Age" property on "User" node.

In order to identify a node or edge, a unique ID is assigned to each node and edge. In this thesis we represent a type of property by

ID(node) or ID(edge)

to represent unique ID of a node or edge.

### 2.2 Graph OLAP

We will use the following four queries to illustrate OLAP operations.

Query #1

Question: Does high upvotes of a user indicate a high-quality post?

Query: Get average post score grouped by users upvotes.

Result:

User.UpVotes	AVG(Post.Score)
0	1.33
1	2.23
2	2.34
3	2.77
4	3.43

What we learned: From the query result we can see that upvotes can be used as a good indicator of a users post quality. Suppose we would like to propose suggested posts based on scores. When a post is freshly posted and score of the post has not been well voted been yet, we may use the authors upvotes as a factor to estimate the quality of his or her post.

Query #2:

Question: Following Query #1. But this time we want to take a closer look at Query #1 for different types of questions. If we take upvotes as quality of a user, perhaps quality of a user is shown only in his or her answers, instead of questions. Or is it true that high quality user also asks much better questions?

Query: Get average post score grouped by users upvotes and posts post types.

Result:

User.Upvotes	Post.PostTypeId	AVG(Post.Score)
0	1	2.14
1	1	2.26
2	1	2.83
3	1	3.04
4	1	3.46
0	2	1.54
1	2	2.21
2	2	2.18
3	2	2.72
4	2	3.58

What we learned: From the query result we are suggested that high-quality users not only provide good questions but ask valuable questions as well. However, there is a subtle difference on how upvotes correlate with questions and answers. For instance, a really low upvote level indicates a low-quality answer more than a low-quality question. This

is probably because people tend to be more tolerate with a naive question rather than a wrong answer.

Query #1 and Query #2 simply focus on relationship between User and Post. We may switch our attention to a slightly more complicated structure by adding Tag.

Query #3:

Question: In year 2017, which is the weighted average age of users? For instance is python more trendy than c among young users?

Query: Get average user age grouped by users 2017 posts tags.

Selected Result:

TagName	AVG(Age)
router	19.6
python	24.1
internet	26.8
c	30.2
programmer	31.4
software	29.8

What we learned: We can see the average user age of each tag clearly and easily compare them. For instance, python is generally more popular among younger users. "Router" is a relatively "younger" topic than "internet".

Query #4:

Question: Follwing Query #4, lets look at tendency of topics "average popular user age" by years. Is there a tendency of younger age?

Query: Get average user age grouped by users posts tags and years.

Selected Result:

TagName	Year	AVG(Age)
router	2012	22.1
router	2017	19.6
python	2012	27.3
python	2017	24.1
internet	2012	27.5
internet	2017	26.8
c	2012	30.4
c	2017	30.2
programmer	2012	34.2
programmer	2017	31.4
software	2012	31.6
software	2017	29.8

What we learned: Tendency of younger age on IT topics is seen. Python is getting faster embraced by younger people compared with C. Similarly we can compare two commercial products customer targeting strategy, advertising performance etc.

From the above OLAP query examples we can see that OLAP over property graphs provides an interactive and informative way to analyze property graphs from multiple dimensions and thus helps people find the hidden correlations, aggregated effects, regularities, tendencies and so on.

Three key elements of a graph OLAP are structure, dimension, and measure. Taking Query #1 as an example:

Question: Does high upvotes of a user indicates a high-quality post? Query: Get average post score grouped by users upvotes.

This query is on all the following structures:



Figure 2.1: Structure of OLAP query.

We say that (User)-[User\_owns\_post]->(Post) is the structure of Query #1. The query is aggregated by (grouped by) users upvotes. We say that User.Upvotes is the dimen-

sion of Query #1. The query is aggregated on average of posts score. We say that  $\text{AVG}(\text{Post.Score})$  is the measure of Query #1.

Similarly, for Query #2:

Question: Similar to Query #1. But this time we want to take a closer look at Query #1 for different types of questions.

Query: Get average post score grouped by users upvotes and posts post types.

Structure: (User)-[User\_owns post]-(Post)

Dimensions: User.Upvotes, Post.PostTypeId

Measures:  $\text{AVG}(\text{Post.Score})$

Notice that Query #2 adds Post.PostTypeId to Query #1s dimensions. That is to say, Query #2 asks for a more detailed partitions over dimensions. We call Query #2 a drill-down from Query #1, and Query #1 a roll-up from Query #2. Such roll-up and drill-down operations allow us to navigate up and down through the dimensional lattice of all possible property combinations.




Figure 2.2: Lattice(Cube) of attributes  $\{A,B,C\}$ .

Query #3:

Question: In year 2017, which is the weighted average age of users? For instance is python more trendy than c among young users?

Query: Get average user age grouped by users 2017 posts tags.

Structure: (User)-[User\_owns\_post]-(Post)-[Post\_hashtag-Tag]-(Tag)

Dimensions: Tag.Tagname

Measures:  $AVG(User.Age)$

In Query #3, a requirement that post must be created in year 2017 picks out a particular subset of all (User)-[User\_owns\_post]-(Post)-[Post\_hashtag\_Tag]-(Tag) candidates. In OLAP this is called slicing operation. Slicing operation allows users to view the data with filtering requirements on selected properties.

In this thesis we call  $Post.Year=2017$  a "slicing condition" of Query #3.

To summarize, graph OLAP allows clients to aggregate different structures, over different dimensions, on different measures. Clients can change their views by performing roll-up, drill-down, and slicing freely and interactively.

## 2.3 Graph Databases

There are two major types of databases that store and process graph data: traditional relational databases and graph databases.

Relational databases adopt traditional ways of modeling data in form of entity and relationship tables. For instance, for the following property graph, which consists 1 user and his or her 3 posts. A relational database stores the property graph as 3 tables:

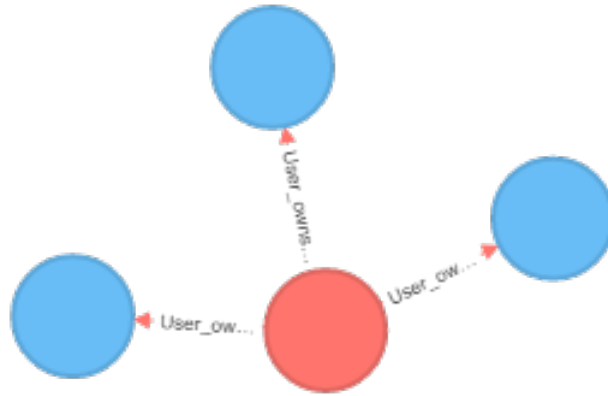


Figure 2.3: A simple property graph.

Table-User

Uid	All user properties
1	Property values

Table-Post

Pid	All post properties
1	Property values
2	Property values
3	Property values

Table-Owns

Uid	Pid
1	1
1	2
1	3

There are two drawbacks of storing property graphs in relational databases. First, each node or edge of in property graph could have arbitrary types of properties. However, schemas of relational tables restrict nodes or edges of a same type to have a uniform set of properties (attributes). Second and more importantly, edges are not stored as a separate table. For instance, we cannot directly query all the posts of a given user without joining User and Own tables in the above example.

Graph databases solve the above two issues by directly adopting property graph structures to store data. In graph databases, edges are stored not as independant tables but directly attached to related nodes using data structures such as adjacency lists. Many graph database applications have been implemented and commercialized. One of the popular ones is Neo4j.

Relational databases and graph databases both have their own strengths in term of query processing. However it is generally accepted that graph databases perform better at property graph data processing as it conforms more with the actual graph structure.

Many graph database applications have been implemented and commercialized. One of the popular ones is Neo4j.

## 2.4 Neo4j

Neo4j is one of the most popular graph databases which holds atomicity, consistency, isolation, durability (ACID).



Instances are modeled and stored as property graphs in Neo4j. Like other graph databases, edges are not stored as physically separate tables, but directly attached to their nodes. One special thing about Neo4j's property graph is that its nodes and edges can be labeled with any number of labels (similar to entity and relationship types). For instance a node referring to a student could have various labels such as student, people etc.

Cypher is Neo4j's query language, which is expressive and simple. Here are some examples of Cypher queries:

Aggregation query: For answers(Post.PostTypeId=2), what is the average score group by different user upvotes?

```
match (u:User)-[r:User_owns_Post]->(p:Post) where p.PostTypeId="2" return u.Upvotes,
AVG(p.Score)
```

Here User and Post are labels, PostTypeId and Score are properties of Post node, Upvotes is property of User node.

Neo4j is written in Java. While applications in various languages could interact the server by issuing queries with its own BOLT protocol(which is binary and more efficient than HTTP).

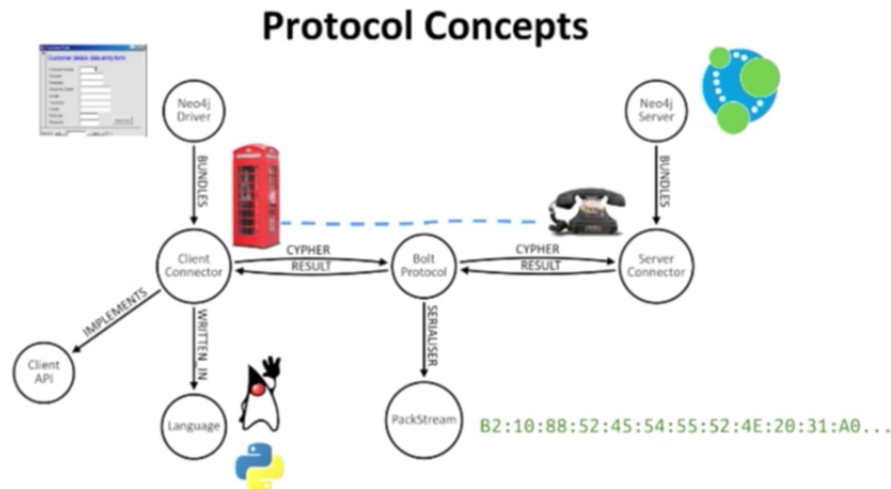


Figure 2.4: Neo4j BOLT transport protocol.

## 2.5 Graph Aggregation Paper Summary

Numerous papers have been published on graph aggregation.

Cube-based [1] proposes the concept of graphs enriched by cubes. Each node and edge of the considered network are described by a cube. It allows the user to quickly analyze the information summarized into cubes. It works well in slowly changing dimension problem in OLAP analysis.

Gagg [2] introduces an RDF graph aggregation operator that is both expressive and flexible. It provides a formal definition of Gagg on top of SPARQL Algebra and defines its operational semantics and describe an algorithm to answer graph aggregation queries. Gagg achieves significant improvements in performance compared to plain-SPARQL graph aggregation.

Pagrol [3] provides an efficient MapReduce-based parallel graph cubing algorithm, MRGraph-Cubing, to compute the graph cube for an attributed graph.

Graph Cube [4] introduces Graph Cube, a new data warehousing model that supports OLAP queries effectively on large multidimensional networks. It takes account of both attribute aggregation and structure summarization of the networks. In order to deal with curse of dimensions, a greedy algorithm framework is introduced for partial materialization of cuboids.

Snapshot [5] studies dimensions and measures in the graph OLAP scenario and furthermore develops a conceptual framework for data cubes on graphs. It differentiates different types of measures (distributive and holistic etc) by their properties during aggregation. It looks into different semantics of OLAP operations, and classifies the framework into two major subcases: informational OLAP and topological OLAP. It points out a graph cube can be fully or partially materialized by calculating a special kind of measure called aggregated graph.

We summarize some of the most related ones as follows:

	Input graph	Query pattern	Layer structure	
Cube-based [1]	property graph	simple relation	yes	cul
Gagg [2]	property graph	all exact-match patterns	no	
Pagrol [3]	property graph	edge and node attributes	yes	Map-Re
Graph Cube [4]	homogenous nodes and edges	node attributes	yes	partial
Snapshot [5]	property graph	edge and node attributes	yes	distrib

From the summary we can categorize the papers into two kinds:


First, like Graph Cube[4], focuses on a simple subset of property graphs(e.g. graphs with only homogenous nodes and edges) and propose optimizations on OLAP query processing. The optimizations are attribute-aware, and since the nodes and edges are of only one kind queries over different structures and structure-aware optimizations are out of the scope.

Second, like Gagg [2], focus on an abstract high-level framework that process generic queries over generic property graphs. However, query optimizations are not focused.

Therefore it is very meaningful to explore faster structure-aware OLAP processing over general property graphs.

## 2.6 Graph Cube

In Graph Cube [4], concepts of graph cube is introduced. Given a particular structure  $S$ , a property set  $P$ , and measure set  $M$ . We can aggregate over  $S$  on  $2^{|P|}$  different combinations of dimensions. These  $2^{|P|}$  queries can be mapped as a lattice structure, where each combination of dimensions corresponds to a cuboid in the lattice. We call the lattice structure of these  $2^{|P|}$  queries a graph cube.



It has been pointed out that as long as if domain of measure is within {count, sum, average} and  $M$  contains count(\*), the following feature holds:

Given any two cuboids  $C1$  and  $C2$  from the same graph cube, as long as  $\text{dimension}(C2)$  is a subset of  $\text{dimension}(C1)$ , result of  $C1$  can be used to generate result of  $C2$ . This is to say once a cuboid is materialized, all roll-up operations from this cuboid could be processed

simply by scanning the materialized cuboid result. This will dramatically decrease roll-up operation time compared to aggregation from data graph(often of larger size, disk I/O), scanning materialized cuboid result(often of smaller size) is often much faster.

Ideally we can materialize all cuboids. But when number of dimension is large, number of cuboids grows exponentially, making total materialization impossible due to overwhelming space cost. To solve this Graph Cube [4] proposed a partial materialization algorithm on graph cube. It is a greedy algorithm and the score function is based on benefits of deduction of total computation cost.

# Chapter 3

## Problem Definition

### 3.1 Preliminaries

#### 3.1.1 Notation of Query

In this thesis, we use

*Structure : Dimension, Measure, Slicing Condition*

to represent an OLAP query.

For instance Query #3

Get average user age grouped by users 2017 posts tags.

is written as

User-Post, Post-Tag: Tag.Tagname, AVG(User.Age), Post.Year=2017

For a query  $q$ , we use  $q.properties$  to refer to a set of all properties in Dimension, Measure, and Slicing Condition of  $q$ . Suppose  $q$  is Query #3, then

$q.properties = \{Tag.Tagname, User.Age, Post.Year\}$ .

Similarly,

$q.structure = \text{User-Post, Post-Tag}$ .

### 3.1.2 Cuboid vs Substructures

Suppose we have the following 7 queries in previous workload:

User-Post, Post-Tag: (AVG)User.Age, Tag.TagName

User-Post, Post-Tag: User.CreationDate\_Year, Tag.TagName

User-Post, Post-Tag: User.CreationDate\_Year, (AVG)Post.Score, Tag.TagName=database

User-Post, Post-Tag: User.Age, (AVG)Post.Score, Tag.TagName=java

User-Post, Post-Tag: User.UpVotes, (AVG)Post.Score, Tag.TagName=algorithm

Badge-User, User-Post, Post-Tag: Tag.TagName, Badge.Name=Student, Post.CreationDate\_Year

Badge-User, User-Post, Post-Tag: Tag.TagName, Badge.Name=Teacher

We can tell that the user is interested in User-Post, Post-Tag structure. Suppose we build a cube as in Graph Cube [4] on User-Post, Post-Tag over all queried attributes and precompute some most beneficial cuboids.

For instance we precompute cuboids like

User-Post, Post-Tag: User.Age, User.UpVotes, Tag.TagName, User.CreationDate\_Year, Post.Score Cuboids only contain attributes.

They do not contain IDs of nodes. Cuboids can only be used in queries with exactly the same structure. They can be scanned for more aggregated dimension combinations (drill-down operations). Notice that cuboids are not useful for queries with different structures.

We cannot process

Badge-User, User-Post, Post-Tag: Tag.TagName, Badge.Name=Teacher

by simply joining cuboid

User-Post, Post-Tag: User.Age, User.UpVotes, Tag.TagName, User.CreationDate\_Year, Post.Score

because IDs of User are not provided in the cuboid.

If besides properties, we also keep IDs of User, then the materialization is joinable on User. The drawback is that result would be much more space-costly than cuboids, as ID of User is unique key.

We call materializations that only aggregates on properties without storing IDs cuboids, and we call those with IDs as substructures. The trade-off between cuboids and substructures is space vs usage potential.

Cuboids are generally lighter in terms of space cost, but they can help with queries with exactly same structure.

Substructures generally heavier in terms of space cost, but it can be widely used to join with other substructures.

## 3.2 Problem Definition

Given previous queries  $P$ , space limit  $\sigma$ , which cuboids  $C$  and substructures  $S$  shall we materialize so that future queries  $F$  could be faster processed using  $C$  and  $S$ ?

Given  $P$ , space limit  $\sigma$ , select  $C$  and  $S$  wisely.

Given  $F$ ,  $C$  and  $S$ , process  $F$  fast.

# Chapter 4

## Solution

### 4.1 Solution Framework

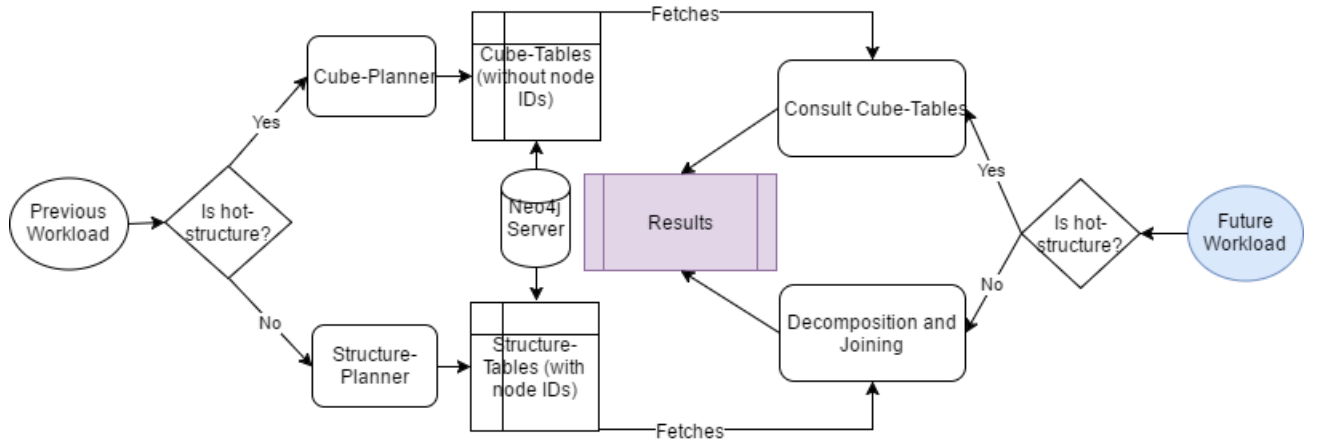


Figure 4.1: Solution framework.

Our solution framework contains two major parts:

Partial Materialization part: Cube-Planner and Structure-Planner select cuboids and substructures to precompute.

Decomposition part: Scan over cuboids or join using substructures to produce results.

We will discuss Partial Materialization part in Section 4.2 and Decomposition part in Section 4.3.



## 4.2 Partial Materialization

In 3.1.2, we have discussed about the trade-off between cuboid and substructures. We know that benefit of a cuboid rely on future queries of exactly same structure. Therefore it is wise that we materialize cuboids on a structure only when we are fully confident that the structure is of high interest for the client. Otherwise, we may risk wasting space only to materialize cuboids that are rarely "hit" by future queries. On the other hand, substructures are less picky in terms of exact match of future query structures. Therefore we make our partial materialization policy as follows:

For queries of structure frequency over a threshold, consider these queries have "hot structure" and pass them to CubePlanner for cuboid selection.

For other queries with "less hot structure", pass them to StructurePlanner for substructure selection.

---

**Algorithm 1:** PartialMaterialization

---

**System setting:** threshold: frequency threshold for hot structures

**Input:**  $Q$ : a set of previous queries

**Output:**  $C$ : a set of materialized cuboids

$S$ : a set of materialized substructures

```
1  $CInput \leftarrow \emptyset$  ;
2  $SInput \leftarrow \emptyset$  ;
3 foreach  $q \in Q$  do
4   if  $structureFreq(Q, q) > threshold$  then
5      $CInput \leftarrow CInput \cup \{q\}$ ;
6   else
7      $SInput \leftarrow SInput \cup \{q\}$ ;
8   end
9 end
10  $C := materialize(CubePlanner(CInput))$  ;
11  $S := materialize(StructurePlanner(SInput))$ ;
12
```

---

For instance:

**Previous Workload:**

Badge-User, User-Post: Badge-Name, Post-Score, Post-PostTypeId=2

User-Comment, Comment-Post: User-UpVotes, Comment-Score, (AVG)Post-Score, Post-PostTypeId=1

User-Post, Post-Vote: User-UpVotes, Vote-VoteTypeId

User-Post, Post-Tag: (AVG)User-CreationDate<sub>year</sub>, Tag – TagName

User-Comment, Comment-Post: User-ActiveMonth, Post-CreationDate<sub>year</sub> = 2016

User-Comment, Comment-Post: User-Age, (AVG)Comment-Score, Post-PostTypeId=2

**Future Workload:**

User-Comment, Comment-Post: User-UpVotes, (AVG)Post-Score, Post-PostTypeId

User-Comment, Comment-Post: User-Age, Post-PostTypeId

User-Post, Post-PostHistory: User-UpVotes, PostHistory-PostHistoryTypeId

Badge-User, User-Post: (AVG)Post-Score, Post-PostTypeId=2

We count previous queries by structure:

Structure	Frequency
<b>User-Comment, Comment-Post</b>	<b>3</b>
User-Post, Post-Tag	1
User-Post, Post-Vote	1

We are confident that *User-Comment, Comment-Post* is a "hot structure". We materialize cuboids over *User-Comment, Comment-Post* using

User-Comment, Comment-Post: User-UpVotes, Comment-Score, (AVG)Post-Score, Post-PostTypeId=1

User-Comment, Comment-Post: User-ActiveMonth, Post-CreationDate<sub>year</sub> = 2016

User-Comment, Comment-Post: User-Age, (AVG)Comment-Score, Post-PostTypeId=2

and hopefully these cuboids benefit processing of future queries

User-Comment, Comment-Post: User-UpVotes, (AVG)Post-Score, Post-PostTypeId

User-Comment, Comment-Post: User-Age, Post-PostTypeId

We pass the rest three queries of "less hot structure"

Badge-User, User-Post:Badge-Name,Post-Score,Post-PostTypeId=2

User-Post, Post-Vote: User-UpVotes, Vote-VoteTypeId

User-Post, Post-Tag: (AVG)User-CreationDate $_{year, Tag} - TagName$

to StructurePlanner. StructurePlanner will discover most useful substructures. For instance StructurePlanner is likely to find

*User-Post*

as a useful substructure and hopefully the materialized substructure can be used in faster joining the result of

User-Post, Post-PostHistory: User-UpVotes, PostHistory-PostHistoryTypeId

Badge-User, User-Post:(AVG)Post-Score,Post-PostTypeId=2

### 4.2.1 Greedy Selection Framework

Cube-Planner and Structure-Planner adopt the same greedy selection framework. We will discuss this greedy selection framework first so that readers could have a high-level idea of our selection policy.

Our problem is

given previous queries  $P$ , space limit  $\sigma$ , select cuboids  $C$  and substructures  $S$  to materialize so that future workload  $F$  processing could be mostly benefited. Suppose  $P$  and  $F$  consist of similar queries.

We used greedy algorithms for cuboid and substructure selection. The idea is to always pick next candidate with highest ratio of margin benefit/space. After a candidate is picked, re-evaluate benefit of the rest candidates. Re-evaluation is essential as margin benefit of a

candidate may be influenced after materializaion of another candidate.

---

**Algorithm 2:** Greedy Selection

---

**System setting:**  $\sigma$ : space limit

**Input:**  $C$ : a set of candidates of cuboids or substructures in lattice structure

$P$ : A set of previous queries

**Output:**  $Q$ : a queue of selected candidates to materialize

```

1 foreach  $c \in C$  do
2    $c.space := estimateSpace(c)$  ;
3    $c.benefit := estimateMarginBenefit(c, P, Q)$  ;
4    $c.score := c.benefit/c.space$  ;
5 end
6 for  $Q.totalsize < \sigma$  do
7    $selected := c$  in  $C$  with highest score ;
8    $Q.offer(selected)$ ;
9   repeat 1-5 ;
10 end
11
```

---

1-5 estimates space cost, marginal benefit for future workload, and score for each candidate. We call this parse "score calculation".

6-10 keeps picking up candidates with highest score one by one until space limit is hit. Notice that each time a candidate is selected, 9 refreshes scores for all candidates by repeating 1-5. We call this parse "pick-and-update".

Cube-Planner and Structure-Planner apply this greedy selection framework with specific implementation of score caculation in 1-5. Future users can plug-in their implementation and design their planners with consideration of their database settings. We will introduce how we implement our Cube-Planner and Structure-Planner for Neo4j in the following sections.

## 4.2.2 Cuboid Planner

### Single Cube

Given previous queries of a same structure, we implement SingleCubePlanner from greedy selection framework to select cuboids.

---

**Algorithm 3:** SingleCubePlanner

---

**System setting:**  $n$ : maximum number of cuboids to precompute  
**Input:**  $P$ : a set of previous queries with a same structure  
**Output:**  $C$ : an queue of selected cuboids to precompute

```
1 Lattice  $\leftarrow$  buildLattice( $Q$ );
2 foreach query  $q \in P$  do
3   |  $q.time \leftarrow estimateProcessingTime(q)$  ;
4 end
5 foreach cuboid  $\in Lattice$  do
6   |  $cuboid.space \leftarrow estimateSpace(cuboid)$ ;
7   |  $cuboid.benefit \leftarrow 0$ ;
8   | foreach query  $q \in P$  and  $q.properties \subseteq cuboid.properties$  do
9     |  $cuboid.benefit+ = max(0, q.time - estimateScanningTime(cuboid))$ ;
10  | end
11  |  $cuboid.score \leftarrow cuboid.benefit / cuboid.space$  ;
12 end
13 for  $i=1$  to  $n$  do
14   |  $nextBestCube \leftarrow$  cuboid in Lattice with highest score ;
15   | if  $nextBestCube.score < 0$  then
16     | break ;
17   | end
18   |  $C.offer(nextBestCube)$ ;
19   | foreach cuboid  $q \in Q$  and  $q.dimension \subseteq nextBestCube.dimension$  do
20     |  $q.time \leftarrow min(q.time, estimateScanningTime(nextBestCube))$ ;
21   | end
22   | repeat 5-12 ;
23 end
24
```

---

1 builds a lattice over all combinations of dimensions of all attributes that appeared in previous queries P, using classic lattice construction algorithms.

2-4 initializes best-so-far processing time for each previous query by its naive database processing time.

5-12 performs "score calculation". For each cuboid, 6 estimates its space. 8-10 iterates over all "roll-up" previous queries adds on marginal benefit if scanning time over the cuboid is smaller than a previous "roll-up" query's best-so-far processing time.


13-23 performs "pick-and-update". 15-17 terminates selection when there is no marginal benefit at all. 19-22 updates best-so-far processing time for previous queries as a result of current round of selection.

Implementation of functions are listed as follows. Notice that users can implement in their own ways based on their database systems.

Function `estimateProcessingTime(query)` provides naive estimated time cost of processing a query with a graph database. Implementation of `estimateProcessingTime(query)` is database specific as physical storage execution plans vary among different databases. Some graph databases like Neo4j provide APIs to see the execution plan and estimated intermediate size. In our implementation we used total size of intermediate results as estimation of time cost.

Execution plan of Cypher query:

```
match (u:User)-[]-(b:Badge) match (u:User)-[]-(p:Post) match (p:Post)-[]-(t:Tag) return
t.TagName, count(*)
```

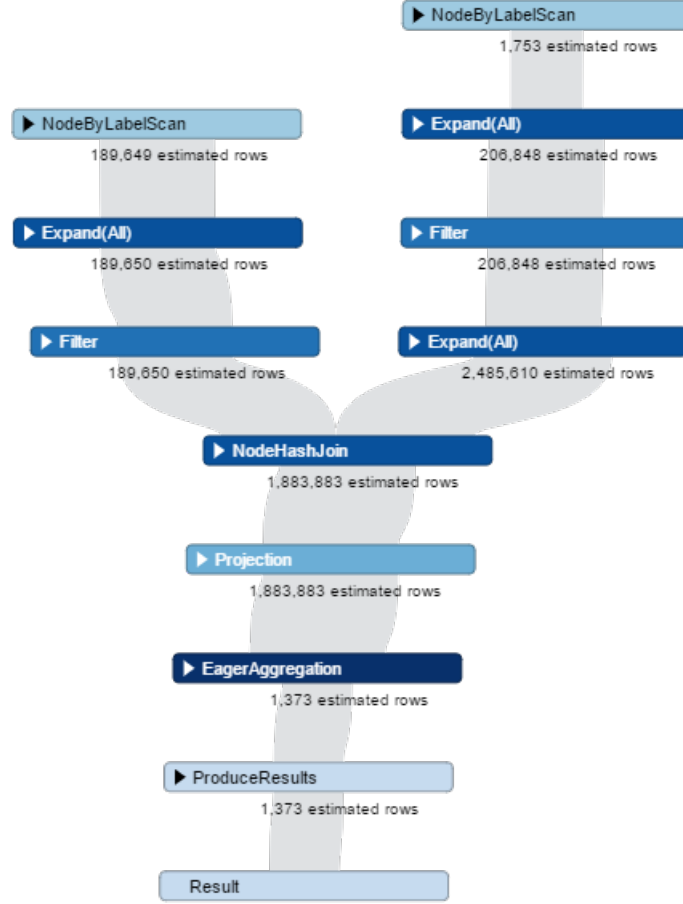

If APIs to see the execution plan and estimated intermediate result sizes are not provided for graph databases, we need to estimate in our own way. There are many studies about joining cost estimation. The key issue is to determine joining order and estimate intermediate result sizes using selectivity. Joining estimation [6] is a good summary of different joining plans and ways of cost estimation.

Function `estimateScanningTime(cuboid)` estimates time cost for scanning cuboid result. For cuboid  $C$ . We use space cost of cuboid result table for estimation.

$$spacePerRow := \sum_{p \in C.properties} sizeOf(p)$$

$$SpaceCost(C) := spacePerRow * numberOfRows(C)$$

Here  $sizeOf(\text{property type})$  refers to standard size of data types. For instance `int` type in `C` is 2 byte.

$numberOfRows(C)$  refers to number of rows of `C`. A rough estimation is product of cardinalities of each property. We added a shrinking effect because some combinations of property values do not exist in the final result.

$$numberOfRows(C) := \prod_{p \in C.properties} |p| * shrinking\_factor^{|C.properties|-1}$$

## Holistic Cube

`SingleCubePlanner` selects cuboids from one lattice of one structure. However the input to `CubePlanner` may consist of previous queries of various hot structures. `CubePlanner` performs cuboid selection in a holistic manner by calling `SingleCubePlanner` for each hot structure and rank cuboids across different lattices(cubes).

---

### Algorithm 4: CubePlanner

---

**System setting:** `n`: maximum number of cuboids to precompute

**Input:** `Q`: a set of previous queries not necessarily with a same structure

**Output:** `C`: a queue of selected cuboids to precompute

```

1 Group := GroupByStructure(Q) ;
2 foreach group ∈ Group do
3   | group.candidates := SingleCubePlanner(group);
4 end
5 for i=1 to n do
6   | selectedGroup := group in Group with highest group.candidates.top().score ;
7   | C.offer(selectedGroup.poll());
8 end
9
```

---



1 partitions Q by structure. Each partition consists of previous queries of a same structure, which could be passed to SingleCubePlanner.

2-4 performs cuboid selection in each partition(cube). An ordered queue of candidates is generated for each partition(cube).

5-8 iteratively checks top candidate for each partition(cube) and picks out the best candidate among them.

### 4.2.3 Structure Planner

---

**Algorithm 5:** StructurePlanner

---

**System setting:**  $n$ : maximum number of substructures to precompute

**Input:**  $Q$ : a set of previous queries

**Output:**  $S$ : an queue of selected substructures to precompute

```

1 Lattice  $\leftarrow$  buildSubstructureLattice( $Q$ );
2 foreach  $q \in Q$  do
3   |  $q.coveredSubstructre := \emptyset$ ;
4 end
5 foreach  $substructure \in Lattice$  do
6   |  $substructure.space \leftarrow estimateSpace(substructure)$ ;
7   |  $substructure.benefit \leftarrow 0$ ;
8   | foreach  $q \in Q$  and  $q.structure \subseteq substructure.structure$  do
9     |  $cuboid.benefit+ = max(0, benefit(q, substructure, q.coveredSubstructre))$ ;
10  | end
11  |  $substructure.score \leftarrow substructure.benefit / substructure.space$  ;
12 end
13 for  $i=1$  to  $n$  do
14   |  $nextBestSubstructre \leftarrow$  substructure in Lattice with highest substructure.score ;
15   | if  $nextBestSubstructre.score < 0$  then
16     | break ;
17   | end
18   |  $S.offer(nextBestSubstructre)$ ;
19   | foreach  $q \in Q$  and  $q.structure \subseteq nextBestSubstructre.structure$  do
20     |  $q.coveredSubstructre \leftarrow q.coveredSubstructre \cup \{nextBestSubstructre\}$ ;
21   | end
22   | repeat 5-12 ;
23 end
24
```

---

1 builds a lattice over all substructures are covered in previous queries P, using classic lattice construction algorithms.

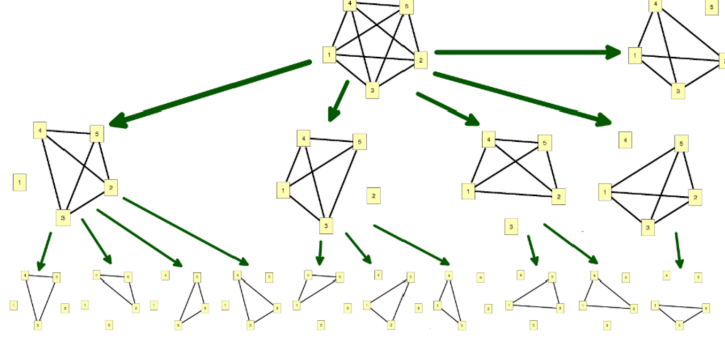


Figure 4.2: Substructure lattice.

2-4 initializes covered substructure for each previous query as empty.

5-12 performs "score calculation". For each substructure, 6 estimates its space. 8-10 iterates over all "favored" previous queries and adds on marginal benefit if any. Here marginal benefit refers to the time saved by adding current substructure to the selected covered substructures.

13-23 performs "pick-and-update". 15-17 terminates selection when there is no marginal benefit at all. 19-22 updates covered substructures for previous queries as a result of current round of selection.

Implementation of functions are listed as follows. Notice that users can implement in their own ways based on their database systems.

Function  $\text{benefit}(q, \text{substructure}, q.\text{coveredSubstructure})$  evaluates marginal benefit of substructure to query  $q$  provided that  $q.\text{coveredSubstructure}$  has been materialized. Such estimation is tricky as using materialized substructure may change original joining plan. Thus estimation on intermediate result sizes is nessasary. We used

$$\text{estimateProcessingTime}(q.\text{coveredSubstructure} \cup \text{substructure}) - \text{estimateProcessingTime}(q.\text{coveredSubstructure})$$

for estimation. As we think that this roughly indicates improvement of adding *substructure* in terms of reduction of hard-disk access and joining operations.

#### 4.2.4 ID and Property Selection

Given a substructure picked by Structure Planner, we need to decide on which IDs and attributes to be stored. Taking all IDs and attributes into account will assure that the structure could be used in any future query which covers it but will on the other hand increase space cost. We are faced with a tradeoff between space and potential usage spectrum.

**IDs:**

- Include IDs of all nodes and edges. This would allow overlap joining of substructures but increases space cost.
- Include IDs of only outer nodes. This saves space cost but does not allow overlap joining of substructures.

Our suggestion is to consider the expansion effect of inner nodes' IDs towards space cost. In our implementation, inner nodes' IDs are kept. However if adding inner nodes' IDs overwhelmingly increase resulting table length, then we may choose to ignore inner nodes' IDs as the overhead on space cost is too much.

**Attributes:**

- Include all attributes.
- Include only attributes that appears in previous workloads.

Our suggestion is to consider the portion of attributes that appeared over all attributes in the data schema. For instance, in our experiment only a small portion of attributes were aggregated, therefore it is more of a waste of space to keep all attributes in the data schema.

### 4.3 Query Processing

Problem:

Given materialization of cuboids  $C$  and substructures  $S$  how to process future queries  $F$  as fast as possible using  $C$  and  $S$ ?

Generally speaking, aggregation on cuboid is faster than joining substructures. When future query  $q$  arrives, we first consult materialization of cuboids. If any cuboids get "hit" by  $q$ , then we select the cuboid of minimum space to aggregate the result of  $q$ . If no cuboid gets "hit" by  $q$ , then we decompose  $q$  and use substructures to compose the result of  $q$ .

---

**Algorithm 6:** FutureQueryProcessing

---

**System:**  $C$ : a set of materialized cuboids

$S$ : a set of materialized substructures

**Input:**  $q$ : a future query

**Output:**  $r$ : result of  $q$

```

1   $minspace := \infty$ ;
2   $mincuboid := NULL$  ;
3  foreach  $cuboid \in C$  do
4      if  $cuboid.structure = q.structure$  and  $q.dimension \subseteq cuboid.dimension$  then
5          if  $cuboid.space < minspace$  then
6               $minspace := cuboid.space$  ;
7               $mincuboid := cuboid$  ;
8          end
9      end
10     if  $mincuboid \neq NULL$  then
11          $r := aggregate(mincuboid, q)$ ;
12     else
13          $r := Decompose_Join(q)$ ;
14     end
15 end
16
```

---

4-9 looks up materialized cuboids and find if there is any "hit". If there are multiple "hits" use the cuboid with the smallest scanning cost.

### 4.3.1 Substructure Selection

Given a future query  $q$  and materialized substructures  $S$ , which substructures shall we select to compose  $q$ ? Obviously selected substructure  $s$  must hold  $s.structure \subseteq q.structure$ .

However, candidate substructures in  $S$  may overlap:

For instance suppose

$q.structure : \text{Badge-User, User-Post, Post-Tag}$

And  $S$  consists of substructures

(1)Badge-User

(2)Badge-User, User-Post

(3)User-Post, Post-Tag

(4)Post-Tag

(5)User-Post

Then we may have at least three ways of substructure selection.

(1) and (2)

(3) and (4)

(1), (4) and (5)

We propose a greedy algorithm for substructure selection. The idea is to always pick up next substructure with highest heuristic score. Example heuristics are edges of sub-

structure, Score when selected by Structure-Planner, tuples in the table etc.

---

**Algorithm 7:** SelectSubstrucure

---

**System:** S: a collection of materialized substructures

heuristic: heuristic for ordering S

**Input:** q: a future query

**Output:** V : selected views for future joining

uncoveredStruc: structure not covered by selected views

uncoveredProp: properties not covered by selected views

```

1 uncoveredStruc := q.structure ;
2 uncoveredProp:= q.properties ;
3 coveredStruc :=  $\emptyset$  ;
4 V :=  $\emptyset$ ;
5 foreach  $s \in S$  ordered by heuristic do
6   if  $s \subseteq \text{uncoveredStruc}$  and  $s \not\subseteq \text{coveredStruc}$  then
7     V := V  $\cup$  {s};
8     coveredStruc := coveredStruc  $\cup$  s.structure ;
9     uncoveredStruc := uncoveredStruc - s.structure ;
10    uncoveredProp := uncoveredProp -s.properties;
11  end
12 end
```

---

5 iterates substructures by user-defined heuristics.

6 assures that a candidate substructure that is totally covered by selected substructures will be dequalified as major effect of the candidate is already occupied.

### 4.3.2 Query Decomposition

Given future query  $q$ , we use `SelectSubstrucure` to select materializaion  $V$ . For the  $q$ 's remaining structure and properties that  $V$  does not cover, we have to retrieve them from database server. Finally we join and aggregate all materials together to produce results.

#### Decompose\_Join

---

**Algorithm 8:** Decompose\_Join

---

**System:**  $S$ : a collection of materialized substructures

heuristic: heuristic for ordering  $S$

**Input:**  $q$ : a future query

**Output:**  $r$ : result of  $q$

```

1  $\Sigma \leftarrow \emptyset$ ;
2  $V, uncoveredStruc, uncoveredProp \leftarrow SelectSubstrucure(q)$ ;
3  $\Sigma \leftarrow \Sigma \cup V$ ;
4  $Splits := split(uncoveredStruc, uncoveredProp)$ ;
5 foreach  $s$ :  $Splits$  do
6   |  $\Sigma \leftarrow \Sigma \cup \{materialize(s)\}$ ;
7 end
8  $r := join(\Sigma)$ 

```

---

1 initializes  $\Sigma$ , which stores all materials that are needed.

2 selects substructures using `SelectSubstructure` algorithm. *uncoveredStruc*, *uncoveredProp* are structures and properties not covered. They need to be retrieved from database servers.

4, splits *uncoveredStruc* and *uncoveredProp* into connected components. We will retrieve each connected component from database server. Notice that *uncoveredStruc* may not be exactly one connected component.

8 joins and aggregates all materials together to produce results.

Function `split(uncoveredStruc, uncoveredProp)` is implemented by classic connected components decomposition algorithms.



Function  $\text{join}(\Sigma)$  can be implemented with different table-joining strategies. In our implementation we keep joining two tables which have common column(s) and with minimum sum of table sizes. That is, we always select small tables to join.

#### *Decompose\_Join<sub>informative</sub>*

Alternatively, we may adopt the idea of Semi-Join. We first join  $V$ . The process of joining has a "filtering" effect. When we retrieve uncovered components from database server, we inform database server with the screened out IDs information. We name this approach "informative materialization". "Informative materialization" may accelerate retrieval from backend databases in two aspects:

First, since screened out IDs are provided, database backend only need to search within screened out IDs. This will reduce database processing time.

Second, size of retrieval results can be deducted. Thus time of transporting results will be reduced.

---

#### **Algorithm 9:** *Decompose\_Join<sub>informative</sub>*

---

**System:**  $S$ : a collection of materialized substructures

heuristic: heuristic for ordering  $S$

**Input:**  $q$ : a future query

**Output:**  $r$ : result of  $q$

```

1  $\Sigma \leftarrow \emptyset$ ;
2  $V, \text{uncoveredStruc}, \text{uncoveredProp} \leftarrow \text{SelectSubstructure}(q)$ ;
3  $V := \text{join}(V)$ ;
4  $\Sigma \leftarrow \Sigma \cup V$ ;
5  $\text{Splits} := \text{split}(\text{uncoveredStruc}, \text{uncoveredProp})$ ;
6 foreach  $s$ : Splits do
7    $\Sigma \leftarrow \Sigma \cup \{\text{materialize}_{\text{informative}}(s, V)\}$ ;
8 end
9  $r := \text{join}(\Sigma)$ 
```

---

Decompose\_Join perform joining after everything is ready. Unlike Decompose\_Join, we first join V in 3 before retrieval from databases(7). Note that substructures in V may reside in multiple connected components. Thus join(V) may result to multiple Intermediate tables.

In 7, *materialize\_informative* fetches results from databases by passing candidate ID information "screened-out" from 3. For instance, Neo4j supports such operations of passing a list of IDs as arguments.

---

### *Decompose\_Join<sub>decisive</sub>*

However "Informative materialization" creates an overhead of transport of screened out IDs. We propose a decisive way to evaluate the trade-off between overhead and benefits of "Informative materialization" and choose between "Informative materialization" and "normal materialization".

---

#### **Algorithm 10:** *Decompose\_Join<sub>decisive</sub>*

---

**System:** S: a collection of materialized substructures

heuristic: heuristic for ordering S

**Input:** q: a future query

**Output:** r: result of q

```

1  $\Sigma \leftarrow \emptyset;$ 
2  $V, uncoveredStruc, uncoveredProp \leftarrow SelectSubstructure(q);$ 
3  $V := join(V);$ 
4  $\Sigma \leftarrow \Sigma \cup V;$ 
5  $Splits := split(uncoveredStruc, uncoveredProp);$ 
6 foreach  $s: Splits$  do
7   if  $decide\_informative(s, V)$  then
8      $\Sigma \leftarrow \Sigma \cup \{materialize\_informative(s, V)\};$ 
9   else
10     $\Sigma \leftarrow \Sigma \cup \{materialize(s)\};$ 
11  end
12 end
13  $r := join(\Sigma)$ 

```

---

In 7, Function `decide_informative(s,V)` determines between *materialize<sub>informative</sub>* or not. In our implementation we calculate ratio of estimated reduced result size by *materialize<sub>informative</sub>*, divided by size of input overhead. We make decision by comparing the ratio with a threshold.

# Chapter 5

## Experiments

### 5.1 Experiment Setup

Our main focus is to evaluate different strategies for preprocessing and query evaluation. For instance, the threshold of Is hot-structure part in the diagram, selection policy for materialized substructures in Cube-Planner and Structure-Planner , different heuristics when ranking sub-structures during decomposition in Decomposition and Joining etc.

#### 5.1.1 Datasets

Big StackOverFlow dataset (44.8GB, with 10 different labels on nodes and 12 different types of edges).

Small StackExchange dataset (2.57GB, same schema with Big StackOverFlow dataset).

#### 5.1.2 Query Workloads

48 human-readable meaningful queries are written as a query pool. 24 queries are randomly selected as previous workload while the rest 24 are future workloads. Queries are listed here:

##### **Previous WorkLoad:**

User-Comment, Comment-Post: User-UpVotes, Comment-Score, (AVG)Post-Score, Post-PostTypeId=1

User-Comment, Comment-Post: User-Age, (AVG)Comment-Score, Post-PostTypeId=2  
 User-Comment, Comment-Post: User-ActiveMonth, Post-CreationDate\_Year=2016  
 User-Comment, Comment-Post: (AVG)User-ActiveMonth, Post-CreationDate\_Year  
 Badge-User, User-Post, Post-Tag: Tag-TagName, Badge-Date\_Year=2016, Post-CreationDate\_Year  
 Badge-User, User-Post, Post-Tag: Tag-TagName, Badge-Class  
 Badge-User, User-Post, Post-Tag: Tag-TagName, Badge-Name=Student  
 User-Post, Post-Vote: User-UpVotes, Vote-VoteTypeId  
 User-Post, Post-Vote: User-Ages, (AVG)Post-Score, Vote-VoteTypeId=1  
 User-Post, Post-Vote: User-Views, Post-CreationDate\_Year=2016, Vote-VoteTypeId  
 Post-PostLink, Post-Tag: Tag-TagName,Post-CreationDate\_Year,  
 Post-PostTypeId, PostLink-LinkTypeId=3  
 Post-PostLink, Post-Tag: Tag-TagName, Post-CreationDate\_Year  
 Post-PostLink, Post-Tag: Tag-TagName=database, Post-PostTypeId  
 Badge-User, User-Post:Badge-Name,Post-Score,Post-PostTypeId=2  
 Badge-User, User-Post:Badge-Name,(AVG)Post-ActiveMonth,Post-PostTypeId=1  
 Badge-User, User-Post:Badge-Class, Post-CreationDate\_Year  
 User-Post, Post-Tag: (AVG)User-CreationDate\_Year, Tag-TagName  
 User-Post, Post-Tag: User-CreationDate\_Year, (AVG)Post-Score,Tag-TagName  
 User-Post, Post-Tag: User-Views, (AVG)Post-Score,Tag-TagName  
 Badge-User: Badge-Name,Badge-Class, Badge-Date\_Year  
 Post-Tag: Post-CreationDate\_Year, Tag-TagName  
 Post-Tag: Post-CreationDate\_Year, Tag-TagName  
 User-Post, Post-PostHistory: User-UpVotes, PostHistory-PostHistoryTypeId  
 User-Post, Post-PostHistory: User-Age, PostHistory-PostHistoryTypeId=5  
 Badge-User, User-Comment: Badge-Class, (AVG)Comment-Score  
 Badge-User, User-Post:(AVG)Post-Score,Post-PostTypeId=2  
 User-Post, Post-Tag:User-CreationDate\_Year=2016, Tag-TagName

Badge-User, User-Post, Post-Tag: Tag-TagName, Badge-Date\_Year=2016  
 User-Post, Post-Vote: User-Ages, (AVG)Post-Score, Vote-VoteTypeId=2  
 Post-PostLink, Post-Tag: Tag-TagName, PostLink-LinkTypeId=3  
 User-Post, Post-PostHistory: User-DownVotes, PostHistory-PostHistoryTypeId  
 Badge-User, User-Comment: Badge-Name, (AVG)Comment-Score

**Future WorkLoad:**

Badge-User, User-Post, Post-Tag: Tag-TagName, Badge-Name  
 User-Post, Post-Vote: User-Views, Vote-VoteTypeId=1  
 Post-PostLink, Post-Tag: Tag-TagName, Post-PostTypeId=2, PostLink-LinkTypeId  
 Post-PostLink, Post-Tag: Tag-TagName, (AVG)Post-Score, PostLink-LinkTypeId=1  
 Post-PostLink, Post-Tag: Tag-TagName, PostLink-LinkTypeId=1  
 Badge-User, User-Post:Badge-Name, (AVG)Post-Score, Post-PostTypeId  
 Badge-User, User-Post:(AVG)Badge-Class, Post-CreationDate\_Year=2016  
 Badge-User, User-Post:Badge-Class,(AVG)Post-Score, Post-PostTypeId  
 User-Post, Post-Tag: User-Age, (AVG)Post-Score,Tag-TagName  
 User-Post, Post-Tag: User-Views,Post-Score,Tag-TagName  
 User-Post, Post-PostHistory: User-Age, PostHistory-PostHistoryTypeId  
 Badge-User, User-Comment: Badge-Class,Comment-Score  
 Badge-User: Badge-Class, (AVG)User-ActiveMonth, (AVG)User-Age  
 Post-Tag: (SUM)Post-ActiveMonth, (AVG)Post-Score, Tag-TagName  
 User-Comment, Comment-Post: User-UpVotes, Comment-Score, (AVG)Post-Score, Post-PostTypeId=2  
 User-Comment, Comment-Post: User-UpVotes, (AVG)Post-Score, Post-PostTypeId  
 User-Comment, Comment-Post: User-Age, Post-PostTypeId  
 User-Comment, Comment-Post: (AVG)User-ActiveMonth, Post-CreationDate\_Year=2015

### 5.1.3 System Setting

We ran the experiments on a Linux cluster machine with 256 GB of memory size.

Our system is implemented in Java.

Initial Java virtual machine memory: 100 GB

Maximum Java virtual machine memory: 200 GB

### 5.1.4 Neo4j Configuration

Neo4j v4.1.2.

Initial memory size: 60GB.

Initial memory size: 200GB.

We imported Neo4j's official BOLT driver to interact with Neo4j server. The transport protocol is BOLT protocol(a binary protocol supported by Neo4j).

## 5.2 Aspects of Interest

### Partial Materialization

- Frequency threshold for hot structures.
- Memory limit.
- Selection policy for materialized substructures.
- Comparison with Jiawei Han's algorithm on selecting cuboids.
- Comparison with frequent pattern mining algorithm(FPM) on selecting which substructures to pre-compute.

### Future Query Processing

- Different heuristics when ranking sub-structures during decomposition (edges of substructure, Score when selected by Structure-Planner, tuples in the table).
- Different ways of Decomposition\_Join(Normal Materialization, Informative Materialization, Decisive Materialization, Hard Disk Materialization).

Dataset Size

- Dataset of different sizes.

## **5.3 Efficiency Test**

### **5.3.1 Neo4j BaseLine**

### **5.3.2 My System**

#### **Precomputation:**

- Frequency threshold for hot structures.  $\leftarrow 5$
- Memory limit.  $\leftarrow 20\text{GB}$
- Selection algorithm.  $\leftarrow$  My algorithm

#### **Decomposition:**

- Different heuristics when ranking sub-structures during decomposition.  $\leftarrow$  edges of sub-structure
- Different ways of Decomposition\_Join  $\leftarrow$  Normal Materialization

### **5.3.3 Frequency Threshold**

### **5.3.4 Memory Limit**

### **5.3.5 Selection Algorithms**

### **5.3.6 View Selection**

### **5.3.7 Decompose\_Join**

## **5.4 Discussion**



# Chapter 6

## Conclusion

### 6.1 Future Work

We summarize future work as follows:

- Online adaptive

The system we have implemented is offline. It can be turned into online adaptive one by keeping a sliding window of previous workloads.

- Schema graph to data graph

Our system currently supports SPARQL like queries over schema graph instead of data graph. It could be further improved to support queries over data graph without changing the high-level solution framework. The key part that needs to be modified is to label each unique node and take isomorphism into consideration during query decomposition.

- Better Cube-Planner and Structure-Planner

We used greedy approach for ranking cuboids and substructures. Although it worked well in our experiment. But greedy approach is not holistic enough. For instance???


- Multi-Thread implementation

The system can be made multi-thread so that joining work of queries could be done when the system is waiting for graph databases query execution.


## 6.2 Reflection on Neo4j

### 6.2.1 Aggregation Size Estimation

We found that Neo4j has a very coarse way of estimating result size of aggregation queries. It simply takes square root of table size before aggregation, without regards to aggregation attributes. Of course this will lead to a huge bias. For instance, lets look at the following 2 queries with the same structure: (1) `match (u:User)-[]-(b:Badge) match (u:User)-[]-(p:Post) match (p:Post)-[]-(t:Tag) return t.TagName, count(*)`

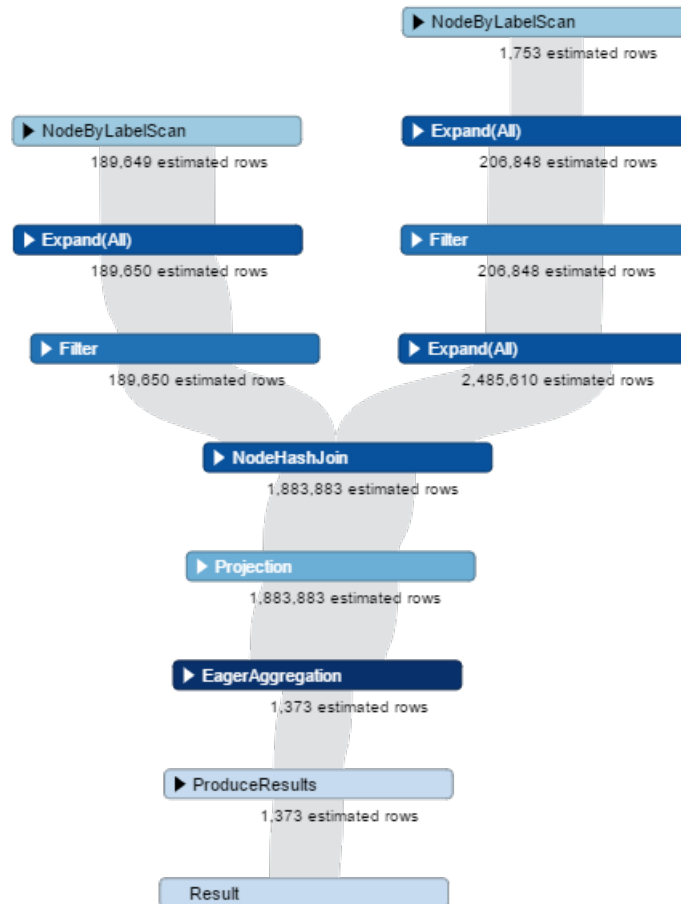

(2) match (u:User)-[]-(b:Badge) match (u:User)-[]-(p:Post) match (p:Post)-[]-(t:Tag) return t.TagName, id(u), id(b), id(p), count(\*)

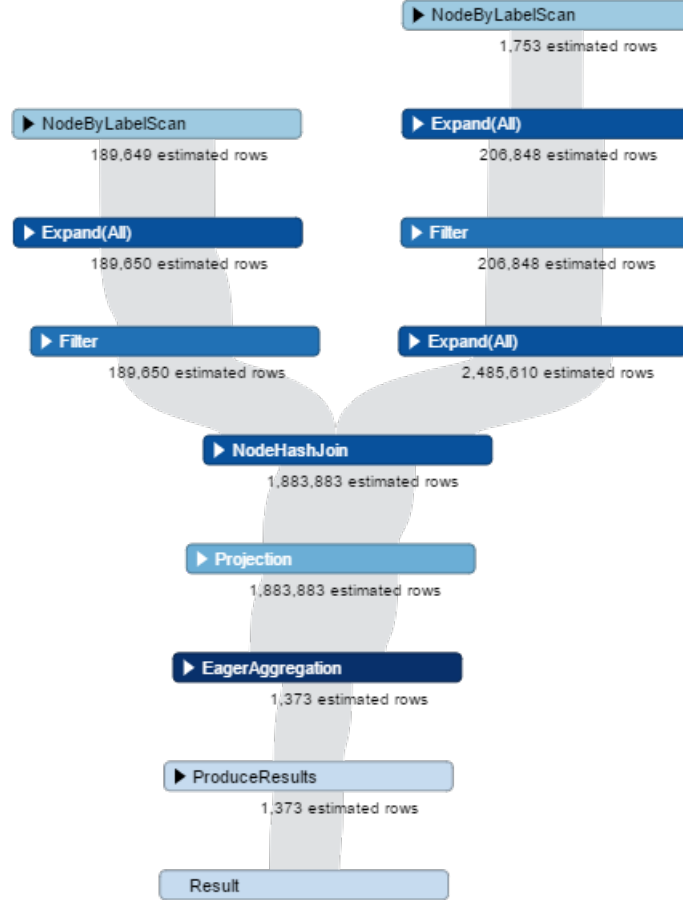

Since (2) contains ids of all queried nodes(User, Badge and Post), supposedly (2) should have a much larger result size than (1). However in Neo4j will estimate that (1) and (2) have the same result size. Therefore in our implementation we use the following function to predict cuboid size:  $Cuiboid(att_1, att_2, \dots, att_n) = Productof(|att_i|) * (shrinkingfactor)^{(n-1)}$

# References

- [1] Michel Goossens, Frank Mittelbach, and Alexander Samarin. *The  $\LaTeX$  Companion*. Addison-Wesley, Reading, Massachusetts, 1994.
- [2] Donald Knuth. *The  $T_{\text{E}}X$ book*. Addison-Wesley, Reading, Massachusetts, 1986.
- [3] Leslie Lamport.  *$\LaTeX$  — A Document Preparation System*. Addison-Wesley, Reading, Massachusetts, second edition, 1994.

# APPENDICES

# Appendix A

## Matlab Code for Making a PDF Plot

### A.1 Using the GUI

Properties of Matab plots can be adjusted from the plot window via a graphical interface. Under the Desktop menu in the Figure window, select the Property Editor. You may also want to check the Plot Browser and Figure Palette for more tools. To adjust properties of the axes, look under the Edit menu and select Axes Properties.

To set the figure size and to save as PDF or other file formats, click the Export Setup button in the figure Property Editor.

### A.2 From the Command Line

All figure properties can also be manipulated from the command line. Here's an example:

```
x=[0:0.1:pi];  
hold on % Plot multiple traces on one figure  
plot(x,sin(x))  
plot(x,cos(x),'--r')  
plot(x,tan(x),'.-g')  
title('Some Trig Functions Over 0 to \pi') % Note LaTeX markup!
```

```
legend('{\it sin}(x)', '{\it cos}(x)', '{\it tan}(x)')
hold off
set(gca, 'Ylim', [-3 3]) % Adjust Y limits of "current axes"
set(gcf, 'Units', 'inches') % Set figure size units of "current figure"
set(gcf, 'Position', [0,0,6,4]) % Set figure width (6 in.) and height (4 in.)
cd n:\thesis\plots % Select where to save
print -dpdf plot.pdf % Save as PDF
```