


leg = edge
one giver, one want, one rate

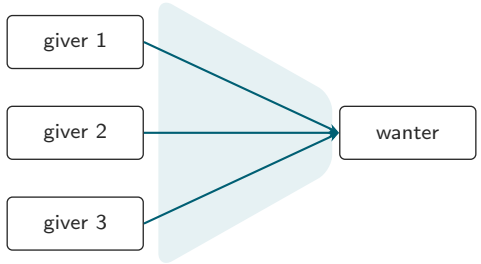

hyper-leg = hyperedge
 k tails, one head, *one* flow variable:
fills every tail or none

The maker graph with hyper-legs is a *hypergraph*. A cleared set is a *circulation* on it: value in equals value out at every node, on that node's own scale. A cycle is the case where every node has one in and one out.