WPIO Home . . . 8
Anleitungsartikel . . . 10
WPIO - internal . . . 11
Team Status . . . 12
WPIO - Process policies . . . 13
WPIO onside team meetings . . . 14
Retroperspectives . . . 15
Onboarding . . . 16
Onboarding Guidelines Collection . . . 17
Onboarding Guidelines - Organizational Information . . . 25
Offboarding . . . 26
Abdel Settah - Offboaring zum 30.09.26 . . . 27
Holiday replacements . . . 32
Steffen - 03.08. - 21.08. . . . 33
Confidence Votes . . . 34
Requirements & planning . . . 35
WPIO - PI-Q3-Anforderungen . . . 36
WPIO - PI-Q4-Anforderungen . . . 54
Schätzungen im Sprint . . . 83
WPIO - Sonstige PI Anforderungen . . . 84
Meeting notes . . . 87
Internal meetings . . . 88
PO-ScM-Sync . . . 89
Teamwork Session . . . 97
Knowledge sharing session - Collection and registration of topics . . . 105
ARCH Weekly . . . 106
Project meetings . . . 110
A.260013 Fusion NeoDepot . . . 111
2026-08-20 Abstimmung agile Zulieferung PI Q4 . . . 112
A.260012 PAV / MLP / Kombiorder . . . 115
Ongoing Agenda für PAV <-> WPIO . . . 116
A.260034 Ablösung SMARAGD . . . 119
2026-10-22 ACTICO Workshop . . . 120
Implementation designs . . . 121
Designs - Framework . . . 122
Umgang von Rate Limitern in WPIO . . . 123
kafka-adapter: payload fields based kafka recod key . . . 127
router: pipeline steps performance measurement . . . 134
MQ Batch Processing . . . 141
Designs - Service development . . . 146
DAB - Bewertung der Anforderung: Nutzung dynamischer Dateinamen über ConnectDirect . . . 147
Architectural Decision Records . . . 152
ADR: Data Exchange for Indexer and Reader Audit Services . . . 153
Service registration . . . 159
X-Gen . . . 161

Service Development . . . 162
Service Build . . . 163
Service Deployment . . . 166
Versions . . . 168
Changelog 4.13 . . . 169
Changelog 4.17 . . . 171
Installed RR versions . . . 172
CVE Handling . . . 173
Framework . . . 174
audit/indexer . . . 175
audit/reader . . . 176
audit/writer . . . 177
certificate-fetcher . . . 178
file-adapter . . . 179
http-adapter . . . 180
WPIO HTTP-Adapter . . . 185
kafka-adapter . . . 187
router . . . 188
soap-adapter . . . 189
audit-pipe-and-metrics . . . 190
Operating Procedures . . . 191
Anwendungsberechtigungen verwalten . . . 192
Regelmäßige Termine . . . 194
Overview WPIO team meetings . . . 195
Komponentenaktualisierungen . . . 197
Contact by WPIO Topic . . . 198
Export Routing-Information . . . 199
Ticket-Bearbeitung . . . 200
Qualys-Scan-Befunde . . . 202
Firewall Beauftragung, Regeln und Rezertifizierung . . . 204
Probleme mit jcf-sys-cert für Kafka . . . 208
Change process TMU/Cloud - parallel phase . . . 209
Helpful Links . . . 212
Usage of Jira . . . 213
Using WPIO Jira-Scrum Board - Guidelines and rules . . . 214
Jira (spaces) Consolidation . . . 218
Definition of standardized Acceptance Criteria for Jira . . . 220
Version Synchronisation . . . 221
WPIO WPIAdmin . . . 224
WPIO Audit . . . 225
WPIO Audit Browser . . . 227
WPIO dwpSoftware team . . . 235
Public holidays in Hungary in 2025 - On-call duty calendar . . . 236
Knowledge base . . . 237
Roles and responsibilities . . . 238

Roles and responsibilities in WPIO team . . . 239
Coordination of release preparation . . . 242
Preparation of WPIO releases . . . 244
Release coordinators in 2025 & 2026 . . . 245
Automated creation of Jira issues . . . 247
Release 5.10 . . . 249
Release 5.11 . . . 250
Release 5.12 . . . 254
SBM + ALM Octane . . . 257
Knowledge transfer . . . 258
Schedule . . . 259
Internal trainings - schedule . . . 260
XGen development - onboarding roadmap for Loránd . . . 270
Topics . . . 272
WPIO goes cloud topics . . . 273
WP3 Landscape and WP3 switch (structure, usage, deployment) . . . 274
Git and GitLab Usage . . . 275
Different operations in Gitlab Cloud . . . 276
SpringBoot . . . 280
OMS JSON and Kafka topics configuration . . . 281
OpenAPI to JSON Schema . . . 282
Kubernetes, Helm, ArgoCD Overview . . . 283
Troubleshooting process for active delivery . . . 284
Active Delivery . . . 285
OpenSearch Dashboards . . . 286
CI/CD Request template for a new X-Gen service . . . 287
CI/CD Request template for a X-Gen service change . . . 288
Operation in the Cloud . . . 290
X-Gen MEM Repository to DB Repository Conversion in the cloud environment . . . 291
Introduction to S3 . . . 292
Introduction to Terraform . . . 293
Decommission (client & service) . . . 294
Client decommission . . . 295
Service decommission . . . 299
Routing data . . . 303
How to configure, run and test SQuirreL . . . 304
Creating a new service channel . . . 310
Connect a new customer to a WPIO service . . . 328
New service configuration . . . 335
Client access rights setup for DWP.ORDER_FP . . . 338
XGen . . . 340
CSV and XSD export . . . 341
Xgen 4.13 . . . 342
Xgen 4.8 . . . 346
Code review for XGen services . . . 350

RR Test Tool . . . 354
FI client - L1 xgen development . . . 365
WPIO FI L1 Common ErrorMsgHandling . . . 366
X-Gen base image - Configuration . . . 367
TCL language & XGen implementation . . . 368
DWP.WP2_CHTX_FP service tcl component . . . 369
ERIC usages . . . 370
DWP.ERIC_PASS_FP passthrough . . . 371
WPIO ERIC service via WPIB solution . . . 372
SSL Connection with Certificate + Private Key . . . 373
FI.CASHMGMNT Service . . . 374
STANDARD.SMARAGD Service . . . 376
XGen services migration to a higher version . . . 377
4.13 -> 4.17 . . . 378
4.8 -> 4.13 . . . 379
XGen IDE . . . 382
XGen 4.17 Quick start . . . 383
Synchronization Process . . . 389
Workflow . . . 399
Create Version Synchronization Jira Issue . . . 400
WII (WebSphere Integrator Informer) . . . 401
WII architecture . . . 402
WII - Contact persons . . . 403
WII Introduction . . . 405
Sonderchanges, eChanges . . . 406
ARS (BAMBI): Software request . . . 407
Audit browser . . . 410
WPIO Architecture . . . 411
Introduction to WPIO . . . 414
Brainstorming topics . . . 415
WPIO goes Cloud . . . 416
Autoscaling für WPIO . . . 419
BC restructuring - ESB . . . 427
BC restructuring - WPIO . . . 428
Routingdata relationship . . . 429
Cloud Monitoring . . . 430
AWS Monitoring Alert Configuration . . . 432
Mail Alert Definition . . . 436
CMDB . . . 442
Configuration Migration from TMU to Cloud . . . 443
Gauge Tests Setup Know-How . . . 445
How to Access Postgres TUA Database . . . 452
How to browse S3 Buckets in TUA Kubernetes Cluster from the DF Laptop . . . 453
How to Modify Remote Postgres Database Tables . . . 455
How to obtain a JWT Token from Keycloak for REST Tests on TUA . . . 456

Infrastructure Activity List to activate a single cloud node . . . 459
Setup Environments . . . 463
FCN_PROD . . . 464
FCN_TUY . . . 482
TUA . . . 492
TUD . . . 502
TUH . . . 512
TUM . . . 523
Log Access . . . 532
Planned Active/Active Scenario . . . 535
Release Process . . . 536
LuP Acceptance Test . . . 538
Service versioning (pitfalls?) . . . 540
WPIO Bounded-Context Overview . . . 542
Optimizing MSCP latencies . . . 548
Status Sync for analyzing and improving latencies on MSCP . . . 549
2026-08-07 Approach to identify latencies on MSCP . . . 555
2026-08-13 Latency analysis with PA / FI-TS - Kick Off . . . 557
How to access Derby Database from Silverfish . . . 560
Betrieb . . . 563
Meldung technische User . . . 564
Monitoring . . . 565
Alert Definitions - log based . . . 566
metric exporter . . . 569
Prometheus . . . 570
Alerts . . . 571
Alert-Mail Verteilung . . . 572
Silence . . . 576
Übersicht . . . 577
Verschiedene Informationen . . . 580
Post-mortem . . . 582
03.12.2024 I LuP-Test on PROD . . . 584
Queuemanager Verbindungsparameter . . . 588
Reminder . . . 589
Zertifikate . . . 590
Runbooks . . . 591
WPIAdmin . . . 592
WPIO . . . 593
Active Delivery (AD) . . . 594
Powerlink Oracle DB is not reachable . . . 595
Framework . . . 597
RR - ^.*ConnectException . . . 598
RR - ^.*FatalException . . . 599
MQ . . . 600
MQ - FDC Writing will be alarmed . . . 601

MQ - Message queueing on WPI.HTTP_RESPONSE.*.PROD . . . 603
MQ - Messages on Backoutqueues . . . 605
MQ - Messages queueing on WPI.RESPONSE_INTERNAL.FI.PROD . . . 611
MQ - MsgAge Threshold reached . . . 613
MQ - uncomitted Messages . . . 616
Other events . . . 618
All WPIO-Services report errors . . . 619
Error/Outage from Layer 1 Servcies . . . 621
Timeout Backend . . . 623
X-Gen Services . . . 624
X-Gen - Error at runtime for Depot/Order Service processing . . . 625
X-Gen - Error at runtime of a Services . . . 628
X-Gen - Error on processing of Services with Workflow Repository, Orderbook, Deposit . . . 631
X-Gen - File Processing . . . 633
X-Gen - Outage of the LOG Server, sideeffect on the X-Gen Service Log Writing . . . 635
SLA and Performancereport Delivery . . . 637
Steuerung der MQ-Cluster-Gewichtung . . . 642
Steuerung der SOAP/HTTP-Gewichtung über den F5 LB . . . 643
Rufbereitschaft . . . 644
Technische Notfallvorsorge Management (ITSCM)- Wiederanlauf und Wiederherstellungstest Beauftragung . . . 664
IBM MQ Knowledge Base . . . 665
Product Lifecycle . . . 666
Last und Performance (LuP) . . . 667
Server . . . 668
ESB . . . 669
Update IDF service registration . . . 670
BI . . . 671
Team 11 - WPIO/ESB vertraulich . . . 672
Team Journey Kickoff 02./03.09.25 . . . 674
Team Journey Kickoff - Reloaded 10.12.25 - 11.12.25 . . . 677
Teamverantwortung Team 11 - WPIO/ESB . . . 684
Steuerliche Schnittstellen . . . 687
ERiC . . . 690
DIP . . . 691
Sicherheitszertifikate . . . 692
Changeboard (CAB) Preparation . . . 693
CAB Archive . . . 694
CAB 2026-02-06 . . . 695
CAB 2026-02-13 . . . 697
CAB 2026-02-20 . . . 699
CAB 2026-02-27 . . . 702
CAB 2026-03-06 . . . 706
CAB 2026-03-13 . . . 708
CAB 2026-03-20 . . . 709
CAB 2026-03-27 . . . 711

CAB 2026-04-10 . . . 712
CAB 2026-04-17 . . . 713
CAB 2026-04-24 . . . 714
CAB 2026-05-08 . . . 715
CAB 2026-05-15 . . . 716
CAB 2026-05-22 . . . 718
CAB 2026-05-29 . . . 720
CAB 2026-06-05 . . . 723
CAB 2026-07-03 . . . 724
CAB 2026 . . . 725
API-Gateway . . . 726
Brainstorming Architektur . . . 728
Deep Dive . . . 732
Hersteller-Präsentationen . . . 733
Parallelphase API-Gateway und WPIO . . . 734
File lists . . . 735
External communication . . . 736
Service Requests @WPIO . . . 739

WPIO Home

Willkommen in Ihrem neuen Bereich!

Confluence-Bereiche eignen sich hervorragend zur Weitergabe von Inhalten und Neuigkeiten an Ihr Team. Dies ist Ihre Homepage. Sie können die Seite ganz nach Ihren Wünschen gestalten. Um den Nutzern einen möglichst hohen Wiedererkennungswert zu geben, empfehlen wir für diese Startseite folgende Inhalte.



Team, Teammitglieder und Rollen

Bild	Name	Rolle	Verantwortlichkeiten	Email
	Dennis Fabi	PO	PO tasks	dennis.fabi@dwpbank.de
	Nóra Móni-Zsigó	SM	SM tasks	Nora.Moni-Zsigo.ext@dwpbank.de
	Steffen Flick	SW Architekt	Framework	steffen.flick@dwpbank.de
	Kristina Nikolova	Entwickler WP3	Framework	kristina.nikolova.ext@dwpbank.de
	Eglee Vasquez	Entwickler WP3	Service Development	vasquezeglee@gmail.com
	László Kerepeszki	Entwickler WP3	Service Development	dwx4910@dwpbank.de
	Matthias Ruthenbeck	BA	Anwendungsbetrieb	matthias.ruthenbeck@dwpbank.de

	Ilian Nakov	Entwickler WP3	Service Development / Framework	ilian.nakov@dwpbank.de
	Julian Keranov	Entwickler WP3	Service Development	julian.keranov@dwpbank.de
	Georgios Eliopoulos	BA	Anwendungsbetrieb	georgios.eliopoulos@dwpbank.de
	Péter Jaloveczki	Entwickler WP3		peter.jaloveczki.ext@dwpbank.de

Bereichsspezifische Inhalte

Hierfür stehen verschiedene Möglichkeiten und Makros zur Verfügung. Um die Startseite nicht mit fachlichen oder teaminternen Inhalten zu überfrachten, empfehlen wir hierfür Unterseiten anzulegen und an dieser Stelle z.B. zu verlinken.

Neueste Bereichsaktivität

Viewing: All

MR **Matthias Ruthenbeck**

Technische Notfallvorsorge Management (ITSCM)-Wiederanlauf und Wiederherstellungstest Beauftragung
updated Nov 3, 2026

SF **Steffen Flick**

Contact by WPIO Topic
updated Nov 3, 2026

🚧Operating Procedures
updated Nov 3, 2026

Version Synchronisation
updated Nov 3, 2026

KN **Kristina Nikolova**

Onboarding Guidelines Collection
updated Nov 3, 2026

Show More

Anleitungsartikel

Add how-to article

How-to article

Provide step-by-step guidance for completing a task.

Add how-to article

WPIO - internal

The internal confluence resources of team WPIO





- Team Status
- WPIO - Process policies
- WPIO onside team meetings
- Retroperspectives
- Onboarding
- Offboarding
- Holiday replacements
- Confidence Votes

Team Status

The matury model (German: Reifegradmodell, RFM) guides us when we evaluate the methodical progress of our team. The monthly team status is based on the maturity model. On this page you can find all relevant information regarding this matter.

All team status reports of Domain BI can be found here: [Status Reports - Backbone & Integration Services - Confluence]

Status history

Monat	Statusbericht	Quelle	Deutsch
2026 04	 2026-04 Statu... IO.pptx 02 Jun 2026, 08:54 PM	Reifegradmodell 2025-01	 Reifegradmodell.pdf 02 Jun 2026, 08:55 PM
2026 03		Statustemplate/ Ausfüllanleitung	Starterpaket Scrum Master - iTOP (Schaut Euch bloß nicht das YouT
2026 02			
2026 01	 2026-01 Status... IO.pptx 02 Jun 2026, 08:55 PM	Statusprozess	**Wer:** Scrum Master in Abstimmun **Wann:** Der Status wird monatlich für den abgelaufenen Monat. **An wen:** Empfänger sind das iTOF Domänenleitung (Andre Liebrucks
2025 12	 2025-12 Status... IO.pptx 02 Jun 2026, 08:54 PM	MA/ Teamzufriedenheit	Team-Agilometer zur Messung de siehe hier: Team Agilometer.pdf
2025 11			
2025 10			
2025 09	 2025-09 Statu... IO.pptx 02 Jun 2026, 08:55 PM		

Altes Material	Information
Reifegradmodell 2023-05	 20230526_Reif... 30.pptx 02 Jun 2026, 08:55 PM

Versionierte Bearbeitung

⚠ Finale Status bitte nicht editieren.

✔ Zur Bearbeitung von Entwürfen bitte über dieses Menü zugreifen

File	Modified
2025-09 Statusbericht BI WPIO.pptx	Jan 8, 2026 by Dominique Josef Stroh
2026-01 Statusbericht BI WPIO.pptx	Feb 16, 2026 by Dominique Josef Stroh
2025-12 Statusbericht BI WPIO.pptx	May 5, 2026 by Dominique Josef Stroh
2026-04 Statusbericht BI WPIO.pptx	May 5, 2026 by Dominique Josef Stroh

Drag and drop to upload or browse for files

Download All

WPIO - Process policies

On this page we keep track of our team policies. According to Kanban practice nb. 4 **"make process policies explicit"**.

As we gain experience we apply **inspect and adept** and adjust our policies together according to our team's needs.

Starting scope of policies on this page mainly relate to Jira and PI/Sprint planning and estimation.

- PI Planning
  - Pre-PI-Planning
  - Capacity for Change

PI Planning

The quarterly planning process is being facilitated on BI domain level. Every team in BI has to contribute accordingly. The overall process and rules are explained on domain level and can be reviewed following the below links. On this page we document how we as Team WPIO comply with the PI process.

Pre-PI-Planning

In BI the teams prepare the PI Planning in a format called Pre-PI-Planning:
Pre PI-Planning Informationspaket und ToDo's - Backbone & Integration Services - Confluence

Capacity for Change

Teams are asked to plan only 80% of their capacity for an upcoming PI cycle. This way we make sure to deliver the commited work on time AND have "free"/ "unplanned" capacity for inquiries from Kundenmanagement, projects and other departments.

Our initial plan values as of PI Q2 2026

Capacity	Sprint (story points)	PI (story points)
100%	120	360
80%	100	300

Rationale:

As of 03-2026 we agree to determine our capacity in story points rather than person days. From the past sprints we experienced an average velocity of 120 Story Points per sprint - this is the combined value of the WgC Sprint and the WPIO team sprint. On that basis we derive

- 100% = 120 SP per sprint
- 80% = 96 SP per sprint

The 80% are rounded up to 100 SP which results in approx. 3 PT additionally allocated for change. We will examine that "optimistic" approach after PI Q2 2026

WPIO onside team meetings

Retroperspectives

Onboarding

Onboarding Guidelines Collection

Laptop and Software setup
Additional Steps for WPIO developers
Important Repositories
Programming Guidelines
WPIO System Documentation
Useful 3rd Party Team Meeting Notes
Release Process Guides using USU (USM)
Merge Request Approval Processes
Deployment Process

Laptop and Software setup

Hungarian and English guides

- Silverfish Setup (Windows)

DWP Employee Onboarding 2026 - Silverfish - dwpSoftware Kft., Ungarn - Confluence

- Goldfish Setup (DF Laptop/Linux)

DWP Employee Onboarding 2026 - Goldfish - dwpSoftware Kft., Ungarn - Confluence

Additional Steps for WPIO developers

OIM Prod Roles

TMU Linux Logs

Click here to expand...

Citrix Software

Click here to expand...

DB2 (Audit db)

Click here to expand...

WPIO Online Drive

Click here to expand...

Kubernetes WPIO-Framework

Click here to expand...

WPITicket (Incident tickets - old system, still in use)

Click here to expand...

USM (new ticketing system)

> Click here to expand...

Release Test Management (SBM/SDM)

> Click here to expand...

Ticket Queue Subscriptions

USM


Subscribe yourself to the “Bearbeitergruppe” (working group) “BG-AA-WPIntegratorOnline_Framework” to receive ticket notifications.

Guide: USM_Self-Service_Bearbeitergruppen.pdf

Putty Settings


1. Install the Software on Silverfish (Windows) using ServiceNow

- https://serviceportal.f-i-ts.de Login with dwp username
- Choose “Software(de)installation (nicht lizenzpflichtig)”
- Fill in the required details.
- The form should look like this:

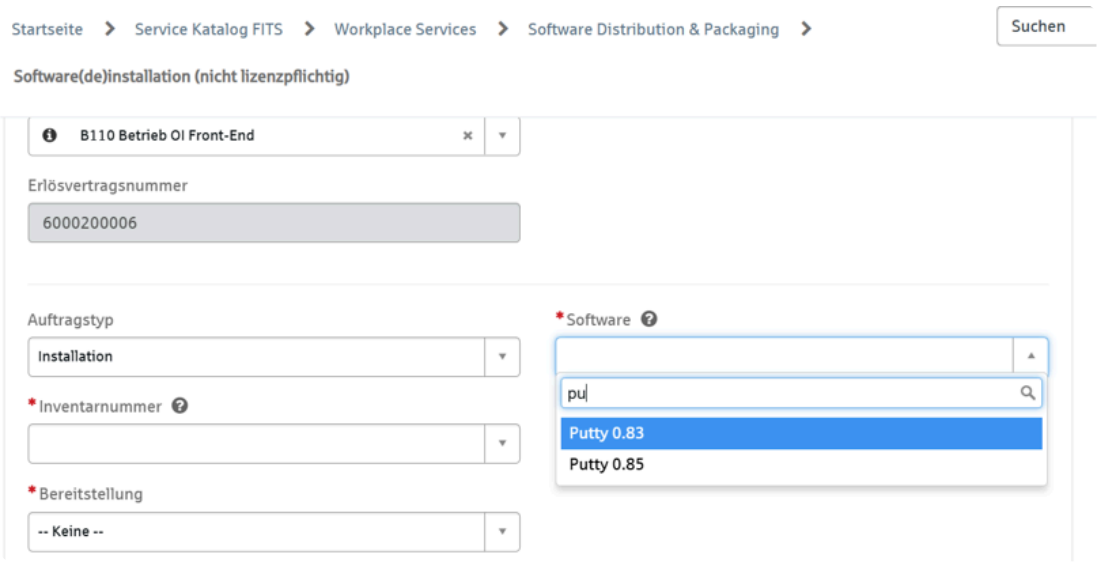


For the Inventartnummer type your Silverfish number in the format: **DPPNB(8 numbers here)**


2. After the installation, set up the following connections:

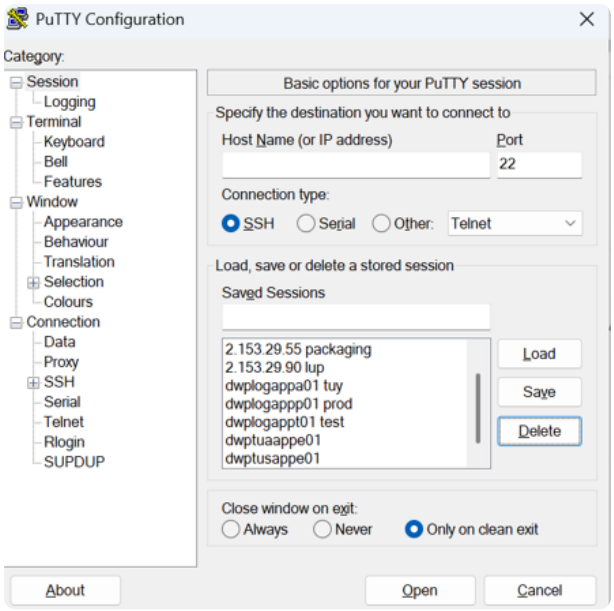


For dwptua/dwptus add SSH Tunnels for db connection:

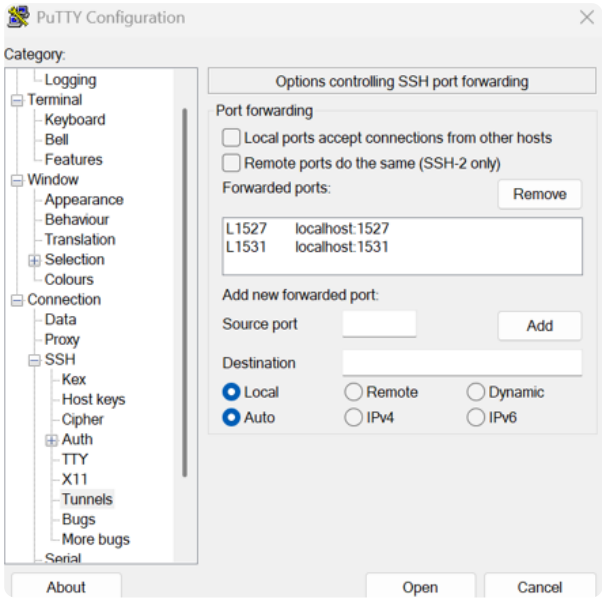

For lup:

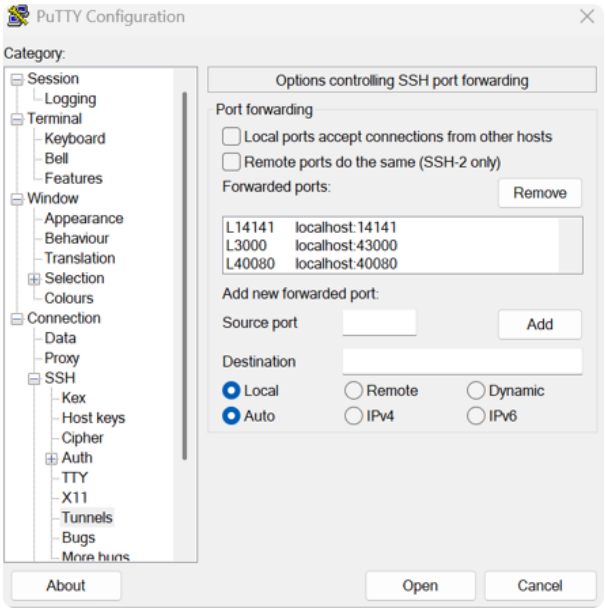

For packaging:

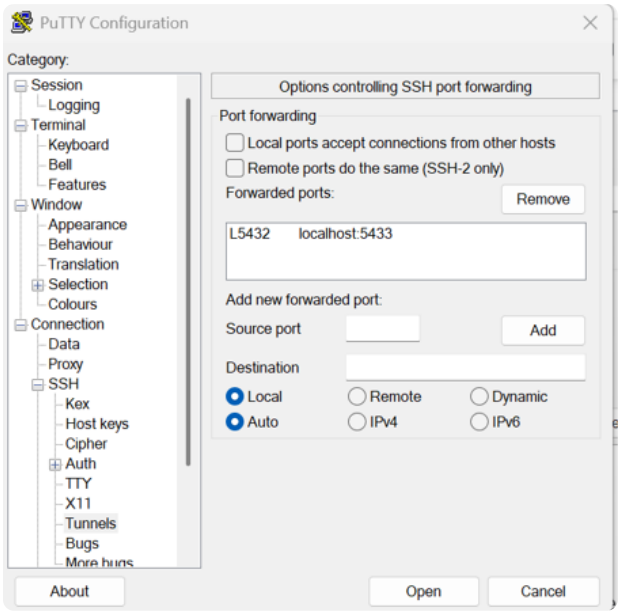

For controlled stages like test, tuy, and prod, we do not have access, so no tunnels are needed.

You can then log in using your dwp username and LDAP password. For tua, tus, and lup, you can use sudo with almost any commands. For test, tuy, and prod, you have access to the log files only. To access them, type:

```
sudo -i -g dwp-wpio
```

Our log folders follow this naming convention:

```
/appdata/data/(environment_name)/wpio/(node_number)/jcf/(service_name)/service.log
```


AuditBrowser Settings

Follow the steps in 🔎WPIO Audit Browser - WPIO - Confluence

OIM PreProd(Test) Roles

Make sure to request the following rights:

Identitätsselfservice

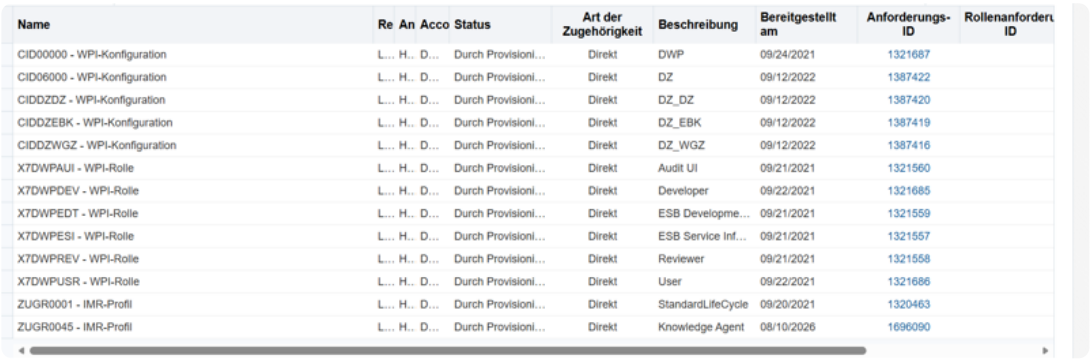

Name	Re	An	Acco	Status	Art der Zugehörigkeit	Beschreibung	Bereitgestellt am	Anforderungs-ID	Rollenanforderu ID
CID00000 - WPI-Konfiguration	L...	H..	D...	Durch Provisioni...	Direkt	DWP	09/24/2021	1321687	
CID06000 - WPI-Konfiguration	L...	H..	D...	Durch Provisioni...	Direkt	DZ	09/12/2022	1387422	
CIDDZDZ - WPI-Konfiguration	L...	H..	D...	Durch Provisioni...	Direkt	DZ_DZ	09/12/2022	1387420	
CIDDZEBK - WPI-Konfiguration	L...	H..	D...	Durch Provisioni...	Direkt	DZ_EBK	09/12/2022	1387419	
CIDDZWGZ - WPI-Konfiguration	L...	H..	D...	Durch Provisioni...	Direkt	DZ_WGZ	09/12/2022	1387416	
X7DWPAUI - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	Audit UI	09/21/2021	1321560	
X7DWPDEV - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	Developer	09/22/2021	1321685	
X7DWPEDT - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	ESB Developme...	09/21/2021	1321559	
X7DWPESI - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	ESB Service Inf...	09/21/2021	1321557	
X7DWPREV - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	Reviewer	09/21/2021	1321558	
X7DWPUSR - WPI-Rolle	L...	H..	D...	Durch Provisioni...	Direkt	User	09/22/2021	1321686	
ZUGR0001 - IMR-Profil	L...	H..	D...	Durch Provisioni...	Direkt	StandardLifeCycle	09/20/2021	1320463	
ZUGR0045 - IMR-Profil	L...	H..	D...	Durch Provisioni...	Direkt	Knowledge Agent	08/10/2026	1696090	

WPIAdmin access

After completing OIM Prod and OIM PreProd requests, check if you can acess WPIAdmin:

🌐 WPIO WPIAdmin - WPIO - Confluence

Derby Access Intellij

How to access Derby Database from Silverfish - WPIO - Confluence

LDAP Account Request

LDAP account setup - dwpSoftware Kft., Ungarn - Confluence

Citrix Access Link

log in with dwp user and windows password

dwpbank-Anwendungs-Portal - DWP1W02XSFP0004

Postgres Access on DF

How to Access Postgres TUA Database - WPIO - Confluence

Important Repositories

LuP (Last and Performance)

login with dwp user and LDAP password

dwp / wpio / wpio-load-test · GitLab

WPIO Deployment TMU (Linux)

login with dwp user and LDAP password

dwp / deployment / wpio · GitLab

WPIO-Framework Projects (Java)

login with dwp user and OIM password

wpio-framework · GitLab

Helm Charts

Click here to expand...

wp3 / hybrid-cloud / helm-charts · GitLab

Note: we use microservice, microservice-job, and xgenservice-wpio

Programming Guidelines

Click here to expand...

MoveWP3: Microservice Programming Guidelines — Java

WPIO Developer Guide

WPIO System Documentation

Click here to expand...

Systemdokumentation WPIO

Useful 3rd Party Team Meeting Notes

TAU, Cloud, etc. If you don´t participate, you can check the news.

TAU Jourfixe - MoveWP3 TAU - Confluence

Agentic AI Community Treffen - Confluence

2026 Dev2PA Dialog Protocols 2026 - PA/CDE - Plattform- und Anwendungsmanagement - Confluence

Release Process Guides using USU (USM)

How to do a monthly release, Sonderrelease, Changes, Emergency Releases etc.

How To: USM Anleitungen (NEU) - STRCM - Confluence

Merge Request Approval Processes

Approval process for TU* environments in the Cloud (AWS)

[Freigabe-Prozess TU* Umgebungen - PA/CDE - Plattform- und Anwendungsmanagement - Confluence]

Note: Approvals for TUY and PROD are now requested via USU (USM) not WPIAuftrag (old system)!

Approval process for TU* environments in TMU

Create a Normal Change in USU (USM)

[Normal Change (NEU) - STRCM - Confluence]

Deployment Process

Click here to expand...

How to deploy

File	Modified
image-20261021-093037.png	Oct 21, 2026 by Kristina Nikolova
image-20261021-093037.png	Oct 21, 2026 by Kristina Nikolova
USM_Self-Service_Bearbeitergruppen.pdf	Oct 21, 2026 by Kristina Nikolova
image-20261026-134530.png	Oct 26, 2026 by Kristina Nikolova
image-20261026-134651.png	Oct 26, 2026 by Kristina Nikolova
image-20261026-134820.png	Oct 26, 2026 by Kristina Nikolova
image-20261026-134903.png	Oct 26, 2026 by Kristina Nikolova
image-20261026-140438.png	Oct 26, 2026 by Kristina Nikolova
d04d0d_Screen_shot_1793204528938-20261029-095354.png	Oct 29, 2026 by Kristina Nikolova
deployment-process-testing-phase.png	19 hours ago by Kristina Nikolova

File	Modified
deployment-process-ready.png	19 hours ago by Kristina Nikolova

Drag and drop to upload or browse for files

Download All

Onboarding Guidelines - Organizational Information

Organizational onboarding for new team members

Offboarding

- Abdel Settah - Offboaring zum 30.09.26

Abdel Settah - Offboaring zum 30.09.26

Legende:

OFFEN

IN ÜBERGABE

ÜBERGEBEN

Aufgabe	Beschreibung	Regelmäßiger Aufwand	Übergeben an	Übergabestatus
Releases-Koordination (dwp und Sonder/E-Releases)	1. Teilnahme an Release-Qualitygate-Terminen und Release-Ablaufplan, Rückfragen an Team transferieren 2. Installationsanleitungen zusammen mit den Entwicklern erstellen und reviewen 3. Release-SBM-Artefakte erstellen und dem Release-Verlauf entlang pflegen (Status setzen pro Quality-Gate,	0,5 PT / Woche Kontinuierliche Koordination und QS rund um Release-Termine	2-3 Hauptverantwortliche innerhalb des Teams Innerhalb der Gruppe der Verantwortlichen wird per 4-Augenprinzip Qualität sichergestellt	OFFEN

	TUY and PROD..) 4. Erstellung, Auswahl, Verteilung und Ausführung von Testfällen (Hauptsächlich WPIO-Framework) zur Sichersstellung der Testabdeckung (ALM-Octane), Erstellung von Reports für SBM. 5. Erstellung von Testthemen bei Bedarf 6. Prüfung nach Installationen an Samstagen nach Release-Einsatz			
Last und Performance Arbeiten (wenn es sich aus der Release-Koordination heraus ergibt)	1. Pflege vom Testsetup auf dem LuP-Server 2. Design, implementerung, Ausführung und Dokumentation	abh. von Testbedarf aus der Release-Koordination	Kristina	ÜBERGEBEN

	von Testszenarien			
Weiterentwicklung / Wartung des ERiC Steuermoduls	1. Weiterentwicklung des Moduls aktuell im file-adapter verankert 2. Elster-Newsletter sichten und bewerten, ob Änderungen notwendig sind 3. Koordination von Einsätzen und Fehlerbehebungen mit Nutzern	1-2 PT / Monat	Entwicklung: Ilian / Kristina Architektur / Bewertung von Änderungen: ❓	OFFEN
TAV-Aktivitäten	1. Überarbeitung BHB 2. Genehmigung von Berechtigungsanfragen	1-2 PT / Monat	Matthias (Stellvertretung suchen)	ÜBERGEBEN
WvD (WPIO-vom-Dienst)	1. Unterstützung Fachbereiche bei Rückfragen zur Nutzung von WPIO-Testumgebungen 2. Tickets-Bearbeitung	2 PT in der Einsatzwoche	Kristina, Matthias, Georgius (wochenweise Rotation) → brauchen wir jemand viertes als direkten Ersatz für Abdel? Rest das Teams übernimmt.	ÜBERGEBEN

	3. wpio MailIn sichten und Anfragen beantworten			
WPIAdmin	1. Überarbeitung BHB (Betriebshandbuch) 2. Koordination von Fehlerbehebungen und Release-Einsätzen und dwpSoftware Entwickler-Unterstützung	0,5 PT / Monat	Matthias	ÜBERGEBEN
Teilnahme an Meetings mit TAU	1. one-to-one Meetings mit TAU für technische Fragen und Erarbeitung von Lösungen	0,5 PT / Monat	Kristina	ÜBERGEBEN
Call on Duty	1. Sicherstellung der Rufbereitschaft gem. Rufbereitschaft - WPIO - Confluence 2. Teilnahme an Meetings mit FI-TS und anderen Stakeholdern	n/a	Übergang im Rahmen von Q3/Q4 an neuen Mitarbeiter	OFFEN

	im Rahmen von Störungen 3. Incident-Management-Kanal sichten (ZOOM → Kommunikation aus dem Tagesgeschäft heraus)			


Holiday replacements

Steffen - 03.08. - 21.08.

	Thema	Aufgabe	Ansprechpartner	Übergeben an
1	MSCP RR-node Latenzen analysieren + optimieren	Messung und Koordinierung von Optimierungsmaßnahmen WVL am Jul 31, 2026 Mittag WGC-2130: Comparison of X-Gen mapping performance - Concept and Implementation Done	PA	@Georgios Eliopoulos @Dennis Fabi
2	Loadbalancer connectivity	Fertigstellung der Loadbalancer Anbindung ☐ Anträge für Firewall-Change stellen für PROD WPIO-1458: Finalize http Loadbalancer connectivity Done		@Georgios Eliopoulos
3	Entscheidungsfindung PostgreSQL	Durchsprache und Entscheidung innerhalb des Teams (v. a. Ilian, Abdel) WGC-1965: Optimize PostgreSQL repository access for X-Gen Services Review	Ilian, Abdel	@Georgios Eliopoulos @Dennis Fabi

Confidence Votes

Pre-Sprint Confidence Vote Sprint 62:

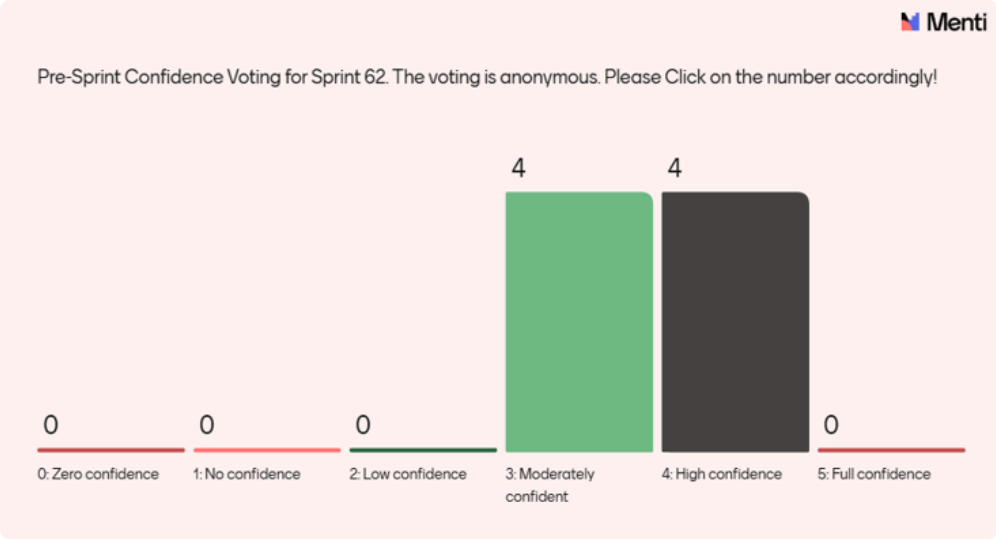

📚 Requirements & planning

WPIO - PI-Q3-Anforderungen

Zielsetzung: Die folgende Übersicht soll eine transparente Darstellung der Working Items auf Basis der Feature-Ebene sowie den zugehörigen Big Stories aus dem PI-Planning bieten.

Kontinuierliche Arbeit an Improvements & Maintenance
Neue Anforderungen (seit 07/2026)
Anforderungen aus PI-Q3-Planning

Legende zur Zelleneinfärbung

Sprint-Planung	Umsetzungsstand
Committed (zur Umsetzung)	offen
Idea (noch keine Umsetzung)	eingeplant (zusätzliche Anforderung)
keine Aktivitäten	in Arbeit (WPIO)
	abgeschlossen
	verzögert (WPIO)

Kontinuierliche Arbeit an Improvements & Maintenance

Prio	BI Feature / Sonstiges	Komponente	Anforderungsbeschreibung	zeitliche Einplanung
n/a	BIMGMT-470: WPIO maintenance & improvement Idea BIMGMT-469: WgC maintenanc	Framework	WPIO-1497: ESB Improvements Collection Backlog WPIO-1496: WPIO Improvements Collection Backlog	kontinuierlich zu jedem Sprintwechsel

	e & improvement Idea					

Neue Anforderungen (seit 07/2026)

Prio	BI Feature / Sonstiges		Komponente	Anforderungsbeschreibung	Schätzung	zeitliche Einplanung	Status
1 Aufgenommen am: Jul 20, 2026	**A.250042 Migration DAB Bank**	BIMG MT-367: A.250042 DAB Migration Q3 (WPIO, SWIFT & WP Dynamic) Geschlossen	Service Development	WPIO-1475: [M] DAB: Aufnahme der STT 059 in DWP.CSTMR MSTR_CHG und _QRY In Progress Bis Ende 08/2026 Bereitstellung auf TUZ	BP: 10 PT BIBAN: 2 PT	Sprint 02 / Q3 ab Aug 4, 2026	☑ Aufgenommen ☑ Analysiert ☑ In Planung aufgenommen ☐ Nicht aufgenommen
1 Aufgenommen am:	**A.250042 Migratio**	BIMG MT-367: A.250042	Service Dev	WPIO-1578: [S] DAB: Extension of DWP.	tbd	Sprint 03 / Q3	☑ Aufgenom

Aug 19, 2026	**n DAB Bank**	2 DAB Migration Q3 (WPIO, SWIFT & WP Dynamic) Geschlossen	elopment	ORDER and DWP.ORDERBOOK In Progress		ab Sep 1, 2026	men ☑ Analysiert ☑ In Planung aufgenommen ☐ Nicht aufgenommen
2 Aufgenommen am: Aug 10, 2026	**A.250009 Einsteigerdepot**	BIMG MT-369: A.250009 Einsteigerdepot Q3 (WPIO) In Umsetzung	Service Development	WPIO-1560: [S] Einsteigerdepot - mapping adjustment for dwpgattung Done	BP: 5 PT (2 + 3 PT)	Sprint 03 / Q3 ab Aug 23, 2026 frühestens	☑ Aufgenommen ☑ Analysiert ☑ In Planung aufgenommen ☐ Nicht aufgen

							omme n
n/a Aufgenommen am: Jul 23, 2026	**Betrieb**	OMS / WP3	Fra me wor k	WPIO-1478: Custo m Kafka Record Keys for WP3 Backends In Progress	BIB AN: 5 PT BP: 5 PT	Sprint 02 / Q3 für Konze pt Sprint 03 / Q3 für Imple menti erung	Au fg en om me n An aly sie rt In Pla nu ng au fg en om me n Ni ch t au fg en om me n
4 Aufgenommen am: Jul 31, 2026	**A.250044 Spk x wpNex**	A.250044 Spk x wpNex | Crypto Service: DWP.CX_ACC_LIST creation	Serv ice Dev elop men t	WPIO-1549: A.250 044 Spk x wpNex | C rypto Service: DWP. CX_ACC_LIST creati on | SD Done Erweiterung des bestehenden Implementierungs-Scopes	BP: 2 PT	• Jul 31, 20 26 ab mo deri ert mit Ver wei s auf	Au fg en om me n An aly sie rt In Pla nu ng au fg en om

						PI-Planning • Zur Umsetzung aufgenommen am Aug 31, 2026	men ☐ Nicht aufgenommen
n/a	**A.260006 Ex-Ante-Anpassungen 2026**	OSPlus / Depotüberträge	Service Development	• Erweiterung WebService WS.BERECHTIGUNG um ein neues Recht für AVL und wpNex • Anforderung wird gestellt, sobald FI Details zur Spezifikation zugeliefert hat • Parallel Prüfung durch Projekt, wie relevant die Anpassung zum Testen ist			☑ Aufgenommen ☐ Analysiert ☐ In Planung aufgenommen ☑ Nicht

							aufgenommen
n/a	**Sonstiges**	n/a	Framework	• Logik zur Ermittlung techn. User in 4 Operationen einzubauen (L1 oder Backend)			☑ Aufgenommen ☐ Analysiert ☐ In Planung aufgenommen ☑ Nicht aufgenommen

Anforderungen aus PI-Q3-Planning

Prio	Projekt / Sonstiges	Feature	Komponente	Sprint-Planung			Umsetzungsstand	Anmerkungen
				Sprint 1 07.07. - 04.08.	Sprint 2 04.08. - 01.09.	Sprint 3 01.09. - 29.09.		
0	**Wartung / Betrieb**	BIMG MT-378: Grundrauschen Q3 (Subdomäne Kundenschnittstelle) Idea	Framework	WGC-2031: WPIO / WgC: Maintenance & improvement 2026/Q3 In Progress WGC-1547: WPIO BC Common Runtime Libraries In Progress WPIO-1425: Revisionsbericht 2025.0049.RV WPIntegrator Online In Progress			☐ In specification ☐ Specified ☐ In refinement ☐ Refined ☑ Under devlopment ☐ Closed	
0	**Wartung / Betrieb**	BIMG MT-377: X-Gen 4.17 Q3 (WPIO, SWIFT) Geschlossen	Framework		WPIO-1407: [M] X-Gen 4.17 Framework preparation Done WPIO-1389: [XL] X-Gen 4.17 Service Upgrade - Pilot In Progress WPIO-1405: [XXL] X-Gen 4.17 Service Upgrade - SWIFT services In Progress		☐ In specification ☐ Specified ☑ In refinement ☐ Refined ☑ Under devlopment ☐ Closed	

1	**A.250042 Migration DAB Bank**	BIMG MT-367: A.250042 DAB Migration Q3 (WPIO, SWIFT & WPDynamic) Geschlossen	Service Development		WPIO-1442: [S] DAB: Initial MQ Connectivity Done WPIO-1436: [S] DAB: Active Delivery Configuration In Progress WPIO-1437: [XL] DAB: WPIO MQ Batch Processing In Progress → **Testbarkeit auf TUM im Oktober** **Erweiterung**: WPIO-1475: [M] DAB: Aufnahme der STT059 in DWP.CSTMRMSTR_CHG und _QRY In Progress WPIO-1492: DAB: Initial FP connectivity for data migration Done WPIO-1578: [S] DAB: Extension of DWP.ORDER and DWP.ORDERBOO	☑ In specification ☑ Specified ☑ In refinement ☑ Refined ☑ Under devlopment ☐ Closed

					K In Progress → **neu seit 20.08.**			
2	**A.260012 Altersvorsorge (pAV & FsR)**	BIMG MT-368: A.26001 2 Altersv orsorge Q3 (WPI O & WP Dynami c) Done				WP IO-1424: [XL] New Service DWP.PRIVATERETIREMENT (L2) In Progr... WP IO-1429: [XL] New Service F I.PRIVATERETIREMENT (L1) In Progr...	In specification Specified In refinement Refined Under devlopment Closed	
2	**A.250009 Einsteigerdepot**	BIMG MT-369: A.25000 9 Einstei gerdepot Q3 (WPI				WP IO-1560: [S] Einsteigerdep	In specification Specified In refine	

		O) In Umsetzung				ot - m appin g adju stmen t for d wpgat tung Done	ment ☑ Refin ed ☑ Unde r devle opme nt ☐ Close d
2	**A.25002 5 Depotmo delle**	BIMG MT-370: A.25002 5 Depot modelle Q3 (WPI O) Geschlossen		WPIO-1443: A.2500 25 DEKA Depot Migrati on - WPIO - Pilot In Progress Platzhalter, sofern Anforderung gestellt wird: WPIO-1441: [S] A.25 0025 DEKA Depot Migr ation - WPIO - Massen rollout Backlog			☑ In speci ficati on ☑ Speci fied ☑ In refine ment ☑ Refin ed ☑ Unde r devle opme nt ☐ Abge schlo ssen
4	**A.25004 4 Sparkas se (AURA) x wpNex**	BIMG MT-371: A.25004 4 wpNex Q3 (WPI O) Done		WP IO-14 09: A URA: New Servi ce D WP.C STDY _CST MR_I D (L 2) In Progr...			☑ In speci ficati on ☑ Speci fied ☑ In refine ment ☑ Refin ed ☑ Unde r devle opme nt ☐ Abge schlo ssen

WP IO-1410: AURA: New Service FI.CSTDY_CSTMR_ID (L1) In Progr...

WP IO-1461: A.250044 - Implementation of 6 services Done

WP IO-1445: [L] A.250044 SP Kxwp Nex - Unterstützung WPIO Done

5	**A.26003 0 Anbindu ng / Datenbe reitstellu ng Santand er / OpenBa nk**	BIMG MT-429: A.26003 0 Anbind ung Date nbereitst ellung S antander Openba nk(WPI O) Done		WPIO-1430: [M] Openbank Deposit API vi a HTTP Done			
5	**Einführu ng API-Gateway (MoveW P3 - div. Projekte)**	BIMG MT-447: MoveWP 3 API-G ateway Done		WP IO-14 39: [X S] AP I-Gat eway - Unt erstüt zung Proje kteins teuer ung Done WP IO-14 38: [S] A PI Ga teway - Unt erstüt			

				zung Architektur konzept Cancelled WP IO-1440: [XL] API-Gateway - Einführung Cancelled				
7	**OMS (MoveWP3 - div. Projekte)**	BIMG MT-372: MoveWP3 A.210057 OMS Q3 (WPIO) Geschlossen		WP IO-1328: [XL] dwp.mixrate für OMS WP3 Analyse → Prio 1 WP IO-1390: [M] Extension D WP.ORDER		WP IO-1478: Custom Kafka Record Keys for WP3 Backends In Progr...	☑ In specification ☐ Specified ☑ In refinement ☐ Refined ☑ Under devlopment ☐ Abgeschlossen	

_AD for OMS WP 3

Prepared

→ Q4

WP IO-1391: Adjustment Weichenschaltung DWP. ORDER for OMS WP3

Backlog

→ Q1 2027

WP IO-1447: A.21005 7 MoveWP3 Order Trade Management - WPIO

Done

				→ Q3 Rest				
25	**A.220030 Umsetzung AMG**	BIMG MT-373: A.220030 Umsetzung AMG Q3 (WPIO) Geschlossen		WP IO-1314: A.220030 AMG - MiKa Div-Meldungen (TEST und PROD) Prepared → ab 2027		WP IO-1428: [S] AMG: Enhance DW P.CST MRM STR_QRY Done WP IO-1427: [S] AMG: Enhance DW P.CST MRM STR_CHG_FP Done WP IO-1426: [S] AMG: Enhance DW P.CST MRM	☑ In specification ☑ Specified ☑ In refinement ☑ Refined ☑ Under devlopment ☐ Abgeschlossen	RS mit Mandy am Jul 31, 2026: Info aus KDS, sobald Felder angelegt und in WPIO bekannt gemacht werden können (BIMGM

						STR_ CHG Done		T-351: A.200030 Umsetzung AMG | Feature Q3 In U...)
40	**A.220035 WPIO goes Cloud**	BIMG MT-375: A.220035 WPIO goes Cloud Q3 (WPIO) Geschlossen		WGC-2111: [XL] Optimize latency in MSCP Cloud node PROD In Progress → Prio 1 WGC-1177: Introduce POD autoscaling In Progress			☑ In specification ☑ Specified ☑ In refinement ☑ Refined ☑ Under devlopment ☐ Abgeschlossen	
41	**A.260006 Ex-Ante-Anpassungen 2026**	BIMG MT-374: A.260006 OSPlus_neo Q3 (WPIO) Done		WP IO-1448: [S] A.260006: New O			☐ In specification ☐ Specified ☐ In refinement	

				SPlus Neo service "Depotübertrage" In Progr... WP IO-1444: WPIO Retail Depot überträge-SST (L2) über WP 3 In Progr... WP IO-1300: A. 260006 - Erweiterung exAnte Kostensimulation Done			☐ Refined ☑ Under devlopment ☐ Abgeschlossen	
KA	**K-26-00099**	BIMG MT-427:			WP IO-14		☑ In speci	Auf PU

	Incentivi ertes Sparen	K-26-00 099 Ord ergeneri erung au s csv- o der Exce ldatei (in centivier tes Spar en) Done			35: [S] In centiv iertes Spare n/Prä miens paren - Nut zung DWP. ORDE R_FP In Progr...		ficati on ☑ Speci fied ☑ In refine ment ☑ Refin ed ☐ Unde r devle opme nt ☐ Abge schlo ssen	End e 08/ 202 6

WPIO - PI-Q4-Anforderungen

Zielsetzung: Die folgende Übersicht soll eine transparente Darstellung der Working Items auf Basis der Feature-Ebene sowie den zugehörigen Big Stories aus dem PI-Planning bieten.

Kontinuierliche Arbeit an Improvements & Maintenance
Seiteneinflieger: neue Anforderungen (seit 10/2026)
PI-Q4-Planning
Anforderungen aus PI-Q4-Planning

Legende zur Zelleneinfärbung

Sprint-Planung	Umsetzungsstand
Committed (zur Umsetzung)	offen
Idea (noch keine Umsetzung)	eingeplant (zusätzliche Anforderung)
keine Aktivitäten	in Arbeit (WPIO)
	abgeschlossen
	verzögert (WPIO)

Kontinuierliche Arbeit an Improvements & Maintenance

Prio	BI Feature / Sonstiges	Komponente	Anforderungsbeschreibung	zeitliche Einplanung
Ops	n/a	Framework	WPIO-1497: ESB Improvements Collection Backlog WPIO-1496: WPIO Improvements Collection Backlog	kontinuierlich zu jedem PI / Sprintwechsel

Ops	n/a	Framework	WPIO-1943: WPIO: Maintenance & improvement 2026/Q4 Prepared	
Others	n/a	Framework	WPIO-1933: WPIO Team Backpacks Q4/26 In Progress	fortlaufend während Q4

Seiteneinflieger: neue Anforderungen (seit 10/2026)

Prio	Projekt / Sonstiges	Feature	Komponente	Anforderungsbeschreibung	Schätzung	zeitliche Einplanung	Status
2	**A.260012 Altersvorsorge (pAV & FsR)**	BIMGMT-682: A.260012 Altersvorsorge Q4 WPIO / CR & Scopeerweiterung In Umsetzung	Service Development	WPIO-1916: [XL] L1/L2 CR and new operations for L1 Private Retirement In Progress WPIO-1971: Extending WS.BERECHTIGUNG v4 and v5 by an new authorization for PAV | SD In Progress as part of the OSPlus_neo Big Story for the extension of WS.BERECHTIGUNG	12 PT	10/2026	☑ Aufgenommen ☑ Analysiert ☑ In Planung aufgenommen

							☐ Nicht aufgenommen
2	**A.250009 Einsteigerdepot**	BIMGMT-693: A.250009 Einsteigerdepot Q4 (WPIO) Seiteneinflieger In Umsetzung	Service Development	WPIO-1955: [S] CR on EDEPOT and dwpgattung(3) channel C Done	0,5 PT	10/2026	☑ Aufgenommen ☐ Analysiert ☐ In Planung aufgenommen ☐ Nicht aufgenommen
4	**A.250044 Sparkasse x wpNex**	BIMGMT-684: A.250044 wpNex Q4 (WPIO) Seiten	Service Development	WPIO-1925: [S] Finalizing FI L1 Service CryptoAcc_List Krypto FI. CX_KRYPTOKONTO In Progress	2 PT	10/2026	☑ Aufgenommen

		einflieger In Umsetzung		WPIO-1954: [S] CR on L2 Krypto Service dwp-cx-trnsctnhstry In Progress			☑ Analysiert ☑ In Planung aufgenommen ☐ Nicht aufgenommen
24	**A.260031 GMW Oberbank**	n/a Upstream	Service Development	WPIO-1939: [M] Technical and functional Onboarding for Oberbank Analyse	9-18 PT	Q4	☑ Aufgenommen ☐ Analysiert ☐ In Planung aufgenommen ☐ Nicht au

							fgenommen
37	**A.250007 LSW KSK Köln**	BIMGMT-723: A.250007 LSW KSK Köln fehlender Eintrag WPIO w/ Taxbox Idea	Service Development	WPIO-2015: Providing missing entry in WPIO Taxbox Backlog		Q4	☑ Aufgenommen ☐ Analysiert ☐ In Planung aufgenommen ☐ Nicht aufgenommen

PI-Q4-Planning

Prio	Projekt / Sonstiges	Feature	Komponente	Big Story	Sprint	Schätzung Big Story	Status	Anmerkungen

						PI Planning	Post PI		
0	**X-Gen 4.17**	BIMGMT-495: X-Gen 4.17 Q4 (WPIO, Swift) Analyse	Framework	WPIO-1392: [XL] X-Gen 4.17 Service Upgrade - DZ Bank services Prepared	Ergebnis aus PI: descoped uncommitted	48 PT		Abstimmung mit Projekt erfolgt Anforderung vollständig Big Story erstellt Big Story beschrieben Aufwand geschätzt Zeitplan abgestimmt	
				WPIO-1867: [L] X-Gen 4.17 Service Upgrade - DZ Bank enablement Backlog		20 PT			
				WPIO-1406: [XL] X-Gen 4.17 Service Upgrade - dwpbank L1 services Prepared		50 PT			
				WPIO-1868: [XL] X-Gen 4.17 Service Upgrade - dwpbank L2 services Prepared		13 PT			
				WPIO-1869: [XL] X-Gen 4.17 Service Upgrade - dwpbank internal services Prepared		16 PT			
				WPIO-1848: [XL] X-Gen 4.17 Service Upgrade - FI services Prepared		32 PT			
				Überkipper Q4	60	n/a			Abschl

				WPIO-1407: [M] X-Gen 4.17 Framework preparation Done					uss in Sprint 60
				Überkipper Q4 WPIO-1389: [XL] X-Gen 4.17 Service Upgrade - Pilot In Progress	61	5 PT			Abschluss in Sprint 60 nicht möglich
				Überkipper Q4 WPIO-1405: [XXL] X-Gen 4.17 Service Upgrade - SWIFT services In Progress	SWIFT	SWIFT			SWIFT Team
1	**A.250042 Migra DAB**	BIMGMT-488: A.250042 DAB Migration Q4 WPIO Planned	Service Development	WPIO-1864: [XL] Backpack: adjustments in WII for DAB In Progress	61	21,5 PT		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig	bis 10.11. auf TUF
				WPIO-1870: [L] Transmission of master data for joint securities accounts Backlog	tbd	10 PT			kein Auftrag seit

									☑ Big Story erstellt ☑ Big Story beschreiben ☑ Aufwand geschätzt ☐ Zeitplan abgestimmt	ens DAB für Anforderung, Projekt in Klärung
				WPIO-1874: [L] DAB: Test and Migration Support Q4/26 Backlog	Q4	8 PT				Test- und Migrationssupport
				Überkipper Q4 WPIO-1436: [S] DAB: Active Delivery Configuration In Progress	61, 62	5 PT				Abschluss abh. von Projekt / Kunde
				Überkipper Q4	61	20 PT				SD in

				WPIO-1437: [XL] DAB: WPIO MQ Batch Processing In Progress					Q4 Bereitstellung Batch Processing Mitte November
				AT WPIO-1475: [M] DAB: Aufnahme der STT059 in DWP.CSTMRMSTR_CHG und _QRY In Progress	62	5 PT			1 SDab 10/2026 und AT
				AT WPIO-1578: [S] DAB: Extension of DWP.ORDER and DWP.ORDERBOOK In Progress	Q4	2 PT			AT in Q4
				Support for LuP Tests	Q4	8 PT			Inhalte LuP-

									Test aktuell in Abstimmung innerhalb des Projekts, ggf. auch erst Q1/2027
1	**A.250042 Migra DAB Gaps (inkl. CRS & FATCA (WPIO & WPDynamic))**	BIMGMT-389: A.250042 DAB | Feature GAP-Closing Q4 2026 In Umsetzung BIMGMT-599: Anpassungen CRS / FATCA wg.	Service Development	WPIO-1639: CRS & FATCA - Account number handling / IBAN Cancelled	n/a	n/a		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Stor	entfällt
				WPIO-1640: [L] CRS & FATCA - Manual processing of CRS and FATCA files Analyse	63	8 PT			• Umsetzun

		Gap DAB Q4 Planned						y erstellt ☑ Big Story beschrieben ☑ Aufwand geschätzt ☑ Zeitplan abgestimmt	gi n Q 4 • A T A nf a ng Q 1 • R el ea se En de Q 2
				⚡ WPIO-1605: (L) DAB - Providing a Rate Limit of 10 RPS Cancelled	n/a	n/a			Du plik at zu MQ Bat ch Pro ces

									sing
2	**A.260013 Fusion NeoDepot**	BIMGMT-600: A.260013 Fusion Neo Depot WPIO Q4 Analyse	Service Development	WPIO-1580: [S] Testunterstützung von DZ BANK / Atruvia für Projekt meinDepot Neo light Prepared	61	2 PT		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Story erstellt ☑ Big Story beschrieben ☑ Aufwand geschätzt ☑ Zeitplan abgestimmt	Nur für Support, kein DEV

2	**A.250009 Einsteigerdepot**	BIMGMT-502: A.250009 Einsteigerdepot Q4 (WPIO) Planned	Service Development	**SD und AT** WPIO-1601: [M] EDEPOT - Ro R adjustment for dwpgattung(4) Prepared	62	5 PT		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Story erstellt ☑ Big Story beschreiben ☑ Aufwand geschätzt ☑ Zeitplan abgestimmt	SD und AT in Q4 Für FI Release 2027(0)
				AT und GL WPIO-1560: [S] Einsteigerdepot - mapping adjustment for dwpgattung Done	62	2 PT			AT und GL in Q4

2	**A.250025 Depotmodelle**	BIMGMT-603: A.250025 Depotmodelle Q4 (WPIO) Idea	Service Development	**GL** WPIO-1443: A.250025 DEKA Depot Migration - WPIO - Pilot In Progress	n/a	n/a		~~Abstimmung mit Projekt erfolgt~~ ~~Anforderung vollständig~~ ~~Big Story erstellt~~ ~~Big Story beschrieben~~ ~~Aufwand geschätzt~~ ~~Zeitplan abgestimmt~~	Abschluss http-Verbindung, To Do bei Fi-TS aktuell Restaufwände für die beiden Pilot-Sparkassen für Go Live in Q4 unter

									Run
2	**A.260012 Altersvorsorge (pAV & FsR)**	BIMGMT-499: A.260012 Altersvorsorge Q4 WPIO Planned	Service Development	WPIO-1633: [S] New L2-Serviceoperation "_WPI_L2_DWP.PRIVATERETIREMENT_v1_m0_ProductInformationSheet" In Progress	61	3 PT		Abstimmung mit Projekterfolgt Anforderung vollständig Big Story erstellt Big Story beschreiben Aufwand geschätzt Zeitplan abgestimmt	
				WPIO-1634: [S] New field "Betrag pro Zielgattung" in Response of ContractDetails Analyse	61	1 PT			
				WPIO-1635: [XL] Collection of several adjustments and extensions for PAV Prepared	61	25 PT			
				WPIO-1878: [M] Extension simulierteExAnte for KombiOrder (PAV) Prepared	62	4 PT			Für Go Live 01.01.
				AT und GL WPIO-1424: [XL] New Service DWP.PRIVATERETIREMENT (L2) In Progress	61	5 PT			AT und GL per Sonder-Rel

				WPIO-1429: [XL] New Service FI.PRIVATERETIREMENT (L1) In Progress					easeam 31.10. für L1 und L2
2	**KA 15561 WPIO - Service zur Kunden- und Depotanlage | AV-Depot für MLP !!! Q4**	BIMGMT-526: KA 15561 WPIO-Service zur Kunden- und Depotanlage | AV-Depot für MLP !!! Q4 Planned	Service Development	WPIO-1581: [S] Providing Private Retirement for MLP In Progress	61	3 PT		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Story erstellt ☑ Big Story beschrieben ☑ Aufwand geschätzt ☑ Zeitplan	Termin: 16.10.2026 auf TUD

								~~Abstimmung mit Projekt erfolgt~~ ~~Anforderung vollständig~~ ~~Big Story erstellt~~ ~~Big Story beschrieben~~ ~~Aufwand geschätzt~~ ~~Zeitplan abgestimmt~~	
4	**A.250044 Sparkasse x wpNex**	BIMGMT-604: A.250044 wpNex Q4 (WPIO) Planned	Service Development	**AT und GL** WPIO-1409: AURA: New Service DWP.CSTDY_CSTMR_ID (L2) In Progress WPIO-1410: AURA: New Service FI.CSTDY_CSTMR_ID (L1) In Progress WPIO-1461: A.250044 - Implementation of 6 services Done WPIO-1445: [L] A.250044 SPKxwpNex - Unterstützung WPIO Done	61, 62	2 PT		~~Abstimmung mit Projekt erfolgt~~ ~~Anforderung vollständig~~ ~~Big Story erstellt~~ ~~Big Story beschrieben~~ ~~Aufwand geschätzt~~ ~~Zeitplan abgestimmt~~	AURA: GL mit Release 5.39 (Prod 14.11.) FI Services: October Release Crypto Services: October Rel

									eas e
5	**A.260 030 Anbin dung / Daten bereit stellu ng Santa nder / Open Bank**	BIMGM T-605: A. 260030 Anbindun g Datenb ereitstellu ng Santa nder Ope nbank(W PIO) Analyse	Servic e Develo pment	Abschluss http-Verbindung Ende September, bis dahin Test begleiten, Release	n/a	n/a		☐ ~~Abs tim mu ng mit Proj ekt erfo lgt~~ ☐ ~~Anf ord eru ng voll stä ndi g~~ ☐ ~~Big Stor y erst ellt~~ ☐ ~~Big Stor y bes chri ebe n~~ ☐ ~~Auf wan d ges chä tzt~~ ☐ ~~Zeit pla n abg esti mm t~~	

7	**A.210057 Move WP3 OMS**	BIMGMT-501: MoveWP3 A.210057 OMS Q4 (WPIO) Planned Zulieferung Details durch Martina ausstehend Konkrete Termine unbekannt, Durchsprache am Sep 18, 2026	Service Development	WPIO-1599: (L) Extension of OMS WP3 (Update Basis v13) Prepared	62	nicht schätzbar; Vermutung: 10 PT		☑ Abstimmung mit Projekt erfolgt ☐ Anforderung vollständig ☑ Big Story erstellt ☐ Big Story beschrieben ☐ Aufwand geschätzt ☐ Zeitplan abgestimmt	Bereitstellung Spezifikation ab Ende 10/2026
				WPIO-1636: (S) Mapping extension for DWP.ORDER operation OrderResponse Cancelled	62	1 PT			Bereitstellung Spezifikation ab Ende 10/2026

				AT und GL WPIO-1328: [XL] dwp.mixrate für OMS WP3 Analyse → **ab Ende 09 / Anfang 10, verspätete Anforderung**	60, 61	10 PT			Fertigstellung in → 09/2026 AT und GL in Q4
				Not started WPIO-1390: [M] Extension DWP.ORDER_AD for OMS WP3 Prepared	61	3 PT			Bereitstellung Spezifikation ab Anfang 10/2026
				Überkipper Q4 - AT und neue Anforderungen WPIO-1447: A.210057 MoveWP3 Order Trade M	61	2 PT			Eine SD offen ohne Tim

				anagement - WPIO Done					elineEine neue SD für dwp.orderbook Rest nur noch AT
			Framework	**AT und GL** WPIO-1478: Custom Kafka Record Keys for WP 3 Backends In Progress	Q4	2 PT			Nur noch AT und GL
23	**A.260009 Migra Seeliger**	BIMGMT-471: A.260009 Migra Seeliger - Unterstützungsleistung agiles Team Kunde	Service Development	n/a	n/a	n/a		☑ Abstimmung mit Projekt erfolgt ☐ ~~Anforderung voll~~	

		nschnittstellen Idea						~~ständig~~ ☐ ~~Big Story erstellt~~ ☐ ~~Big Story beschreiben~~ ☐ ~~Aufwand geschätzt~~ ☐ ~~Zeitplan abgestimmt~~	
38	**A.260034 Ablösung SMARAGD**	BIMGMT-474: A.260034 Ablösung SMARAGD Planned	Service Development	**Neu** WPIO-1568: [M] WPIO-Anpassungen für Migration von SMARAGD auf ACTICO Prepared	63	~~7 PT~~ 11 PT (ohne AT, Release)		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Story erstellt	Bereitstellung Test 12/2026

								☑ Big Story beschrieben ☑ Aufwand geschätzt ☑ Zeitplan abgestimmt	
41	**A.260006 OSPlus_neo (Ex-Ante-Anpassungen 2026)**	BIMGMT-606: A.260006 OSPlus_neo Q4 (WPIO) Planned	Service Development	**Erweiterung** WPIO-1448: [S] A.260006: New OSPlusNeo service "Depotüberträge" In Progress	61	3 PT		☑ Abstimmung mit Projekt erfolgt ☑ Anforderung vollständig ☑ Big Story erstellt ☑ Big Story beschrieben ☑ Aufwan	2 PT für Fix (v4/v5) und 3 PT für Anpassung
				Neu WPIO-1638: [S] A.260006: Extension of OSPlusNeo service "WS.BERECHTIGUNG" In Progress	61	5 PT			

								d ges chä tzt ☑ Zeit pla n abg esti mm t	(v6)
				GL WPIO-1444: W PIO Retail Depot überträge-SST (L 2) über WP3 In Progress	Q4	1 PT			Nur noc h Rel eas e
				AT und GL WPIO-1300: A. 260006 - Erweit erung exAnte Ko stensimulation Done	Q4	1 PT			AT und Rel eas e
44	**A.220 035 WPIO goes Cloud**	BIMGM T-500: A. 220035 WPIO go es Cloud Q4 (WPI O) Planned	Frame work	**Überkipper Q4** WGC-2111: [XL] Optimize latency in MSCP Cloud n ode PROD In Progress	63	25 PT		☑ Abs tim mu ng mit Proj ekt erfo lgt ☐ Anf ord eru ng voll stä ndi g ☑ Big Stor y erst ellt ☐ Big Stor y bes chri ebe n	

							☐ Aufwand geschätzt ☐ Zeitplan abgestimmt	
KA	**K-26-00099 incentivierte s Sparen Q3**	BIMGMT-623: K-26-00099 Ordergenerierung aus csv - oder Exceldatei (incentivierte s Sparen) Planned	Service Development	**AT und GL** WPIO-1435: [S] Incentiviertes Sparen/Prämiensparen - Nutzung DWP.ORDER_FP In Progress	62	2 PT		☐ ~~Abstimmung mit Projekt erfolgt~~ ☐ ~~Anforderung vollständig~~ ☐ ~~Big Story erstellt~~ ☐ ~~Big Story beschrieben~~ ☐ ~~Aufwand geschätzt~~ ☐ ~~Zeitplan~~	Nur noch AT und Release

								~~abg esti mmt~~	
tbd	tbd	BIMGMT-421: TUQ - AWS Cloud Idea	Framework	WPIO-1451: Begleitung Aufbau TUQ für JAB Analyse	tbd	tbd		☐ Abstimmung mit Projekt erfolgt ☐ Anforderung vollständig ☐ Big Story erstellt ☐ Big Story beschrieben ☐ Aufwand geschätzt ☐ Zeitplan abgestimmt	Bereitstellung TUQ durch PA ggf. erstgegen Ende Q4, dadurch nur Vorarbeiten durch WPIO möglich, Hauptarb

									eit fällt in Q1/ 20 27
tbd	**A.220 030 Umset zung AMG**	BIMGM T-663: A. 220030 Umsetzu ng AMG Q4 (WPI O) Analyse	Servic e Develo pment	**SD, AT und GL** WPIO-1314: A. 220030 AMG - MiKaDiv-Meldun gen (TEST und P ROD) Prepared	62	1 PT		☐ ~~Abs tim mu ng mit Proj ekt erfo lgt~~ ☐ ~~Anf ord eru ng voll stä ndi g~~ ☐ ~~Big Stor y erst ellt~~ ☐ ~~Big Stor y bes chri ebe n~~ ☐ ~~Auf wan d ges chä tzt~~ ☐ ~~Zeit pla n abg esti mm t~~	ent fällt für Q4 20 27

Anforderungen aus PI-Q4-Planning

Prio	Projekt / Sonstiges	Feature	Komponente	Sprint-Planung			Umsetzungsstand	Anmerkungen
				Sprint 1 07.07. - 04.08.	Sprint 2 04.08. - 01.09.	Sprint 3 01.09. - 29.09.		
							☐ In specification ☐ Specified ☐ In refinement ☐ Refined ☐ Under development ☐ Closed	

Schätzungen im Sprint

PT	Story Point	T-Shirt Size
	Story	Big Stories
	1	10
	2	20
1	3	30
	5	50
	8	80
	13	130
		210

WPIO - Sonstige PI Anforderungen

Prio	Projekt / Sonstiges	Feature	Komponente	Big Story	Schätzung	Status	Anmerkungen
PI-Q1 2027	**A.250039 Optimierung IT-Betriebskosten**	BIM GMT-704: A.250039 Optimierung IT-Betriebskosten Backlog	Framework	WPIO-2014: WPIO Storage Cost Optimization: Audit Data & Backup Analysis Backlog			
PI-Q1 2027	**CRS 2.0**	BIM GMT-655: A.260007 PUR | CRS 2.0 - neue Meldeinhalte Q1 2027 Idea	Service Development	WPIO-1877: CRS 2.0 - Adjustments of Mapping conditions Backlog			
PI-Q1 2027	**A.210057 MoveWP3 OMS**	BIM GMT-696: MoveWP3 A.210057 OMS Q1 (WPI	Service Development	WPIO-1391: Adjustment Weichenschaltung DWP.ORDER for OMS WP3 Backlog WPIO-1973: [M] MoveWP3			

		O) Analyse		OMS - OrderTradeBuch adjustments Backlog			
PI-Q1 2027	**A.260025 CARF**	BIM GMT-688: A.260025 CARF - Beauftragung BI/WPIB Analyse	Service Development	WPIO-1944: CARF - to be defined Backlog			
PI-Q1 2027	**A.250044 Sparkasse x wpNex**	BIM GMT-686: A.250044 Sparkasse x wpNex (WPIO) Idea	Service Development	WPIO-1951: [S] Extension of CX_CRYPTO_SPRD to include an additional data field for decimal places Backlog			
PI-Q1 2027	**A.220030 Umsetzung AMG**	BIM GMT-663: A.220030 Umsetzung AMG Q4 (WPIO) Analyse	Service Development				
PI-Q1-2027	**A.260031 GMW Oberbank**	BIM GMT-687: A.260031	Service Development	WPIO-2013: [M] Establishing technical WPIO connectivity			

		GMW Oberbank Anbindung WPIO Services Analyse	ment	for Oberbank on TUM Backlog			
PI-Q2 2027	**A.260009 Migra Seeliger**				6 PT (5 PT für Umsetzung AD / Testinsgesamt für Mai Juni, 1 PT für Support)		

👥 Meeting notes

Internal meetings

PO-ScM-Sync

Regelagenda:

1. Offene Punkte aus dem Themenspeicher
2. Sonstige Themen

Zeitpunkt: montags, 13:00 bis 13:45 Uhr

Teilnehmer: @Nora Moni-Zsigo , @Dennis Fabi , @Steffen Flick

Date	Topic	Description	Responsible	Next Steps
11.09.2026				

	Thema	Beschreibung	Eingetragen von ... / am ...	Nächste Schritte
15	WPIO Service Request & Upstream	Wir benötigen eine Strukturierung für unser Team-Eingangskörbchen Annahmen: WPIO work items werden nur vom Team, PO, Lead-PO angelegt Annahmen: Themen, die über PO und Lead-PO eingehen, müssen regelmäßig im Team besprochen werden	@Dominique Josef Stroh	Alle Themen werden im Zweifel eigenständig erfasst (Backlog) Das Backlog wird regelmäßig analysiert und die neuen Stories werden geclustert, zugeordnet,

				refined bzw. verworfen. Idee: Eigenes Board für den Upstream Später: für die Zukunft wäre eine Jira-Funktion sinnvoll, über die Teams/ Projekte “Service Requests” an WPIO stellen können.
14	Dreiteilung der Stories in Entwicklung, Test und Go Live	• Ausarbeitung und Testen der Funktion zum automatisierten Erstellen von Jira Tasks • Vorstellung im Team und Festlegung des neuen Vorgehens	@Dennis Fabi / 24.08.	☐ Erstellung der Automation @Steffen Flick ☐ Testen der Automation ☐ Vorstellung des Vorgehens im Team
13	Agenda für Budapest	• Inhalte / Ideen von Dominique, Steffen und Dennis • Aspekte aus der Team Retro vom 25.08.	@Dennis Fabi / 24.08.	
12	Arbeitsweise im Team vorstellen und vergemeinschaften	• Welche Boards nutzen wir? • Was sind Features, Big Stories und Stories?	@Dennis Fabi / 20.08.	
11	Backlog Grooming	Wir wollen ein aufgeräumtes Backlog haben. Dafür archivieren nicht mehr benötigte Stories und sorgen	@Dennis Fabi / 20.08.	

		dafür, dass vorhandene Stories jeweils einer Big Story zugeordnet ist.		
10	Anlage von Templates für Jira-Karten	Anlage generischer Tickets als Template für Service Development und Framework-Development	@Dennis Fabi / 20.08.	
9	Urlaubsübersicht und Planung	• Wie werden Urlaube aktuell abgestimmt? ◦ Zweck: Vermeidung von doppelten Abwesenheiten → Vertreterregelung	@Dennis Fabi / 19.08.	
8	Planbarkeit von PI / Sprints und Steuerung des Teams	• Kapa-Planung für 3 Monate • Schätzung von Stories • Schätzung von Überkippern	@Dennis Fabi / 19.08.	
7	PI Execution & ART-Sync, PO-Sync, Coach-Sync	Was brauchst Du als PO-WPIO, um während des PI effektiv Impediments, Risiken und Abhängigkeiten zu steuern?	@Dominique Josef Stroh / 20.07.	
6	Strukturierung der Refinement-Sessions	• Reservierter wöchentlicher Slot für Refinements • Dienstags 13:30 • Am Sprintwechseltag findet hier das Review statt und geht in das Planning über. • Bei Bedarf wird das Planning in der folgenden Teamwork-Session fortgesetzt/ abgeschlossen. • Während der Sprints entscheidet PO, ob die Backlogs und/oder einzelne	@Dominique Josef Stroh / 20.07.	☐ Konsolidierung der Komponenten in WGC und WPIO; Entscheidung, welche verwendet werden sollen.

		Work-Items besprochen werden. ℹ️ Kurzer Check-In zu Beginn der Session und Verabredung, wie die Stunde heute genutzt werden soll ◦ Backlog-Besprechung ◦ Work-Item-Refinement • Backlog-Besprechungen finden entweder gesamthaft statt, oder nach den Sub-Teams Plattform und Business Services. ⚠️ Für die Sub-Team-Sicht sollen Filter auf Komponenten genutzt werden. • Work-Item Refinement findet auf Initiative der Umsetzer oder des POs statt. Zu Beginn der Session werden die Work-Items, die Zielsetzung und die benötigten Teammitglieder identifiziert		
5	Zusammenarbeit zwischen uns dreien (bis Steffen sich aus der PO-Rolle zurückzieht)		@Dennis Fabi / Jul 8, 2026	
4	Terminserien	• Wozu ist die Terminserie “team - weekly follow-up and status meeting” ℹ️ Dieser Slot soll zukünftig	@Dennis Fabi / Jul 8, 2026	• Terminserie “team - weekly follow-up and status meeting”

		für Refinement-Arbeit mit dem Team genutzt werden. • ✅ Wollen wir einen Termin zur “Arbeit am System mit dem Team” einführen? Zweck: Reflektion und Optimierung der Arbeitsweise, Arbeit an Teamregeln (z. B. Dokumentation von Arbeitsständen in Jira etc.) ℹ️ Das ist die Team-Retro. Immer Dienstag in der Teamwork-Session in der Woche nach dem Sprintwechsel • ✅ Macht es Sinn, die Team Meetings mit beiden “Sub Teams” durchzuführen? ℹ️ Wurde am 16.07. zusammengelegt		◦ Dennis stellt diesen Termin neu ein und koordiniert die Absage der alten Serie mit Janos (wurde von Dominique am 16.07. informiert.)
3	Neuaufsatz des Sprint-Vorgehens	Idee / Vorschlag: Wir führen dedizierte Termine für Refinement, Planning und Review ein. • Refinement in der Mitte eines Sprints ◦ Fokus auf: sind unsere Stories vollständig und beschrieben? sind unsere Stories geschätzt? was fehlt uns noch? • Review am Ende eines Sprints ◦ Fokus auf: was haben wir geschafft? was haben wir	@Dennis Fabi / Jul 8, 2026	☐ Ausarbeitung und Dokumentation des Vorgehens ☐ Vergemeinschaftung des Vorgehens im Team ☐ Teilen der Dokumentation im Team

		nicht geschafft? wie viel Aufwand steckt in dem, was wir nicht geschafft haben? • Planning zu Beginn eines Sprints ◦ Fokus auf: proaktive Auswahl der Stories, die wir gemäß Gesamtplanung in Bearbeitung nehmen müssen, um Big Stories bzw. Features am Ende des PI liefern zu können Sonstige Fragen: • Wir definieren zudem eine DoR für jede Story (was muss gegeben sein, damit wir die Story in Bearbeitung nehmen können?) • Wie können wir Blocker / Abhängigkeiten besser transparent machen? • Können wir einheitliche AC in den Stories (in Form eines Templates) hinterlegen?		
1	Konsolidierung von Jira-Boards	Aktuell verwendet das WPIO-Team zwei Jira-Boards, einmal ein Scrum-Board und einmal ein Kanban-Board. Diese sollen zwecks Transparenz auf ein einziges Scrum-Board konsolidiert werden. Heute werden zwei unterschiedliche Workflows	@Steffen Flick & @Dominique Josef Stroh / Jul 6, 2026	**Vorbereitung**: ☑ Definition der Zielstellungen ☑ Konzeption der neuen Jira-Arbeitsweise (z. B. Mapping der Stati auf ein gemeinsames Board) ☑ Dokumentation der neuen Arbeitsweise

unterschieden, je nach dem ob eine Service- oder eine Framework-Entwicklung erfolgt:

- Service-Entwicklung (tendenziell eher langläufig)
  - Entwicklung
  - Testunterstützung
  - Go Live
- WPIO (Framework)

Zielsetzung des neuen Vorgehens (Entwurf):

- Gemeinsame Sicht auf Kapazitäten / Engpässe / Impediments
- Gemeinsames Planning

- [ ] Dokumentation sonstiger Regelungen (“Kopfwissen”)

Konkretes Vorgehen für die zeitnahe Umsetzung:

- [x] Verschiebung von Nicht-WgC-Tickets (Stories & Big Stories) ins Projekt WPIO (WgC-Stories verbleiben im WgC-Projekt)
  - [ ] QS durch @Steffen Flick
  - [ ] Nicht sichtbare Issues in WgC aufgrund Ausblenden von Statuswerten auflösen
- [x] Identifizierung derjenigen Stories aus dem WPIO-Projekt, die aktuell “lose” bearbeitet werden → Zuordnung zu Big Story (Namensgebung: Service-Entwicklung)

Folgeaktivitäten:

- [x] In WPIO-Projekt ein Scrum-Board erstellen für die Sprints sowie ein Kanban-Board für die Big Stories
  - [x] Anpassung der Spalten je Board
  - [x] Anpassung der Workflows je Tickettyp

				- [x] Änderung von Tasks (ehemals im Kanban-Board verortet) zu Story - [x] Ungewünschte Tickettypen nicht auswählbar machen - [ ] Dreiteilung der Stories in Entwicklung, Test und Go Live → separates Item - [x] Nicht mehr benötigte Jira Boards entfernen

Teamwork Session

Standard agenda

During the WPIO teamwork session, we collaborate as a WPIO team on various topics. Depending on the week within the sprint cycle, this Tuesday session focuses on different key areas:

- Week 1 (after Sprint transition): Sprint retrospective for the previous sprint
- Week 2: Substantive work on team-related matters (e.g., improvements to our working system)
- Week 3: Knowledge transfer
- Week 4 (always last week of the Sprint): Sprint Review and Sprint Planning

Date: every Tuesday

Time: 14:30 until 15:50

The following table shall be used to document our discussed topics originating from the substantive work on team-related matters. *Please add topics that you wish to share, present, discuss or work on with your name at the respective date below.*

To document our shared knowledge we use this Confluence page: Knowledge sharing session - Collection and registration of topics

Datum	Agenda	Decision log/ Information
10.11.2026	**14:30 Team Work Sessions - Agenda:** • Knowledge sharing session • Discussing Standard Acceptance Criteria	
03.11.2026	**13:30 Team Work Sessions - Agenda:** 1. Common Out of Office-Overview (also for PI Planning relevant) 2. Discussing and Presenting Service Request Feature in Confluence for Jira 3. Improving Quality through adjustments in our Deployment and Sync Process ◦ What is the Status quo? Do we have documentation about this current state? ◦ How do we check executed deployments in TMU and Cloud? ▪ What is WPIO / AppOps / FI-TS (AppCore) responsibility? ◦ How do we Sync the environments?	**Out of office overview:** ☐ @Dennis Fabi will check if SAP Reports can be downloaded for German colleagues, if yes it can be merged somewhere together with the Management Tool report **Service Request Feature:** ☐ @Dennis Fabi @Eglee Vasquez @Laszlo Kerepeszki will check it out together, and present the findings in a following appointment ☐ The request feature then can be presented for the stakeholders in the confluence page. Afterwards this process should be followed by all stakeholders ☐ Probably the raised tickets should be collected in a separate backlog item collection in our current Scrum board **Quality Improvement topic:** ☐ Version Synchronisation - WPIO - Confluence

	▪ What is WPIO / AppOps / FI-TS (AppCore) responsibility? 4. Approval of MR in Gitlab • It seems that we don't have "enough" team members to approve MR • Differentiation needed!	
05.10.2026	13:30 Backlog Refinement 14:30 Action Items from Budapest 1. Foto protocol: Budapest - 30.09. - 02.10. Agenda - WPIO - Confluence 2. Follow-up on action items: Stories in WPIO Backlog 3. WPIO Onsite in Düsseldorf 4. Implement Definition of Ready 5. Using "**Team WPIO"** Chat for requesting approvals (Post & comment when done)	**Point Nr. 4 Example:** **DoR:** It shows for the team when a task or User Story is clear enough to start. Example checklist for that: • Acceptance criteria is given • Task is estimated • Dependencies are cleared and removed • Designs and wireframes are attached • Timeline by requester is communicated Example for a good Story in Jira: [WPIO-1348] A.260006 FI L1 Erweiterung WS.MIFID2WPAB simuliereExAnte - A channel | SD - Jira this one still needs a) acceptance criteria b) expected delivery (for example asap, Release x.yz, End of month x, end of quarter y, ...) **DoD:** Shows the team when the work (story) is completely finished. Example checklist for that: • Work has been already revised/checked by other team members • It has been tested, no errors were found • Documentation is uploaded **Difference between Acceptance Criteria and Definition of Done?** The Definition of Done (DoD) is a universal quality checklist that applies to every product item, while Acceptance Criteria (AC) are specific, functional requirements unique to a single user story.
30.09.2026	Budapest Onsite	

15.09.2026	For the refinement: • Topics for October / PI-Q4-2026 Teamworksession: • Topic for Onsite in Budapest	
08.09.2026	For the refinement: Discuss Smaragd URL for DEV (Georgios, Ilian)	
25.08.026	Retrospective: Retrospective 2026-08-25 - WPIO - Confluence Agenda topics for Budapest Onsite 30.09. - 02.10.	
11.08.2026	#1 Explanation of the issuetype “Big Story” and how we use it. What questions does the team have regarding Jira issue hierarchy? #2 Presentation of the adjusted Jira status and usage of columns #3 Discussing and deciding WGC-1965: Optimize PostgreSQL repository access for X-Gen Services Review #4 Sharing learnings after the SAP SMARAGD integration onto LB #5 Highlightung current quality issues and discussing concrete improvements #6 Handling Change types in USU	
28.07.2026	#1 Discuss how to handle prod bug wptickets or DZ ticket regarding new service deployment. - Create or not WGC Jira so that to see the tasks of the employees. Decision per Jul 28, 2026 : we create a corresponding Jira Issue (Type: Bug) in order to make the work on the issue transparent and organize necessary steps to solve the Bug. We also agreed to define Acceptance criterias that are necessary to solve the Bug. If it comes to a change in Software, we **always** create a Jira Issue (Bug) in our WPIO / WgC space.	
21.07.2026	#1 Discuss how to handle issues involving other departments. Like the recent proxy whitelist removal which caused massive impact on TUY across multiple business departments.	

	Attached is the Email thread: kafka connectivity issue on TUY.msg ☐ we (@Dennis Fabi , @Dominique Josef Stroh) need to address this with PA in order to prevent such prod issues in the future ☐ there must be at least upfront information for this kind of changes ☐ also negative impacts to wpio services have to be considered by PA ☐ a proper way of communication and approval (by wpio) should be considred #2 Genehmigung Release: • There've been complaints (brought to us by Christian Rapp) regarding Release 5.34 for not approving on time • What can we do to improve here? ◦ Groups or Rights Issue ? → no ◦ IT-Approval was missing in this case. Why? → sorry, we were just late this time ☐ Suggestion to address this again in Release Coordination Meeting (@Dennis Fabi) #3 Offboarding of Abdel - distribution of topics • Link: Abdel Settah - Offboaring zum 30.09.26 - WPIO - Confluence ☑ ALL: please visit the task list and respond your opinion to Dennis/ Dominique until Jul 28, 2026	
14.07.2026	Consolidation of JIRA spaces WgC and WPIO <u>Setup</u> • Steffen, Dennis and Dominique will be in our zoom-session. • We will then walk through the WPIO Kanban Board. • We will invite the other team members one-by-one to go through concrete work items. ◦ **Please hold yourself available on zoom between 14:30 – 16:00** ◦ We expect each session to take between 10-15 minutes <u>What we aim to achieve</u> • we have an estimated story points till completion on each story • we have assigned a Big Story to each story • we have pulled all "in progress"-Stories into the current team sprint.	

	Goal • After the session we should be able to visualize all WPIO Team work items here: WPIO & WgC - Downstream - Scrum Board - Backlog - Jira • enabling joint team meetings, regular refinement and efficient planning 😉	
07.07.2026	Sprint Planning	
30.06.2026		
23.06.2026		
16.06.2026	• Retrospective: WPIO Retro Board - Retro 16.06.26	
09.06.2026	• Impact of new USM Change and Incidentmanagement Process (Matthias) Environment pre-prod: https://usm.usm-prep.dwpbank.net/vmweb/vmweb Confluence resources: USU Service Management (USM) GoLive Dates: Einführung IT Service Management • Sprint Planning	
02.06.2026	• Team Event in Budapest ◦ Monday - Wednesday ◦ Which week ▪ ⚠ Wed 09.09. - Fri 11.09. (Lazlo vacation, Pre-PI-Planning, Georgios off till 07.09.) ▪ ✖ Mon 14.09. - Wed 16.09. (Lazlo vacation, Steffen tbc) ▪ ✖ Mon 21.09. - Wed 23.09. (PI Planning) ▪ ✖ Mon 28.09. - Wed 30.09. (Sylvia Seminar) ▪ ✔ Wed 30.09. - 02.10. ▪ ✖ 05.10. - 07.10. (Sylvia Vacation) ▪ ✔ 12.10. - 16.10. ◦ How to involve new PO Dennis Fabi? ▪ Sylvia • Example Story for XGen 4.17 Migration Tasks	

26.05.2026	1. Common Story Workflow for Service Development and Framework (Steffen) 2. From Retro: XGEN 4.17 Migration Orga: a. EPIC b. Tracking-Board c. Story-Workflow d. Story-Description (generic) e. Bulk Upload	
19.05.2026	• Retrospective: Retro-Board WPIO – Conceptboard	
12.05.2026	• Sprint Planning WgC • Sprint Planning WPIO Team	
05.05.2026	Work on Retro Results 1. Provide a common template for installation instructions (Hybrid Cloud) 2. Inform EVERY developer in wpio context to prepare separate installation instructions (Hybrid Cloud) 3. Have an informal meeting with Release Management (their perspective | our perspective) 4. Distinguish Deployment use cases and prepare checklists for each in confluence	
28.04.2026	Work on Retro Results • Use the release coordination meeting for further improvement in Instal-Intruct Topic • Structure: ◦ Introduction by release coordinator ◦ Jira Tasks in release ◦ Preparations done ◦ Open points ◦ Dependencies? ◦ Sonderchanges? ◦ Current release calendar	
21.04.2026	• Retrospective • Release Management Process	
24.02.2026	• How we should handle WPTicket, we have to prevent long running tickets and always keep the status up to date. (Georgios)	

	• Jira Consolidation - brief update (Dominique) • Jira issue hierarchie (Topic, Epic, Story) for Kundenanforderungen (KA) ⚠ in German ⚠ Georgios & Dominique (breakout session)	
17.02.2026	• Refinement regarding cloud node activation activities (Steffen) • Let's discuss: How to handle departments directly approaching developers? (Georgios) > DONE **> Confluence Link einfügen**	
10.02.2026	• WPIO Sprint Planning	
03.02.2026	• WPIO 03.02.26 EN - Template How to write good User Stories – Conceptboard	
27.01.2026	• Jira use cases; Jira project overview; team discussion (team) • Run-Cluster: team preferences for future use of PPM/ CATS (Dom)	
20.01.2026	• Retrospektive (Dominique)	
13.01.2026	• Refinement (Steffen) ◦ topics & priorities ◦ capacity and opportunities ◦ Sprint planning f. WgC & WPIO separately ◦ (optional) Visualization requirements (JIRA)	
06.01.2026	• Initial meeting of this format (Dominique) • Chageboard participation for WPIO on Friday (Georgios) • Jira views for the release coordination meeting	

Teamwork session - decision log/ notes

24.02.2026	We (Janos) will clear and and request closure of Queue: ITKFT - Software Kft Ungarn::ITKFT - WPIO / ESB / WPIAdmin / Audit We should inform BOSC/ David Hüther about the new BI Queue names

	How can we faster close Tickets/ Inform in the Ticket why it is still open A year ago we agreed to review long running tickets every Monday
13.01.2026	• Refinement ◦ WgC ◦ XGen-Dev ◦ CtB WPIO Plattform (i.e. HTTP-Adapter) ◦ RtB WPIO Plattform • Breakouts • Visualization requirements (JIRA)
06.01..2026	• Initial meeting of this format (Dominique) • Chageboard participation for WPIO on Friday ◦ Georgios will attend the upcoming meeting on 09.01. (quick fix) ◦ In the future FAV/ TAV and deputies will rotate in the Friday meeting ◦ In Monday's release coordination the team discusses if further attendance is required for the upcoming Change board ◦ We will observe this arrangement and reflect regularly ◦ Every team member is invited to attend the changeboard in "spectator mode" • Jira views for the release coordination meeting ◦ Proposal 1: use the field "fix version" aka "Lösungsversion" to flag the anticipated standard release ◦ Proposal 2: let's use this task to kick off the consolidation of our three Jira projects. ◦ Decision: as a next step we will collect our different Jira use cases in a smaller sub-group (Steffen, Janos, Dominique) as a concept board visualization. We aim to introduce it in the tw-session 20.01.

Knowledge sharing session - Collection and registration of topics

Topic	Discussion date	Questions / Details
USU	Oct 20, 2026	How to create Normal change to synchronize (multiple) test environments after Sonder Release on Prod? Where must these information be documented in USU? This is an exception executed by WPIO team. Merge requests are created in GitLab. USU aims to provide information for FI-TS in order to execute the MR. Typical tasks: • Creation of MR in GitLab and provide MR in USU • Naming of affected test environments; every environment has a unique link originating from the MR from GitLab Response: • Normal change is the correct way; it is in discussion whether a simplified process can be designed ◦ FI-TS requests Normal Change ◦ AppOps doesn't require a Normal Change • **Recommendation by STRCM**: using the field "Installationsanleitung" to document environments and unique URL • Further clarification on Tuesday Oct 27, 2026
USU	Oct 20, 2026	What approvers are necessary in order to execute the Change? Who is approving next? Are Changes forwarded to FI-TS directly or is it a manual / additional step necessary?

ARCH Weekly

Legende:

offen
in Arbeit
erldigt

Teilnehmerkreis:

@Georgios Eliopoulos @Steffen Flick @Matthias Ruthenbeck @Dennis Fabi

#	Topic	Details	Eingetragen von / am	Nächste Schritte
6	Dokumentation von Versionsnummern div. Anwendungen	Anfrage: Hallo Dennis, wir halten aktuell bei den verschiedenen Anwendungen die Versionsnummern nach, hierbei fehlt uns noch die aktuelle Versionsnummer von der Anwendung "WPIntegrator Online - Produktion", "WPIntegrator Online AuditBrowser - Produktion" & "WPIntegrator Online-Audit und Gen-Audit - Produktion". Erste Rückmeldung: 1. Die genannten „Anwendungen“ stammen aus Hopex und sind damals nicht bewusst von uns angelegt worden sondern sind eher	@Dennis Fabi / Oct 13, 2026	Notizen aus der ersten Diskussion: • Was ist der Bestandteil der Abfrage? ◦ Lediglich Plattform-/Anwendungs-Ebene? ◦ Soll jede Komponente einzeln aufgelistet werden (auch fachliche Services)? ◦ Welche Versionsnummer wird erwartet? • Was ist die Zielsetzung der Anfrage? Wofür werden die Informationen benötigt? Können wir die Anfrage mit den aktuellen

		willkürlich entstanden (und ich stelle diese Aufteilung in Frage). 2. Es könnte sich um so etwas wie „FI-TS Deployment-Anwendungen“ handeln. 3. Wir maintainen diese Anwendungen nicht aktiv, da es nur Teile der großen Anwendung „WPIntegrator Online Framework“ sind: jetzt fängt man an, auf diese Anwendungen formale Prozesse aufzusetzen… 4. ich vermute, das kommt aus iLuna und der Anforderung, zu jeder Anwendung und in jeder Umgebung in der Lage zu sein, die zu einem bestimmten Zeitpunkt installierte Version nachweisen zu können… 5. Bei uns hat nahezu jede Komponente eine eigene Versionsnummer, d.h. wenn wir zukünftig (oder ab sofort) so kleinteilig Versionen reporten müssten, dann müssten wir 250 zusätzliche „Deployment-Anwendungen“ (=jeden Service) neu anmelden…		Möglichkeiten überhaupt beantworten? @Dennis Fabi gibt Rückmeldung an Etienne Albert und lädt zum gemeinsamen Termin am Nov 12, 2026 zur Klärung der offenen Fragen ein

		6. Wenn wir Punkt 3 nicht wollen (ich fürchte aber, da kommen wir nicht drum herum), müssten wir unsere technischen Deploymentverfahren anpassen und immer größere Service-Gruppen gesamthaft versionieren/austauschen …		
5	Servicevertrag mit Valantic / XGen	Wir werden die Migration nicht zum 31.12. abschließen - wir müssen den Hersteller darüber informieren und uns über die Konditionen einer weiteren Wartungsverlängerung informieren.	@Dennis Fabi / Oct 5, 2026	Es wird keine Vertragsverlängerung benötigt! Wir zahlen bis zur Fertigstellung der Migration pro Quartal 25.000 €.
4	Verbesserung des Monitorings div. Services			
3	Upgrade von X-Gen auf 4.17	Definition eines Vorgehens, um die X-Gen Migration durchzuführen. Vorgehen: • Weitere Services migrieren und “echte” Erfahrungswerte sammeln • Möglichkeiten von KI-Unterstützung erproben	@Dennis Fabi / Sep 25, 2026	

2	Latenzanalyse WgC	Planen wir eine feste Terminserie zu diesem Thema, um die entsprechende Aufmerksamkeit darauf zu bekommen?	@Dennis Fabi / Sep 25, 2026	☑ Feste Terminserie ab Oct 8, 2026
1	SV-IT 0301 HCOB - Anhang 5 Leistungsqualität der Systeme und Schnittstellen	Um mit der SV-IT der HCOB weiter zu kommen, würden wir dem Kundenmanagement für die Verfügbarkeit von WPIO folgendes vorschlagen: Da die bisherige Vereinbarung auf 97% gesetzt war, im Reporting aber 99% als Referenzwert hinterlegt war, würden wir in der Vereinbarung jetzt 99% einpflegen. Aus den Zahlen dieses Jahres wissen wir, dass wir dies sicher einhalten können.	@Dennis Fabi / Sep 25, 2026	☑ Rückmeldung durch Dennis an Christoph W. zum weiteren Vorgehen (gem. Termin zur Durchsprache)

Project meetings

A.260013 Fusion NeoDepot

2026-08-20 Abstimmung agile Zulieferung PI Q4

Datum: Aug 20, 2026

Teilnehmer: @Claudia Cleef @Achim Geldmacher @Marc Bengfort @Georgios Eliopoulos @Dennis Fabi

Beschreibung der Anforderung

Feld	Erklärung
Bezeichnung	Unterstützung der Tests von DZ BANK und Atruvia im Rahmen von meinDepot Neo light
Domäne und Team	BI - Kundenschnittstellen
Owner	Sebastian Münz (Lead PO), Dennis Fabi (PO)
WS meinDepot Neo light	Achim Geldmacher
Aufwand	15 PT (je 5 PT für die Monate Oktober, November, Dezember)
Beschreibung	Die DZ BANK hat sich Ende Q2 entschieden, ihr neues Depotangebot meinDepot Neo auf Basis von WP2/3 umzusetzen. Zu diesen Zweck erstellt die Atruvia nach den Vorgaben der DZ BANK eine neue App, die es Depotkunden ermöglicht Depots zu eröffnen sowie Wertpapierhandel zu betreiben. Die Atruvia setzt dazu die WPIO-Architektur ein, die auch heute schon im Einsatz ist. Nach dem Plan der Atruvia soll eine erste Version der App für einen Test ab dem 15.10.2026 zur Verfügung stehen. Die Tests finden gegen die TUD statt. Es wird erwartet, dass sich aus diesen Tests mehr Aufwand für das WPIO-Umfeld ergibt,

	als es eigentlich für die Betreuung des regulären Testbetriebs in der TUD erforderlich ist. Die eigentliche Produktionsaufnahme für das neue Depotangebot im genossenschaftlichen Sektor wird am 15.03. mit einer friends & family Phase erfolgen.
Meilenstein	31.12.2026 Unterstützung der Testphase von DZ BANK und Atruvia
Umsetzungstermin	31.12.2026
(Kunden-)Nutzen	Neobroker Depot für die Volks- und Kooperationsbanken der DZ BANK
Acceptance Criteria	Tickets werden in kurzer Zeit abgearbeitet Testfortschritt wird erreicht

Details aus der Besprechung

Hintergrund zum Projekt

Das Projekt startete ursprünglich, ein NeoDepot mit LemonMarkets für die DZ Bank zu bauen. Die DZ Bank hat bestimmte Kunden, für die über WP2 ein solches NeoDepot bereitzustellen. Für dieses neue Produkt wird seitens DZ Bank eine neue App gebaut. Diese neue App nutzt alle vorhandenen WPIO-Schnittstellen mit allen verfügbaren Ausprägungen. Im Rahmen der Tests wird die Unterstützung von WPIO benötigt, um entsprechende Anpassungen während der Tests durchzuführen.

Priorität

Das Projekt wird für Q4 mit **Priorität 2** versehen.

Aufwand

Der geschätzte Aufwand von 5 PT je Monat ist sehr hoch. Es handelt sich erst mal nur um “Testunterstützung”. Für die entwicklungsseitige Umsetzung bei der Atruvia wurden seitens Atruvia neue Teams gestaffed, die sich mit der Entwicklung der neuen App beschäftigen. Allerdings ist hier ein WPIO-Wissen verfügbar. Dabei werden vorhandene WPIO-Schnittstellen verwendet, weshalb kein Implementierungsaufwand entsteht. Die 5 PT je Monat verstehen sich

als Ramp Up der Ressourcen bei Atruvia - hierfür wird WPIO-spezifischer Wissenstransfer benötigt.

A.260012 PAV / MLP / Kombiorder

Ongoing Agenda für PAV ↔ WPIO

Datum: wöchentlich mittwochs um 13:00 bis 13:30 Uhr vom 21.10.2026 bis 27.01.2027

Zielsetzung:

- Abstimmung relevanter Bereitstellungstermine von Spezifikationen (fachlich) sowie Implementierungen auf Test / Prod (technisch)
- Transparenz über aktuelle Arbeitsergebnisse
- Durchführung notwendiger Priorisierungen / sonstiger Entscheidungen

Teilnehmer (fest): @Heinz-Joachim Leenders @Sascha Höpfner @Sebastian Münz @Dennis Fabi

Optional: @Stefan Homann @Ingrid Lieven @Regina Haitel

#	Thema (fortlaufend)	Details
4	Kommende Change Requests	*Stand* Oct 21, 2026*:* Für L1 werden durch FI Change Requests an folgenden Operationen gestellt (Aufnahme FRUEHSTART_RENTE_KZ als optionales Feld-): • vertragVorvalidieren • vertragAnlegen • vertraegeLesen • vertragDetailsLesen Bereitstellung durch Achim tbd
3	Bestehende Change Request / Neue Operationen	*Stand* Oct 21, 2026*:* On hold: • vertragAnlegen (FI wird weiteren CR stellen) • vertragVorvalidieren (FI wird weiteren CR stellen)

		WIP durch WPIO bis `Oct 22, 2026` TUA/TUM-Bereitstellung von folgenden Services: • vertragAendernVorvalidieren • vertragAendern • vertragBeenden • ContractTerminateRequest • produkteLesen WIP durch Achim bis `Oct 23, 2026` • anfordernPAVPIB
3	L1 Bereitstellung	*Stand* `Oct 21, 2026` *:* • Alle ursprünglich angeforderten L1 Operationen sind fertig entwickelt ◦ WIP: vertragDetailsLesen (aufgr. Change Request vom `Oct 19, 2026`)
2	L2 Bereitstellung - offene Services	*Stand* `Oct 21, 2026` *:* Offen: • ContractTerminateRequest (nach Umbenennung von ContractDeleteRequest) ◦ Neue XSD durch Achim in Bearbeitung ◦ Anschl. Fertigstellung bei WPIO
1	L2 Bereitstellung - TUY / PROD Deployment	*Stand* `Oct 21, 2026` *:* Beauftragung TUY / PROD Deployment - betrifft folgende Operationen: • ContractChangeRequest • ContractDetails • ContractInsertRequest • ContractList • ProductList • Response_ErrorResponse • SepcialPaymentInsertRequest • SpecialPaymentResponse • SpecialPaymentList • SpecialPaymentDeleteRequest → TUY Installation ✅

		→ PROD Installation ⚠ WIP

A.260034 Ablösung SMARAGD

2026-10-22 ACTICO Workshop

🎨 Implementation designs

Designs - Framework

Umgang von Rate Limitern in WPIO

Titel	Umgang von Rate Limitern in WPIO
Beteiligte	@Georgios Eliopoulos @Steffen Flick @Dennis Fabi
Status	ENTSCHIEDEN
Story	WPIO-1478: Custom Kafka Record Keys for WP3 Backends In Progress
Datum	Jul 23, 2026

Beschreibung der Ist-Situation

Kunden-Requests werden über WPIO entgegengenommen und über einen Kafka-Adapter an das WP3 OrderTradeSystem der dwpbank weitergeleitet.

Im vorliegenden Fall hat eine hohe Anzahl an Requests eines einzelnen Endkunden mit großen Ordner-Büchern (Heavy Trader) innerhalb kürzester Zeit dazu geführt, dass sämtliche verfügbaren Instanzen des Geschäftsvorfalls OrderTradeBuch mit der Verarbeitung belegt wurden. Durch die parallele Verarbeitung der Requests wurden die übrigen Instanzen zur Verarbeitung weiterer Kunden-Requests blockiert. Diese konnten nach einer höheren Zeitverzögerung bearbeitet werden.

Eine inhaltliche Überprüfung von Daten in der Payload des Requests sowie anschließende Sortierung, z. B. auf Basis der Depotnummer, ist derzeit nicht möglich. Damit könnte eine Blockierung von Anwendungsinstanzen durch eine große Anzahl hintereinander gestellter Kunden-Requests verhindern werden.

Beschreibung der Lösungsoptionen

	Variante 1	Variante 2

Ziel	Die parallele Verarbeitung von Kunden-Requests basierend auf der gleichen Depotnummer wird aktiv verhindert.	Die parallele Verarbeitung von Kunden-Requests basierend auf der gleichen Depotnummer wird aktiv verhindert.
Beschreibung der Umsetzung	WPIO belegt bei der Anfrage an ein Backend das Feld “Kafka Record Key” mit Werten aus dem eingehenden Request. Die zu verwendenden Felder werden durch das Backend-Team vorgegeben*. Damit soll verhindert werden, dass alle verfügbaren OrderTradeBuch-Instanzen durch Requests eines Kunden bei der Abfrage des Depots blockiert werden. Nur eine Instanz soll der Bearbeitung der Depot-spezifischen Requests zugeordnet werden. *OMS benötigt eine kombinierte Belegung aus den Feldern {details.institutsebene.institutsnummer} + “:” + {details.institutsebene.depotnummer}	Die Lösung und Umsetzung der Anforderung erfolgt im WP3-Backend im Service OrderTradeBuch.
Auswirkung auf WPIO	Die Variante führt zu einer Weiterentwicklung des WPIO Frameworks (Anpassung des generisch arbeitenden Kafka Adapters sowie der Routing-Konfiguration “routingdata“). Die Anpassungen müssen anschließend getestet werden.	Keine Auswirkungen auf WPIO und Kafka-Adapter, da Weiterentwicklung komplett in WP3 erfolgt.
Aufwandsschätzung	• Konzeption: 4 PT • Implementierung: 2 PT • Tests, Abstimmungen und Error Handling: 2 PT • Release: 2 PT	

Bewertung	Vorteile ⊕	Nachteile ⊖	Vorteile ⊕	Nachteile ⊖
	• Anpassung des WPIO-Frameworks weniger zeitaufwändig als eine Entwicklung im WP3 Backend • Weiterentwicklung kann gut getestet werden • Architektonisch als Standard-Feature eines potentiellen “Gateways” zu betrachten (späterer Umzug von WP3 ins API Gateway entfällt)	• Höhere Verarbeitungszeit des Round Trips (Durchlaufzeit), da Kafka-Adapter die erforderlichen Werte aus der Datenstruktur extrahieren/konkatenieren und in den Kafka Header schreiben muss • Einführungen anderer Backend-Formate können dazu führen, dass zusätzliche Anpassungen am Kafka-Adapter erforderlich sind • Präzedenzfall setzt möglichen Standard für weitere Anfragen dieser Art, die eine Weiterentwicklung des WPIO	• Entwicklung erfolgt unabhängig von WPIO in WP3 • Keine WPIO-Umpriorisierung von committeten Anforderungen • Ähnliche Anforderungen werden künftig direkt im Service verortet, ohne Abhängigkeit zu WPIO	• Möglicherweise höhere Umsetzungszeit der geforderten Lösung innerhalb von WP3 durch höhere Entwicklungs- und Testaufwände • Führt zu einem Rückbau, sofern ein potentielles API Gateway die Funktion eines Rate Limiters mit sich bringt • Noch höhere Verarbeitungszeit des Round Trips (Durchlaufzeit) aus Kundensicht als bei Umsetzung in WPIO je nach Implementierung im WP3-Backend

		Frameworks und des Kafka-Adapters zur Folge haben		

kafka-adapter: payload fields based kafka recod key

1. Purpose

This document specifies the technical design for introducing a configurable **Kafka Record Key resolution mechanism** into the WPIO kafka-adapter.

The objective is to prevent parallel processing of customer requests belonging to the **same depot** in the backend that consumes the created Kafka records.

For the initial OMS use case, the Kafka Record Key shall be constructed from:

```
details.institutsebene.institutsnummer "-" details.institutsebene.depotnummer
```

Example:

```
12345-4711
```

Requests with the same institution and depot combination will therefore receive the same Kafka Record Key. Kafka will consequently route them to the same partition, allowing Kafka's ordering and partitioning semantics to prevent parallel processing of these requests across multiple consumers.

The solution shall be implemented generically in the WPIO Framework so that it can support different backend payload formats and different routing-key requirements in the future.

2. Background

Customer requests are received by WPIO and forwarded to the WP3 ordertradebuch through the WPIO kafka-adapter.

A high number of requests from a single customer, particularly requests containing large order books, can cause all available ordertradebuch instances to become occupied with requests belonging to the same customer or depot.

This can block the processing of requests for all other customers and result in increased processing times.

The required information for identifying the relevant depot is available in the request payload.

However, the current generic kafka-adapter does not dynamically derive the Kafka Record Key from configurable payload fields.

The required solution is therefore to make the Kafka Record Key configurable based on the request payload.

If records belonging to the same customer get processed over the same backend instance the other instances will stay free and the backend team is able to implement an in-memory solution for a rate limiting (message rejection) in case of one customer sending to many messages in a certain period of time.

3. Objective

The WPIO solution shall provide a generic mechanism that:

1. Loads routing configuration from `routingdata`.
2. Attempts to extract the configured fields from the request payload.
3. Uses all fields that can be successfully resolved.
4. Builds the Kafka Record Key using the existing delimiter used also for the correlationId (-).
5. Passes the resulting key to the existing Kafka producer.
6. Does not fail the request if none of the fields are present in the payload.
7. Allows different payload formats to be supported through separate interceptor spring bean implementations.

3.1 Out of Scope

⚠ The generated Kafka Record Key shall only be used for an automated usage by Kafka and its partition adressing. It is not meant to be used/parsed by the recieving application!

---

4. Functional Requirements

1. The Kafka Record Key shall be configurable through our routingdata approach
2. routingdata shall be stored in a database table.
3. All fields listed in the configuration for which a value can be successfully extracted shall be used. If a value cannot be extracted an empty string has to be used.
4. If no field can be extracted at all no derived Kafka Record Key shall get applied, instead the existing messageId based record key has to be used as a fallback
5. The only initial payload format shall be JSON.
6. JSON-specific extraction shall be implemented by a dedicated Spring bean.
7. Additional payload formats might be implemented later on as additional interceptor beans.
8. The Kafka producer itself shall remain independent of the payload format.
9. Existing routes without routing-key configuration shall continue to work unchanged.

10. For OMS, the key fields “details.institutsebene.institutsnummer, details.institutsebene.depotnummer” have to be used.

5. `routingdata`

The existing `routingdata KAFKA_ROUTING` configuration should be extended to contain the configuration required for Kafka Record Key resolution.

No additional table shall be introduced for the routing fields.

New attributes:

Attribute	Datatype	Description	Example
PAYLOAD_FORMAT	varchar(10)	Payload format	`JSON`
KEY_FIELDS	varchar(1000)	Comma separated fields list	group1.field1, group2.field3

The exact database table and column names should follow the existing WPIO database standards.

6. Routing Configuration Structure

A routing configuration should conceptually look like:

```
{
  "payloadFormat": "JSON",
  "keyFields": "details.institutsebene.institutsnummer, details.institutsebene.depotnummer"
}
```

The exact representation in the database depends on the existing `routingdata` implementation.

`KEY_FIELDS` shall contain an **ordered comma separated list** of fields.

For JSON, these fields represent JSON paths.

Example:

```
  "details.institutsebene.institutsnummer, details.institutsebene.depotnummer"
```

The order is significant.

Given:

```
institutsnummer = X
```

```
depotnummer = Y
```

the resulting key is:

```
X-Y
```

The implementation must not reorder the configured fields

7. Implementation guidelines

7.1 Interceptor Interface

The Kafka Record Key resolution shall use an interface-based design.

Example:

```
public interface KafkaRecordKeyInterceptor {
  Optional<String> resolve(String payload, List<KafkaFieldsConfiguration> configurations);
}
```

The interface must remain independent of a specific payload format.

7.2 JSON Implementation

The first implementation shall support JSON.

The JSON interceptor is responsible for:

1. Parsing the JSON payload (using modern and fast JSON parser, Jackson, maybe supported by Jayway JsonPath).
2. Resolving each configured JSON field.
3. Checking that every configured field exists.
4. Checking that every configured field contains a usable value.
5. Building the key in the configured order.
6. Applying the delimiter (-).
7. Returning the resulting key if a minimum of one field could be extracted successfully and has a length greater 1.
8. Set the value as record key. If no valid record key could be determined the default behaviour should take place and the existing messageId-based record key should be used

7.3 Processing example

Given the following payload:

```
{
  "abrechnung": { "zeitraum": { "tageZurueck": 90 } },
  "auftrag": { "statusFilter": "BEIDES" },
  "details": {
    "institutsebene": {
    "depotnummer": 1127494442,
    "institutsnummer": 1022
    }
  },
```

```
  "kopfzeile": {
    "benutzeridentifikation": "KR0P259T",
    "gueltigkeitszeitraumNachricht": "P1Y",
    "identifikationInstitut": 1022,
    "versionsnummer": 1,
    "versionsnummerMinor": 13,
    "zeitpunktNachrichtenerzeugung": "2026-08-03T07:30:51.906+02:00",
    "korrelation": { "operation": "ORDERBOOK" }
  }
}
```

and configuration:

```
{
  "payloadFormat": "JSON",
  "keyFields": "details.institutsebene.institutsnummer, details.institutsebene.depotnummer"
}
```

the interceptor produces:

```
1022-1127494442
```

If a minimum of one of the configured fields can be extracted, the header key should be set.

Example (OK):

```
institutsnummer = 12345
```

```
depotnummer = missing
```

Result (OK):

```
12345-
```

If no configured fields can be extracted at all, the header key should not be set and the messageId-based default key shall be applied.

Example (NOK):

```
institutsnummer = missing
```

```
depotnummer = missing
```

Result (NOK):

```
-
```

7.4 Data validation

When routing configuration is loaded, the following should be validated:

- `PAYLOAD_FORMAT` is present.
- `KEY_FIELDS` is not empty.
- `KEY_FIELDS` maintains a defined order.
- The configured format has a corresponding interceptor.

The following constraints are mandatory:

1. **One database table only** shall be used for `routingdata`.
2. `KEY_FIELDS` is an ordered structured list.
3. The actual matching configuration is determined against the request payload.
4. If no field can be found at all, no key is derived.
5. `KafkaRecordKeyInterceptor` must be format-independent.
6. JSON shall be the first implementation.
7. JSON interceptor shall be a spring bean implementing the interface.
8. Future payload formats shall be implemented as separate interceptor spring bean implementation.
9. Existing behaviour must remain unchanged when no key can be resolved.

8.4 Exception Handling

Error scenario	Behaviour
All configurations fail	print meaningful WARN message and use messageId-based Record Key
None of the configured fields exist	print meaningful WARN message and use messageId-based Record Key
All fields are empty	print meaningful WARN message and use messageId-based Record Key
Unsupported payload format	print meaningful WARN message and use messageId-based Record Key
Unparseable JSON	1. print meaningful ERROR message 2. generate and deliver an ErrorResponse back to the requester, use existing WPIO error codes for not parseable content

8.4 Last and performance

To ensure that the change is not introducing performance degradation, an existing LuP test should be executed with previous version and the new version and a comparison should be made.

9. OMS initial configuration

The initial requirement from OMS is:

```
details.institutsebene.institutsnummer:details.institutsebene.depotnummer
```

The corresponding routing configuration to be added to the concerned backend `WP3.ORDERB_V21` is:

```
{
  "payloadFormat": "JSON",
  "keyFields": "details.institutsebene.institutsnummer, details.institutsebene.depotnummer"
}
```

router: pipeline steps performance measurement

1. Purpose

The router component follows the **Pipeline Pattern**, where a message processing within a specific pipeline (connector request, border request, border response, border expiry, error etc.) is going through multiple sequential steps, providing a way to define fine-grained processing units, those units are responsible for different logic parts, routing, payload extraction, database writing/reading logic, message sending, audit message preparation and sending, metrics writing etc..

Example CustomerConnectorPipeline:

```java
/**
 * Component class that represents the pipeline for processing messages within the customer connector. The pipeline consists of several
 * processing steps that are executed in a specific order to handle incoming messages. Each step in the pipeline is represented by a
 * specific component that performs a particular task on the message. The pipeline is constructed by assembling these components in the
 * desired sequence. The pipeline follows a specific order of operations to process incoming messages, including message validation,
 * correlation, message creation, persistence validation, data routing, caching, connector communication, and sending audit messages and
 * writing prometheus metrics.
 */
@Component
public class CustomerConnectorPipeline {

  // Components for the pipeline
  private final TotalConnectorMetricCounter totalConnectorMetricCounter;
  private final PayloadExtractor payloadExtractor;
  private final PayloadFormatSetter payloadFormatSetter;
  private final ConnectorMessageRoutingCorrelator connectorMessageRoutingCorrelator;
  private final ConnectorMessageCorrelator connectorMessageCorrelator;
  private final ExpiryAndPriorityResetter expiryAndPriorityResetter;
  private final CustomerConnectorAuditMessageCreator auditMessageCreator;
  private final ConnectorAuditMessageIdsSetterFromCustomer auditMessageIdsSetter;
  private final CustomerConnectorRequestGrantsQualifier customerConnectorRequestGrantsQualifier;
  private final CustomerConnectorRoutingDataSetter customerConnectorRoutingDataSetter;
  private final StoreWriter storeWriter;
  private final RedundantOrderRoutingCache redundantOrderRoutingCache;
  private final MQPersistenceValidator mqPersistenceValidator;
  private final MessageSenderStep messageSenderStep;
  private final ConnectorAuditMessageIdsSetterAfterSending connectorAuditMessageIdsSetterAfterSending;
  private final AuditMessageSender auditMessageSender;
  private final SuccessConnectorMetricCounter metricCounter;

  /**
   * Constructs a new CustomerConnectorPipeline with the required components.
   *
   * @param payloadExtractor the payload extractor
   * @param payloadFormatSetter the payload format validator to determine a payload type (@{@link PayloadFormat })
   * @param connectorMessageRoutingCorrelator the component to correlate messages
```

```
   * @param connectorMessageCorrelator the component to set the correlationId based from
the messageId
   * @param expiryAndPriorityResetter the component to reset message expiry and priority
   * @param auditMessageCreator the component to create audit messages
   * @param auditMessageIdsSetter the auditMessageIdsSetter for audit relationships between
child and parent nodes
   * @param customerConnectorRequestGrantsQualifier the component to qualify message grants
   * @param customerConnectorRoutingDataSetter the component to set data routing
information
   * @param storeWriter the component for store persisting
   * @param redundantOrderRoutingCache the component for redundant order routing caching
   * @param mqPersistenceValidator the component to validate MQ persistence conditions
   * @param messageSenderStep the component for sending message to the concerned border
   * @param connectorAuditMessageIdsSetterAfterSending the connector audit message
messageIds setter after the message has be sent to the
* requester
   * @param auditMessageSender the component to send audit messages
   * @param metricCounter the component to write metrics
   */
  public CustomerConnectorPipeline(
      TotalConnectorMetricCounter totalConnectorMetricCounter,
      PayloadExtractor payloadExtractor, PayloadFormatSetter payloadFormatSetter,
      ConnectorMessageRoutingCorrelator connectorMessageRoutingCorrelator,
      ConnectorMessageCorrelator connectorMessageCorrelator,
      ExpiryAndPriorityResetter expiryAndPriorityResetter,
      CustomerConnectorAuditMessageCreator auditMessageCreator,
      ConnectorAuditMessageIdsSetterFromCustomer auditMessageIdsSetter,
      CustomerConnectorRequestGrantsQualifier customerConnectorRequestGrantsQualifier,
      CustomerConnectorRoutingDataSetter customerConnectorRoutingDataSetter,
      RedundantOrderRoutingCache redundantOrderRoutingCache,
      MQPersistenceValidator mqPersistenceValidator,
      MessageSenderStep messageSenderStep,
      StoreWriter storeWriter,
      ConnectorAuditMessageIdsSetterAfterSending
connectorAuditMessageIdsSetterAfterSending,
      AuditMessageSender auditMessageSender,
      SuccessConnectorMetricCounter metricCounter) {
    this.totalConnectorMetricCounter = totalConnectorMetricCounter;
    this.payloadExtractor = payloadExtractor;
    this.payloadFormatSetter = payloadFormatSetter;
    this.connectorMessageRoutingCorrelator = connectorMessageRoutingCorrelator;
    this.connectorMessageCorrelator = connectorMessageCorrelator;
    this.expiryAndPriorityResetter = expiryAndPriorityResetter;
    this.auditMessageCreator = auditMessageCreator;
    this.auditMessageIdsSetter = auditMessageIdsSetter;
    this.customerConnectorRequestGrantsQualifier = customerConnectorRequestGrantsQualifier;
    this.storeWriter = storeWriter;
    this.redundantOrderRoutingCache = redundantOrderRoutingCache;
    this.mqPersistenceValidator = mqPersistenceValidator;
    this.customerConnectorRoutingDataSetter = customerConnectorRoutingDataSetter;
    this.messageSenderStep = messageSenderStep;
    this.connectorAuditMessageIdsSetterAfterSending =
connectorAuditMessageIdsSetterAfterSending;
    this.auditMessageSender = auditMessageSender;
    this.metricCounter = metricCounter;
  }

  /**
   * Returns a new instance of the pipeline with the configured components. The pipeline is
constructed by assembling the components in the
   * desired sequence.
   *
   * @return the constructed pipeline for processing messages
   */
  public Pipeline<Exchange, Exchange> get() {
    return new Pipeline<>(totalConnectorMetricCounter)
        .pipe(payloadExtractor)
```

```
97          .pipe(payloadFormatSetter)
98          .pipe(connectorMessageRoutingCorrelator)
99          .pipe(connectorMessageCorrelator)
100         .pipe(expiryAndPriorityResetter)
101         .pipe(auditMessageCreator)
102         .pipe(auditMessageIdsSetter)
103         .pipe(customerConnectorRequestGrantsQualifier)
104         .pipe(mqPersistenceValidator)
105         .pipe(customerConnectorRoutingDataSetter)
106         .pipe(redundantOrderRoutingCache)
107         .pipe(messageSenderStep)
108         .pipe(storeWriter)
109         .pipe(connectorAuditMessageIdsSetterAfterSending)
110         .pipe(auditMessageSender)
111         .pipe(metricCounter);
112   }
```

Those steps should be measured so that we would be able to compare between TMU and CLOUD in a detailed way, which steps are especially slower than others, this measurement helps us to determinte latencies/bottlenecks and should be implemented as a cross-cutting concern, for this the pipeline approach with separate steps offers this possibility.

A **Spring Aspect** should be used, so that performance measurement remains separated from the business logic of the pipeline steps, the measurement shall be enabled explicitly using the annotation named Measured, for a specific step:

2. Technical Design

A custom annotation `@Measured` shall be introduced:

```
1 @Target(ElementType.METHOD)
2 @Retention(RetentionPolicy.RUNTIME)
3 public @interface Measured {
4
5 }
```

A Spring `@Aspect` shall intercept all methods annotated with `@Measured`.

The Aspect is responsible for:

1. Starting a timer before the method execution.
2. Stopping the timer after execution.
3. Recording the execution duration.

The pipeline step itself must not contain any performance measurement code, this decouples the business logic from the measurement concern.

2.1 Measurement Configuration

The steps to be measured are configured per Border (can be inhanced for connector components easas well) component. The configuration contains a list of measurement entries

consisting of the step and the corresponding pipeline:

```
- name: B2
  auditBatchUse: false
  request-queue:
    name: WPI.B2.REQUEST.{env}
    concurrency: 1-2
    indexing: true
  response-queue:
    indexing: true
    name: WPI.B2.RESPONSE.{env}
    concurrency: 1-2
  measure:
    - step: PayloadExtractor
      pipeline: BorderRequestPipeline
    - step: ConditionalRequestStoreWriter
      pipeline: BorderRequestPipeline
    - step: ConditionalBorderResponseMessageSender
      pipeline: BorderResponsePipeline
```

oThis allows the measurement to be enabled selectively for individual steps and pipelines without requiring changes to the business logic.

The combination of **component, pipeline and step** uniquely identifies a measurement configuration. A measurement is only recorded if a corresponding entry exists in the configuration.

2.2 Pipeline Context

Since the same step can potentially be used in different pipelines or for different Border components, the pipeline execution requires additional context to uniquely identify the execution.

For this purpose, a `PipelineContext` is introduced:

```
public record PipelineContext(String component, String name) {}
```

The `PipelineContext` is created when a pipeline is instantiated and is propagated to all context-aware steps during pipeline execution.

The context contains:

- `component` : the Border component, e.g. `B2`
- `name` : the pipeline name, e.g. `BorderRequestPipeline`

This context is also used by the measurement aspect to determine whether the current step is configured for measurement.

2.3 Context-Aware Pipeline Steps

Steps that require access to the pipeline context implement `ContextAwareStep` :

```
@FunctionalInterface
public interface ContextAwareStep<I, O> extends Step<I, O> {
```

```
      O process(I input, PipelineContext context)
              throws StoppingPipeException,
              FailingPipeException,
              WarningPipeException,
              HoldingPipeException;
      @Override
      default O process(I input)
            throws StoppingPipeException,
                  FailingPipeException,
                  WarningPipeException,
                  HoldingPipeException {
        throw new UnsupportedOperationException(
                "ContextAwareStep requires PipelineContext");
              }
}
```

A context-aware conditional step provides the common processing logic for conditional steps:

```
public abstract class ConditionalContextAwareStep<I> implements ContextAwareStep<I, I> {
    public abstract boolean shouldProcess(I exchange, PipelineContext context);
      public abstract I execute(I exchange, PipelineContext context)
                  throws StoppingPipeException,
                     FailingPipeException,
                     WarningPipeException,
                     HoldingPipeException;
      @Override
      public I process(I input, PipelineContext context){
                  throws StoppingPipeException,
                     FailingPipeException,
                     WarningPipeException,
                     HoldingPipeException;
    if (shouldProcess(input, context)) {
       return execute(input, context);
    }
    return input;
  }
}
```

The `PipelineContext` is then available to the step without introducing measurement-specific logic into the step implementation.

3. Metrics

The measurement should be recorded as a custom histogram metric (Micrometer internally this will be a `Timer)`.

The metric should identify the pipeline and the pipeline step.

Metric name:

```
de_dwpbank_wpio_framework_step_duration_seconds
```

with labels:

```
step=StepName
pipeline=PipeLineName
component=componentName
```

Histogram buckets: 1ms, 5ms, 10ms, 25ms, 100ms, 500ms, 1000ms, 2500ms

Hint: buckets >100ms are dedicated for measuring activities where external ressource managers like DB or MQ are involved

MetricPort

```
public interface MetricPort {
  void recordDuration(String metricName, long duration, Tag... tags);
}
```

Implementation (not complete, to be fulfilled!):

```
@Aspect
@Component
  public class TimeMeasurementAspect {

  private final MetricPort metricPort;

  @Around("@annotation(Measured)")
  public Object measure(ProceedingJoinPoint joinPoint) throws Throwable {
    // 1 record time
    try {
        return joinPoint.proceed();
      } finally {
        // 2 calculate time duration timeDelta -> time - (1)
        metricPort.recordDuration("de_dwpbank_wpio_framework_step_duration_seconds",
        timeDelta,Tag.of("step", joinPoint.getSignature().getName(),
                  Tag.of("pipeline", // get pipeline name
                         ));
      }
  }
}
```

An Adapter should implement the metric port interface:

```
@Component
  public class TimeMeasurementMetricAdapter implements MetricPort {
  // implement recordDuration with timer with injecting MeterRegistry
}
```

Step to be measured:

```
@Component
@Slf4j
@Measured
public class MessageSenderStep implements Step<Exchange, Exchange> {
  ...
}
```

4. Exception Handling

The Aspect must not change the behaviour of the intercepted pipeline step.

- If the method completes successfully, the result is returned unchanged.
- If the method throws an exception, the execution time must still be recorded and the **original exception must be propagated unchanged!**
  For this timing must be stopped in a `finally` block.

The performance measurement itself must never cause a business request to fail!

5. Load and performance

To ensure that the change is not introducing performance degradation, an existing LuP test should be executed with previous version and the new version and a comparison should be made.

6. Implementation Guidelines / Acceptance criteria

The implementation is complete when:

- `@Measured` annotation is available.
- A Spring Aspect intercepts methods annotated with `@Measured`.
- Execution duration is recorded using a custom metric.
- Individual pipeline steps can be identified in the metrics.
- These steps are annotated: ConditionalBorderResponseMessageSender@rr/B2-response, PayloadExtractor@rr/B2-request, ConditionalRequestStoreWriter@rr/B2-request
- Successful executions are measured.
- Failed executions are measured.
- Original exceptions are propagated unchanged.
- No timing logic is required inside the pipeline implementations (“the business code“).
- The measurement mechanism doesn’t introduce significant performance overhead.
- Existing router behaviour remains unchanged for non-annotated steps.
- Test is successful, for example in TUA for the mentioned steps and the metric is visible in Grafana for TMU and CLOUD

MQ Batch Processing

1 Requirement
2 Solution
  2.1 General idea
  2.2 Implications for the customer
3 Implementation overview
4 Components to be changed
  4.1 Step 1: “Minimum Viable Product” in order to provide runtime functionality for stages DEV/TEST
    4.1.1 MQ
    4.1.2 wpio-framework-rr/router
    4.1.3 wpio-framework-routingdata/data
    4.1.4 xgen-base image
    4.1.5 X-Gen service DWP.ORDER
    4.1.6 ⚠ TMU deployment
    4.1.7 Cloud Deployment
  4.2 Step 2: Feature completeness
    4.2.1 WIP: wpio-framework-audit/writer
    4.2.2 WIP: wpio-framework-audit/reader
    4.2.3 WIP: WPIAdmin
    4.2.4 WIP: AuditBrowser
  4.3 Open questions
  4.4 Design decisions

Requirement

WPIO has to be enabled to accept batches of MQ messages and forward it to backends without interfering with existing MQ online transactions.

That means WPIO shall be able to process messages over a “online processing service chain“ (OPSC) or a “batch processing service chain“ (BPSC).

The solution shall be applicable on any of the current X-Gen business services if the responsible backend team tells us to do so.

The solution should not require a separate X-Gen service to be developed, we want to be able to simply spin up another instance of the service.

Solution

General idea

- Introduce further Batch Borders (for example B1B, B2B, B3B, ...)
- Flag an X-Gen service for Batch usage: this will start the same channel versions already known for this service additionally on separate Batch queues
- If a customer has a need for a batch processing over MQ we will provide separate Connector queues for such messages.

- The MQ Connector will decide based on the input queue if the incoming request will be processed over OPSC or BPSC
- There is no bridging between BPSC and OPSC allowed!

Implications for the customer

- It will be the responsibility of the customer to take care for the correct dispatching to all his connector queues!
- Customer also has to set a longer expiry value in every input message for BPC messages!

Implementation overview

- for every service that gets connected to one of the Batch Borders a separate service instance has to be configured for this service.
- technically such a service instance will be handled inside WPIO like an additional service channel (separate service queues required). Configuration will happen hardcoded in the service config repository.
- we use convention over configuration for distinguishing Online and Batch instances of a service: A/B/C are Online instances, Q/R/S are Batch instances
- we will use the existing service configuration structures in order to register these additional service instances. there we can also configure a longer expiry default for such a service batch instance
- the "router" component will add an additional header field to the Audit message created by the Connector indicating that the initial incoming request was a batch request.
- This "Batch message indicator" will be written to the Audit database by the audit-writer component in the Audit-Header table.
- The delivery type (Online, Batch) shall be shown in AuditBrowser and WPIAdmin as part of the "Request list" view

Components to be changed

Step 1: “Minimum Viable Product” in order to provide runtime functionality for stages DEV/TEST

MQ

- ServiceNow: request additional border queues (currently only B2B, B3B)

- ServiceNow: request additional service queues for X-Gen services to be started in a batch mode (currently only DWP.ORDER)

wpio-framework-rr/router

- Code change: connector listeners have to know based on a configuration setting “`APP_CONNECTORS_?_BATCHMODE: true|false(default)`“ if they are consuming from a “batch” or an “online” connector queue
- Code change: Border instance for B2|B2B must know if it is responsible for OPSC or BPSC and only search for routingdata configuration related to this specific kind of processing
- Code change: Connector add a new RFH2 header field “ServiceDetails_ServiceMode“ to every Audit message indicating if this is an ONLINE or a BATCH request
- Config change: add listeners on additional batch border queues (currently only B2B, B3B) also using `APP_CONNECTORS_?_AUDITBATCHUSE: true` (this will hand over Audit messages via separate queues to the Audit system in order to still have a neartime view on the normal online processing)

wpio-framework-routingdata/data

- Code change: add batch configuration data for affected X-Gen services (currently only DWP.ORDER.Q)
- Code change: add new external service WP2.ORDER_BATCH

xgen-base image

- Code change: enhance the check on supported channels from “A/B/C” to “A/B/C and Q/R/S”
- Code change: if channels Q/R/S get requested install the appropriate version from A/B/C: Q=A, R=B, S=C
- Code change: set new X-Gen runtime parameter “wpi.runtime.mode” depending on the channel: A/B/C = “ONLINE“, Q/R/S = “BATCH“

X-Gen service DWP.ORDER

- code change: use different backend usecaseId depending on “wpi.runtime.mode“: BATCH → “WP2.ORDER_BATCH”, else “WP2.ORDER”

⚠ TMU deployment

- Code change: add “dwp-order-q” to roles/xgen/rr/vars/services.yaml · master · dwp / deployment / wpio · GitLab
  BREAKING CHANGE!
  Only do this if DWP.ORDER version in PROD is already using the xgen-base image supporting

channels Q/R/S!

Even do not push this change to “master“ branch if this is not yet the case!

Cloud Deployment

- Config change: add channel Q to [bounded-context/values-default.yaml · main · wp3 / bc / wpio-oi / xgen-dwp-order-config · GitLab]

Step 2: Feature completeness

WIP: wpio-framework-audit/writer

- Audit-Writer writes in the request HEADER whether it is a batch or not

WIP: wpio-framework-audit/reader

- Adjust audit readers to provide this additional information via XML to the participating use cases

WIP: WPIAdmin

1. Customize WPIAdmin to display this additional information.

WIP: AuditBrowser

- AuditBrowser must be adapted and show the delivery type (ONLINE|BATCH) in the “Request View”

Open questions

1. Check for needed changes in state-controller, audit-indexer
2. Decide how to behave if ROR mode gets activated
   a. reject all batch messages at the Connector? (Impact for customers)
   b. or accept and buffer it? (stop listener and buffer on MQ)
3. Set default expiry for the batch services to max value, e.g. 7 days? Or something like 2 hours?
4. RC9 Expiry must be deactivated in WP2? (Noted by someone else in a Jira ticket, don’t get this… To be clarified with the team…)

Design decisions

1. We have decided to spin up the additional service instances as new channels as this will require fewer changes on the routingdata level. The other option would have been to add all

deviating parameters like target queue, expiry time, etc, as new table columns to existing tables and just select different columns depending on the Delivery Mode

2. We have decided to name the new batch channels Q,R,S instead of for example AB, BB, CB as this might break existing logic in several components expecting channel id's to be only 1 char long. We might also exceed the MQ length limits for MQ object names.
3. We have decided to reuse the existing configuration options and define a convention that A/B/C are online channels and Q/R/S are Batch channels as this requires fewer code changes

Designs - Service development

DAB - Bewertung der Anforderung: Nutzung dynamischer Dateinamen über ConnectDirect

Teilnehmer: @Christian Rapp , @Tugay Oruc , @Georgios Eliopoulos , @Dennis Fabi

Ausgangslage - aktueller Funktionsumfang des WPIO Frameworks

Dateinamen, die im Rahmen des File Processings verarbeitet werden (sowohl Request als Response), bestehen aus 3 Bestandteilen:

	1. Umgebungsvorgabe <ENV> (variabel, verpflichtend) - Bsp. für die Testumgebung TUF	**2. Kundenidentifizierung und Fachservice (verpflichtend und abgestimmt mit Kunden)**	**3. Timestamp (variabel, optional)**
Request (file from DAB to WPIO)	**ENAF59T.**	**SP1E.B59SW320.T0892T01.STT001.02.**	**D??????.T??????**
Response (file from WPIO to DAB)	**ENAF59T.**	**SP1E.B59SW3Y2.T0892T04.STT001.02.**	**D??????.T??????**

Die Ausführungen hier beziehen sich nur auf die Dateinamen, die zwischen dem Kunden und WPIO zum Einsatz kommen! Die zwischen WPIO und dem Backend verwendeten Dateinamen werden bilateral zwischen WPIO und dem Backend-Team im Rahmen der Umsetzung abgestimmt.

Anforderung der DAB zur Erweiterung / Anpassung des aktuellen Funktionsumfangs

Die DAB erwartet eine Dynamisierung des Dateinamens im Rahmen von Request und Response.

- **Annahmen zum Hintergrund**:
  - Wenn alle Dateien zur selben Zeit per Request an WPIO versendet werden, erfolgt die Bearbeitung dieser innerhalb von WPIO und im Backend losgelöst von einer Reihenfolge, d.h. es wird kein FIFO-Prinzip angewendet.
  - Der Response der Dateien an die DAB Bank erfolgt ebenfalls ohne Beibehaltung einer Reihenfolge oder ähnlichen Logik, d.h. mittels zeitlicher Betrachtung kann der Kunde keine Referenzierung/Korrelation von ausgehendem (Request) und eingehender Datei (Response) durchführen
  - Eine Korrelation der erhaltenen Datei (Response) auf die ursprünglich abgegebene Datei (Request) ist aktuell nur **manuell** über die Payload der Dateien möglich
- Damit während der Migration **automatisiert** eine Referenzierung der entsprechenden Responses auf die Ursprungsdatei des Requests durchgeführt und eine Qualitätssicherung vollzogen werden kann, wird eine fortlaufende Nummerierung der Dateien innerhalb des Dateinamens benötigt

	1. Umgebungsvorgabe (variabel, verpflichtend)	**2. Kundenidentifizierung und Fachservice (verpflichtend und abgestimmt mit Kunden)**	**~~3. Timestamp (variabel, optional)~~** **3 Fortlaufende Nummerierung**
Request (file from DAB to WPIO)	**ENAF59T.**	**SP1E.B59SW320.T0892T01.STT001.02.**	**~~D??????.T??????~~** **#fortlaufendeNummer; z. B. 001, 002, ...**
Response (file from WPIO to DAB)	**ENAF59T.**	**SP1E.B59SW3Y2.T0892T04.STT001.02.**	**~~D??????.T??????~~** **#fortlaufendeNummer; z. B. 001, 002, ...**

- Die Logik der Dateinamensgebung soll dahingehend angepasst werden, dass statt des variablen / optionalen Timestamps eine fortlaufende Nummerierung als Suffix angefügt werden kann
- Die Herausforderung bei der Implementierung dieser Logik besteht darin, dass das Framework erkennen muss, welche Dateien auf Basis des Dateinamens zusammengehören

    - Beispiel: der Request **ENAF59T.SP1E.B59SW320.T0892T01.STT001.02.001** ff. erzeugt nach Verarbeitung eine Response mit der Dateikennzeichnung **ENAF59T.SP1E.B59SW3Y2.T0892T04.STT001.02.001** ff.
- WPIO Framework beherrscht diese Dynamisierung aktuell nicht und müsste eigens für die DAB im Rahmen von Migrationsaktivitäten implementiert werden
    - Diese Anforderung widerspricht sowohl der Standardfunktionalität des Frameworks als auch des fachlichen Services
- Der Aufwand der Implementierung wird auf ca. 10 PT geschätzt (insb. wegen umfangreicher Tests zur Vermeidung von ungewünschten Nebeneffekten auf Bestandskunden)
- Zusätzliche Anforderung:
    - Eine weitere Anforderung, dass die Entitätsnummer als fester Bestandteil des Dateinamen hinzugenommen werden soll, wurde bereits zugestimmt (**STT001**)
    - Auch wenn dies nicht dem Standard entspricht, kann die Anforderung durch Parametrisierung mit wenig Aufwand bereitgestellt werden

---

Bewertung der Anforderung

Organisatorisch

- Die Funktionalität muss mit einem Entwicklungsaufwand i. H. v. ca. 10 PT implementiert werden (Schätzung per `Aug 17, 2026`), erfüllt aber nur einen einmaligen Nutzen (= Durchführung der Migration)
- Die implementierte Funktionalität führt zu umfangreichen Testaufwänden
    - Auswirkungen auf andere Kundenprojekte müssen noch ermittelt und getestet werden
- Die Funktion kann im September nicht mehr realisiert werden; dies hätte eine Verdrängung anderer priorisierter Kundenprojekte zur Folge
    - Bei planmäßiger Aufnahme der Anforderung zum Oktober kann eine Bereitstellung für Ende Oktober realisiert werden → dies führt zur Verzögerung der Migration um einen Monat auf Mitte November

Technisch

- Die Bereitstellung einer solchen Funktion hat Auswirkungen auf den Betrieb, da sich der Funktionsumfang des Frameworks verändert (= Wartung)
    - Ein etwaiger Rückbau muss ebenfalls in Betracht gezogen werden, welcher wiederum Entwicklungsaufwände (ca. 4 PT) verursachen wird. Diese Aufwände müssen vom Projekt getragen werden

Mögliche Alternativen

Eine Reihenfolge der Dateien selbst kann in der Verarbeitung (sowohl Request als auch Response) systembedingt nicht gewährleistet werden. Wenn also alle Dateien zur selben Zeit per Request an WPIO versendet werden, werden diese unabhängig des Eingangszeitpunkts verarbeitet und auch losgelöst einer Abarbeitungsreihenfolge per Response an die DAB Bank zurückgeschickt. Eine Referenzierung der erhaltenen Datei auf Basis des Dateinamens (Request) auf die verarbeitete Datei (Response) ist nicht möglich (z. B. durch Time Stamps o. ä.)

1. Lösung “Serialisierung“: Um dies zu umgehen, ist unser Vorschlag, dass Dateien einzeln per Request an WPIO gesendet werden. Erst wenn der Response erfolgt ist, soll die DAB Bank die nächste Datei an WPIO übertragen (= serielle Verarbeitung)
    - Dieses Vorgehen ermöglicht es, eingehende und ausgehende Dateien ohne manuellen Aufwand aufeinander zu referenzieren, da sich immer nur eine Datei im “Umlauf” befindet
2. Lösung “Statische Konfiguration mit fester Anzahl Dateien“: Die Dateiverarbeitung wird dahingehend parametrisiert, dass für eine vorgegebene maximale Anzahl von Dateien pro Entität jeweils ein eigner Eintrag angelegt wird, der die erwartete fortlaufende Nummer explizit statisch konfiguriert.


- [ ] Klärung: Aufwandsschätzung auf Basis der Dateianzahl; Einplanung für September Sprint mit Bereitstellung Mitte September (Zieltermin: 07.10. für nächste Probemigration)
- [ ] Klärung: Wer ist für Parametrisierung (Whitelist-Erweiterung) zuständig? Wie erfolgt die Beauftragung?

Offene Punkte

- [x] Klärung durch Projekt, inwiefern serielles Senden der Dateien möglich ist → wird nicht weiterverfolgt
- [x] Bereitstellung einer Datei, welche Entitäten durch die DAB versendet werden und wie viele Dateien je Entität verarbeitet werden sollen (aktuell werden 50.000 Dateien je Entität verarbeitet, systembedingt können bis zu 100.000 Dateien je Entität verarbeitet werden)

Ergebnis

- Umsetzung der Alternative 2, “Statische Konfiguration mit fester Anzahl Dateien“
- Zusätzlich eine Anpassung des Antwortdateinamens an DAB, da der Qualifier “B59SW3Y2“ den Eindruck erweckt, dass es sich um einen WP2-Hostjob handelt, dieser aber gar nicht existiert.

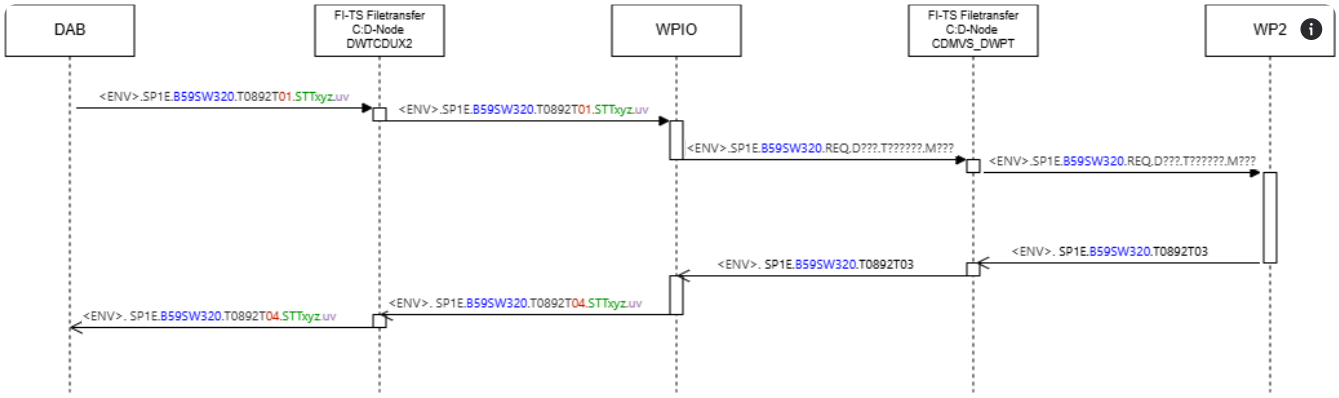
DAB
FI-TS Filetransfer C:D-Node DWTCDUX2
WPIO
FI-TS Filetransfer C:D-Node CDMVS_DWPT
WP2
<ENV>.SP1E.B59SW320.T0892T01.STTxyz.uv
<ENV>.SP1E.B59SW320.T0892T01.STTxyz.uv
<ENV>.SP1E.B59SW320.REQ.D???.T???????.M???
<ENV>.SP1E.B59SW320.REQ.D???.T???????.M???
<ENV>. SP1E.B59SW320.T0892T03
<ENV>. SP1E.B59SW320.T0892T03
<ENV>. SP1E.B59SW320.T0892T04.STTxyz.uv
<ENV>. SP1E.B59SW320.T0892T04.STTxyz.uv

Architectural Decision Records

ADR: Data Exchange for Indexer and Reader Audit Services

Status	Proposed
Date	Oct 14, 2026
Deciders	WPIO Framework DEV Team, PO, TAV, FAV
Related Story	Jira WGC-843

Context
  Facts established so far
Considered Options
Decision
  Decision Drivers
  Consequences
Open Points/Further Actions

Context

The indexer service writes Apache Lucene index files, and the reader service queries them. Today both run on Linux and share the data through a common directory on the filesystem. As part of the move to AWS and MSCP, this pattern has to be reproduced on Kubernetes.

Facts established so far

- The Lucene index cannot be rebuilt from another source, so loss of the index is permanent data loss.
- Near-real-time visibility of new data in queries is required.
- The AWS clusters offer only the EBS CSI driver (EKS add-on). There is no EFS. The approved StorageClass is gp3-encrypted (KMS, “WaitForFirstConsumer”, expansion allowed, “reclaimPolicy: Delete”). EBS volumes are RWO (ReadWriteOnce) and bound to one AZ (Availability Zone).
- The platform team does not allow different pods to share one PVC (each StatefulSet pod gets its own).
- EBS and VolumeSnapshots are currently opted out of the platform backup. Only RDS and S3 are covered.

EBS CSI Driver - How Kubernetes connects to EBS storage

The **Amazon Elastic Block Store (EBS) Container Storage Interface (CSI) driver** is a standardized storage plugin that allows **Kubernetes** clusters running on AWS (such as **Amazon EKS**) to manage the lifecycle of **Amazon EBS volumes** for persistent storage.

[High-Performance Block Storage – Amazon EBS – Amazon Web Services]

EFS - Shared storage across pods

Amazon Elastic File System (EFS) is a fully managed, serverless cloud file storage service provided by Amazon Web Services (AWS) that allows multiple compute resources to share file data concurrently.

[What is Amazon Elastic File System? - Amazon Elastic File System]

gp3-encrypted - What encryption in EBS means

The Volume Type (`gp3`): This is AWS's latest generation of general-purpose SSD storage. It provides a baseline performance of **3,000 IOPS and 125 MB/s throughput** out of the box regardless of the size, and it allows you to scale performance up to 16,000 IOPS independently without paying for extra storage space.

The Encryption State (`encrypted: true`): The volume uses **AES-256 cryptographic algorithms** managed by the [AWS Key Management Service (AWS KMS)].

WaitForFirstConsumer - PV creation process

By default, Kubernetes uses a mode called `Immediate`, which provisions the storage disk (like an AWS gp3 volume) the exact moment a developer creates a `PersistentVolumeClaim` (PVC), even if no application is using it yet. `WaitForFirstConsumer` delays creating the physical cloud storage volume until a Pod actually requests it.

reclaimPolicy - PV deletion process

`persistentVolumeReclaimPolicy: Delete` means that **when a user deletes a `PersistentVolumeClaim` (PVC), the underlying physical storage disk in the cloud is automatically destroyed along with it.**

It is the **default reclaim policy** for most dynamically provisioned StorageClasses (including AWS `gp3`).

`persistentVolumeReclaimPolicy: Retain` is a configuration that tells the cluster to **keep the underlying physical storage disk intact when its corresponding PersistentVolumeClaim (PVC) is deleted.**

ReadWriteOnce - PV access mode

`ReadWriteOnce` **(RWO)** is an access mode that means **the storage volume can be mounted with read and write permissions by only a single worker node at a time**.

RDS - Database cloud service

Amazon Relational Database Service (RDS) is a fully managed cloud service by AWS that automates the **setup, operation, and scaling of relational databases**.

S3 - Object storage service

Amazon Simple Storage Service (S3) is a fully managed, object storage service that allows you to **store and retrieve any amount of data from anywhere on the web**.

Unlike standard block storage (like Amazon EBS) which acts like a hard drive attached to a single server, Amazon S3 is structured as a global, decoupled key-value store.

Considered Options

Option	➕ Pros	➖ Cons
1. **Shared block device (PVC) mounted into both containers in one pod** Both services remain separate images, run as two containers in a StatefulSet with 1 Replica, and mount the same RWO PVC.	• No code change (same directory path). • Lucene runs on a normal local Linux filesystem. Reader sees commits immediately, so freshness is near real time. • Uses the Cloud platform's existing, approved storage.	• The two components are tightly coupled: they deploy, restart and scale together and must run in the same datacenter and AZ (availability zone). • A single pod runs both services. Pod/Node failure causes minutes of downtime. • AZ failure leaves the pod Pending. • No automatic backup provided by the Cloud team.
2. **Shared file system (NFS/EFS)**	• Multi-writer or multi-reader access across pods, and across AZs with EFS.	• Strongly discouraged by the Lucene community because of NFS locking and stale-file

	• Separate pods possible.	issues (see *Lucene Index Directory over NFS - Atlassian*), especially with many writes. • EFS is not available on the platform, so it would need a new driver and platform changes. • Higher latency than a block device.
3. **S3 as central repository (indexer uploads at intervals, reader downloads)**	• Multi-writer or multi-reader access across pods, and across AZs with EFS. • Separate pods possible.	• Lucene cannot work directly on S3, so each side needs a local copy plus custom upload/download logic. • Queries are no longer up to date (they lag by the sync interval). • High IO and request volume for frequent commits (writing several index files in parallel, file growth is increasing over the day). • Cold start requires downloading the full index. • Significant code change and a custom replication mechanism to maintain.
4. **Centrally managed Elasticsearch/OpenSearch**	• Replication, multi-AZ operation, snapshots and scaling handled by a purpose-built service. • Removes the shared-filesystem problem entirely.	• Requires a rewrite of indexing and query code. • New operational dependency/infrastructure has to be requested. It comes with additional costs (license, budget).

5. **Postgres features instead of Lucene**	• Managed RDS is already covered by the platform backups and supports multi-AZ. • No shared filesystem needed.	• Full-text search in Postgres has a different feature set than Lucene (analyzers, scoring, faceting), so functional equivalence must be validated. • Requires a rewrite of the search layer (WPIAdmin) • Moves query and indexing load onto the database. • Not evaluated in detail yet.

Decision

We recommend Option 1: PVCs and run the indexer and reader as two containers in one StatefulSet pod.

Decision Drivers

- No application code change and the fastest path to a working migration.
- Same semantics as the current Linux setup.
- Actuality of business data is the same.
- PVCs survive Pod and Node crashes.

Consequences

- Strong coupling: indexer and reader are deployed, restarted and scaled together, in one datacenter and AZ.
- Availability: node failure means a few minutes of downtime, and an AZ outage means the pod stays Pending until the AZ recovers.
- No other team has been using it in Prod yet.
- No automatic backup: EBS data is currently not backed up and restore has never been tested. EBS replicates data within an AZ, but gp3 is designed for 99.8-99.9% durability, with an annual failure rate of up to 0.2% (Amazon EBS General Purpose SSD volumes - Amazon EBS). Because the index cannot be rebuilt, volume loss or logical corruption means permanent data loss. The team agreed to accept the risk with the condition that **one hour** data loss is acceptable.

Open Points/Further Actions

- [ ] Evaluate Postgres if we can implement the lucene features. Time-boxed (1 week) @Kristina Nikolova Review the results with the team again.
- [ ] Do we need to back up old data? @Georgios Eliopoulos @Steffen Flick : Yes. Frequency of backup - every 1 hour. We will observe the failure rates, how often crashes happen, etc.
- [ ] The MSCP cluster has storage characteristics that are not yet known / to be clarified with Cloud PA. @Kristina Nikolova
- [ ] How does backup work on MSCP? @Kristina Nikolova
- [ ] StatefulSet technical details to be clarified - what does the config look like in dwpbank, is there a custom implementation, etc. @Kristina Nikolova

📝Service registration

Prior to the development of a new service a service registration has to happen.

Based on a registration request a WPIO internal unique service name will be defined or confirmed and initial technical configuration for the service (IBM MQ queues, access rights, routing, etc.) will be carried out to the runtime environments.

During the registration the following information has to be collected/provided/defined:

Service description:

- Short description regarding the business purpose of the service

Service naming:

- Technical: ServiceBaseId
- Consisting of: <ClientId>.<ModuleId>
- <ClientId> will be defined by dwpbank (WPIO team)
- <ModuleId> has to comply with the following conditions:
  - should reflect the business functionality (no application names)
  - maximum length: 21 minus length of the <ClientId>
  - Suggestion: removal of individual vowels if the ModuleId gets to long (DWP.INSTRMDTLS instead of DWP.INSTRUMENTDETAILS)
  - allowed characters: A-Z,0-9,_
  - capital letters
  - start with a letter
  - suffix “_AD” only allowed and required if it is an Active Delivery (AD) service
  - suffix “_FP” only allowed and required if it is a File Processing service (FP)

Type of the service:

- Request Response (RR)
- Active Delivery (AD)
- File Processing (FP)

Persistence:

- true/false
  - persistent services tend to be slighty slower

- persistence should only be used for critical business services like order requests
- reading services should operate in a non-persistent way

Encoding:

- codepage of the input messages (usually UTF-8)
  - XGen works internally based on UTF-8 → standard UTF-8 (MQ CCSID: 1208)
  - MQ CCSID of the incoming input message has to match the encoding used for the message payload!

XGen repository usage:

Needed if the service module has to orchestrate replies to multiple backend requests that might come back at different times.

- no repository (NONE)
- persistent repository (SQL)
- number of the repositories

Message load at runtime:

- quantity: number of the messages per day
- size: average and maximum size of the messages in kilobytes
- distribution over the day: core delivery time with number of the messages/minute

Addressed services:

- Other WPIO services (serviceBaseId) inside the WPIO cluster that the new services want to talk to

Necessary service fragments:

- list of the service fragments that are required by this service (see chapter about fragment files in the X-Gen developer documentation)

🚀X-Gen

WPIntegrator Online Framework (WPIO) is using a third party mapping engine called X-Gen (vendor: Valantic) to implement simple transformation services.

If you want to participate in X-Gen development you have to get familar with some general principles:

- how to develop a X-Gen based WPIO service
- how to build a container image for such a service
- how to deploy such a service to the runtime environments

⚠ OIM role *M012_FACH_051353 - "DIR Arbeitsgruppen V:\WPIOnline (Read)"* is required in order to access certain files and additional information.

Service Development

The development of services based on X-Gen happens on the local Microsoft Windows based workstation computer/notebook with an
integrated development environment (IDE) provided by Valantic. It has been enhanced by some WPIntegrator-Online specific features.

The IDE installation has to be requested via ARS/BAM request "Software auf Clients der dwpbank installieren (Einzelplatzlizenz)",
software "X-Gen 4.x".

After the installation has happened the latest IDE patch (see here) has to be applied by simply extracting the zip file in the X-Gen root folder of your local installation, typically located under C:\Users\<user>\XGen4xx\X-Gen4.xx\X-Gen

A X-Gen Developer Guide explaining the general development principles can be found here:

V:\WPIOnline\1Z Softwarepakete\1Z6 IDE XGen-Services\WPIO_XGen_4.8_Development_Manual_V1.1_en.pdf

Service Build

Please also see the Hybrid-Cloud Onboarding Guide for general hints how to access GitlabEE and work with git repositories!

Sources of the local service development get stored in Gitlab EE repositories per service.
The repositories are structured in service groups specific for the business domain the service belongs to.

Example:
a standard layer2 XML service for Order creation (DWP.ORDER) is located in the GitlabEE group "wpio-oi" (https://gitlab.dwp.fits.cloud/wp3/bc/wpio-oi/xgen-dwp-order)

Which group a service belongs to is derived from the relationship defined in Rimago: all WPIO business services are defined there as application components (AK) of a business application (Appl).

X-Gen services never belong to the application "**WPIntegrator Online Framework**" (WPIO), WPIO is only a runtime platform!

Repository initialization for a new service

If a completely new service has to be build some preparational steps have to be executed:

1. agree with the WPIO team on the service name (see WPIO X-Gen developer guide, chapter 5 for details)
2. identify the business application this service belongs to and ask the FAV to request the creation of an AK object in Rimago
3. Request the creation of the git repository in Gitlab EE via CI/CD Support request. The correct location depends on the domain and the service name that has been identified
4. Once the git repository is available create the general file and directory structure inside the repository:
   a. create a feature branch and check it out
   b. copy and modify these files/directories from a similar service:
      i. .gitlab-ci.yaml
      ii. .gitattributes
      iii. .gitignore
      iv. oci-build.yml
      v. pom.xml
      vi. archives/
      vii. archives/SystemSpecification.*.xml
   c. install a Maven runtime by executing this command (git bash on Windows!):
      i. *mvn -N wrapper:wrapper -Dmaven=3.9.9*
   d. place your new service xpk file in the archives/ folder
   e. add/commit all files by executing these commands (git bash on Windows!):

i. *unix2dos .git?**
ii. *unix2dos oci-build.yml*
iii. *git add --renormalize .*
iv. *git add .*
v. *git update-index --chmod=+x mvnw*
vi. *git commit -m 'Initial X-Gen service structure'*

Steps to be executed for building an existing service:

1. create a feature branch in the GitlabEE repository of the specific service
2. checkout the newly created feature branch on your local laptop
3. add the new X-Gen xpk package and remove the old one. Modify the pom.xml in order to reference the new xpk name
4. adapt the X-Gen base image if needed (see details below)
5. commit and push everything. This will start an automated feature-branch build
6. switch to GitlabEE and check if the feature-branch build succeeds
7. optional: take the image tag name of the image built via the feature branch and try it out on TUS by directly modifying the systemd unit! (a deployment will not work!)
8. create a merge request in GitlabEE from your feature branch to the *main* branch. Add yourself and a second person as an approver (two approvals are required). Mark the feature branch as "to be deleted". This will remove the branch later on after a successful merge
9. let the Merge Request be approved and merge it
10. check in GitlabEE that the main branch build succeeds
11. create a git tag in GitlabEE on the last commit of the main branch. The git tag must look like this: "***v<major>.<minor>.<bugfix>***"! Use semantic versioning for the version number. If you only changed the X-Gen base image simply increase the patch level, i.e. v4.13.0 will get v4.13.1
12. wait for the GitlabEE tag build to succeed
13. take a look at the GitlabEE build job "*publish:image:release*" and identify the image tag name that has been created. It contains the "business version of the service" as well as additional parts describing the XGen version, patch level and Swift version (i.e. xgen-wp2-mt515-ka-e-onl-registry:v4.13.6-4.13-DWP-p013-2023). This is the version you have to use in the wpio deployment.
14. Try it out in TUS. You have to specify the version in wpio/deployment with the suffix "@EE" (i.e. v4.13.6-4.13-DWP-p013-2023@EE)
15. Stage to further environments (for example TUA) if TUS is working fine

Using another XGen runtime/patch level:

Simply modify the file oci-build.yml and create a new release version.

The content of the variable *XGEN_BASE_IMAGE_VERSION* differs depending on the XGen version that is needed.

```
build_args:
  XGEN_BASE_IMAGE_TAG: latest-${build_args.XGEN_BASE_IMAGE_VERSION}
  XGEN_BASE_IMAGE_VERSION: 4.13-DWP-p017-2024
```

This version string consist of several parts with a specific meaning separated by a dash(\-):

```
<X-Gen version>-<X-Gen patch level>-<S.W.I.F.T release>

```

Information about the latest X-Gen base image version is provided here

Service Deployment


Services get deployed via a configuration stored in Gitlab CE:

- https://git.f-i-ts.de/dwp/deployment/wpio/-/tree/master/roles/xgen/rr/vars
- https://git.f-i-ts.de/dwp/deployment/wpio/-/tree/master/roles/xgen/ad/vars
- https://git.f-i-ts.de/dwp/deployment/wpio/-/tree/master/roles/xgen/fp/vars


In order to support a parallel phase where some images got built the old way (Bitbucket, Jenkins, GitlabCE) and some the new way (GitlabEE only) you have to tell the deployment jobs which image registry to use.


You have to add a suffix "***@EE***" in order to fetch the image from GitlabEE otherwise the deployment job will try to fetch the image from the old FI-TS registry:

The old configuration for GitlabCE ...

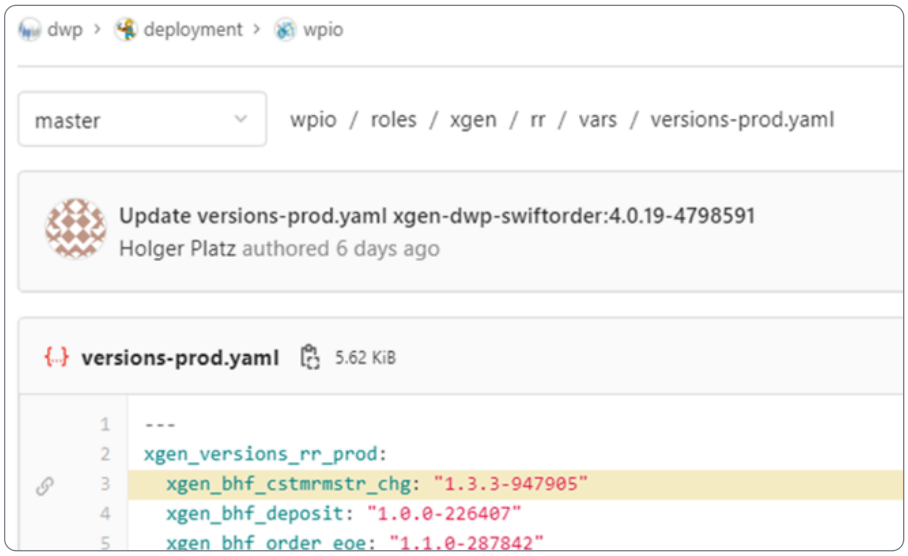

...will change to ...

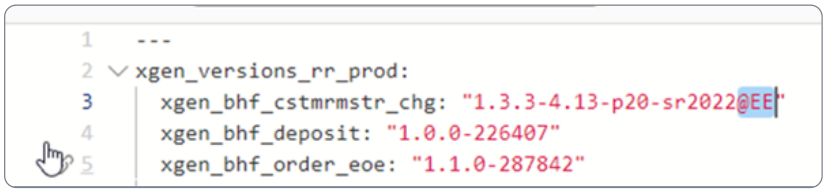

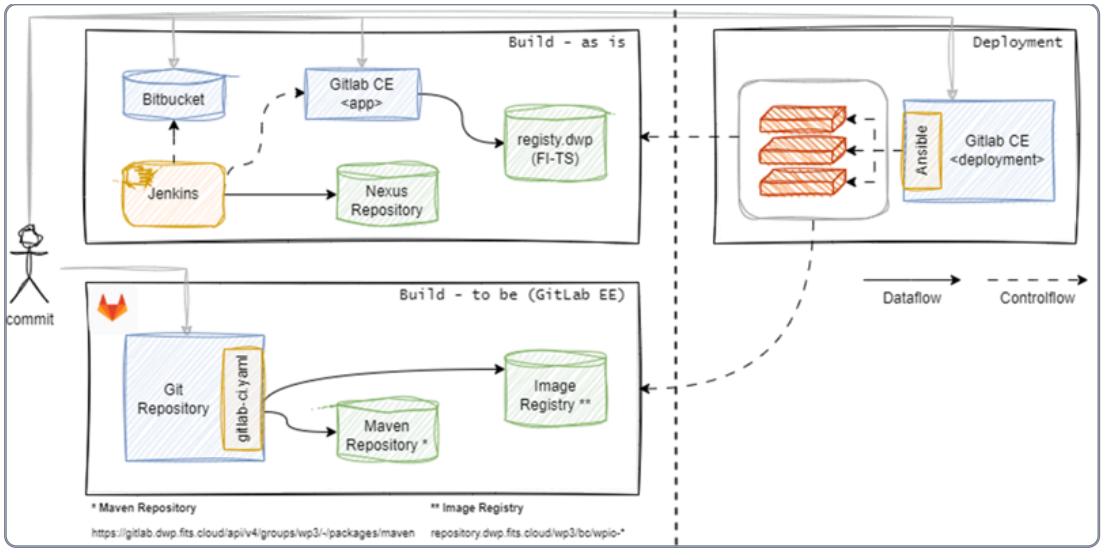
Build - as is
Bitbucket
Gitlab CE
<app>
registy.dwp
(FI-TS)
Jenkins
Nexus
Repository
Deployment
Ansible
Gitlab CE
<deployment>
commit
Dataflow
Controlflow
Build - to be (GitLab EE)
Git
Repository
gitlab-ci.yaml
Image
Registry **
Maven
Repository *
* Maven Repository
https://gitlab.dwp.fits.cloud/api/v4/groups/wp3/-/packages/maven
** Image Registry
repository.dwp.fits.cloud/wp3/bc/wpio-*

Versions

Please subscribe to this page in order to receive a notification regarding a new patch!

Most recent versions information:

X-Gen 4.13

- X-Gen base image version: **4.13-1.16-DWP-p017-2025**
- IDE patch: **X-Gen-4.13-Windows-64-DWP-p017.zip**
- IDE Patches can be downloaded from **V:\WPIOnline\1Z Softwarepakete\X-Gen-4.13**
- A Change logs can be found here.

X-Gen 4.17

- **X-Gen base image version**: **4.17-1.0-p016-2025**
- IDE patch: **p012 (IDE gets rolled out by FI-TS including the patches, no manual activity required)**
- All patches provided by Valantic are stored in **V:\WPIOnline\1Z Softwarepakete\X-Gen-4.17**
- A Change logs can be found here.

Changelog 4.13

X-Gen Base Image:

latest-4.13-1.16-DWP-p017-2025:

- X-Gen 4.13
- X-Gen framework script version 1.16
- Patchlevel 17
- SWIFT release 2025

Cloud ready - stable version!

==========

X-Gen framework script version 1.16

Fix of locking XA prepared pending transactions - Cloud only

==========

X-Gen framework script version 1.15

Fix of a File Processing services startup issue on TMU

==========

X-Gen framework script version 1.10

Fix of missing RUN status update on TMU environments!

==========

X-Gen framework script version 1.9

Cloud ready - stable version + extended logging during shutdown!

==========

p017 (07-AUG-2024, #dfa6652db71, XGEN-8233)

XRD

Changed: lib/ruledesigner.kit, lib/common.kit

Fixed: XGEN-8263: JSON schema import: Field 'nullable' property not evaluated

BACKEND

Fixed: XGEN-8425/FSA-40780: Fix for a data race condition using ACE_Future objects (backport to 4.13)
This is a rare data race that may cause unknown return codes in asynchronous "calls". It is caused by template code of a 3rd party library (libACE) and affects all X-Gen modules using this functionality.

Changed: Libraries: ACE, ACE_SSL, xgencore, workspace, tokensvc, httprestclient, monitor, sqlutils, tranmgr, tcltools, xgenfcgi, auth, httprest, restfulwsadapterclient, channelmanager, rmeventdispatcher, rmchannelmgrclient, eventmgrhaserver, eventdispatcher, emservices, channelmgrclient, csevent, clnthttpinterface
Executables: fcgitclsh, trantool

Changelog 4.17


X-Gen Base Image:

latest-4.17-1.0-p016-2025:

- X-Gen 4.17
- X-Gen framework script version 1.0
- Patchlevel 16 XGENCHANGES-VALANTIC-p016.txt
- SWIFT release 2025

Cloud ready - stable version!

==========


XGENCHANGE... 016.txt
03 Sep 2026, 05:03 PM

Installed RR versions

Here are the installed XGEN-Services versions and a diff between TMU and CLOUD plattform (11.09.2025)

File	Modified
versions.html	Sep 11, 2025 by Abdelillah Settah

Drag and drop to upload or browse for files

CVE Handling

The CVE Report delivered by valantic (☢ CVE Vulnerability Reporting - X-Gen - Confluence) must be regulary checked to update the **trivy ignore** List.

Further Information you find here in the README. .trivyignore · main · wp3 / hybrid-cloud / dockerfiles / xgen-base · GitLab

🔧Framework

audit/indexer

audit/reader

Old service name: jcf-audit-query

Repository: microservices/reader · main · wp3 / bc / wpio-framework / audit · GitLab

audit/writer

Old service name: jcf-audit

Repository: microservices/writer · main · wp3 / bc / wpio-framework / audit · GitLab

certificate-fetcher

file-adapter


http-adapter

Einführung

http-adapter (und soap-adapter) bekommen Anfragen von unseren Kunden sowie über WPIAdmin (zu Testzwecken in Stages ungleich PROD). Die dafür notwendige Loadbalancer-Anbindung muss sowohl für die aktuelle Plattform TMU als auch für die zukünftige Cloud-Plattform (FCN/MSCP) tragfähig sein.

Architektur

In mehreren Abstimmungen mit FI-TS (WPIO-Betriebsführer, Loadbalancer-Team) als auch dem dwpbank Cloud-Team wurde folgende Architektur herausgearbeitet:

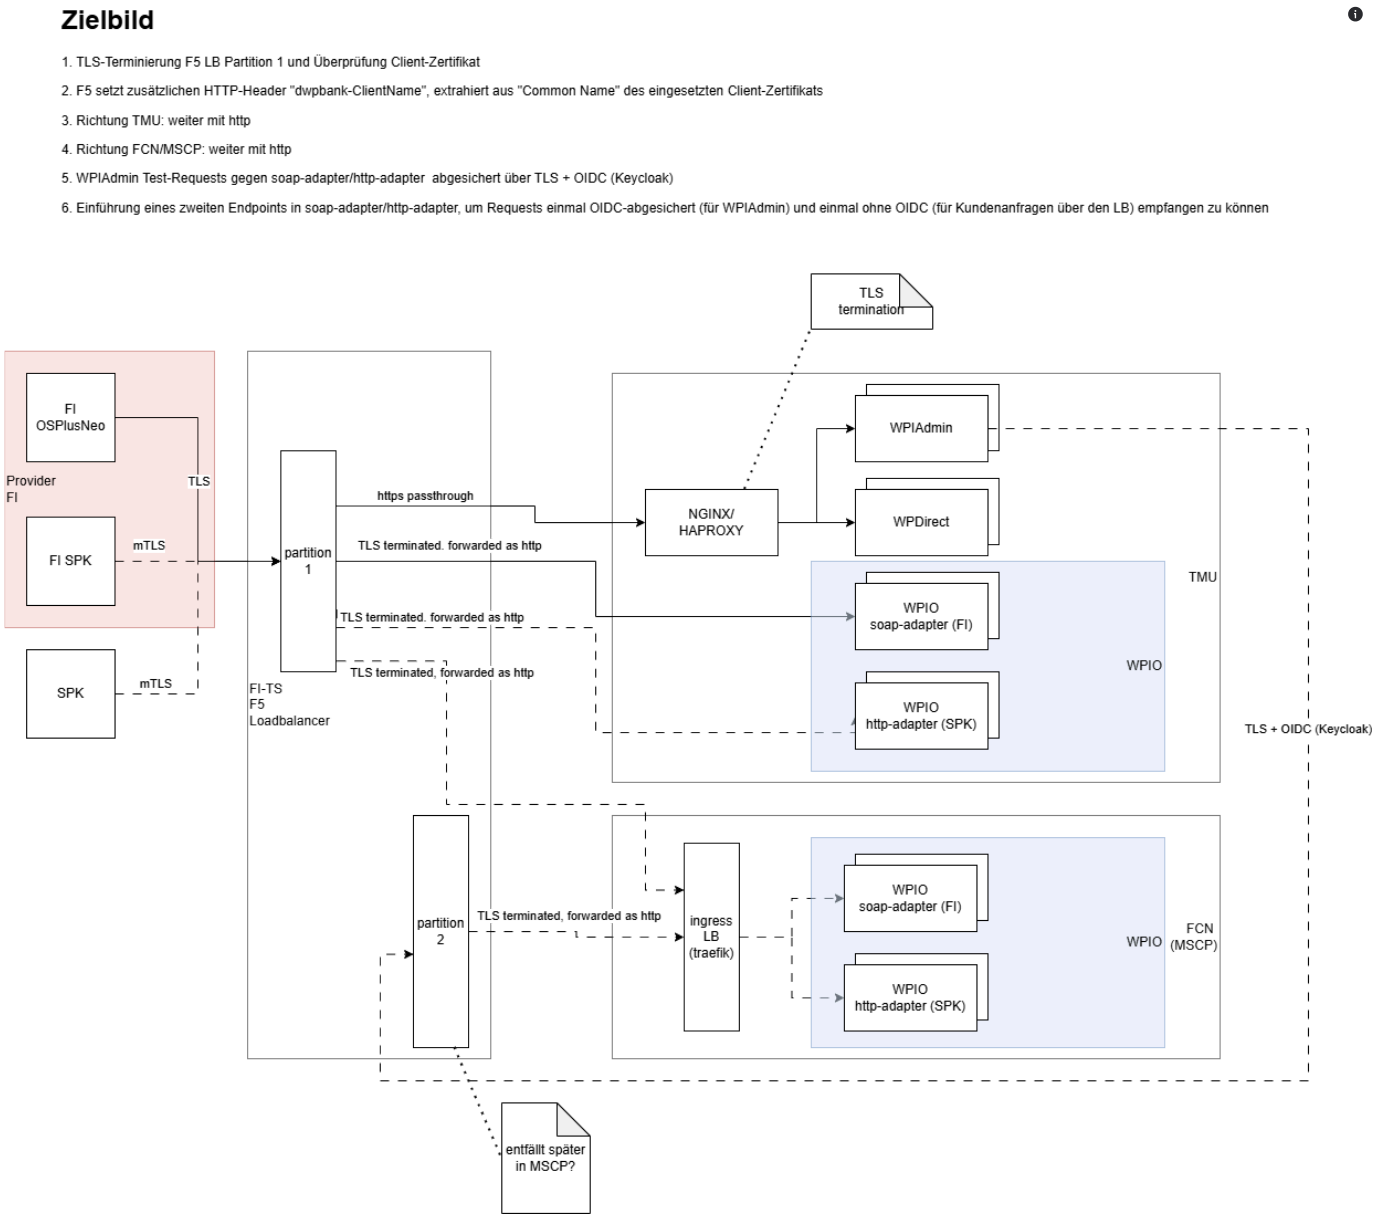

Loadbalancer-Konfiguration

Auf dem F5-Loadbalancer ist pro Umgebung je eine URL konfiguriert, unter der Anfragen an WPIO entgegengenommen werden und an die Endpunkte auf den jeweiligen Anwendungsinstanzen (Spalte „Ziel“) gleichmäßig verteilt werden.

Da die Umgebung nicht Teil des Domänennamens ist, kann für die Stages DEV, TEST und PrePROD umgebungsübergreifend mit demselben Server-Zertifikat gearbeitet werden. Ob ein Kunde Anfragen an eine bestimmte TU stellen kann, wird damit alleine über die Konfiguration im LB und der Freischaltung in WPIO gesteuert.

- DEV, TEST/PrePROD: https://wpio-http.test.dwpbank.net.
  - Virtuelle Loadbalancer IP (exklusiv für WPIO): 2.153.51.22
- PROD: https://wpio-http.dwpbank.net
  - Virtuelle Loadbalancer IP (exklusiv für WPIO): 2.153.52.23

Zertifikate

Das Server-Zertifikat wird seitens FI-TS auf Basis der öffentlichen CA TeleSec ausgestellt. Dadurch erleichtern wir den meisten Kunden die Arbeit, da die CA in den gängigen Truststores enthalten sein sollte und keine Koordination für einen regelmäßigen Zertifikatstausch erforderlich wird.

Das Client-Zertifikat wird von der dwpbank zur Verfügung gestellt (STINO). Es basiert auf einer privaten FI-TS CA mit einer deutlich längeren Laufzeit. Zur Info: da es viele verschiedene Formate gibt, wie ein Zertifikat als Datei abgelegt wird, liefert STINO eine ZIP-Datei mit verschiedenen Formaten (pfx (=p12), key/crt, pem).

LB-Aktivitäten im Rahmen der Request-Weiterleitung:

1. TLS-Terminierung. Kontrolle des Clientzertifikats
2. Grundsätzlich sollen alle angelieferten http-Header an die Zieladressen weitergereicht werden
3. Extraktion des "Common Name" aus dem verwendeten Clientzertifikat und Erzeugung (falls notwendig: Überschreibung) des Header-Feldes "dwpbank-ClientName" mit dem Wert aus "Common Name"
4. Löschen des http-Headerfeldes "dwpbank-ClientId" bei externen Anfragen über LB Partition 1, sofern vorhanden! (bei Anfragen von WPIAdmin ist das Feld durchzuleiten)
5. Wird eine nicht konfigurierte Testumgebung im Context-Pfad adressiert, ist die Anfrage mit dem Http Status Code 404 (Not Found) abzulehnen

Verfügbarkeit der Anwendungsinstanzen

Um die Verfügbarkeit des Endpoints festzustellen, steht unter den angegeben Zieladressen ein weiterer Kontextpfad */health/readiness* für Monitor-Requests zur Verfügung, Beispiel TUA: *2.153.29.82:5831/health/readiness.*

Antwortet der Endpunkt mit dem Http Status Code 200, gilt er als verfügbar, in allen anderen Fällen als nicht verfügbar.

Umgebung	URL	Ziel
TUA	https://wpio-http.test.dwpbank.net/tua	2.153.29.82:5831/api/ext (dwptuaappe01, Node 1)
		2.153.29.82:5835/api/ext (dwptuaappe01, Node 5)
TUS nicht angebunden	https://wpio-http.test.dwpbank.net/tus	2.153.29.52:5831/api/ext (dwptusappe01, Node 1)
		2.153.29.52:5835/api/ext (dwptusappe01, Node 5)
TUD nicht angebunden	https://wpio-http.test.dwpbank.net/tud	2.153.21.102:5831/api/ext (dwptudappt01, Node 1)
		2.153.21.102:5835/api/ext (dwptudappt01, Node 5)
TUF nicht angebunden	https://wpio-http.test.dwpbank.net/tuf	2.153.21.116:5831/api/ext (dwptufappt01, Node 1)
		2.153.21.116:5835/api/ext (dwptufappt01, Node 5)
TUG	https://wpio-http.test.dwpbank.net/tug	2.153.21.109:5831/api/ext (dwptugappt01, Node 1)
		2.153.21.109:5835/api/ext (dwptugappt01, Node 5)
TUH nicht angebunden	https://wpio-http.test.dwpbank.net/tuh	2.153.21.53:5831/api/ext (dwptuhappt01, Node 1)
		2.153.21.53:5835/api/ext (dwptuhappt01, Node 5)
TUM	https://wpio-http.test.dwpbank.net/tum	2.153.21.137:5831/api/ext (dwptumappt01, Node 1)
		2.153.21.137:5835/api/ext (dwptumappt01, Node 5)
TUZ nicht angebunden	https://wpio-http.test.dwpbank.net/tuz	2.153.21.130:5831/api/ext (dwptuzappt01, Node 1)
		2.153.21.130:5835/api/ext (dwptuzappt01, Node 5)
TUY nicht angebunden	https://wpio-http.test.dwpbank.net/tuy	2.153.11.62:5831/api/ext (dwpwpioappa01) 2.153.11.63:5832/api/ext (dwpwpioappa02. Nicht angebunden, Rechner ist Teil eines Cloud-Nodes)
PROD	https://wpio-http.dwpbank.net	2.153.1.66:5831/api/ext (dwpwpioappp01) 2.153.1.67:5832/api/ext (dwpwpioappp02) 2.153.1.68:5833/api/ext (dwpwpioappp03) 2.153.1.69:5834/api/ext (dwpwpioappp04) 2.153.1.71:5835/api/ext (dwpwpioappp05) 2.153.1.121:5837/api/ext (dwpwpioappp07) 2.153.1.122:5838/api/ext (dwpwpioappp08) 2.153.1.124:5839/api/ext (dwpwpioappp09) 2.153.1.125:5840/api/ext (dwpwpioappp10) 2.153.1.126:5841/api/ext (dwpwpioappp11)

		2.153.1.127:5842/api/ext (dwpwpioappp12) 2.153.1.128:5843/api/ext (dwpwpioappp13) 2.153.1.129:5844/api/ext (dwpwpioappp14) 2.153.1.130:5845/api/ext (dwpwpioappp15) (2.153.1.131:5846/api/ext dwpwpioappp16. Nicht angebunden, Rechner ist Teil eines Cloud-Nodes) 2.153.1.135:5847/api/ext (dwpwpioappp17) 2.153.1.33:5848/api/ext (dwpwpioappp18) 2.153.1.34:5849/api/ext (dwpwpioappp19)

Autorisierung des Clients in WPIO

Der im Client-Zertifikat hinterlegte Kunden-Name "*Common Name*" ist gemäß Zertifikatsmanagement eindeutig. Daher wird die Komponente http-adapter auf Basis des HTTP-Header-Feldes "*dwpbank-ClientName*" den Kunden mittels einer Übersetzungstabelle identifizieren:

- ClientId: <vom WPIO-Team vorgegebene Kennung pro Kunde(n-Gruppe)>
  - FI_SPK (Sparkassen, die über die Infrastruktur der FI anfragen) oder
  - SPK (Sparkassen, die individuell an die dwpbank angebunden sind)
- ClientNumber: <Teilnehmernummer des Instituts (TEILNR)>
  - Beispiel: 1045

Mit diesen Informationen kann eine normale Einsteuerung der Anfrage in die bestehenden MQ-Verarbeitungsprozesse von WPIO erfolgen, wozu auch die Berechtigungsprüfung für den Aufruf der Services gehört (routingdata).

Common Name Mapping


The mapping between the client name and client teilnehmer number can be found in this file. `</> http_tn_cn.csv`

dwpbank team zertifikatsmanagement@dwpbank.de is maintaining this list.

Names might change as part of a corporate customer rebranding!

If we are onboarding a new customer we have to get in contact with that team!

Beauftragungswege bei FI-TS

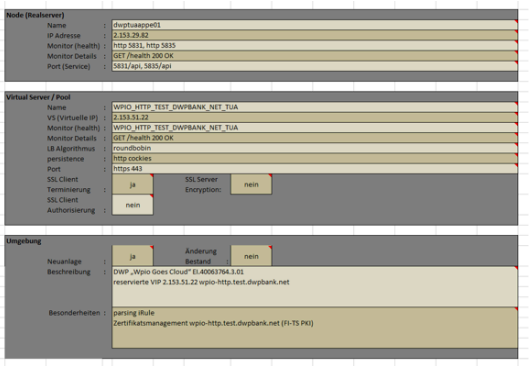

jcf-http LB configuration, example TUA

This Excel will be provided by FITS. We have to order via ARS-BAM this configuration. See below under orderprocess the example excel file.

Learnings form the initial setup process

- WPIAdmin and WPIO TMU Cluster are part of the same V-LAN, no firewall activation for direct communication required
- the F5 configuration requires the IPs from requesting clients
- the F5 configurations required the endpoints for services (IP + Port + Context Path)
- the F5 configuration requires a URL which should be called by clients, in this case https://wpio-http.test.dwpbank.net/<env>
- the F5 configuration requires service-endpoints for health-check calls
- F-I-TS will as always provide the IPs from the involved Linux machines
- Manfred Baumgartner is responsible for the F5 configuration at FITS: Manfred.Baumgartner@f-i-ts.de
- at least for the dwpbank internal communication via the F5 no security certificates are required at all
- A CWNP (ClusterWideNetworkPolicy) on Kubernetes for "egress-allow-wpio" must be ordered via ARS-BAMBI.

WPIAdmin

Add endpoints for the http-adapter to WPIAdmin. We want to be able to address a specific WPIO node or the whole WPIO cluster (communication by loadbalancer).

Acceptance criteria:

- WPIAdmin is able to send requests directly to all WPIO nodes available in an environment
- WPIAdmin is able to send a request via loadbalancer to one of the available WPIO nodes

JIRA-Referenzen

[WGC-1452] Request Scraping for jcf-http - dwpbank

[WGC-1511] Clarify the K-Matrix to access jcf-http from outside the WPIO cluster - dwpbank

[WGC-1530] Request Scraping for jcf-http (TEST/PP/PROD) - dwpbank

[WGC-1680] Configure http-adapter endpoints in WPIAdmin - dwpbank

Orderprocess

	Description	Ordered by	Order Type	Status	Reference
DNS Auflösung	Order DNS Resolution "**wpio-http.test.dwpbank.net → 2.153.51.22"** BAM-**1461164**: "DNS-Eintrag einrichten, ändern und löschen / WPIO wpio-http.test.dwpbank.net in F5"	F-I-TS	internal BAM		
Zertifikat Beauftragung	<https://ars.f-i-ts.de/arsys/forms/arsprod/BAM:Betriebsauftrag/Default View/?eid=000000001438315>	F-I-TS	internal BAM		
Neue Ports	Ports.yaml erweitern lassen ports.yaml · master · dwp / deployment / wp2-dezentral-configuration · GitLab	F-I-TS	-		
http-adapter LB Konfiguration		dwpbank	ARS-BAM		BAM 1463553
FW Freischaltung Prometheus endpoints	Scrape Endpoint for Prometheus (K-Matrix delivered by F-I-TS)	dwpbank	WPChange		
FW Freischaltung Loadbalancer → TU Server	unlocking between "F5 LB wpio VIP http-adapter → jct-http backend (TMU)"	dwpank	WPChange		
FW Freischaltung WPIAdmin Service → Loadbalancer	unlocking between "WPIadmin Service → F5 LB wpio http-adapter service"	dwpbank	WPChange		
FW Freischaltung Source IPs → Loadbalancer	Requests from Customer Server (possible via Proxy) → Loadbalancer. Needed only if new customer will be connected	dwpbank	WPChange		
Whitelisting (Allowlist)	Requests from Customer Server must be whitelisted in Loadbalancer	dwpbank	ARS-BAM		
CWNP - egress-allow-wpio	ClusterWideNetworkPolicy "*egress-allow-wpio*" on Kubernetes Cluster for Prometheus connect	dwpbank	ARS-BAM		

Example Files:



JCF-HTTP_Loa... 1).xlsx
02 Jun 2026, 08:54 PM



Firewallfreisch... 1).xlsm
02 Jun 2026, 08:54 PM



Firewallfreisch... es.xlsm
02 Jun 2026, 08:54 PM

WPIO HTTP-Adapter

Angefordert wird die Erweiterung der bestehenden Loadbalancer-Konfiguration für alle bereits über den Loadbalancer angebundenen Sparkassen. Eingehende mTLS-Anfragen auf https://wpio-http.test.dwpbank.net (TEST) bzw. https://wpio-http.dwpbank.net (PROD) sollen gemäß Context-Pfad an WPIO-Anwendungskomponenten der jeweiligen Testumgebung an einen vorgegebenen Endpunkt weitergeleitet werden.

Im Rahmen der Verbindungsentgegennahme und Weiterleitung sind folgende Aktivitäten erforderlich:

1. Durchführung der mTLS-Prüfung
2. Extraktion des "Common Name" aus dem verwendeten Client-Zertifikat
3. Weiterleitung des Wertes aus "Common Name" in einem neu in den Request aufzunehmenen HTTP-Header-Feldes "dwpbank-ClientName". Sollte das Feld im Request bereits existieren, ist der angelieferte Wert zu überschreiben
4. Löschen des HTTP-Headerfeldes "dwpbank-ClientId", sofern es vorhanden ist
5. Anfragen an eine nicht konfigurierte Testumgebung sind mit dem Http Status Code 404 (Not Found) abzulehnen

Es sind Anfragen für folgende Umgebungen durchzuleiten: TUM, TUG, PROD.

Anbindungsdetails:

https://wpio-http.test.dwpbank.net/tum
2.153.21.137:5831/api/ext
2.153.21.137:5835/api/ext

https://wpio-http.test.dwpbank.net/tug
2.153.21.109:5831/api/ext
2.153.21.109:5835/api/ext


https://wpio-http.dwpbank.net
?:5831/api/ext
?:5832/api/ext
?:5833/api/ext
...(Alle aktuell verfügbaren WPIO-Knoten)

Jede der oben genannten WPIO-Instanzen stellt zusätzlich einen Health-Endpunkt bereit, über den die Verfügbarkeit durch den Loadbalancer erfragt werden kann. Ein aktiver/gesunder Endpunkt beantwortet die Anfragen mit dem HTTP-Statuscode 200, alle anderen Statuscodes sind als Fehler zu interpretieren.

Er ist zu erreichen unter ***IP:PORT/health/readiness***

Architekturskizze:

Hinweis: die Architekturskizze zeigt auch die Anbindung des Loadbalancers an WPIO-Komponenten in der FCN/MSCP: diese Anbindung ist nicht Gegenstand dieser Anfrage, eine derartige Anbindung wird zu einem späteren Zeitpunkt angefragt. Fokus dieser Anfrage liegt auf der Anbindung des LB an die nach dem TMU-Muster betriebenen WPIO-Komponenten.

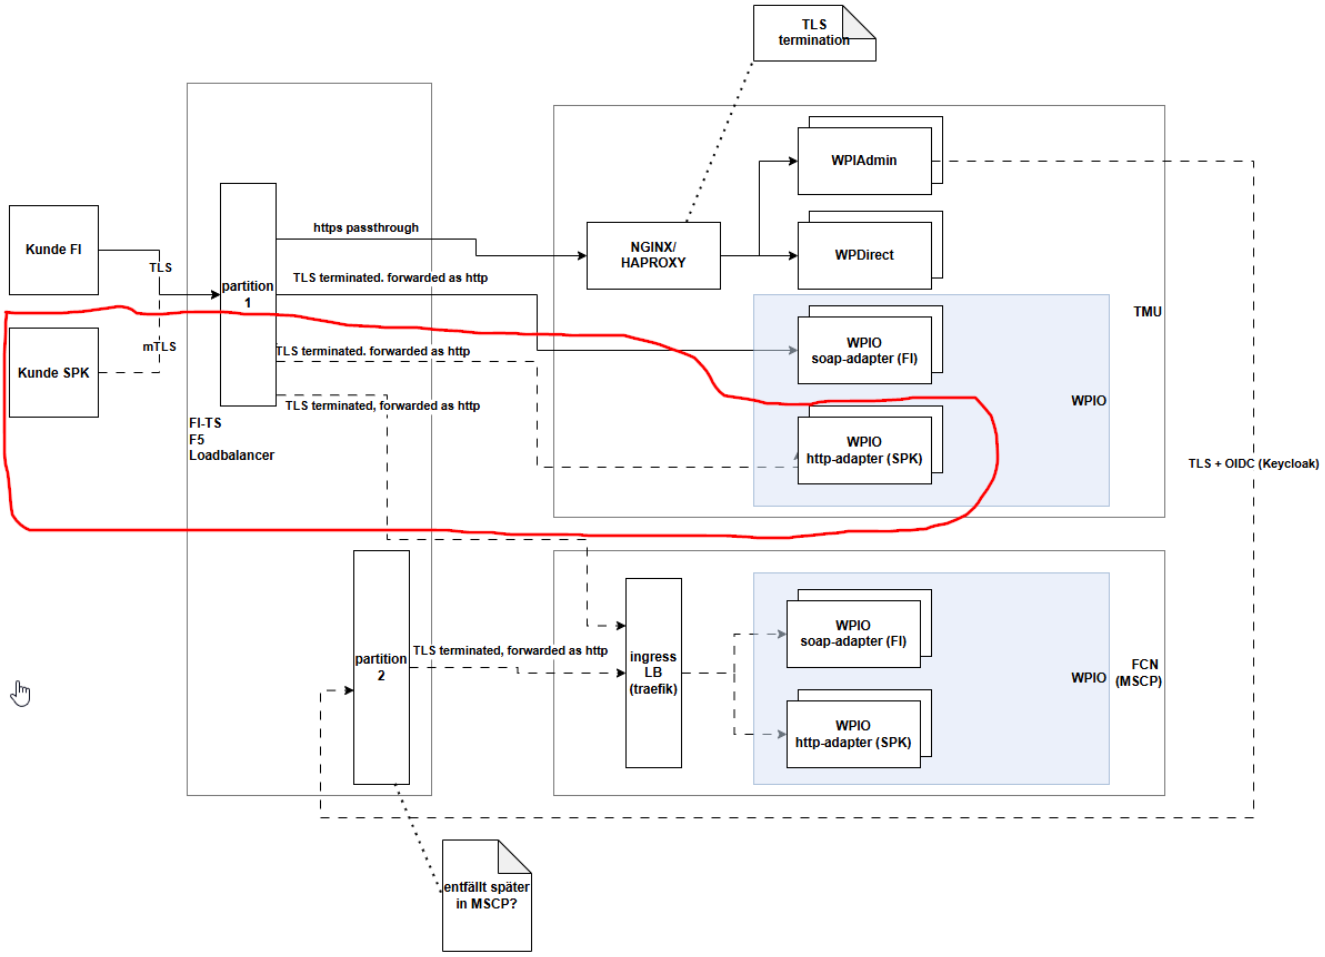

Umsetzung:

Die Anbindung soll zuerst in der TUM mittels zweier Kunden pilotiert werden. Bei erfolgreicher Abnahme erfolgt ein umgehender Einsatz in Produktion.

Bestätigt sich die Tragfähigkeit des Ansatzes, hat eine entsprechende Konfiguration aller aktuell bekannten Sparkassen-Institute zu erfolgen.

kafka-adapter

router

soap-adapter

audit-pipe-and-metrics

Old service name: jcf-audit-move

Repository: microservices/audit-pipe-and-metrics · main · wp3 / bc / wpio-framework / rr · GitLab

🚧Operating Procedures

WPIO-interne Arbeitsabläufe und Verfahren zur Organisation des WPIO-Teams. Die Informationen sind nur relevant für direkt im WPIO-Team tätige Mitarbeiter.

- Anwendungsberechtigungen verwalten
- Regelmäßige Termine
- Overview WPIO team meetings
- Komponentenaktualisierungen
- Contact by WPIO Topic
- Export Routing-Information
- Ticket-Bearbeitung
- 🔥Firewall Beauftragung, Regeln und Rezertifizierung
- 🛡️Probleme mit jcf-sys-cert für Kafka
- Change process TMU/Cloud - parallel phase
- 🔗Helpful Links
- Usage of Jira
- Definition of standardized Acceptance Criteria for Jira
- Version Synchronisation

Anwendungsberechtigungen verwalten

Beauftragung Konfigurationsrecht WPIAdmin

WPIAdmin bietet Nutzern, die für mehrere Institute (=verschiedene Teilnehmernummern) zuständig sind an, die Menge an Daten vorzufiltern. Das geschieht über eine sogenannte CID, die über das Berechtigungsmanagement zur Anlage zu beauftragen ist und ab dem Moment über OIM zur Verfügung steht.

Durchführung:

1. Download des Beantragungsformulars im process@work - Auftrag_Rechtemodell im OIM_außer SAP.xlsx http://processatwork/Process/Origigrafxprod/obj/27389
2. Formular befüllen und an fAV zwecks Beantragung schicken.
3. fAV prüft, unterschreibt und sendet das Formular mit dem Hinweis "Bitte Auftrag umsetzen" an IdM-Berechtigungen@dwpbank.de.
   Falls das Konfigurationsrecht für mehrere Teilnehmer(nummern) freigeschaltet werden soll, muss dies in Verbindung mit dem Formular mitgeteilt werden.
4. Die beantragte Rolle muss anschließend im Berechtigungskonzept der Anwendung hinterlegt werden.
   a. Dazu das Berechtigungskonzept im process@work herunterladen unter http://processatwork/Process/Origigrafxprod/obj/31759
   b. Datei lokal öffnen, Rolle einfügen und Änderungshistorie ergänzen
   c. Die CID muss im Punkt 8.4 Berechtigungsmodell Oracle Identity Manager der Tabelle hinzugefügt werden
   d. Datei im process@work hochladen und mit einem passenden Kommentar versehen, z.B. mit dem Text Änderungshistorie aus 4.b.
   e. Auf der process@work Seite des Berechtigungskonzeptes den Reiter "VERFAHREN VERWALTEN" öffnen und Verfahren starten.

Weitere Informationen zum Berechtigungsprozess sind hier http://processatwork/Process/Origigrafxprod/obj/18550 zu finden.

AuditBrowser Berechtigungen

Neben der eigentlichen LDAP Berechtigung können die Rollen, die jeder Nutzer benötigt, dem Handbuch entnommen werden.

Falls ein Benutzer eine SQL Fehlermeldung "Cannot connect to Database" während des Login Versuchs erhält, dann ist der Schwellenwert 'unsuccessful_login_count' überschritten worden. Dieser registriert die fehlerhaften Login Versuche.
Der Counter läuft auf dem AIX System der DB2 Datenbank.

In diesem Fall ist eine Mail an "ZZG-FITS-65022-Operation Control UNIX <oc-unix@f-i-ts.de>" zu schicken mit diesem Hinweis:

```
Bitte den AIX "unsuccessful_login_count" für DB2 Zugriff, zu meinem User dwpXXXX, zurücksetzen
```

Falls oc-unix ein Ticket benötigt, kann dieses per D-2500 eröffnet werden. Ein anderer Weg wäre direkt ein ARS-Ticket zu eröffnen.

Regelmäßige Termine

Turnus	Uhrzeit	Titel	Moderator	Teilnehmer WPIO
~~Jeden Montag~~	~~11:00 - 11:30~~	~~WPIO Release-Coordination~~	~~Janos Solti~~	~~WPIO-Team + andere X-Gen-Service-Entwickler~~
Jeden Montag	14:30 – 15:30	TAV-Arbeitsgruppe (Apollo)	?	Georgios
Jeden Dienstag	13:00 – 13:50	JF-WPIO mit ITKFT	?	Georgios, Matthias, Abdel
~~Jeden Dienstag~~	~~14:30 - 15:50~~	~~WPIO Teamwork-Session~~	~~Dominique~~	~~WPIO-Team~~
Jeden Montag	15:00 - bis 15:30	ESB-Improvements Meeting mit Andras	Steffen	Georgios, Andras
Jeden Donnerstag	15:00 – 15:30	KA´s-Review Meeting	?	Georgios
~~Jeden Montag + Mittwoch + Freitag~~	~~10:30 - 10:45~~	~~WgC Daily~~	~~Steffen~~	~~WgC-Projekt-Team~~
Jeden Freitag	15:00 – 15:30	OSPlus-Neo / ROR-Meeting	?	Georgios
Mittwochs(alle 2 Wochen)	16:00 – 17:00	WPIO&ESB: Abstimmung CR 18 + offener Betriebsthemen	Georgios	Georgios, Matthias, Abdel
Jeden Freitag	13:00 – 14:00	DDF-Meeting (WPIO FAV – TAV)	Steffen	Georgios, Matthias, Abdel
Mittwochs (alle 4 Wochen)	10:30 – 11:00	Status-Update PWL-Forms und WPIAdmin FITS + ITKFT	?	Abdel

Overview WPIO team meetings

Meeting	Target group	Date / time	Purpose	Moderation
Daily	WPIO team	Monday, Wednesday, Friday (Friday is optional for Business dev.) 10:30 to 10:55 am	Gaining transparency about current working items, identifying blockers and requesting support	Default: PO or ScM Jira: 2 sprints - WPIO & WgC - Downstream - Scrum Board - Scrum Board - Jira
TAV FAV Weekly	TAV / FAV	Fridays, 1:00 to 1:50 pm	Synchronizing and discussing TAV / FAV related topics	Participants
Refinement	WPIO team (framework development) WPIO team (service development)	Every week (except sprint transition week) (1,0 hr)	Validating content and description of Big Stories and corresponding user stories and estimations	Default: PO or ScM Jira: 2 sprints - WPIO & WgC - Downstream - Scrum Board - Scrum Board - Jira
Review	WPIO team	Tuesdays in sprint transition week (1 hr) (optional we use the timeslot of WPIO team work session to finish Review and planning)	Summarizing sprint results: gaining overview about finished and unfinished stories (updating ticket status) After closing the current sprint we estimate the	Default: PO or ScM Jira: 2 sprints - WPIO & WgC - Downstream - Scrum Board - Scrum Board - Jira

			remaining work of our unfinished strories Decision: do we pull our spill over to the new sprint or to the backlog?	
Planning	WPIO team		Evaluating available capacities for the new sprint (considering vacation, holidays etc.) and pulling new stories from our backlog to the new sprint	Default: PO or ScM Jira: 2 sprints - WPIO & WgC - Downstream - Scrum Board - Scrum Board - Jira
WPIO team work session	WPIO team	Tuesdays (except sprint transition week) (2,0 hrs)	Working on team related topics, e. g. adjusting our agile working mode, improvement of work related processes, general topics)	Default: PO or ScM
WPIO release coordination	WPIO team	Mondays 11:00 to 11:25 am	Exchange of information regarding releases of WPIO changes	Dev

Komponentenaktualisierungen

Anwendungen sind regelmäßig auf veraltete Software-Stände zu kontrollieren, die ggfls. Schwachstellen (z.B. reportet über CVE) aufweisen.

"WPIntegrator Online Framework" besteht aus mehreren eigenständig betriebenen Anwendungskomponenten, die auf kommerzieller Software wie auch auf freier Software basieren.

Die meisten Komponenten unterliegen nur wenigen fachlichen Weiterentwicklungen, in dessen Zuge man zu Beginn eine solche Kontrolle und Aktualisierung durchführen könnte. Daher ist über einen separaten Prozess sicherzustellen, dass die selbstentwickelten Anwendungskomponenten regelmäßig einer Überprüfung auf Schwachstellen unterworfen werden.

Die zeitlichen Vorgaben dafür sind vorgegeben über die sfO Schwachstellenmanagement (30290). Auf Basis des Schutzbedarfs unserer Anwendung ergibt sich eine monatliche Überprüfung.

⚠ **Task: Komponenten-Überprüfung**

- **Wer:** Technischer Anwendungsverantwortlicher (oder Delegierter)
- **Wann:** monatlich
- **Was:** Kontrolle aller produktiven Anwendungskomponenten in Sonarqube, ob sicherheitsrelevante Befunde vorliegen. Für jede Komponente mit Befunden der Kategorie "Vulnerability" ist ein eigener JIRA-Issue "Komponenten-Aktualisierung xyz" im WPIO-Projekt zu erstellen (Prio 1) und umgehend in die Entwicklung einzusteuern. Im Rahmen der Entwicklung erfolgt eine Detailanalyse des Risikos. Bei Relevanz wird der reguläre Schwachstellenmanagement-Prozess (sfO 30290, Kapitel 4: Erstellung eines Schwachstellen-WPTickets, etc.) gestartet.

Quellen:

- sfO Schwachstellenmanagement (30290)

Contact by WPIO Topic

Category	Topic	Contact
WPIO	WPIO Java Framework (jcf)	Kristina Nikolova, Ilian Nakov
WPIO	X-Gen	Eglee Vasquez, Julian Keranov, Laszlo Kerepeszki, Ilian Nakov
WPIO	EriC	Laszlo Kerepeszki, Abdelillah Settah
ESB	Technique	Andras Illes-Tomka, Zoltan Richtscheidt
AuditBrowser	Usage	Matthias Ruthenbeck
AuditBrowser	Technique	Steffen Flick
WPIAdmin	Fachlich	Matthias Ruthenbeck
WPIAdmin	Technique	Matthias Ruthenbeck, Zsolt Gyimesi
IDF	IDF Architecture	Steffen Flick
IDF	IDF Usage over ESB (Technique)	Andras Illes-Tomka
Gen-Audit	Technique	Andras Illes-Tomka

Export Routing-Information

Es kann die Anfrage kommen, welche Kunden welche Services in WPIO nutzen.

Dazu können aus dem aktuellen Stand des routingdata-Containers folgende Reports generiert werden:

1. rp_accessid: Welche Services und use cases pro ClientID für alle Servicetypen (RR, FP und AD) berechtigt sind
2. ad_events: Welche AD Events pro ClientID abonniert sind
3. ad_subscriptions: Welche AD Use Cases pro ClientID abonniert sind

Der Export wird durchgeführt auf dem LuP-Server, das Ausgabeformat sind CSV-Dateien.

Export-Skripte und Anleitung sind in GitLabEE (wpio/wpio-reports) zu finden.

Ticket-Bearbeitung

Erfassen von Abweichungen

1. zeitkritische Fehler in produktiven Komponentenversionen sind als WPTicket zu erfassen (Prio2-Ticket für e-Change benötigt)
2. alle anderen Fehler als Jira-Issue in Projekt WPIO (oder dem verursachenden Projekt-JIRA)
3. Es sind die Vorgaben zu den erforderlichen Inhalten(siehe unten) zu beachten!

> Tickets und Issues werden grundsätzlich keiner Person zugeordnet, es sei denn, man hat vorher mit der Person gesprochen! Durch das Einstellen ohne Besitzer werden alle Personen benachrichtigt, die die Queue oder das Projekt abonniert haben.

Mindestanforderungen an Ticketinhalte

Für eine zielgerichtete Ticketbearbeitung sollten diese Informationen im Ticket hinterlegt sein:

1. Aussagekräftiger Titel
2. Betroffene Umgebung (Prod oder die genaue TUx)
3. Betroffene(r) Kunden(-Gruppe)
4. Aufgetretener Fehler
5. Erwartetes Verhalten
6. Detailinformationen:
   a. Daraus muss der Zeitpunkt (Timestamp) erkennbar sein, zu dem der Vorgang stattgefunden hat!
   b. Fehlgeschlagener Request bzw. Response (Ggfls. WPIO AuditId)
   c. Logauszüge
   d. Ggfls. Version der Komponente, die den Fehler aufweist

Bearbeiten eingegangener Tickets

> Gehen nicht ausreichend detaillierte Tickets bei uns ein, sind diese mit dem Hinweis auf die fehlenden Bestandteile an den Absender zurückzugeben!

1. Sich als Besitzer eintragen damit für andere erkennbar ist, dass das Thema in Arbeit ist!
2. Daten zu dem Vorgang sichern: unsere Logs rollieren und auch das Audit steht nicht unbegrenzt zur Verfügung!
   a. Logdateien als .zip oder .tgz sichern und an das Ticket hängen
   b. Nachrichten der AuditId via AuditBrowser exportieren und als Zip-Datei an das Ticket hängen
3. Seine eigenen Erkenntnisse im Ticket als Notiz hinterlegen:
   a. was hat man geprüft, was kann man als Fehler ausschliessen

    b. erkannten Fehler beschreiben
4. ggfls. das Ticket an eine andere Einheit weiterleiten
5. Bei Fehler in einer unserer Komponenten einen Jira-Issue erzeugen und diesen im Ticket verlinken

Tickets prüfen gegen Excel "wiederkehrende Tickets"

Alle eingegangen WPTickets sollten gegen das Excel Ticketauswertung_wiederkehrendeTickets.xlsx geprüft werden ob diese Art Ticket schon einmal bearbeitet wurde.
Diese Liste soll einem Betrieb unterstützen um zukünftige sich wiederholende Ereignisse besser einzustufen.

ohne eine detailliertere Bereitstellung von Informationen, an welchen Stellen auf der VM die Befunde wie gefunden wurden, können weder die genauen Verantwortlichen identifiziert noch die Betroffenheit noch die Risikoeinwertung vorgenommen werden.

FI-TS scannt mittels Qualys das vollständige Dateisystem. Das beinhaltet auch das sogenannte Overlay-Filesystem, das von der eingesetzten Container-Runtime (Docker, Podman, etc.) genutzt wird. Die Pfade sind technischer Natur und lassen erst einmal keinen Rückschluss auf das nutzende Image (und damit die Anwendung) zu. Solange FI-TS nicht nach einem Befund das betroffene Image identifiziert, lehnen wir derartige Tickets mit Verweis auf diese Seite ab.

Sicherheitsscans unserer Images erfolgen ohnehin über die CI/CD-Build-Pipelines.

Ermittlung der fehlenden Informationen:

Hier würde nur helfen, wenn FI-TS direkt nach einem Fund im Overlay-Filesystem die laufenden Container mit podman-Kommandos nach dem gefundenen Layernamen abgefragt werden und die sich dann ergebenen finalen Image-Namen ermittelt werden.

Und noch ein genereller Hinweis: aus der reinen Existenz einer Datei/Bibliothek kann man nicht direkt ableiten, dass diese auch genutzt wird und damit ein Risiko besteht.
So kann es z.B. sein, dass in einem Container-Image ein Framework eines Drittherstellers enthalten ist, von dem in der konkreten Umsetzung bestimmte Anteile gar nicht genutzt werden. Aus diesem Grund pflegen die Entwickler für den Securityscan in der Buildpipeline Ausnahmelisten pro Anwendung, über die CVE-Funde als nicht relevant klassifiziert werden.

Solange FI-TS mit einem Qualys-Scan nicht diese Informationen ebenfalls auswertet und berücksichtigt und stattdessen einfach nur Prüfaufträge in die Organisation "gepustet" werden, wird die Organisation mit doppelter Arbeit beschäftigt und kommt im Zweifelsfall nicht dazu, echte Schwachstellen wirklich zu korrigieren oder dem Kunden neue Features bereitzustellen.

Befunde auf dem WPIO LuP-System:

Die Maschine dwpwpioappe01 steht in der Stage DEV und wird vom WPIO-Team genutzt, um Last- und Performance-Tests in einer isolierten Form durchzuführen, d.h. ohne eine Anbindung ein ein Backend wie WP2. (Dieses Vorgehen ist aktuell erforderlich, da die anderen Testumgebungen nicht ansatzweise ressourcentechnisch vergleichbar mit der Produktion sind und dort entsprechende Tests nicht in einer aussagekräftigen Form durchgeführt werden können.)

WPIO ist eine Integrationsplattform, d.h. um isolierte Tests durchführen zu können, betreiben wir Backend-Simulatoren, die die anderen dwpbank-Anwendungen simulieren (sogenannte Mockbackends). Diese Komponenten werden nur für den LuP-Test benötigt und landen niemals auf den eigentlichen dwpbank-Umgebungs-Servern. Die Komponenten entwickeln wir daher auch auf der Maschine, d.h. die Sourcen und Bibliotheken dazu liegen nach einem git-Checkout in den Homeverzeichnissen der Entwickler.

Die reine Existenz einer Datei (wie z.B. die log4j-Bibliothek in einer alten Version) stellt an sich noch kein Risiko dar. Ein Risiko kann erst dann entstehen, wenn

1. eine Software gestartet wird, die diese Bibliothek benutzt
2. eine fremde Person speziell präparierte Daten an die laufende Anwendung übergibt, um die Schwachstelle auszunutzen

Da die auf der LuP-Maschine gestarteten eigenentwickelten Anwendungen

1. nicht dauerhaft laufen (werden durch den Entwickler gestartet, wenn ein LuP-Test durchgeführt wird)
2. und die Daten nur von unseren eigenen Lasttreibern injiziert werden

sehen wir kein Risiko durch einen CVE-Fund auf dem System. Unsere Empfehlung ist, die WPIO-LuP-Maschine vom Qualys-Scan auszuschliessen.

🔥Firewall Beauftragung, Regeln und Rezertifizierung

Beauftragung

Zur Freischaltung weiterer FW Regeln muss man einen WP-Change mit angehängten WP-Auftrag einstellen.
Der genaue Prozess ist hier beschrieben:

Firewall Freischaltungen / K-Matrix / IP-Adresse - PA/CDE - Plattform- und Anwendungsmanagement - Confluence (dwpbank.net)

Präsentation: Firewall Freischaltungen / K-Matrix / IP-Adresse - PA/CDE - Plattform- und Anwendungsmanagement - Confluence (dwpbank.net)

Wichtig:

- Am besten als Blaupause einen, zuvor durchgeführten, FW WPChange **duplizieren**, damit die Workorder und Rahmenparameter korrekt vorausgefüllt sind.
  I.d.R verwenden wir als beauftragende Applikation den Changetyp ***Firewall***. Der Changetyp ***Firewall_AWS*** wird ggf. vom Cloud Team beauftragt.
- Freischaltungsmatrix (K-Matrix wird durch F-I-TS zur Verfügung gestellt), später im WPAuftrag des Changes anfügen : Antrag Firewall-Regeln.docx / Origigrafxprod.
- Der Change muss inklusive Auftrag am Montag bis 18:00 Uhr vorgelegt werden, wenn er bis **Mittwoch in der folgenden Woche** umgesetzt werden soll.
  Man kann also nicht am Dienstag einen Change für Mittwoch in der folgenden Woche einstellen.
  Wichtiger Hinweis: Wenn der Change nicht am Montag eingestellt werden kann, gibt es noch eine weiteren Aspekt zu berücksichtigen.
  STARC muss als WO Freigeber spätestens am **Mittwoch (15:00 Uhr)** über den Change mit der F-I-TS sprechen, damit der Change noch in der **gleichen** Woche im Changeboard (CAB) genehmigt werden kann.
  Da aber sowieso der Change, wenn er nicht bis Montag 18:00 Uhr eingestellt wurde, erst in 2 Wochen eingesetzt wird, kann der Termin durch STARC auch in der Folgewoche wahrgenommen werden und
  der Einsatztermin sollte dann auch nicht gefährdet sein.

  Hierzu gibt es auch einen **IT-Changemanagement.docx** (sfO-ID 9461) Eintrag:

Firewall	FI-TS	Mittwoch 07:00 - 08:00 Uhr Donnerstag 07:00 - 08:00 Uhr* Freitag 07:00 - 08:00 Uhr*	Vorwoche
Firewall_AWS	dwpbank	Montag – Freitag 06:00 – 22:00 Uhr	Einsatzwoche

- Change (Auftrag) **Einsatz bzw. Startzeit** muss immer auf **07:00** Uhr stehen, weil der ARS, BAM der F-I-TS darauf fix terminiert ist.
- Prometheus Änderungen, seit 31.01.2025: "...genehmigt vorbehaltlich der Genehmigung durch ITG-Cloud (bitte in Zukunft als **Genehmiger** (Workorder) mit aufnehmen)" siehe Bsp.: 2025012300004
- Auch bei einem FW Change mit AWS Beteiligung, der kein Prometheus basierte Anpassung enthält, sollte man ggf. eine zusätzliche *Workorder* "IT-Genehmigung" mit *Workorderagent* "ITG-Cloud" Freigabe hinzufügen.

- K-Matrix: In Beschreibungsfeld muss klar und einfach benannt werden, wofür die FW Änderung vorgesehen ist. Vorgabe kommt von F-I-TS, bitte prüfen ob Angaben ausreichend sind.
- Prometheus FW Änderungen müssen immer die Cluster berüchsichtigt werden.
- Aus dem Punkt 10. der Verlinkung zu Firewall Freischaltungen von PACDE: "Wenn auf AWS Seite die Security Groups angepasst werden müssen, die dafür auch ein Change zu erstellen. Im Change Namen soll "Security Groups AWS" auftauschen."
  resultiert ein weiterer Change (Bsp.: Firewallfreischaltung WPIO gegen Queue Manager aus AWS Umgebungen - Security Group Change - Inhalt - Change - WPTicket 6.0). Dieser Change ist nur dann zu erstellen wenn aus dem K8S Cluster auf die Qmgr. zugegriffen wird.
  Das muss eindeutig auch aus der K-Matrix hervorgehen. Sollte ein Sprungserver involviert sein, ist dieser Fall anders gelagert. Dann wird die Security Gruppe nicht benötigt.

Rezertifizierung


Windows Ablageort: V:\WPIOnline\1B Dokumentation\1BG SelfAss_ISR_audit_risikobehandlung_datenschutz\FireWallRegel_Rezertifzierung_FWR_Audit

Ressourcenanforderung zwecks Analyse

- Die Analyse sollte mindestens nach dem 4 Augenprinzip stattfinden.
  Optimal wären sicherlich 6 Augen (3 Personen) um Fehler auszuschließen und um zeitnah alle Regeln abzuarbeiten.
- Es sollte neben den dwpbank Mitarbeitern auch der Betriebsführer der F-I-TS teilnehmen, da u.a. nur er Zugriff auf BAM Aufträge hat um ableiten zu können welche Hintergründe einige Regeln haben.
- Alle FW Regeln basieren auf Aufträgen, diese sind aber nicht immer perfekt ausgearbeitet, somit fehlen in den Zeilen der FW Regeln einige Einträge. Hierfür ist zwingend ein F-I-TS Mitarbeiter (Betriebsführer) in die Analyse mit einzubinden.
- Aufwand für die Analyse aller wpio FW Regeln:
  Für 2 Personen, ca. 4 x 1.5 h = ~1PT

Regeln

- Firewall Freischaltungen als Übersicht sind erhältlich über **Netzwerkmanagement** MailIn.
- SUCHE: ARS Netzfreigabe & Pakete (WPIO: APP-1432 und WPIAdmin: APP-1239)

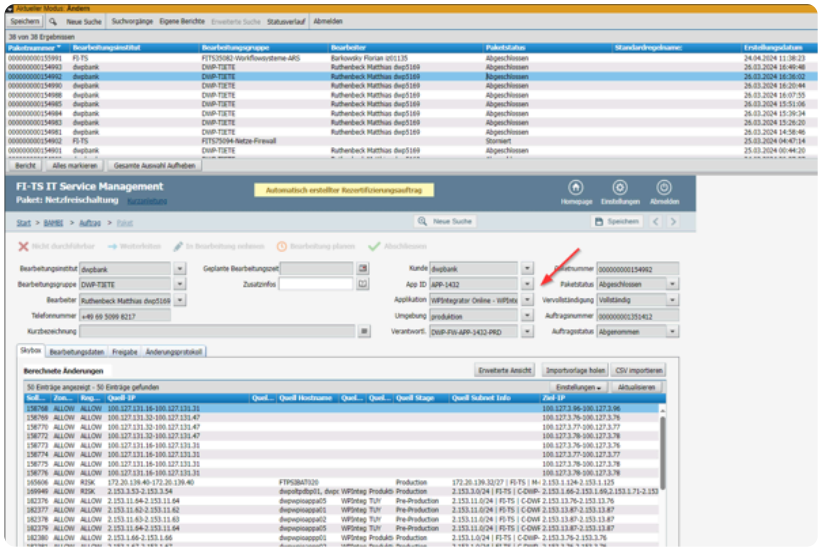


May 22, 2024 **aktueller Stand** der FW-Regeln: 2024-05-15 APP-1239, APP-1432.xlsx

---

Fachliche Zuordnung einiger FW-Regeln (da nicht immer alle FW Rules eindeutig kommentiert sind)


BUY-IN Service

Quelle : 2.153.1.x – Ziel : 193.29.88.x / Port 10475




FI WebService Zugriff

QuellName : fel-dwp-c7s51, stg-dwp-c7s51 Ziel : 2.153.1.x / Port 568x



NAS Filer Zugriff

Ziel : 2.153.1.x / Port 111 – Port 2049



EUREX Zugriff

ZielIP : 193.29.88.x / Port 10575 ZielStage Extern

	dwptuqappt01	Integration	2.153.21.0/24	1-65535/15336-15336/TCP	CERTIFIED	000000001162676	172.17.19.129-172.17.19.129	DST-NAT-UBS-FIX
	dwptuqappt01	Integration	2.153.21.0/24	1-65535/3860-3860/TCP	CERTIFIED	000000001162676	172.20.169.66-172.20.169.66	AWA5
1.123-2.153.21.	dwptuqappt01, dwpwpioappa01, dwpw WPIntegrato TUY	Integration, Pre-Pı	2.153.11.0/24	1-65535/10575-10575/TCP	EUREX	000000001162676	193.29.88.226-193.29.88.226	
				1-65535/5774-5774/TCP		000000001162676	100.127.3.113-100.127.3.113	DNAT-dwpwpioappp17
	dwptuqappt01	Integration	2.153.21.0/24	1-65535/20320-20320/TCP		000000001162676	2.153.252.226-2.153.252.226	NAT-Deuba-XOL-FIX-PreLiv

🛡️ Probleme mit jcf-sys-cert für Kafka

Problem / Exception	Ursachen	Auswirkungen	Maßnahmen
`sun.security.provider.certpath.SunCertPathBuilderException: unable to find valid certification path to requested target`	**Zertifikat aus K8S kann nicht gezogen werden (K8S cluster nicht erreichbar etc.)**	• **WP3 Anbidung an Kafka topics gestört**	
`java.lang.RuntimeException: java.security.cert.CertificateException: java.io.IOException: Incomplete data`	**certificate-authority-data token ist nicht valide (Token abgelaufen, nicht BASE64 kodiert)**	• **Zertifikat aus K8S kann nicht gezogen werden** • **WP3 Anbidung an Kafka topics gestört**	

Change process TMU/Cloud - parallel phase

This page describes the needed high level steps to get software rolled out to PROD for the old TMU and the new Cloud (Kubernetes) platform in parallel.

1 New USM processes/tooling:
  1.1 Sonderrelease
    1.1.1 Release change differences per platform/stage/env
2 Old processes/tooling:
  2.1 Standard Release:
  2.2 Sonderchange/eChange:
  2.3 Special situation: SonderChange is planned, but at least one day before, a eChange is executed/requested:

New USM processes/tooling:

(Hint: USU is the vendor, USM is an abbreviation for USU Service Management)

Sonderrelease

General USM guidelines, see Sonderrelease (NEU)

Special aspects:

1. Search the correct link to USM in services@work
2. Take care that your USM user profile (top right corner) is configured as a “USM Endanwender” otherwise you will not be able to see certain items!
3. We are required to strictly follow the SLC process TUH → TUY → PROD even for SonderReleases!
4. Never start an activity for a follow up stage if the previous stage has not been completed! (The USM internal workflow will most likely break!)
5. Once you have created a new ”Release-Paket” try to use the USM task inbox (“Aufgaben für mich“) as much as possible! This will also tell you when to create the next Release Change!
6. Create Release Change: there is a hint in the video that such a “Release Change” can also be created from within Gitlab: this does not work for WPIO right now, don’t use it!
7. Create Release Change: we have to create a separate Release Change per platform TMU and Cloud and they have to be created in a slightly different way! See the table below for details...
8. Create Release Change: do not set a “start date“ on a too short notice: there are several approvals required and FI-TS API will automatically reject a request with a “Start Date“ in the past!
9. Create Release Change: add a platform suffix (TMU/Cloud) to every “Change Titel“ in order to distinguish the Changes more easily in an overview listing

Release change differences per platform/stage/env

stage/ env	Platform	“Change-Implementierer“	CI (Configuration Item)	“Ziel Version”

TUH	TMU	FI-TS	WPIntegrator Online TUH	a.b.c
TUH	Cloud (AWS)	Anwendungsverantwortliche	<bounded context> for TUH	a.b.c-x.y.z
TUY	TMU	FI-TS	WPIntegrator Online TUY	a.b.c
TUY	Cloud (MSCP)	dwpbank Anwendungsbetrieb	<bounded context> for TUY	a.b.c-x.y.z
PROD	TMU	FI-TS	WPIntegrator Online PROD	a.b.c
PROD	Cloud (MSCP)	dwpbank Anwendungsbetrieb	<bounded context> for PROD	a.b.c-x.y.z

Old processes/tooling:

Standard Release:

SBM:
1x TT WPIO:
  NRP:
    ANW WPIO: TMU
      Word document including Mergerequest
    ANW Hybrid Cloud (Cloud)
      Word document including Mergerequest (Template available)

1x TT ESB:
  NRP:
    ANW WPIO: TMU
      Word document including Mergerequest
    ANW Hybrid Cloud (Cloud)
      Word document including Mergerequest (Template available)

Assumption: we are allowed to mention several BC in a single installation instruction

Sonderchange/eChange:

SBM:
1x TT WPIO:
  Change WPIO TMU (references ANW WPIO):
    WPAuftrag (Anwendungsbetrieb FI-TS):
      Word document including Mergerequest
  Change Hybrid Cloud (references ANW Hybrid Cloud):

WPAuftrag (dwp-Anwendungsbetrieb):
Word document including Mergerequest (Template available)

1x TT ESB:
Change ESB TMU (references ANW WPIO):
WPAuftrag (Anwendungsbetrieb FI-TS):
Word document including Mergerequest
Change Hybrid Cloud (references ANW Hybrid Cloud):
WPAuftrag (dwp-Anwendungsbetrieb):
Word document including Mergerequest (Template available)

Hint: we have double work (2 changes) to do because Hybrid Cloud has to be choosen as an application (This is IMO wrong, it should always be WPIO)

Special situation: SonderChange is planned, but at least one day before, a eChange is executed/requested:

TMU:

We have to send a mail to IT-Changemanagement-dwpbank@dwpbank.de and describe the chnages in the already approved Sonderchange, because of the eChange: xyz

Update the description (Beschreibung) of the Auftrag.
Upload an new attachemend, if needed
Add a notice into the Auftrag that the installation instructions has been updated.
IMPORTANT: The CheckBox: "ist sichtbar für Kunden" must be activated. Only in that case the TAM-Team will get the update.

Cloud:

We have to send a mail to IT-Changemanagement-dwpbank@dwpbank.de and appops@dwpbank.de and describe the chnages in the already approved Sonderchange, because of the eChange: xyz.
We have to ask for confirmation as well. Especially AppOps have to confirm that they have read the mail and act accordingly

Update the description (Beschreibung) of the Auftrag.
Upload an new attachemend, if needed.
Add a notice into the Auftrag that the installation instructions has been updated.

🔗Helpful Links

ProcessAtWork (igrafx)

- WPIO Berechtigungskonzept
- Betriebshandbücher
- Vorhaltekapazitäten aktivieren
- Vorhaltekapazitäten Anstieg an Aufrufen

GitLab

- system-dokumentation/wpio-wpio-doc/latest/

Usage of Jira

Using WPIO Jira-Scrum Board - Guidelines and rules

Jira Spaces WPIO, WgC, Other

WPIO

- WPIO is and will be our team's Jira space
- All work items of our team are located here
- ⚠️ Exception: work items related to WgC will remain in the WGC space until project end


A.220035 - WPIO goes Cloud

- WGC is the project related space for A.22035
- All work items that are not related to *A.220035 - WPIO goes Cloud* will be moved to the WPIO space

Other

- There're currently more Jira spaces associated with/ owned by WPIO
- We will subsequently analyse these
- Perspectively we aim at migrating (moving) relevant work items to WPIO space
- The unused spaces shall then be decomissioned

Daily board: WPIO & WgC - Downstream - Scrum Board



This board is cross-spaces to keep all the team's active work items in one place.

Purpose:

- Used during team sprints to visualize the team's current downstream work.
- Support daily stand up visually with status collumns and filters


Scope:

The board only displays committed work items. That means only work items that have been pulled into either


- WPIO Team Sprint

- WgC Sprint

All other work items can be found in the Backlog Tab of the board



Filters:



★ Name filters as usual


★Q3-Committment: Shows only work items that have a parent (Big Story, Feature) that's been committed in the last PI-Planning

★ WPIO/ WgC:

- Use the sprint Filter to distinguish WgC work items from othe WPIO work items
- Use the Space-Filters to perform consistency checks

Workflow and explanation of columns

Both our WPIO and WgC Board are using the same Workflow and Status model. The goal is that every work in our team (whether it is Framework or Service development or general acitivities) can be displayed in our Sprint board. Therefore the Workflow and Status model has been standardized and reduced to a minimum in terms of columns and status.

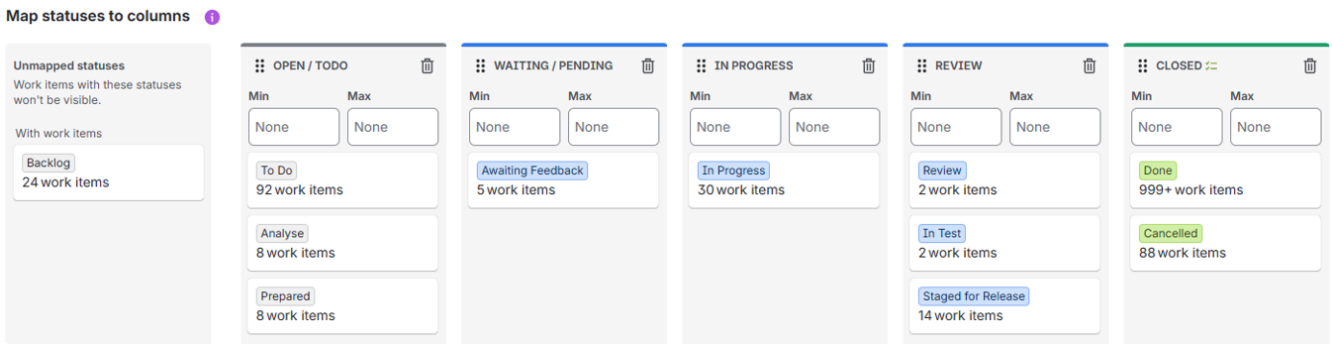

Jira Backlog	Open / To Do	Waiting / Pending	In Progress	Review	Closed

Backlog: newly generated Work items in Jira are allocated the status “Backlog”. These items are initially not described or refined nor added to a ongoing Sprint. This has to be done manually after the creation of the issue (e.g. by the creator or as a Team in our Refinement session).	**To Do**: allocated issues must be reviewed and allocated either to **Backlog** (if issue isn’t sufficient described) or **Prepared** (issue is ready for implementation)	**Awaiting Feedback**: issue is waiting or pending for feedback. Blockers or impediments that lead to an Issue to be put into this status must be made transparent to the team and discussed	**In Progress**: issue is in work (e. g. requirement is under development.), this also includes a develp	**Review**: work is under review by a team mate (e. g. code review)	Done
	Analyse: requirement must be further analyzed and refined → issue is not yet ready to be set in Progress			In Test	Cancelled
	Prepared: issue is ready to bet pulled by the team within the Sprint			Staged for Release	


The overall model is set

Workflow explanation

Status explanation

Estimations (sub page with description for sprint meetings)

Jira (spaces) Consolidation



Heute werden zwei unterschiedliche Workflows unterschieden, je nach dem ob eine Service- oder eine Framework-Entwicklung erfolgt:

- Service-Entwicklung (tendenziell eher langläufig)
  - Entwicklung
  - Testunterstützung
  - Go Live
- WPIO (Framework)

Zielsetzung des neuen Vorgehens (Entwurf):

- Gemeinsame Sicht auf Kapazitäten / Engpässe / Impediments
- Gemeinsames Planning

Definition of standardized Acceptance Criteria for Jira

This page aims to define standardized acceptance criteria for use when writing stories for Jira issues.

For this purpose, a differentiation is made between the issue types "Big Story" and "User Story", as well as with regard to the different requirements we have, e. g. Service Development and Framework.

Last update	Oct 30, 2026
Last modification	Initial Creation
Owner	@Dennis Fabi

Service Development

	Big Story	User Story
	☐ The requirement is understood and the SD story is prepared ☐ Mapping rules are specified and provided by the project ☐ The desired timeline is provided by the requestor and discussed with WPIO team ☐ Devleopment on TUA is done and dev test was successfully executed ☐ Business tests were successfully executed on TUA ☐ Staging for TUH was executed ☐ Release on PROD is prepared ☐ Release on PROD is executed	☐ Developer test successful on TUA until DATE ☐ Communication is working well between wpio and core system. ☐ minimum 1 request and response are working well without error response. ☐ Test on TUA successfully operated by business site ☐ Development staged on TUx until DATE (ready for client tests)
		Routing Data?

Framework

TMU and Cloud nodes are synchronized

Framework Version ist auf jeden Umgebungen identisch

Installationen auf TUY haben funktioniert

Version Synchronisation

WPIO consists of several hundred components/services each having its own version number. During our productive releases we normally only update some of the components (the overall installation process for all 17 nodes would take really long!)

Based on a general company rule (see sfO 27260: Testprozess Staging- und Testumgebungskonzept) after a production deployment the same application update has to be applied to all test environments as well.

Overview per environment

For an up to date list of all test environments take a look at the official environment list maintained by department SSTMG: Testumgebungen

Stage	Environment	WPIO TMU	WPIO Cloud
DEV	TUA (SDLC = Software Development LifeCycle)	no sync	no sync?
TEST	TUD (DZ)	manual	automated?
TEST	TUF (DAB,...)	manual	automated?
TEST	TUM (FI,...)	manual	automated?
TEST	TUH (SDLC)	*no sync needed (prod prerequisite)*	*no sync needed (prod prerequisite)?*
PreProd	TUY (SDLC)	*no sync needed (prod prerequisite)*	*no sync needed (prod prerequisite)?*
Prod	PROD (SDLC)	*no sync needed (baseline)*	*no sync needed (baseline)*
TEST	TUG (SKTU = Standard Customer Test Env.)	manual	(automated. WPIO not yet installed)

TEST	TUZ (Customer Training)	manual	automated?

Technical Details

Conflict detection

During synchronisation from PROD to another environment it might happen that the target the component in the target environment (<env>) is already running a newer version than the one in the source environment (PROD). In such a case the deployment gets skipped.

If a version is newer than another one gets determined based on the version string.

⚠ Version string looks different for TMU (a.b.c) and Cloud (a.b.c-x.y.z) !

TODO: ask Cloud team for the conflict detection logic...

TMU

...

Cloud

...

Responsibilities

Open Questions

- [ ] Who orders the synchronisation for an environment
  - [ ] The requester of a prod change?
  - [ ] no one, we detect differences automatically and send a trigger?
- [ ] how can we detect easily what has to be synchronized
- [ ] Who is responsible to check the success of the deployment? → depends on the stage. For stage DEV it is the development team, otherwise dwpBF (AppOps), see sfO 35251: Aufgaben dwpbank Betriebsführer im plattformzentrierten Anwendungsbetrieb, Page 7
- [ ] How do we track the activities (JIRA)
- [ ] Can we get informed if a long running synchronisation run has ended?
  - [ ] Can we get a condensed report which versions have been skipped due to conflicts?
- [ ] How can we harmonize synchronization updates between TMU and Cloud?

🌐 WPIO WPIAdmin

https://wpiadmintua.test.dwpbank.net/ TUA

https://wpiadmintus.test.dwpbank.net/ TUS

Anmeldung WPIO Admin Form - Deutsche WertpapierService Bank TUD

Anmeldung WPIO Admin Form - Deutsche WertpapierService Bank TUY

Log in with DWP Test user (dwp1020t) and OIM test password

See if your access to OIM PreProd works Identitätsselfservice

---

Anmeldung WPIO Admin Form - Deutsche WertpapierService Bank PROD

Log in with DWP Prod user and OIM Prod password


V:\WPIOnline\1C Implementierung\1C5 WebUI

V:\WPIOnline\1B Dokumentation\1B3 Implementierung\Web-UI

WPIO Audit

Audit

Zu allen Nachrichten, die den WPIO durchlaufen werden sog. Auditinformationen aufgezeichnet, anhand derer später Auswertungen, bspw. zur Durchlaufzeit, erstellt werden können.
Die Informationen werden in Form von MQ-Messages von einer Broker Route (AuditKomponente) verarbeitet und in eine Auditdatenbank geschrieben.
Diese Datenbank ist wie die AuditKomponente selbst auf einem separaten, dedizierten Knoten implementiert. Der AuditKomponente dient eine Remote Queue als Input Queue, in die von allen ESBInstanzen weiterer Servicegruppen Nachrichten eingestellt werden können. Das bedeutet einerseits, dass Auditnachrichten aufgrund ihrer Persistenz zwar nicht verloren gehen können, andererseits sind die Funktionalität des AuditFlows nur vorhanden und Abfragen gegen die Auditdatenbank nur möglich, wenn diese spezielle Servicegruppe (derzeit Servicegruppe 1) läuft.

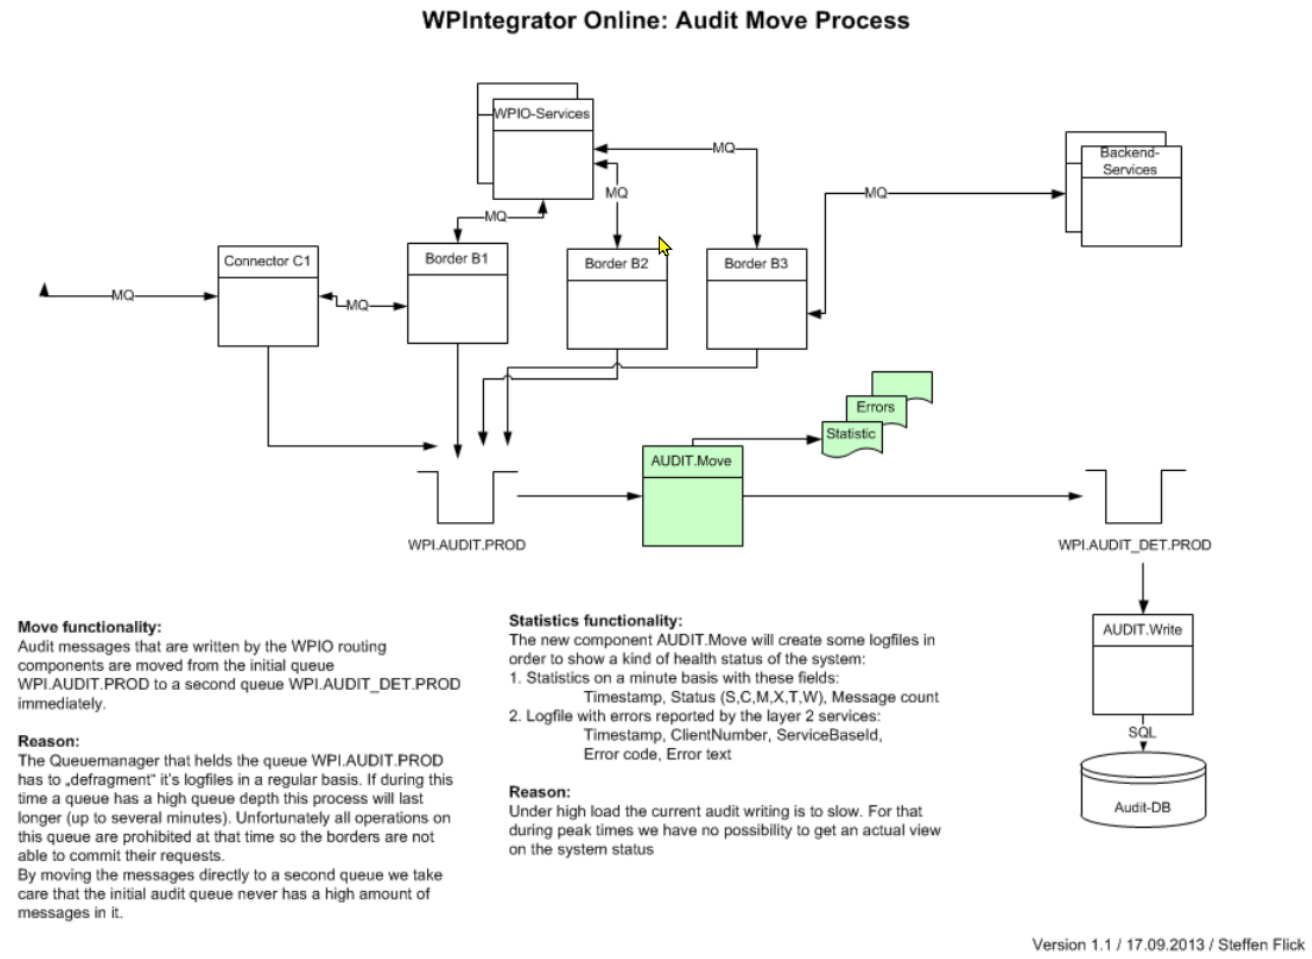

DB2

Bei Audit-DB handelt es sich um eine DB2 Datenbank mit partitionierten Tabellen. Jede Tabellenpartition enthält Datenaufkommen von einem Tag.
Es werden aktuell Daten von 40 Tagen in 40 Partitionen vorgehalten. Es sind zusätzlich 10 Partitionen in die Zukunft angelegt, damit bei einem Ausfall des cronjobs noch leere Partitionen zur Verfügung stehen.
Diese Vorauserstellung ist im Skript konfigurierbar.
Die Partitionen die älter als 40 Tage sind, werden gelöscht (drop). Die Anzahl der Tage kann über eine Konfigurationstabelle in der Datenbank eingestellt werden.
Die Audit-DB ist auf einem DB2 Cluster installiert. Zum Anlegen der verschiedenen Datenbanken wurden, wie im Installationslogbuch beschrieben, Skripte verwendet.

Archivierung der Daten


Während des täglichen Archivierungsjobs der großen Datenmengen kommt ein CPU basiertes Hardware Compression Tool zum Einsatz, dass besonders schnell umfangreiche Datenmengen komprimieren kann.
Dieses Tool (xgzip, pigz) nutzt eine spezielle Library um spezifische CPU Techniken anzuwenden. Der genaue Vorgang ist unter dem folgenden Link dokumentiert.
https://community.ibm.com/community/user/power/blogs/brian-veale1/2022/03/14/gzip-acceleration-with-aix-on-power-systems

Die mit xgzip oder pigz komprimierten Archive können mit jedem handelsüblichen gzip (bzw. gunzip) wieder entkomprimiert werden.

🔎WPIO Audit Browser

Der WPIO Audit Browser ist eine Anwendung, mittels der die über WPIO verarbeiteten Anfragen nachträglich eingesehen werden können. Weiterhin können über dieses Tool Testnachrichten an den WPIO-Cluster gesendet werden, um im Rahmen von Abnahmetests die Anfragen der Kunden zu simulieren.

> ⚠ Das Tool steht nur in den Stages DEV, TEST und PreProd zur Verfügung! In der Produktion ist stattdessen das webbasierte Tool WPIadmin zu nutzen!

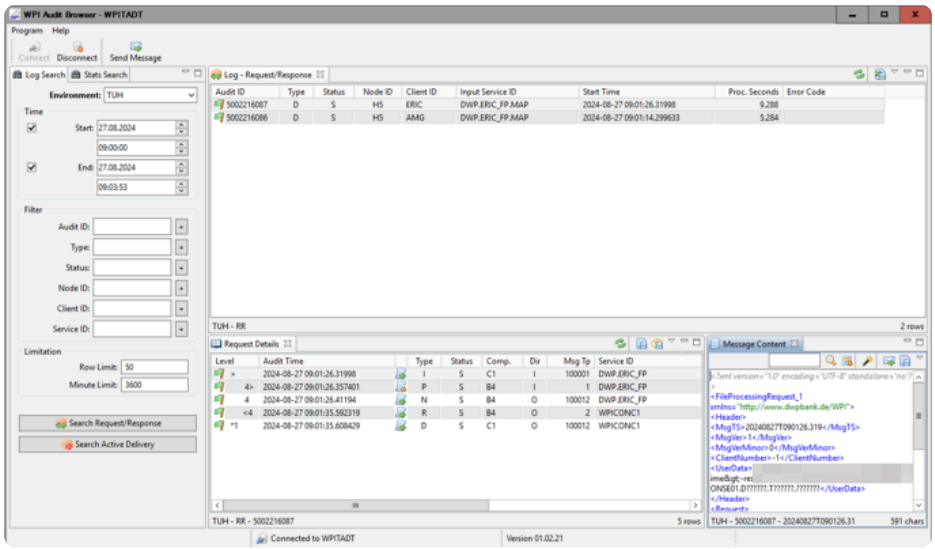

Berechtigungen beantragen

Bitte **OIM** für die Beantragung der Audit Browser Berechtigungen nutzen.

Alleine mit der Autorisierung auf die Audit Browser GUI (002885) existiert noch kein Recht Daten einzusehen.

Zusätzlich benötigt man je Stage *Entwicklung*, *Test*, *PräProd* (Abnahme) eine **DB2** Berechtigung per LDAP.

Bitte immer nur die Stage beantragen die, zwecks Erfüllung der Arbeit, auch tatsächlich benötigt wird.
Eine Begründung für den Zugriff auf die jeweilige DB Stage im OIM Auftrag muss mit angegeben werden, sonst wird der Auftrag abgelehnt.

Bei der Anmeldung im Audit Browser benötigt man die oben erwähnte LDAP Autorisierung um sich gegen die DB anbinden zu können.

SQL Fehlermeldung "Cannot connect to Database" während des Login Versuchs

Falls eine SQL Fehlermeldung "Cannot connect to Database" während des Login Versuchs erscheint, ist in diesem Fall

1. Ein Ticket per D-2500 zu eröffnen oder ein anderer Weg wäre direkt ein F-I-TS ARS-Ticket zu eröffnen.


2. Mit diesem Ticket, anschließend per Mail, an "ZZG-FITS-65022-Operation Control UNIX <oc-unix@f-i-ts.de>" mit diesem Hinweis den User zurück setzen lassen.

```
Bitte den AIX "unsuccessful_login_count" für DB2 Zugriff, zu meinem User dwpXXXX, zurücksetzen
```

Folgende Rollen können beauftrag werden:


Audit Browser Anwendung

M012_FACH_002885	Anwendung WPIO Audit Browser V 1.0

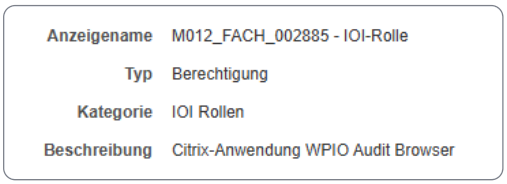


Zugriff - Entwicklung

M012_FACH_053700	WPIOAuditDB DB2 Zugriff lesend /schreibend Entwicklung

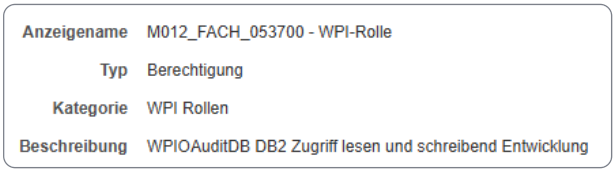

Zugriff - Test

M012_FACH_053699	WPIOAuditDB DB2 Zugriff lesend/schreibend Test

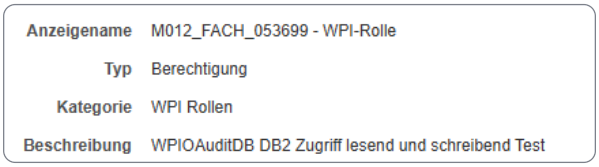

Zugriff - PräProd

M012_FACH_053698	WPIOAuditDB DB2 Zugriff lesend PräProd

Anzeigename	M012_FACH_053698 - WPI-Rolle
Typ	Berechtigung
Kategorie	WPI Rollen
Beschreibung	WPIOAuditDB DB2 Zugriff lesend PräProd

Zugriff - Prod

Der Zugriff auf Produktion wird Nutzern ausserhalb des WPIO-Teams nicht mehr bereitgestellt.

Für den **produktiven Zugriff** auf Daten bitte nur noch das ***Webfrontend WPIAdmin*** **nutzen:**
https://wpipadm.dwpbank.net/wpiadmin/

Folgende Rollen können zwecks Verfolgung der Auditdaten **per OIM** beantragt werden:

X7DWPUSR (User): Kontroll-Tätigkeiten / Basis-Monitor


X7DWPREV (Reviewer): Kontroll- Tätigkeiten / Detaillierter Zugriff auf AUDIT-Informationen

---

Anzeigename	M012_FACH_053697 - WPI-Rolle
Typ	Berechtigung
Kategorie	WPI Rollen
Beschreibung	WPIOAuditDB DB2 Zugriff lesend Prod


Aufruf des Audit Browsers

...erfolgt über die MyWorkplace (im Windows Menü)

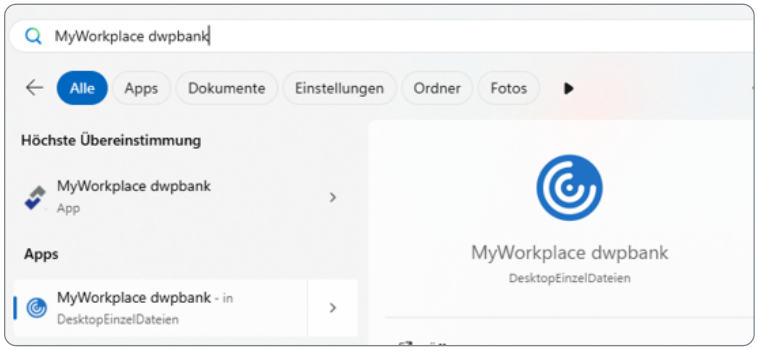

1. Nach Start der Anwendung müssen initial diverse Komponenten des Workplace geladen werden.
   Zwischen dem Start der Anwendung und dem ersten Klick auf das Anwendungssymbol vergeht ein wenig Zeit.
   Bei dem zweiten Start wird die Anwendung allerdings sehr viel schneller ausgeführt.
2. Sollte die Anwendung nicht starten ist es hilfreich einen „Disconnect“ des workplace durchzuführen.
   Dieser befindet sich direkt unter „Favoriten“. Danach den Workplace neu starten und die Anwendung nochmals

aufrufen.

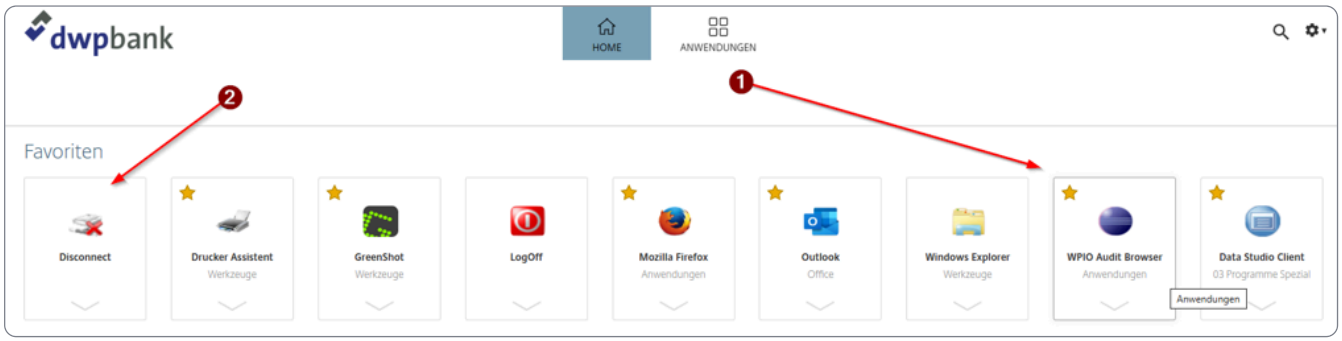


Falls sie folgendes Icon (**ABNAHME**-WPIO Audit Browser) sehen, **bitte NICHT! verwenden:** 

Verbinden zu einer WPIO Audit Datenbank

Wenn die Anwendung gestartet ist, funktioniert alles wie gehabt. Nur die Parameter für den Connect müssen angepasst werden

WPI Audit Login (DB2 connect)

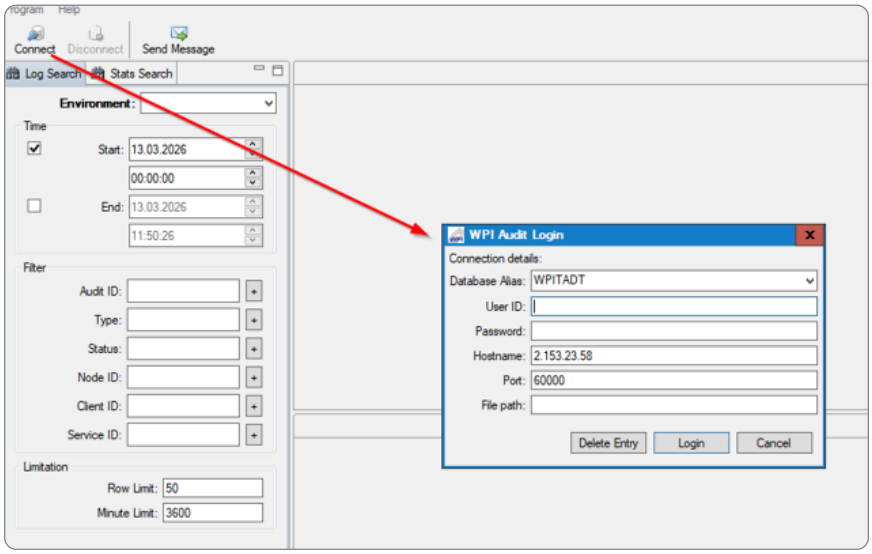


Ausfüllen der Felder mit folgenden Parametern:

Stage / Parameter	**Entwicklung TU: E, A, O, S**	**Test TU: D,F,G,H,K,M,Z**	**Abnahme TU: Y**	**Produktion**
Database Alias	WPI**E**ADT	WPI**T**ADT	WPI**A**ADT	WPI**P**ADT

User ID	**wpiadt**	**Persönliche UserId**	**Persönliche UserId**	**Persönliche UserId (HPU-Berechtigung)**
Password	Telefonisch anfragen (wpio Team)	LDAP Passwort	LDAP Passwort	LDAP Passwort
Hostname	2.153.**31.54**	2.153.**23.58**	2.153.**13.98**	2.153.**3.108**
Port	60000			

„*Send Message*“ - MQ Dialog

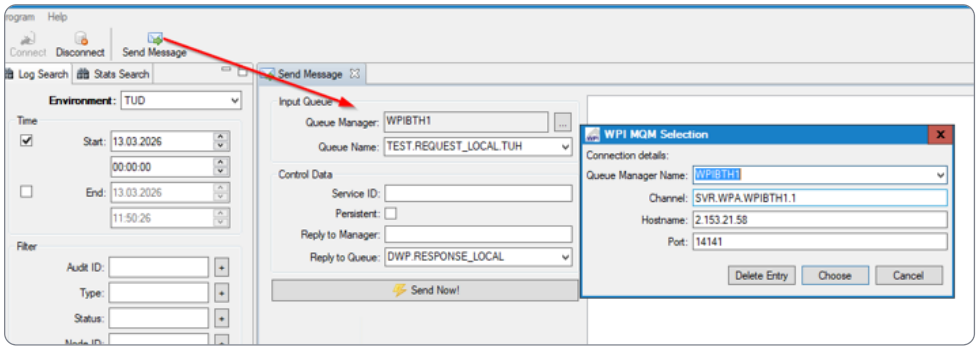

Im **Channel** Namen ist auch der QManager Name integriert:

Bsp.: „SVR.WPA.***WPIBES1***.1“ = roter Text entspricht **QMgr**. Name

Send Message (MQ Connect)

TUS1/channel= SVR.WPA.WPIBES1.1

TUS1/hostname=2.153.29.62

TUS1/port=14141

TUS5/channel= SVR.WPA.WPIBES5.1

TUS5/hostname=2.153.29.63

TUS5/port=14141

TUA1/channel= SVR.WPA.WPIBEA1.1

TUA1/hostname=2.153.29.86

TUA1/port=14141

TUA5/channel= SVR.WPA.WPIBEA5.1

TUA5/hostname=2.153.29.88

TUA5/port=14141

TUD1/channel=SVR.WPA.WPIBTD1.1

TUD1/hostname=2.153.21.105

TUD1/port=14141

TUD5/channel=SVR.WPA.WPIBTD5.1

TUD5/hostname=2.153.21.106

TUD5/port=14141

TUF1/channel=SVR.WPA.WPIBTF1.1

TUF1/hostname=2.153.21.119

TUF1/port=14141

TUF5/channel=SVR.WPA.WPIBTF5.1

TUF5/hostname=2.153.21.120

TUF5/port=14141

TUG1/channel=SVR.WPA.WPIBTG1.1

TUG1/hostname=2.153.21.112

TUG1/port=14141

TUG5/channel=SVR.WPA.WPIBTG5.1

TUG5/hostname=2.153.21.113

TUG5/port=14141

TUK1/channel=SVR.WPA.WPIBTK1.1

TUK1/hostname=2.153.21.91

TUK1/port=14141

TUK5/channel=SVR.WPA.WPIBTK5.1

TUK5/hostname=2.153.21.92

TUK5/port=14141

TUM1/channel=SVR.WPA.WPIBTM1.1

TUM1/hostname=2.153.21.140

TUM1/port=14141

TUM5/channel=SVR.WPA.WPIBTM5.1

TUM5/hostname=2.153.21.141

TUM5/port=14141

TUQ1/channel=SVR.WPA.WPIBTQ1.1

TUQ1/hostname=2.153.21.126

TUQ1/port=14141

TUQ5/channel=SVR.WPA.WPIBTQ5.1

TUQ5/hostname=2.153.21.127

TUQ5/port=14141

TUV1/channel=SVR.WPA.WPIBTV1.1

TUV1/hostname=2.153.21.84

TUV1/port=14141

TUV5/channel=SVR.WPA.WPIBTV5.1

TUV5/hostname=2.153.21.85

TUV5/port=14141

TUZ1/channel=SVR.WPA.WPIBTZ1.1

TUZ1/hostname=2.153.21.133

TUZ1/port=14141

TUZ5/channel=SVR.WPA.WPIBTZ5.1

TUZ5/hostname=2.153.21.134

TUZ5/port=14141

TUH1/channel=SVR.WPA.WPIBTH1.1

TUH1/hostname=2.153.21.58

TUH1/port=14141

TUH5/channel=SVR.WPA.WPIBTH5.1

TUH5/hostname=2.153.21.59

TUH5/port=14141

TUY1/channel= SVR.WPI.WPIBA01.1

TUY1/hostname=2.153.11.62

TUY1/port=14141

TUY2/channel= SVR.WPI.WPIBA02.1

TUY2/hostname=2.153.11.63

TUY2/port=14141

TUY5/channel= SVR.WPI.WPIBA05.1

TUY5/hostname=2.153.11.64

TUY5/port=14141

🏢 WPIO dwpSoftware team

Public holidays in Hungary in 2025 - On-call duty calendar

Date	Day of the week	Occasion	On-call duty required	Responsible
15.03.2025	Samstag	1848 Revolution		
18.04.2025	Freitag	Karfreitag		
21.04.2025	Montag	Ostern		
01.05.2025	Donnerstag	Tag der Arbeit		
02.05.2025	Freitag	Brückentag	yes	
09.06.2025	Montag	Pfingsten		
20.08.2025	Mittwoch	Day of St. Stephan	yes	
23.10.2025	Donnerstag	1956 Revolution	yes	
24.10.2024	Freitag	Brückentag	yes	
24.12.2025	Mittwoch	Weihnachten		
25.12.2025	Donnerstag	Weihnachten		
26.12.2025	Freitag	Weihnachten		
29.12.2025	Montag	Arbeitstag	yes	
30.12.2025	Dienstag	Arbeitstag	yes	

Knowledge base

Roles and responsibilities

Roles and responsibilities in WPIO team

Legende

Abbreviation	Role	Description
R	Responsible	Responsible (also recommender) Those who are responsible for the correct completion of the task.[7] There is at least one role with a participation type of responsible, although others can be delegated to assist in the work required.
A	Accountable	Accountable (also approver or final approving authority) The one ultimately answerable for the correct and thorough completion of the deliverable or task, the one who ensures the prerequisites of the task are met and who delegates the work to those responsible. In other words, an accountable must sign off (approve) work that responsible provides. There must be only one accountable specified for each task or deliverable.
C	Consulted	Those whose opinions are sought, typically subject-matter experts, and with whom there is **two-way communication**.
I	Informed	Those who are kept up-to-date on progress, often only on completion of the task or deliverable, and with whom there is just **one-way communication**.

RACI matrix

Topic	**Aufgabe (Deutsch)**	**Task (English)**	**Roles**					**Description**
			WPIO TIETE Team (TAV, FAV)	WPIO BUD Team	Product owner	Test-management	Zsigmond	
WPIO Framework								
	Schwachstellenmanagement	Vulnerability management						
	Identifikation von Schwachstellen	Identification of vulnerabilities	A, R	R				
	Risikobewertung, Festlegung der Maßnahmen	Risk assessment, definition of measures	A, R	C,I				
	Implementierungstätigkeiten	Implementation related activities	A, R	R				in scope: XGen, Java SpringBoot out of scope: DB2, Derby, Postgres
	Architektur Entscheidungen	Architectural decisions	A, R	C, I				
	Betrieb	Operation	A, R	R				Act proactively if a threat to smooth operation is identified.
	WPTicket	WPTicket			I			
	Ticket Bearbeitung	Ticket processing	A, R	R			R	
	Analyse, Fehlerbehebung	Analysis, troubleshooting	A, R	R				
	Rufbereitschaft	On call duty	A, R	R				
	Change- und Releasemanagement	Change- and release management Coordination of the release preparation						
	Releaseprozess	Release preparation	A	R				
		• ◦ Create a Releasepaket in SBM	A, R	R				

		◦ Create a Testthema in SBM ◦ Link Testthema to Releasepaket ◦ Upload the test result (PDF file) from ALM to the Testthema						
	Sonderchanges / eChanges	Sonderhange and eChange	A, R	R				WPIO BUD team is responsible only for the technical changes. The business changes are handeled by the business team (reporter / requester)
	Testbetrieb	Test execution / operation						
	WPIO Framework Komponenten	WPIO Framework components	A,R	R				
	WPIO fachlichen Services	WPIO business services	I, C	I, C	A, R			The business team is responsible for testing.
	Version Synchronisation	Version synchronisation	A, R	R	~~A, I~~			
	Monitoring (WPIO von Dienst)	Monitoring	A,R	R				- **Operational monitoring**: After the change has been implemented, a check must be carried out to ensure that everything is working as expected.
	Ressourcenplanung	resource planning						
	RUN	for run activities	A, R	I			I	
	Projekte	for projects	C	I			A, R	
	Koordination der Tätigkeiten des WPIO BUD Teams	Coordination of the activities of the WPIO BUD team						
	RUN	for run activities	A,R	I			I	
	Projekte	for projects	C	I			A,R	
Projektaufträge / Project orders								
	Fachliche Services (business services)	Business services						Neither the WPIO TIETE team nor the WPIO BUD team is responsible for implementation. The team members are on loan for the projects that have commissioned changes to business services.
	Projektmanagement	project management			A,R			
	Koordination	coordination	C		A,R			
	Qualitätssicherung	Quality assurance	C		A,R			
	Erstellung der Spezifikation	Creation of the specification			A,R			
	Schätzungen	Provide effort estimate	C	C			A,R	
	Change- und Releasemanagement							
		• Create a Releasepaket in SBM		R	A, R			

		• Create a Testthema in SBM • Link Testthema to Releasepaket • Upload the test result (PDF file) from ALM to the Testthema						

Coordination of release preparation

Legende

Abbreviation	Role	Description
R	Responsible	Responsible (also recommender) Those who are responsible for the correct completion of the task.[7] There is at least one role with a participation type of responsible, although others can be delegated to assist in the work required.
A	Accountable	Accountable (also approver or final approving authority) The one ultimately answerable for the correct and thorough completion of the deliverable or task, the one who ensures the prerequisites of the task are met and who delegates the work to those responsible. In other words, an accountable must sign off (approve) work that responsible provides. There must be only one accountable specified for each task or deliverable.
C	Consulted	Those whose opinions are sought, typically subject-matter experts, and with whom there is **two-way communication**.
I	Informed	Those who are kept up-to-date on progress, often only on completion of the task or deliverable, and with whom there is just **one-way communication**.

Effort estimate of the coordination related activities

2 mandays

RACI matrix

No #	Task	Roles				Description
		Releasepaket-Verantwortlicher (TIETE)	Responsible for the WPIO release (WPIO BUD team)	Change- und Request Service Line (ITKFT)	Business department or Product owner	
1	Organize a meeting two weeks before the "registration deadline" (Anmeldeschluss) to review the WPIO release and the open points.	C, I	A, R	C		The release is registered by the TIETE team in SBM. Participants: - Release coordinator from the WPIO BUD team - The project team members who have registered their changes in SBM for release. (Project manager or a project team member on behalf of the project management) Distribution of the meeting minutes to all participants and WPIO TAV/FAV
2	Create all SBM items and communicate it to the WPIO BUD team. (Anwendung, Testthema)					
3	In case of a technical task	A, R	C			Technical changes to the WPIO Framework
4	In case of a business task	C, I	C		A, R	
5	Identify the responsible persons for the WPIO release	C, I	A, R			
6	Clarify outstanding issues and ensure that all SBM activities are completed by the "registration deadline". (Anmeldeschluss)		R	C	A, R	
7	Create a Jira issue with sub-tasks for the release preparation, set the deadlines and assign them to the appropriate team members	C, I	A, R			

8	Have installation instructions for TUY created and ensure that all WPIO Jira tasks have been taken into account.	C	A, R	I		
9	Identify the responsible person of the creation of install guides	I	R	C	A	
10	Upload or have installation instructions for TUY uploaded to SBM.	C,I	R	I	A	
11	Ensure that SBM is correct for "Ready for TUY" and for "QG TUY Rel.x.xx".		A, R	C		
12	Participate in the "QG TUY Rel.x.xx" meeting for WPIO		I	C	A, R	
13	Have installation instructions for production created and ensure that all WPIO Jira tasks have been taken into account.	C	A, R	I		
14	Upload or have installation instructions for production uploaded to SBM.	C,I	R	I	A	
15	Ensure that SBM is correct and complete for "QG Prod Rel.x.xx".		A, R	C		
16	Participate in the meeting "QG Prod Rel.x.xx" for WPIO		I	C	A, R	
17	Participate in the schedule (Ablaufplan) meeting for the release	I	C	I	A, R	
18	Verify schedule (Ablaufplan)	I	C	I	A, R	
19	Participate at the release deployment on Saturday (if needed)	I	C	I	A, R	
20	Test / monitor the new release, if everything works as expected	I	C	I	A, R	
21	Update test environment based on PROD environment (synchronisation of the services)	I	C	I	A, R	

Preparation of WPIO releases

Release coordinators in 2025 & 2026

Release overview: [WPIO releases - EPICS] Issue Navigator - dwpbank

2025


Month	Release ID	Go live date	Release coordinator
January	5.17		-
February	5.18	22.02.2025	@Laszlo Kerepeszki
March	5.19	22.03.2025	@Ilian Nakov
April	5.20	26.04.2025	@Eglee Vasquez
May	5.21	24.05.2025	@Julian Keranov
June	5.22	21.06.2025	@Kristina Nikolova
July	5.23	26.07.2025	@Laszlo Kerepeszki
August	5.24	23.08.2025	@Ilian Nakov
September	5.25	20.09.2025	@Eglee Vasquez
October	5.26	18.10.2025	@Julian Keranov

November	5.27	15.11.2025	@Kristina Nikolova
December	5.28	13.12.2025	@Laszlo Kerepeszki

2026

Month	Release ID	Go live date	Release coordinator
January	5.29	Jan 24, 2026	@Ilian Nakov
February	5.30	Feb 21, 2026	@Eglee Vasquez
March	5.31	Mar 21, 2026	@Julian Keranov
April	5.32	Apr 25, 2026	@Kristina Nikolova
May	5.33	May 23, 2026	@Laszlo Kerepeszki
June	5.34	Jun 27, 2026	@Julian Keranov
July	5.35	Jul 25, 2026	@Eglee Vasquez
August	5.36	Aug 22, 2026	@Ilian Nakov
September	5.37	Sep 19, 2026	@Kristina Nikolova
October	5.38	Oct 17, 2026	@Laszlo Kerepeszki
November	5.39	Nov 14, 2026	@Ilian Nakov
December	5.40	Dec 12, 2026	@Eglee Vasquez

Automated creation of Jira issues

Task	Attributes
Create a Jira epic	When creating a task, set the following attributes: • **Epic name**: Release preparation - R**<x.xx>** • **Summary**: Release preparation - R**<x.xx>** • **Due date**: go live date + 1 workday according to release calendar • **Assignee**: Name of WPIO team member, who is responsible for coordinating of the release preparation • **Labels**: Release_preparation_R**<x.xx>**
Create stories and sub tasks	 Choose "Create stories for release preparation" menu item. This automation • **creates** the stories and their sub tasks • Sets the **status** of epic, stories and sub-tasks to backlog • sets the **assignee** ◦ The assignee of all stories and sub-tasks is the same as the assignee of the epic. ◦ The only one exception is: "R**<x.xx>** | 12 - Post installation actions" → "Synchronizations of the environments" sub task, which is assigned to Loránd Ternesz • sets the **label**: The label of all stories and sub-tasks is the same as the label of the epic. • sets the **due date** according to the table below.
Query	You can run this query for a list of the issues that have been created: project = "Smart process automation" AND labels = Release_preparation_R**<x.xx>** ORDER BY due ASC, summary ASC

The issues and the deadlines are added to the Kalender - WPIO - Confluence (dwpbank.net) calendar.

Issue type	Issue name	Due date	Responsible	suggestions for modification
Epic	Release preparation - R**<x.xx>**	Go live date (D) + 1 workday	Release coordinator	
Story	01 - Review of the Jira issues	D - 29 workdays	Release coordinator	Review of the Jira tasks for this Release. Determine who will attend the QG 'Y' and QG 'Prod'
Story	02 - Create Releasepaket, Anwendung and Testthema	D - 24 workdays	Release coordinator	Check SBM items are created:

				Releasepaket, Anwendung and Testthema
sub-task	Create Releasepaket, Anwendung and Testthema in SBM	D - 24 workdays	Requester of the Jira issue	törölhető
Story	03 - Review Jira issues and Anwendung	D - 24 workdays	Release coordinator	törölhető
Story	04 - Anmeldeschluss (registration deadline)	D - 20 workdays	Release coordinator	
sub-task	Perform code review	D - 20 workdays	WPIO developer	
sub-task	Final review	D - 20 workdays	Release coordinator	
Story	05 - Check the deliverables for "ready for TUY"	D - 17 workdays	Release coordinator	Check TUY Installation Instructions
Story	06 - Ready for TUY (Bereit für TUY)	D - 16 workdays	Release coordinator	Check SBM - Ready for TUY (Bereit für TUY)
Story	07 - Quality Gate TUY meeting	D - 14 workdays	TIETE team member	
Story	08 - Check TUY Installation	D - 11 workdays	Release coordinator	
Story	09 - Check the deliverables for "ready for PROD"	D - 8 workdays	Release coordinator	Check PROD Installation Instructions
Story	10 - Ready for PROD (Bereit für PROD)	D - 6 workdays	Release coordinator	Check SBM - Ready for PROD (Bereit für PROD)
Story	11 - Quality Gate PROD meeting	D - 4 workdays	TIETE team member	
Story	12 - Support of deployment to PROD	D	WPIO developer	
Story	13 - Post installation actions	D + 1 workday	Release coordinator	
sub-task	Synchronizations of the environments	D + 1 workday	~~Loránd Ternesz~~ Release coordinator	
sub-task	Update CSV & XSD files	D + 1 workday	~~Release coordinator~~ WPIO developer	
sub-task	Check synchronization	D + 1 workday	Release coordinator	törölhető

Release 5.10

Deadline (DD.MM.YYYY)	Task description	Responsible	Status
14.06.2024	Ready for release Make sure that there are no open issues and that the deployment document for production has been created and loaded into SBM (only in the application "ANW055623: WgC: WPIO Release 5.10"). TODO: • Update deployment document @Eglee Vasquez • Change the name of responsible in SBM from Laurent to Eglee @Laurent Devos	@Eglee Vasquez	
18.06.2024	QG Prod Rel.5.10 A representative of WPIO team must attend this meeting.	@Holger Platz @Abdelillah Settah	
22.06.2024	Deployment to PROD TODO: • One WPIO BUD team member has to support the deployment. https://wiki.tools.dwpbank.net/itswiki/ITSUN/RufbereitschaftWIIWPIO • Ensure hat the merge request created and all configurations are available. • Send the merge request to FI-TS, if necessary	@Laszlo Kerepeszki	

Release 5.11

Deadline (DD.MM.YYYY)	Task description	Responsible	Status
17.06.2024	Organize a meeting and conduct a review of the WPIO Jira tasks. The list must be complete and the tests almost done TODO: • Participants of the meeting: ◦ @Holger Platz ◦ somebody from WPIO goes cloud project ▪ @Abdelillah Settah ▪ @Nils Wiemer ◦ @Georgios Eliopoulos ◦ WPIO BUD team members - everybody • Review the Jira tasks and their status assigned to the release • Review Anwendungen in SBM (The status must be "ready") • Clarify, if there is any activity to Hybrid Cloud.	@Eglee Vasquez	
21.06.2024	Ensure that all WPIO applications are logged off in Release. TODO: • Review again the Jira tasks and their status assigned to the release • Review Anwendungen in SBM (The status must be "ready") • Execution of ALM Octane tests (make sure that the business side of the test is completed on time)	@Eglee Vasquez	
24.06.2024	“Anmeldeschluss 5.11” (registration deadline) Final review of the WPIO release in SBM	@Eglee Vasquez	
27.06.2024	Upload the document for deployment in TUY to an SBM application. The other applications should reference this application. TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM	@Eglee Vasquez	