Release 5.11

Deadline (DD.MM.YYYY)	Task description	Responsible	Status
17.06.2024	Organize a meeting and conduct a review of the WPIO Jira tasks. The list must be complete and the tests almost done TODO: • Participants of the meeting: ◦ @Holger Platz ◦ somebody from WPIO goes cloud project ▪ @Abdelillah Settah ▪ @Nils Wiemer ◦ @Georgios Eliopoulos ◦ WPIO BUD team members - everybody • Review the Jira tasks and their status assigned to the release • Review Anwendungen in SBM (The status must be "ready") • Clarify, if there is any activity to Hybrid Cloud.	@Eglee Vasquez	
21.06.2024	Ensure that all WPIO applications are logged off in Release. TODO: • Review again the Jira tasks and their status assigned to the release • Review Anwendungen in SBM (The status must be "ready") • Execution of ALM Octane tests (make sure that the business side of the test is completed on time)	@Eglee Vasquez	
24.06.2024	“Anmeldeschluss 5.11” (registration deadline) Final review of the WPIO release in SBM	@Eglee Vasquez	
27.06.2024	Upload the document for deployment in TUY to an SBM application. The other applications should reference this application. TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM	@Eglee Vasquez	

	• All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • Check if everything is ready (all intended installations have Anwendung, SBM status should be "ready") • The SBM status and status of the Releasepaket have to be set to "ready" by the owner of the SBM Releasepaket.		
28.06.2024	Ready for TUY Everything must be ready for deployment in TUY TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM • All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • Check if everything is ready (all intended installations have Anwendung, SBM status should be "ready") • The SBM status and status of the Releasepaket have to be set to "ready" by the owner of the SBM Releasepaket.	@Eglee Vasquez	
02.07.2024	QG TUY Rel.5.11 Teilnahme an dem Meeting für das WPIO Release TODO: • Participants of the meeting: ◦ @Holger Platz ◦ somebody from WPIO goes cloud project ▪ @Abdelillah Settah ▪ @Nils Wiemer ◦ @Georgios Eliopoulos ◦ WPIO BUD team members - everybody • Review the Jira tasks and their status assigned to the release • Review Anwendungen in SBM (The status must be "ready") The invitation will be sent by release management team.	@Eglee Vasquez	
11.07.2024	Upload the document for deployment in **PROD** to an SBM application. The other applications should reference this application.	@Eglee Vasquez	

	TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM • All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • Deployments: ◦ Canary release: on Friday. ◦ Full deployment: on Saturday.		
12.07.2024	Ready for release (Bereit für Release) Make sure that there are no open issues and that the deployment document for production has been created and loaded into SBM (only in the application "ANW????: WgC: WPIO Release 5.11"). TODO: • Update deployment document @Eglee Vasquez • Change the name of responsible in SBM from Laurent to Eglee @Laurent Devos	@Eglee Vasquez	
16.07.2024	QG Prod Rel.5.11 A representative of WPIO team must attend this meeting.	@Laurent Devos	
20.07.2024	Deployment to PROD TODO: • One WPIO BUD team member has to support the deployment. ITSUN/RufbereitschaftWIIWPIO - ITSWiki (dwpbank.net) • Create 2 merge requests and send them to FI-TS	@Ilian Nakov	
22.07.2024	Update of CSV & XSD files in the V drive, if necessary (in case of layer 2 schema update)	@Loránd Ternesz (Deactivated) @Eglee Vasquez	

22.07.2024	Version synchronisation	@Loránd Ternesz (Deactivated)	

Release 5.12

Jira Filter to dwp Release 5.12: [WPIO Release 5.12] Issue Navigator - dwpbank

Deadline (DD.MM.YYYY)	Task description	Responsible (R)	Accountable (A)	Status, Remark
08.07.2024	**Review of the Jira issues** Organize a meeting to conduct a review of the WPIO Jira tasks.			Done
15.07.2024	**Create Releasepaket, Anwendung and Testthema**	@Laszlo Kerepeszki	@Laszlo Kerepeszki	Done
	• Create a Jira issue for development	Reporter of the Jira issue		Done
	• Create Releasepaket, Anwendung and Testthema in SBM	Reporter of the Jira issue or Fachbereich	Assignee of the Jira issue	Done
	• Add Releasepaket, Anwendug and Testthema in the Jira issue into comment. [Anwendung id must be added into "Release:" field. Format is ANW055795.]	Assignee of the Jira issue		Done
15.07.2024	**Review Jira issues and Anwendung**	@Laszlo Kerepeszki	@Laszlo Kerepeszki	done
	Conduct a review of the WPIO Jira tasks. The list must be complete and the tests almost done • Participants of the meeting: ◦ WPIO team members: ◦ @Ilian Nakov ◦ @Julian Keranov ◦ @Laszlo Kerepeszki ◦ @Eglee Vasquez ◦ somebody from WPIO goes cloud project ▪ @Abdelillah Settah ▪ @Nils Wiemer ◦ @Georgios Eliopoulos **TODO**: • Review the Jira tasks and their status assigned to the release • Review Anwendungen in SBM • Clarify, if there is any activity to Hybrid Cloud.	@Laszlo Kerepeszki	@Laszlo Kerepeszki	The next Jiras are OK for release: WPIO-994 WPIO-1054 WPIO-1040 it seems to be that the next Jiras will be postponed becauseof the lack of tests: (Missing anwendung also) WPIO-900 WPIO-1033 No Hybrid Cloud activity.
22.07.2024	**"Anmeldeschluss 5.12" (registration deadline)**			
	Perform code review on the P drive. Document the result of the code review. (**P:_Testdokumentation\#2024_1_Releases\Release 5.12\CodeReview\ITKFT**)	Assignees of the Jira issues		WPIO-994 - Done WPIO-999 - Done WPIO-1040 - Done WPIO-1054 - Done

	Final review TODO: • Check the code reviews (**P:_Testdokumentation\#2024_1_Releases\Release 5.12\CodeReview\ITKFT**) • Ensure that all WPIO applications are logged off in Release. (NRP status = angemeldet, Testthema must be ready) • Check the status of the Anwendung. It must be "ready" in SBM. • Review again the Jira tasks and their status assigned to the release • Review Releasepaket, Anwendug and Testthema in SBM (The status must be "ready") • Execution of ALM Octane tests (make sure that the business side of the test is completed on time) • Create installation instruction (**v:\WPIOnline\1B Dokumentation\1BW Installation Instruction\5.12 August Release**) • Final review of the WPIO release in SBM		@Laszlo Kerepeszki	NRP are checked and OK. Done
25.07.2024	**Check the deliverables for "ready for TUY"**			
	Upload the document for deployment in TUY to an SBM application. The other applications should reference this application. TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM • All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • Check if everything is ready (all intended installations have Anwendung, SBM status should be "ready") • The SBM status and status of the Releasepaket have to be set to "ready" by the owner of the SBM Releasepaket.		@Laszlo Kerepeszki	Done
26.07.2024	**Ready for TUY (Bereit für TUY)**			
	Everything must be ready for deployment in TUY **TODO**: • The PDF file has to be uploaded in one WPIO Anwendung in SBM • All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • SBM Releaasepaket status has to be "Bereit für TUY" • Check if the execution of ALM Octane tests completed		@Laszlo Kerepeszki	NRP000767 (ANW056350) was removed from August Release 5.12 because test docu couldn't be finished in time. (WPIO-999 , WPIO-988) Installationguide_TUY_Synchronization_5.12-Release-20240817-V1.1_en.pdf has been uploaded to SBM. Done
30.07.2024	**Quality Gate TUY Rel.5.12**			
	The invitation will be sent by release management team. The release coordinator invites the mandatory participants. Possible participants of the meeting: ◦ @Holger Platz ◦ somebody from WPIO goes cloud project ▪ @Abdelillah Settah ▪ @Nils Wiemer ◦ @Georgios Eliopoulos ◦ @Laurent Devos		@Laurent Devos	WPIOR-12: R5.12 I 07 - Quality Gate TUY meeting Done Key / Assignee WPIOR-12 / LD Lau Synced just now · 1 item
02.08.2024	**Check TUY Installation**			

	Check the wpio installation in TUY based on the installation manual TUY.		@Laszlo Kerepeszki	Done
07.08.2024	**Upload PROD installation PDF** Upload the document for deployment in PROD to the SBM Anwendung. The other applications should reference this application. TODO: • The PDF file has to be uploaded in one WPIO Anwendung in SBM • All other WPIO Anwendungen in SBM must refer to the that WPIO Anwendung. • Deployments: ◦ Canary release: on Friday. ◦ All changes which are not part of the Canary release: on Saturday ◦ Full deployment: on Monday.		@Laszlo Kerepeszki	WPIOR-13: R5.12 I 08 - Check the deliverables for "ready for PROD" Done
09.08.2024	**Review of ready for release (Bereit zum Release)** Make sure that there are no open issues and that the deployment document for production has been created and loaded into SBM (only in the application "ANW????: WgC: WPIO Release 5.11"). TODO: • Update deployment document @Eglee Vasquez • Change the name of responsible in SBM from Laurent to Eglee @Laurent Devos		@Laszlo Kerepeszki	WPIOR-14: R5.12 I 09 - Ready for PROD (Bereit für PROD) Done
13.08.2024	**Quality Gate PROD meeting** QG Prod Rel.5.12 A representative of WPIO team must attend this meeting.		@Laurent Devos	WPIOR-15: R5.12 I 10 - Quality Gate PROD meeting Done
17.08.2024	**Support of deployment to PROD** TODO: • One of the WPIO BUD team members has to support the deployment. ITSUN/RufbereitschaftWIIWPIO - ITSWiki (dwpbank.net) • Create 2 merge requests and send them to FI-TS		**To be defined**	WPIOR-16: R5.12 I 11 - Support of deployment to PROD Done
19.08.2024	**Post installation actions:**			WPIOR-17: R5.12 I 12 - Post installation actions Done
	Synchronizations of test environments	@Loránd Ternesz (Deactivated)		WPIOR-18: Synchronizations of the environments Done
	Update of CSV & XSD files in the V drive, if necessary (in case of layer 2 schema update)	Assignees of the Jira issues		WPIOR-19: Update CSV & XSD files Done
	Check synchronization and \1B Dokumentation\1B5 Schnittstellen updating		@Laszlo Kerepeszki	WPIOR-20: Check synchronization Done

SBM + ALM Octane

Change_Anleit... es.docx
02 Jun 2026, 06:54 PM



ALM_Octane_A... HU.docx
02 Jun 2026, 06:54 PM

Knowledge transfer

Schedule

Internal trainings - schedule

Where to store the presentations and descriptions of the topics?

1. Create a subpage of this Confluence page: Topics - WPIO - Confluence (dwpbank.net)
2. Upload your presentation to the new subpage
3. Insert the link of the subpage into the table next to your topics on this page.

Schedule 2026 H1

Topic	Confluence link	Responsible	Deputy	Ranking	Deadline	Presentation date	Status
Referesh WPIO ERIC Passthrough xgen solution based on the new AMG_NEK client	DWP.ERIC_PASS_FP passthrough	@Laszlo Kerepeszki			2026 H1	17/03/2026	done
Discuss Production problem - FI.SPARPLAN Add all FI savings plan serviceoperations to the 'Technical user determination' functionality. Echange: Change#: 2026012800013		@Laszlo Kerepeszki			2026 H1	21/05/2026	done

DWP.ORDER_FP config for a new Client	Client access rights setup for DWP.ORDER_FP	@Eglee Vasquez			2026 H1	Mar 18, 2026	done
Service and Client Decommission	Service and Client Decommission	@Eglee Vasquez			2026 H1	Mar 25, 2026	done
Fragement files Cloud operation, additional files, technical changes and changes with regards to content since 2026	Re: WP3 Landscape and WP3 switch (structure, usage, deployment)	@Julian Keranov			2026 H1	02.06.2026	done
X-Gen 4.17 migration steps	4.13 → 4.17 - WPIO - Confluence	@Ilian Nakov			2026 H1	30.06.2026	open
Networkproxy, system proxy configuration for Cloud for Xgen service		@Kristina Nikolova			2026 H1	30.06.2026	open

Schedule 2025 H2

Topic	Confluence link	Responsible	Deputy	Ranking	Deadline	Presentation date	Status
How to use OpenSearch (DEV and Test environments) and Kibana (PreProd and Prod) for log file analysis OpenSearch Dashboards - WPIO - Confluence	OpenSearch Dashboards - WPIO - Confluence	@Kristina Nikolova		1	ASAP	27.10.2025	DONE
MQ connectivity guide API to dwpbank for request & reply • To check, if the document is up-to-date • Check which changes of the document are necessary to • translate? also to English and keep both versions (German and English) synchronously up-to-date		@Georgios Eliopoulos		9	End of December		open
~~ROR configuration~~		@Ilian Nakov	@Julian Keranov -	~~3~~	~~31.07.2025~~		~~open~~
FP connectivity guide to be created Currently we don't have an FP connectivity guide for internal and external usage (for the customers).		@Georgios Eliopoulos @Abdelillah Settah		10	End of December		open
S3 in the cloud environment: S3 introduction, buckets, and access files from S3 buckets	Introduction to S3 - WPIO - Confluence	@Kristina Nikolova				27.10.2025	DONE
Terraform	Introduction to Terraform - WPIO - Confluence	@Kristina Nikolova			2025 Q2	27.10.2025	DONE

FI-TS infrastructure components (proxy, end points, password, certificates) 2 Services: SMARAGD and FI.CASHMGMT - they communicate over REST call To be described what are the activities for the XGen developers to establish this kind of secure connection. @Ilian Nakov : What is the reason of cancellation? The REST calls follow the well established standard for connecting and communicating with endpoints. Nothing special for SMARAGD and FI.CASHMGMT services.	STANDARD.SMARAGD Service - WPIO - Confluence FI.CASHMGMNT - WPIO - Confluence	@Ilian Nakov			2025 Q4		DONE
Fragement files Cloud operation, additional files, technical changes and changes with regards to content since 2024	WP3 Landscape and WP3 switch (structure, usage, deployment) - WPIO - Confluence	@Julian Keranov			2025 Q3	16.09.2025	done
Troubleshooting in Kafka		@Georgios Eliopoulos			28.08.2025		open
XGEN - FI Client - FI.COMMON - Common ErrorMsgHandling (V23.1 - metamapping)	WPIO FI L1 Common ErrorMsgHandling - WPIO - Confluence	@Laszlo Kerepeszki			2025 H2	28.10.2025	done
Introduction to WPIO	Introduction to WPIO	@Eglee Vasquez			2025 H2	15.10.2025	done
WPIO Audit Browser and Deployment History usage	Audit Browser Deployment History of WPIO Services	@Eglee Vasquez			2025 H2	02.12.	done

						20 25	

Schedule 2025 H1

Topic	Confluence link	Responsible	Deputy	Ranking	Deadline	Presentation date	Status
Troubleshooting process for active delivery Create a description in Confluence for all known error constellations and related Entstörung (fault-clearance) process.	Active Delivery - WPIO - Confluence	@Ilian Nakov		2	Jun 30, 2025	19 Jun 2025	Done
Converting OpenAPI structure to JSON format Please take also care to document the needed steeps, etc. in confluence, so this can be used also by others in the future!!	OpenAPI to JSON Schema - WPIO - Confluence (dwpbank.net)	@Ilian Nakov	@Julian Keranov		Jan 15, 2025	04. 02. 2025	**Done**
TCL • Get familiar with TCL programing language • Get familiar with WPIO services using TCL workspace413\WP2.ELST_EXEMPT_FP\ElsterExemptionRequest_1.xfl workspace413\WP2.WP2_CHTX_FP\ChurchTaxFileRequest.xfl workspace413\WPIB.ELST_FREEACCTR_FP\ElsterFreeChargeAccTrRequest_1.xfl • **Note: There are are a lot of custom operators written in TCL, and used in a lot of services**	DWP.WP2_CHTX_FP service tcl component - WPIO - Confluence	@Laszlo Kerepeszki	@Julian Keranov	4	Feb 15, 2205	04. 02. 2025	**Done**

TCL • Get familiar with TCL programing language • Get familiar with WPIO services using TCL workspace413\DWP.CSTMRMSTR_CHG_FP\CustomerMasterChangeRequest_1.xfl workspace413\DWP.EXANTE\ExanteRequest_1.xfl workspace413\DWP.EXANTE\ExanteRequest_2.xfl workspace413\DWP.ORDERBOOK\OrderbookResponse_v1.xfl workspace413\WP2.AWV_FP\AWVRequest.xfl workspace413\WP2.CRS_FI_FP\CRSRequest_1.xfl workspace413\WP2.FITAX_FP\FITAXFileRequest.xfl workspace413\WP2.FSADV_FI_FP\FSADVFileRequest_1.xfl workspace413\WP2.SEPA_FI_FP\SEPAFileRequest_1.xfl workspace413\WPIB.BAFIN_FP\Bafin_Request.xfl • **Note: There are are a lot of custom operators written in TCL, and used in a lot of services**	TCL language & XGen implementation - WPIO - Confluence	@Julian Keranov	@Laszlo Kerepeszki	4	Feb 28, 2025	28. 01. 2025	**Done**
Usage of WPIO ERIC service via WPIB solution including TCL - workspace413\WPIB.ELST_FREACCTR_FP\ElsterFreeChargeAccTrRequest_1.xfl	WPIO ERIC service via WPIB solution - WPIO - Confluence	@Laszlo Kerepeszki		5	Feb 28, 2025	04. 03. 2025	**Done**
Refactoring the services to use an external database Give a presentation, which outlines the necessary changes of the service specification to be made to utilise an external database.	X-Gen MEM Repository to DB Repository Conversion in the cloud environment - WPIO - Confluence	@Ilian Nakov @Steffen Flick	@Eglee Vasquez	1	Jun 24, 2025	19 Jun 2025	Done

There are around 30 XGen services which are using inmem repository / workflow. In order to make the services cloud ready we need to use to those services a DB repository. (instead inmem repository) Ilian together with TIETE colleauges and Valantic are going to indentify which changes are needed in the base image and also parametrisation of the services. If we have a clear picture we will template and describe the specification. Based on this it schould be easy to update the related XGen sevices. • priority: It depends on the project. • deadline: It depends on the project. At latest end of June2025							
API REST calls in XGen		@Julian Keranov	@Ilian Nakov	3	Feb 11, 2025	11. 02. 20 25	**Do ne**
Application operation in cloud environment: Part 1: A deeper dive into Kubernetes (commands to operate pods, examples, etc.) Part 2: Helm chart configuration Part 3: Deployment process in dwpbank using ArgoCD Bonus: Suggestions for LinkedInLearning / Udemy / O'Reilly trainings & presentation by Kristina	Operation in the Cloud - WPIO - Confluence	@Kristina Nikolova			2025 Q1	04. 03. 20 25	Don e

OpenSearch - introduction, how to use queries and filters to find log entries from kubernetes	OpenSearch Dashboards - WPIO - Confluence	@Kristina Nikolova			2025 Q1	18.02.2025	**Done**
For wpNex team: - WPIO architecture - WPIO services		@Eglee Vasquez		3	2025 Q1	18.02.2025	**Done**
For wpNex team: - How to identify and analyze the WPIO related issues? - Audit Browser usage		@Eglee Vasquez		3	2025 Q1	25.02.2025	**Done**

Schedule 2024

Topic	Confluence link	Responsible	Deputy	Presentation date	Status
Manual testing tool	RR Test Tool - WPIO - Confluence (dwpbank.net)	@Eglee Vasquez	@Julian Keranov	24.09.2024	done
XGen migration to a higher version	XGen services migration to a higher version - WPIO - Confluence (dwpbank.net)	@Eglee Vasquez	@Laszlo Kerepeszki	03.09.2024	done
Connect a new customer to a WPIO service (e.g.:[WPIO-1076] A.230059 Connect investify to ORDER_FP on PROD - dwpbank)	Connect a new customer to a WPIO service - WPIO - Confluence (dwpbank.net)	@Eglee Vasquez	@Laszlo Kerepeszki	05.11.2024	done
Enhanced knowledge regarding XGen base image and build and deployment processes	X-Gen base image - Configuration - WPIO - Confluence (dwpbank.net)	@Ilian Nakov	@Eglee Vasquez	29.10.2024	done

Active delivery - configuration (filter, routing parameter) Pilot project: KA14799	Active Delivery - WPIO - Confluence	@Ilian Nakov	@Eglee Vasquez	28.11.2024	done
Active delivery - Java development	Active Delivery - WPIO - Confluence	@Ilian Nakov	@Kristina Nikolova	28.11.2024	done
Git (basic and advanced commands, cheat sheet) GitLab features overview	Git and GitLab usage - WPIO - Confluence (dwpbank.net)	@Kristina Nikolova		10.09.2024	Done
SpringBoot introduction and overview	SpringBoot - WPIO - Confluence (dwpbank.net)	@Kristina Nikolova		15.10.2024	Done
Kubernetes, Helm, ArgoCD Overview	Kubernetes, Helm, ArgoCD Overview - WPIO - Confluence (dwpbank.net)	@Kristina Nikolova		11.11.2024	done
WPIO ERIC Passthrough xgen solution	DWP.ERIC_PASS_FP passthrough - WPIO - Confluence (dwpbank.net)	@Laszlo Kerepeszki	@Eglee Vasquez	15.10.2024	done
OSPlus neo - XGen development	FI client - L1 xgen development - WPIO - Confluence (dwpbank.net)	@Laszlo Kerepeszki	@Eglee Vasquez	17.09.2024	done
WII - architecture, functionality	WII Introduction - WPIO - Confluence	@Laszlo Kerepeszki	@Ilian Nakov (@Julian Keranov)	26.11.2024	done
WP3 switch (structure, usage, deployment)	WP3 Landscape and WP3 switch (structure, usage, deployment) - WPIO - Confluence (dwpbank.net)	@Julian Keranov	@Laszlo Kerepeszki	23.07.2024	done
OMS/WP3, Kafka topic configuration for WPIO	OMS JSON and Kafka topics configuration - WPIO - Confluence (dwpbank.net)	@Julian Keranov	@Laszlo Kerepeszki	01.10.2024	done

OMS JSON structures	OMS JSON and Kafka topics configuration - WPIO - Confluence (dwpbank.net)	@Julian Keranov	@Eglee Vasquez	01.10.2024	done
WP3 landscape in general	WP3 Landscape and WP3 switch (structure, usage, deployment) - WPIO - Confluence (dwpbank.net)	@Julian Keranov		23.07.2024	done
Automated CSV and XSD exports	CSV and XSD export - WPIO - Confluence (dwpbank.net)	@Loránd Ternesz (Deactivated)	@Julian Keranov	29.10.2024	done
Version Synchronisation Tool	Synchronization Process - WPIO - Confluence (dwpbank.net)	@Loránd Ternesz (Deactivated)	@Eglee Vasquez	29.10.2024	done
Using SBM for E-Change and Sonderchange preparation	Sonderchanges, eChanges	@Eglee Vasquez		22.10.2024	done

XGen development - onboarding roadmap for Loránd

Roadmap for 2024

Topic	Due Date	Topic owner	Date of completion	Status of take over	working independently	Date of completion
Getting to know and using XGEN Software.			12.07.2024	done	yes	
Introduction into Rule Designer and XGEN	25.07.2024		25.07.2024	done	yes	
Reading and modifying an existing XGen flow that does not contain a workflow	31.08.2024			done	no	31.12.2024.
Modifying an existing Xgen mapping	31.08.2024		31.08.2024	Done	no	31.12.2024.
Modifying existing Xgen message definition (new field, new minor)	31.08.2024		31.08.2024	Done	no	31.12.2024
Testing and debugging an existing Xgen flow that does not contain a workflow	30.09.2024			done	yes	
Learning about the possibilities of using Mapping functions in existing services	30.09.2024			done	no	31.12.2024.
Storing changes in Gitlab	30.09.2024			done	yes	
xpk delivery during software lifecycle in gitlabEE and installing (normal, SNAPSHOT) version on TUA and with Auftrag in other test environments.	30.09.2024			done	yes	
Bugfixing in FI services OSPLUITKFT-1067	30.09.2024			done	yes	
Bugfixing in FI services in genaral				in progre	no	31.12.2024

				ss		
Coordination of release preparation	30.11.2024	@Eglee Vasquez		open	no	30.11.2024
Registration of a new XGen service • Registration of an XGen FP service • request the key from FI-TS file transfer team	30.09.2024	@Eglee Vasquez		open	no	31.10.2024

Roadmap for 2025

Topic	Date of completion	Status
Using workflow		

Topics

WPIO goes cloud topics

WP3 Landscape and WP3 switch (structure, usage, deployment)

Updated 2026

Git and GitLab Usage

Git overview, use-cases, commands, and alternatives. GitLab overview, usage

Presentation summary Outline:

- *Title: WP3 Git and GitLab Usage*
- *Date: 10 September 2024*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Lorand Tenesz
- Julian Keranov

Presentation Overview

The presentation focused on presenting basic, intermediate to advanced Git commands. The purpose is to show the colleagues different use-cases with possible solutions to problems. They can refer to the presentation slides as a cheat-sheet.

Finally, there was a live demo of GitLab, and its not so known features, but that are useful.

Outcome and Next steps:

The colleagues learned about new Git commands and Gitlab features. They can refer to the presentation when needed.

Attachments

Different operations in Gitlab Cloud

1. Create a new Branch

The creation of a new branch must be done carefully, because several people can be working in the jcf-routingdata at the same time, and if we are not careful enough, we can easily overwrite the changes of others when we merge back. Also, if you want to test that your changes work, it makes a difference what you create the new branch from. If we want to dump the changes to test environments first, then from release/DEV, and if we want to dump them to test environments and then PROD, then from main. Also, to facilitate backtracking, it's worth asking around and checking the current branches to see when their branch goes to Prod, to avoid the overwriting mentioned above. It may then be worth creating from the branch of the appropriate colleague.

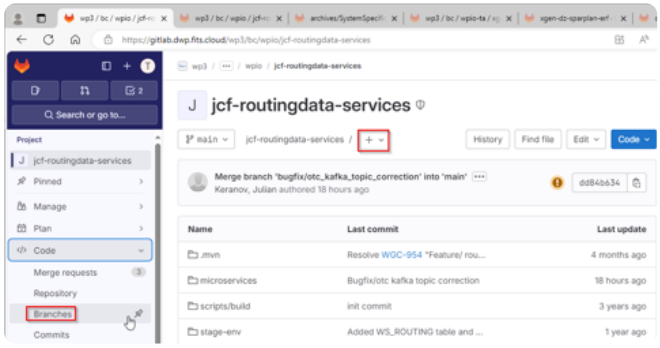

- Open the "+" menu under the service name

- Select the "New branch" menu item in the "This repository" section

- On the page that appears, type the name of the branch you want to create
  The name must start with "feature/"
  then a unique name, which may include its identifier if a Jira ticket exists

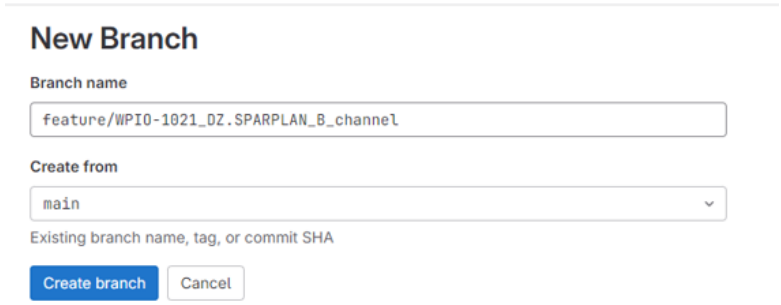

You can clone the new branch into IDE and make the necessary changes there, or you can implement it in the Gitlab Cloud interface (we use Cloud in this example)

2. Merge Request

Click on the "Merge request side menu or on the top right "New merge request" button

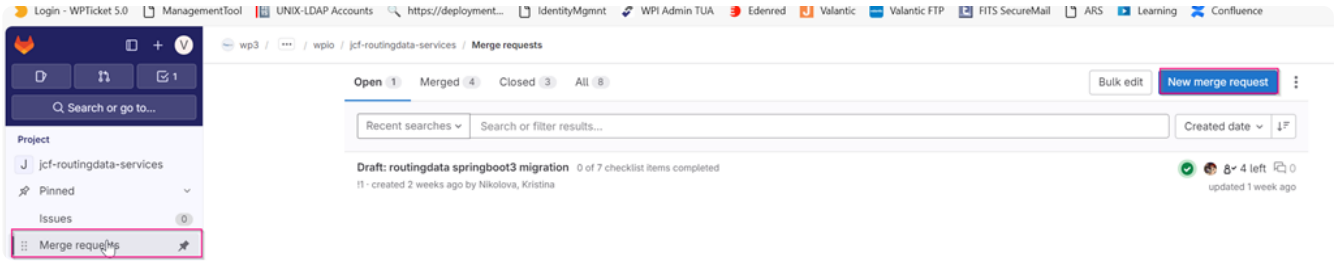

Select branch which you want merge and click on "Compare branches and continue" button

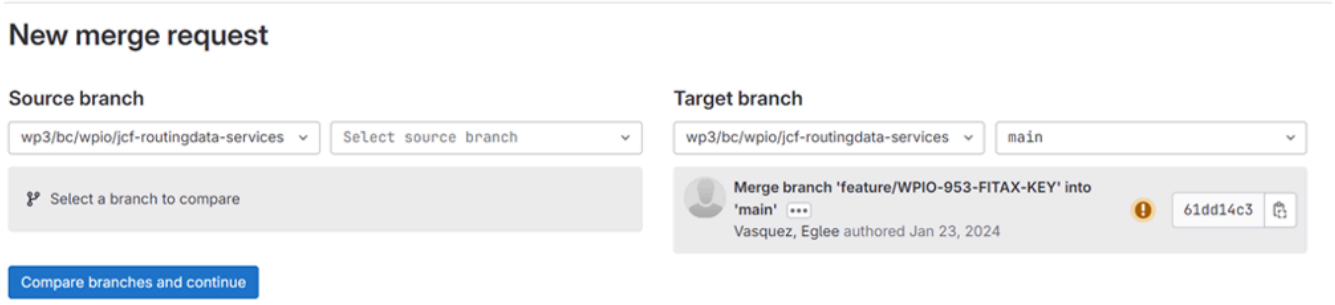

Fill the description if necessary

Choose approvals. A successful merge request requires two approvals

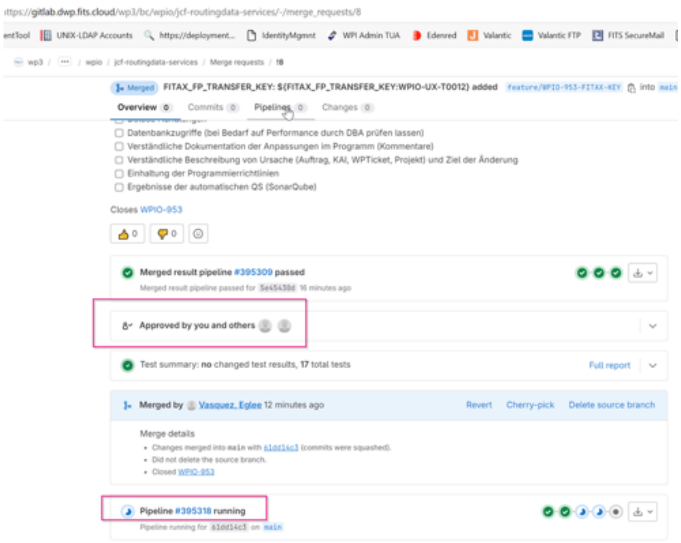

Click on the Merge button when it is activated and wait until the pipeline is running

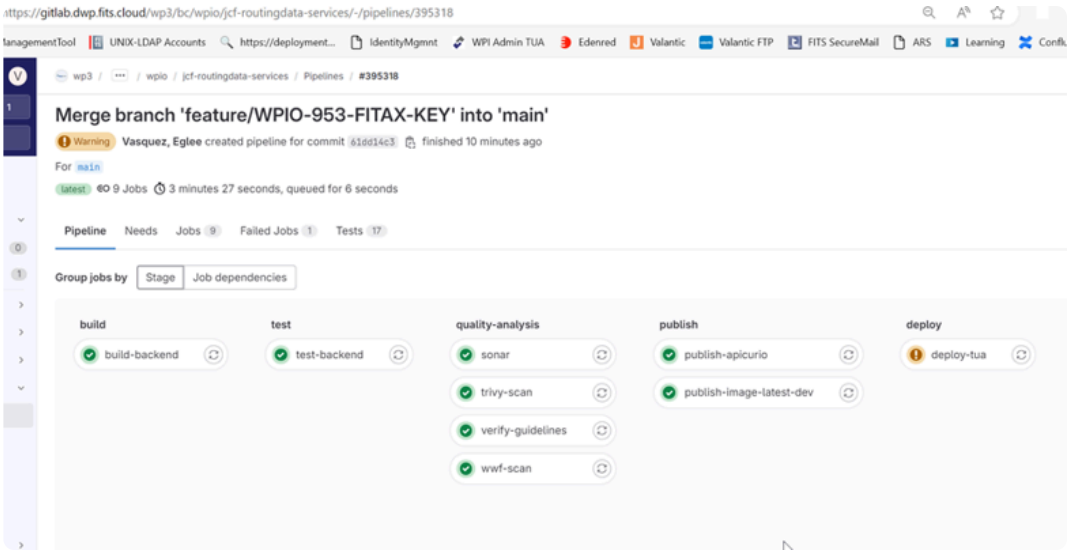

After the success pipeline running you have to create a new tag (this is the version)

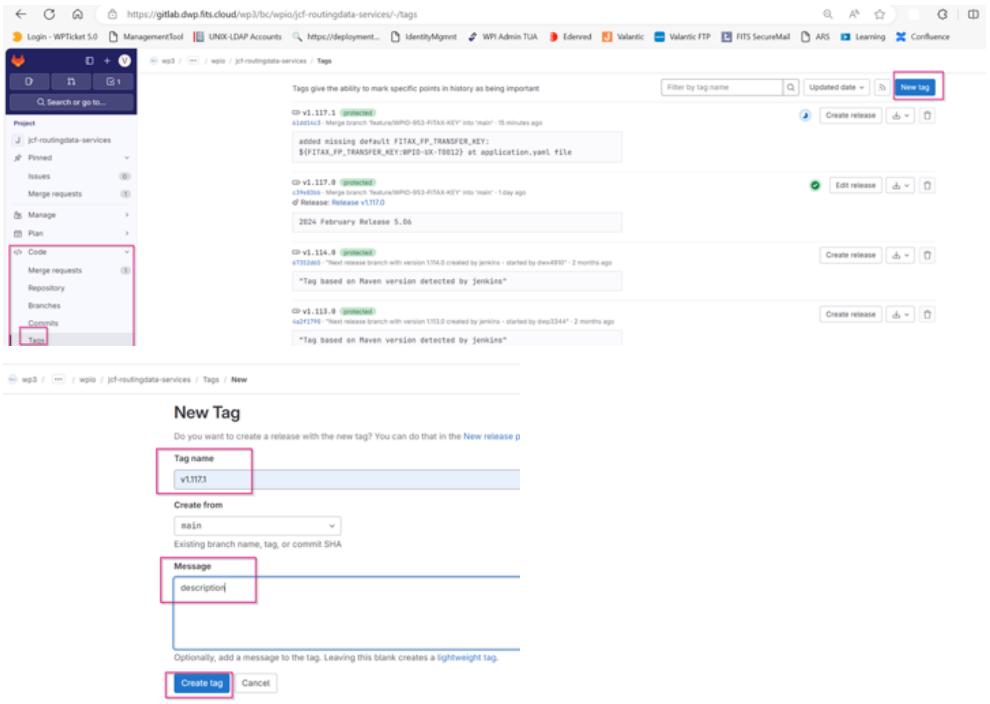

You have to wait until the pipeline run successfully.

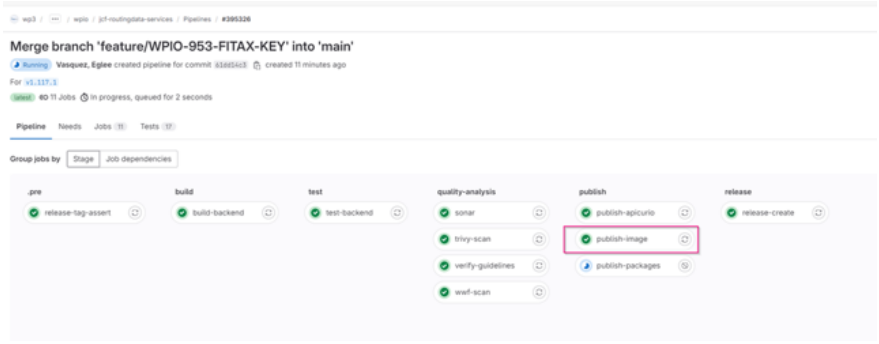

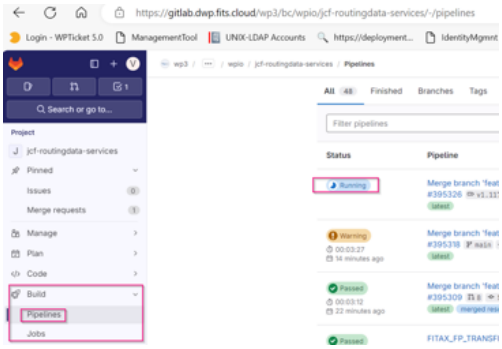

The public-image job contains the versions you which you can use

e.g.: In case routing data

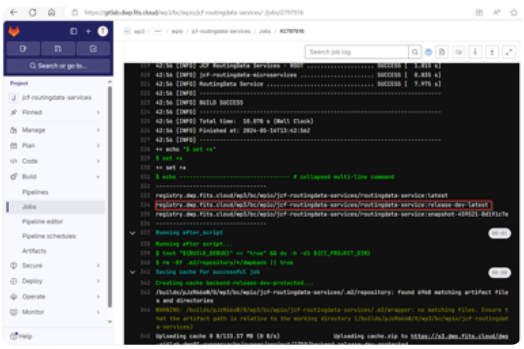

SpringBoot

Spring Boot Overview

Presentation summary Outline:

- *Title: Spring Boot Overview*
- *Date: 15.10.2024*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Lorand Tenesz
- Julian Keranov
- Zsigmond Molnar

Presentation Overview

The presentation focused on the basics of Spring Boot, what it is, how it works. An example app was presented to demonstrate some typical use-cases.

Outcome and Next steps:

Optionally, the colleagues can try to do the optional homework task to learn Spring Boot.

Attachments

OMS JSON and Kafka topics configuration

OpenAPI to JSON Schema

Kubernetes, Helm, ArgoCD Overview

Presentation summary Outline:

- *Title: Kubernetes, Helm, ArgoCD Overview*
- *Date: 11.11.2024*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Georgios Eliopolus
- Julian Keranov
- Zsigmond Molnar

Presentation Overview

The presentation focused on the basics of Kubernetes, Helm, ArgoCD, what it is, how it works. An ArgoCD example app was presented to demonstrate some typical use-cases.

Attachments

kubernetes_helm_argocd_presentation.pptx

Video record: o:\OE\VSU\BP\Austausch_Alle\WPIO\Kubernetes presentation\2024-11-11 - Kristina.mp4

Troubleshooting process for active delivery

Active Delivery

Presentation summary Outline:

- *Active Delivery Services and Configuration*
- *Date: 28 November 2024*

Attendees:

- Julian Keranov
- Eglee Vasquez
- Laszlo Kerepeszki
- Krisztina Nikolova
- Zsigmond Molnar

Presentation Overview

The presentation focused on introducing all Active Delivery services and its configuration.

Key points and trails

- DWP.ORDER_AD Processing – overview
- DWP.FWDISPO_AD Processing – overview
- DWP.WII_AD Processing – overview
- DWP.ROUTSTAT_AD Processing - overview
- Active Delivery - routing configuration
- Active Delivery - filter configuration by interface
- Troubleshooting – common issues



OpenSearch Dashboards

How to find log files in OpenSeach Dashboards

Presentation summary Outline:

- Title: How to find log files in OpenSeach Dashboards
- Date: 18.02.2025

Refreshment Training:

Date: 27.10.2025

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

Presented how to use OpenSearch and what OIM roles are required for the login. There was a practical live demo at the end.

Outcome and Next steps:

The colleagues will request the OIM rights and experiment with OpenSearch.

Attachments (updated version)

CI/CD Request template for a new X-Gen service

Operating our XGen-Service in the Cloud, some tasks need to be executed by the PACICD-Team.

In order to cretae a new X-Gen service on the Cloud platform a support request has to be sent to PACICD via Jira.

To establish a smooth onboarding process we should provide a request template.

Follow information are needed to request a issue by PACICD:

1. The Business-Unit (PO) which request the change of the XGen-Service have to specify:
   a. In which "App-Group", based on our repository, the Service have to be attached.
      For example, "wpio-oi", for "order-input". It is needed to determine the location in Git-lab.
   b. The name of the X-Gen service
      For example, "xgen-dwp-bestex". It is needed for the concrete service-name into Git-Lab.
   c. The Service-Type:
      Options: RR, AD, FP, AD/RR (for RR services called in a Request from AD layer 1 services)
2. Postgres database required: (Y/N)
   (needed in case where the service is not "stateless".)

We have to create a Jira-Task, contains follow parameters:

- Jira-Project: WP3 Cloud DevOps (M4INF)
- Issue Type: "Support Request"
-

- Linked Issues: "Relates to"
- Issue: the link to our WPIO-internal Jira-Task

Template, "copy/paste" into the Jira task for PACICD. Jira-Project: PA - CI/CD (PACICD)

Dear CICD-Team.

We got a new request to change the configuration of a existing WPIO-XGen-Service.

Please add all needed configuration/parameters based on the following information:

- Name of the App-Group.
- XGen-Service-Name (based on the gitlab representation):
- Service-Type (valid values: RR, AD, FP, AD/RR)
- Postgres database required: (Y/N)

CI/CD Request template for a X-Gen service change

Operating our XGen-Service in the Cloud, some tasks need to be executed by the PACICD-Team.

In order to change the configuration of an existing X-Gen service on the Cloud platform a support request has to be sent to PACICD.

To establish a smooth onboarding process we should provide a request template.

Follow information is needed to be able to request an issue by PACICD:

1. The Business-Unit (PO) which request the change of the XGen-Service have to specify:
   a. In which "App-Group", based on our repository, the Service have to be attached.
      For example "wpio-oi", for "order-input" (needed to determine the location in git-lab)
   b. The name of the X-Gen service
      For example "xgen-dwp-bestex" (needed for the concrete service-name into Git-Lab)
   c. The Service-Type.
      Options: RR, AD, FP, AD/RR (for RR services called in a ReRequest from AD layer 1 services)
2. Postgres database required: (Y/N)
   (needed in case where the service is not "stateless".)

We have to create a Jira-Task, contains follow parameters:

- Jira-Project: PA - CI/CD (PACICD)
- Issue Type: "Support Request"
-

- Linked Issues: "Relates to"
- Issue: the link to our WPIO-internal Jira-Task

Template, "copy/paste into the issue for PACICD. Jira-Project: PA - CI/CD (PACICD)

Dear CICD-Team.

We got a new request to change the configuration of a existing WPIO-XGen-Service.

Change the configuration/parameters:

current configuration:

- Name of the App-Group.
- XGen-Service-Name (based on the gitlab representation):
- Service-Type (valid values: RR, AD, FP, AD/RR)
- Postgres database required: (Y/N)

new configuration:

Please add all needed configurations/parameters based on follow information.

Only follow parameters can be changed over this request.

- Service-Type (valid values: RR, AD, FP, AD/RR)
- Postgres database required: (Y/N)

Delete the configuration/parameters:

current configuration:

- Name of the App-Group.
- XGen-Service-Name (based on the gitlab representation):
- Service-Type (valid values: RR, AD, FP, AD/RR)
- Postgres database required: (Y/N)

new configuration:

remove

Operation in the Cloud

How to configure and deploy applications to the Cloud via Gitlab EE

Presentation summary Outline:

- Title:

  How to configure and deploy application to the Cloud via Gitlab EE

- Date: 04.03.2025

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

Presented how to configure the environments to deploy to the Cloud.

Outcome and Next steps:

The colleagues will check the links and the screenshots in the presentation for future references.

If you want to know more technical details about Kubernetes and Deployments, check this linkedin learning training:

https://www.linkedin.com/learning/google-kubernetes-engine-gke-foundations-deploying-stateful-applications/kubernetes-clusters-nodes-and-pods?contextUrn=urn%3Ali%3AlearningCollection%3A7282346713095262209&standalone=true&u=91395162

Attachments

Cloud Deploym... on.pptx
02 Jun 2026, 06:54 PM

X-Gen MEM Repository to DB Repository Conversion in the cloud environment

Presentation summary Outline:

- *Active Delivery Services and Configuration*
- *Date: 18 June 2025*

Attendees:

- Julian Keranov
- Eglee Vasquez
- Laszlo Kerepeszki

Presentation Overview

The presentation focused on introducing the replacement process of MEM Repositories to DB Repositories

Key points and trails

- Introduction
- List of X-Gen PUs automatically converted to DB repository
- Development and local testing
- Summary

Introduction to S3

What is S3 and S3 Buckets

Presentation summary Outline:

- Title: S3 Overview
- Date: 27.10.2025

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

Explained the purpose of S3 and showed examples of S3 bucket usage in dwp bank.

Outcome and Next steps:

The colleagues know how to search for S3 buckets and fragment files.

Attachments



Introduction toS3.pptx
02 Jun 2026, 06:55 PM

Introduction to Terraform

What is Infrastructure as Code and Terrafrom

Presentation summary Outline:

- Title:

  What is Infrastructure as Code and Terrafrom
- Date: 27.10.2025

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

Summarized my experience from LinkedIn learning about IaC and Terraform and showed examples.

Outcome and Next steps:

The colleagues know what Terraform is and what use cases it has in dwpbank.

Attachments

Infrastructure_... rm.pptx
02 Jun 2026, 06:55 PM

Decommission (client & service)

Client decommission

In this section are described the steps that shall be followed to ensure the effective decommission of a Client.

It also lists the actions to be taken by WPIO team and other teams (like TIETE, WII and FITS MQ team) to achieve the complete decommission.

1) Uninstall customer-specific L1 XGen services in all environments and removing the service components from the Ansible scripts

For the Client that will be decommissioned, identify its customer specific XGen L1 services and proceed to remove them in all test environments.

See Service removal procedure

2) Removing customer-specific logic from shared XGen services

Check through the XGen services looking for customer-specific logic at the Flows, mappings, meta-mappings, tcl code and remove it.

3) Removing the Client MQ Connector configuration (jcf-rp)

The removal happens at file: /wpio/roles/jcf/rp/templates/environment.conf.j2

Once a client connector is removed, its index is removed. Since the index numeration must be continuous, the indexes shall be re-arranged:

Sample: DEGUSSA decommission.

> Once DEGUSSA entries are removed (at index [9]), the index [9] shall be set for the next client in the list (DEKA). Index[10] shall be set to DKB and so on, till the end of the list - the latest index in this case will be [58]

-

2.

Create a Merge Request and run the job jcf-rp in the TU-x environments. No versioning is needed since it is a configuration change (not a content change), and can be enforced without versioning, just by running the jcf-rp job.

Important: Only after the Client connector configuration was removed, it would be possible for FITS to remove the MQ Client connector queue.

1.

4) Removal of routing configuration (jcf-routingdata)

Delete Client configuration from routing files and Release.cfg file.

a. routing files

> Sample for client ELI_DUR:

- /jcf-routingdata-services/microservices/routingdata-service/src/main/resources/routing/**ELI_DUR**/2_config_client_ucs.xml
- jcf-routingdata-services/microservices/routingdata-service/src/main/resources/routing/**ELI_DUR**/3_config_access_mq.xml
- /jcf-routingdata-services/microservices/routingdata-service/src/main/resources/routing/**ELI_DUR**/4_config_ad.xml

Update the routing files by adding "delete=Y" to every open tag in every file except 1_config_client.xml

Sample:

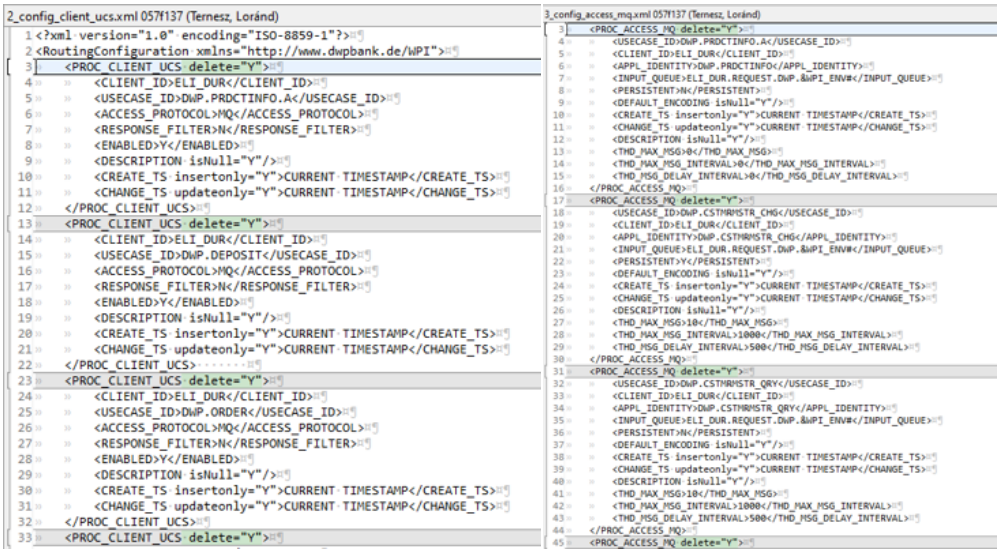

b. RELEASE.cfg

In the file RELEASE.cfg, replace the client install line with the client delete line.

Sample for GAD_APO client decommission:

line: client install GAD_APO shall be removed.

line: client delete GAD_APO shall be added at the end of the file (client delete section).

Note: It is advisable all client deletion entries to be permanently removed from RELEASE.cfg file after PROD installation.

c. Verification

Using SQuirreL we can double check that the configuration was removed from the database tables.

[How to configure and run SQuirreL]

Once the jcf-routingdata version is installed, the relevant tables (PROC_CLIENTS_UCS, PROC_ACCESS_MQ, etc) can be queried to confirm if the removal worked fine:

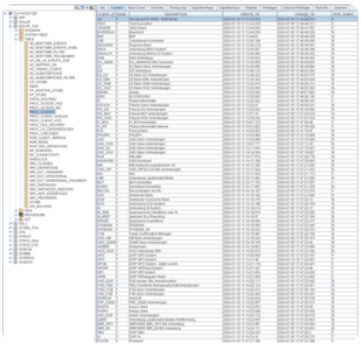

5) Request the removal of service queues, connector queues, gateway channels, queues, remote queues, used for the Client. A Bambi Auftrag shall be submitted to FI-TS MQ team for this removal.

As part of the Client decommission, all the client's MQ objects must be removed.

The removal is done by FITS MQ team; WPIO team shall open a Bambi (ARS) request for FITS MQ team for the removal. The Auftragstyp have to be "MQ-Series dwpbank"

WPIO colleague responsible for the decommission shall request from FITS MQ team the list of the client MQ objects and shall include them in the removal spreadsheet form.

The spreadsheet form with all the client MQ objects shall be attached to the Bambi ticket.

The Bambi request must be approved by the DWP Bank. If the accepting group in the ticket is DWP-BPPRD-FK, it indicates the two heads of ITKFT, in this case Ádám Toporczi and Adrien Reizer.

Sample spreadsheet Sample Bambi request

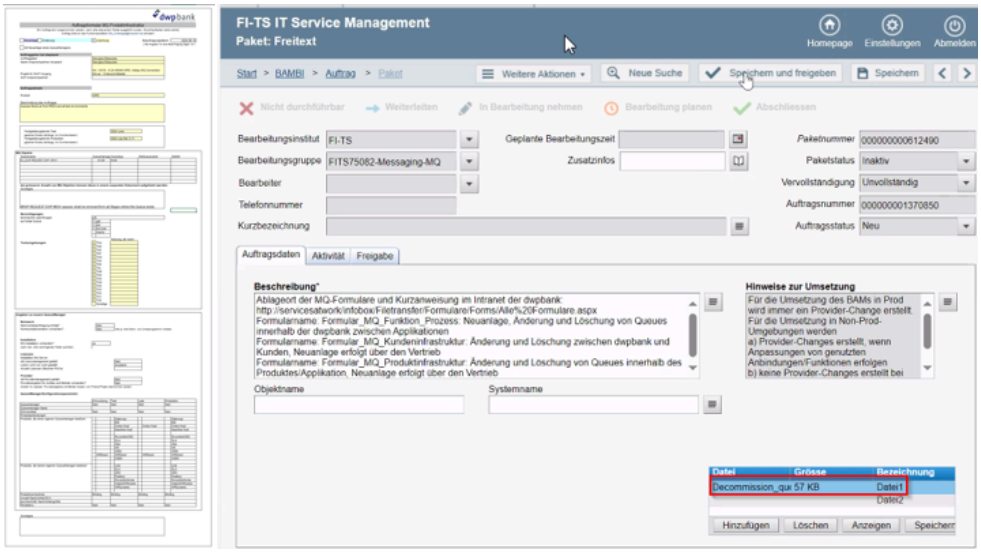

6) WII Client removal. If the Client uses Active Delivery functionality (WII Team)

Double check if the Client Teilnehmer Id is in use in WII.

7) Double check the Fragments

Make sure that the Fragments are updated, so they do not contain Clients that are decommissioned.

Another case is for example Fragment STT100, which is used only by FI. If FI client is decommissioned, then the fragment can also be archived.

8) WPIAdmin - (Matthias, Georgios, Steffen, Abdel)

- ***Removing the participant filter CID*.***
- ***Revoking all rights for this ID via user management.***
- ***Adapting the authorization concept***

9) MXRC: Remove customer-specific processing logic. (SwiftManager and ESB team Illes-Tomka Andras, Richtschild Zoltan)

This client has been decommissioned: Client-name.

Please doble check if you have it in your processing logic.

Service decommission

In this section are described the steps that shall be followed to ensure the effective decommission of an XGen Service.

It also lists the actions to be taken by WPIO team and other teams (like TIETE, WII and FITS MQ team) to achieve the complete decommission.

1) Service configuration removal from routing.

Removal of the service from routing files and Release.cfg file.

a. routing files

Check in all client routing where the service is used, the service configuration must be deleted
Relevant files: 2_config_client_ucs.xml, 3_config_access_fp.xml, 3_config_access_mq.xml, 4_config_ad.xml

Update the routing files by adding "delete=Y" to every open tag

Sample:

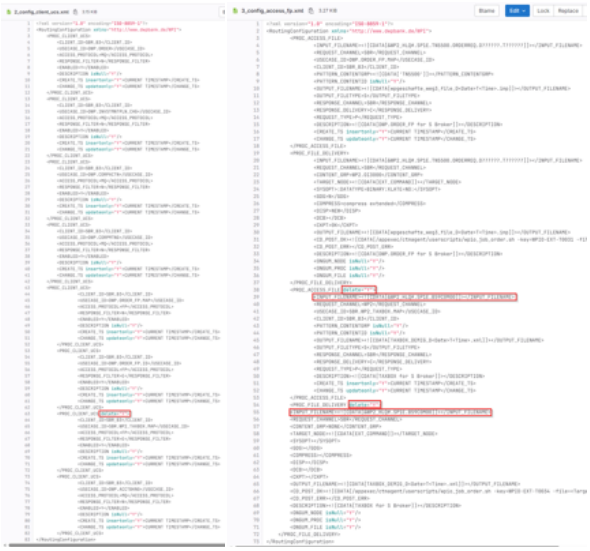

Note: It is advisable the entries marked with delete="Y" to be permanently removed from all configuration files after the change is installed on PROD environment

b. RELEASE.cfg

In the file RELEASE.cfg, replace the client install line with the client delete line.

Sample for WP2.MT596_A_ONL decommission:

line: service install WPIXGEN RR L4 WP2.MT596_A_ONL A shall be removed

line: service delete WPIXGEN RR L4 WP2.MT596_A_ONL A shall be added at the end of the file (service delete section).

```
512 service delete EXT  RR  L3  ESB.TRGTMRKT  A
513
514 ##--Jira WPIO-982 2024-05-21
515 service delete WPIXGEN  RR  L1  SBR.WP2_TAXBOX  A
516
517
```

Note: It is advisable all service deletion entries to be permanently removed from RELEASE.cfg file after the PROD installation.

2) Service removal from WPIO runtime environments

- ***In files: roles/xgen/(rr|ad|fp)/vars/services-to-remove-(tu[x]|prod).yaml, enlist all services to be removed from FI-TS runtime environments.***
- ***The service name must contain also the channel***

Sample from file "roles/xgen/rr/vars/services-to-remove-tua.yaml":

```
xgen_services_rr_to_remove_tua:
- "wp2-mt596-a-onl-a"
- "wp2-mt515-e-onl-a"
- "gad-cashmgmnt-apo-a"
```

- ***In files "roles/xgen/(rr|ad|fp)/vars/versions-(tu[x]|prod).yaml", set the version of removing services to "0.0.0"***

Sample from file "roles/xgen/rr/vars/versions-tua.yaml":

```
xgen_wp2_mt596_a_onl: "0.0.0"
xgen_wp2_mt515_e_onl: "0.0.0"
xgen_gad_cashmgmnt_apo: "0.0.0"
```

- ***Merge master branch to test/prod branch and from created pipeline run/order job "xgen-(rr|ad|fp)-remove-single". The environment order: tus+tua, tests, tuh, tuy, prod, tug***
- ***After the job is completed check if the services are no longer present in the runtime environment.***

- ***After the services are removed from all dev, test and prod runtime environments, delete the service entry from these files:***

roles/xgen/(rr|ad|fp)/vars/services.yaml

roles/xgen/(rr)/vars/services-canary.yaml

roles/xgen/(rr|ad|fp)/vars/versions-(tu[x]|prod).yaml

- ***After the job "xgen-(rr|ad|fp)-remove-single" run successfully and the service was removed, create an Auftrag to FITS to request the docker image removal (after Prod removal).***

a) For this, the service full name and the version shall be provided. For example:

dwp-wpio-xgen-rr-wp2-mt596-a-onl-a-node5.service 1.0.2-860891

(You can search the necessary information with the following commands: sudo systemctl list-units | grep sbr-wp2-taxbox)

b) Remove all image versions from docker repository : registry.dwp.fits.cloud/wp3/bc/wpio-oi/xgen-nb-order-fp-registry (sample)

Verification

Using SQuirreL we can double check that the configuration was removed from the database tables.

How to configure and run SQuirreL

Once the jcf-routingdata version is installed, the relevant tables (PROC_CLIENTS_UCS, PROC_ACCESS_MQ, PROC_ACCESS_FILE, PROC_FILE_DELIVERY, AD_SUBSCRIPTIONS) can be queried to confirm if the removal worked fine. Samples:

```
SELECT * FROM ROUTE_TUA.PROC_CLIENT_UCS WHERE USECASE_ID='<service-name>'
SELECT * FROM ROUTE_TUA.PROC_CLIENT_UCS WHERE USECASE_ID='SBR.WP2_TAXBOX'
```

The expected result here is that no rows are found in the table, which means that the configuration was removed from the tables.

3) Management Cockpit: Deleting the application components (AK) in the Management Cockpit - (Matthias, Georgios, Steffen, Abdel)

Responsible business unit shall remove the client from Management Cockpit

4) Cleaning up the system documentation (interfaces v: drive Schnittstellen folder, services, etc.)

Save the service interface folder under the archive folder.

5) Archiving the Git repositories for uninstalled XGen services. (Alternative: keep read-only for 2 years and then have them deleted?) (Cloud team)

Open a Jira task to the Cloud team requesting the service archive

Project: WP3 Cloud DevOps (M4INF)

Issue Type: Support Request

6) Deletion of Nexus artifacts for all uninstalled XGen services. (Cloud team)

7) Remove firewall rules. (FITS)

If the service has http connection. For example: DWP.PRDCTINFO

8) MXRC: Remove service-specific processing logic. (SwiftManager and ESB team Illes-Tomka Andras, Richtschild Zoltan)

This Service has been decommissioned: Client-name.

Please doble check if you have it in your processing logic.

9) JCF-FP: Remove UNIX Scripts (Matthias, Georgios, Steffen, Abdel)

10) HOPEX: Deleting the application components (AK) in the HOPEX - (TIETE Team)

Responsible business unit shall remove the client from HOPEX

Routing data

How to configure, run and test SQuirreL

1. Configuration

A. Squirrel SQL

Download and install the appropriate version from the Squirrel SQL website: https://squirrel-sql.sourceforge.io/

After installation, click on Drivers on the left and select DerbyClient

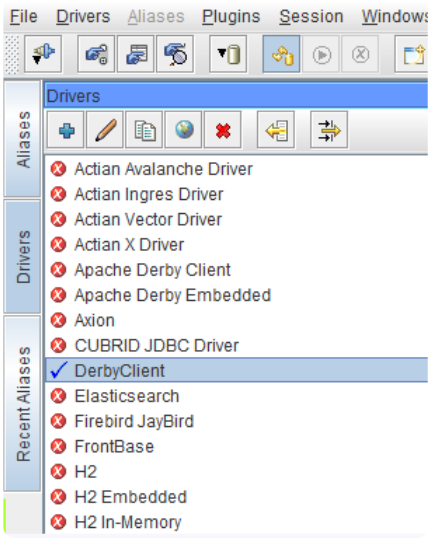

If you cannot find it in the list, you must download it and add it to the program: https://db.apache.org/derby/derby_downloads.html

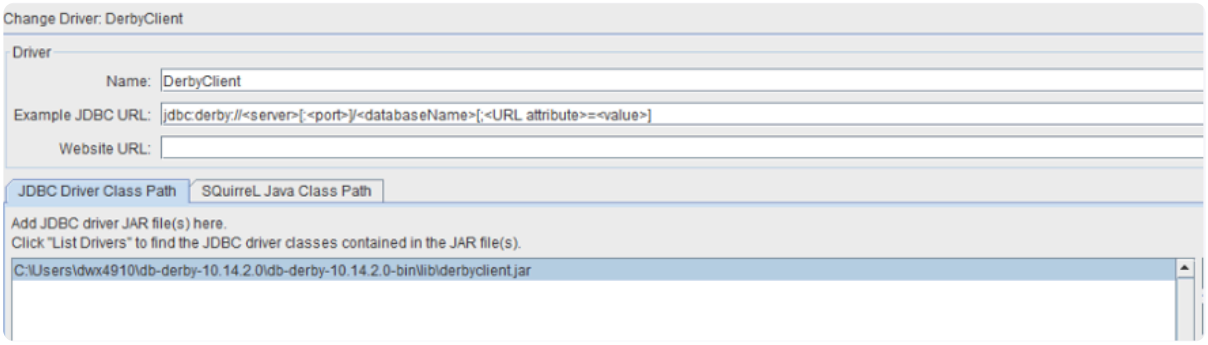

- Name: DerbyClient
- Example JDBC URL: jdbc:derby://<server>[:<port>]/<databaseName>[;<URL attribute>=<value>]
- Click the "Add" button and add the downloaded driver path. (You can find it lib\derbyclient.jar in the home folder)
- Add the aliaces
  - Click the "+" button
  - Name: TUA-NODE1DB
  - Driver: DerbyClient
  - URL: jdbc:derby://127.0.0.1:1528/NODE1DB
  - User Name: APP

- Password: ***** (Ask your colleagues)
- The "Test" button should not be clicked, as experience has shown that it does not work.
- Previous points should be repeated for the other environments and nodes where the name and URL change only:
  - TUA-NODE5DB
  - jdbc:derby://127.0.0.1:1532/NODE5DB
  - TUS-NODE5
  - jdbc:derby://127.0.0.1:1531/NODE5DB

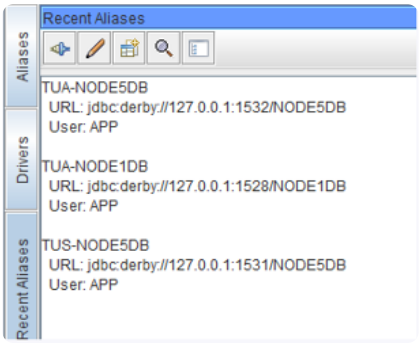

B. PuTTY

Start PuTTY

If no TUA and/or TUS session has been configured yet, it must be created:

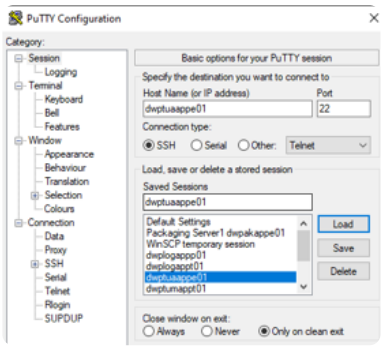

TUA:

Host name: dwptuaappe01

Port: 22

Connection type: SSH

TUS:

Host name: dwptusappe01

Port: 22

Connection type: SSH

You then need to configure Tunnels for both development environments

The path to do this is in the Category window Connection/SSH/Tunnels



After entering the two required details, press the "Add" button.

TUA:

1.

Source port: 1528

Destination: 127.0.0.1:1527

2.

Source port: 1532

Destination: 127.0.0.1:1531

TUS:

1.

Source port: 1529

Destination: 127.0.0.1:1527

2.

Source port: 1539

Destination: 127.0.0.1:1531

2. Run

A. Run PuTTY

You have to start the TUA/TUS environment in the PuTTY

Select the environment you need and click on the "OK" button:



Login with your LDAP password:

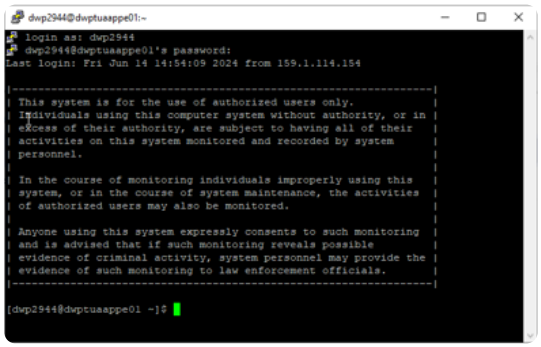

Nothing else you need to do, just let it run

B. Run SQuirreL

Select the environment with node you need and click on the "Connect" button:

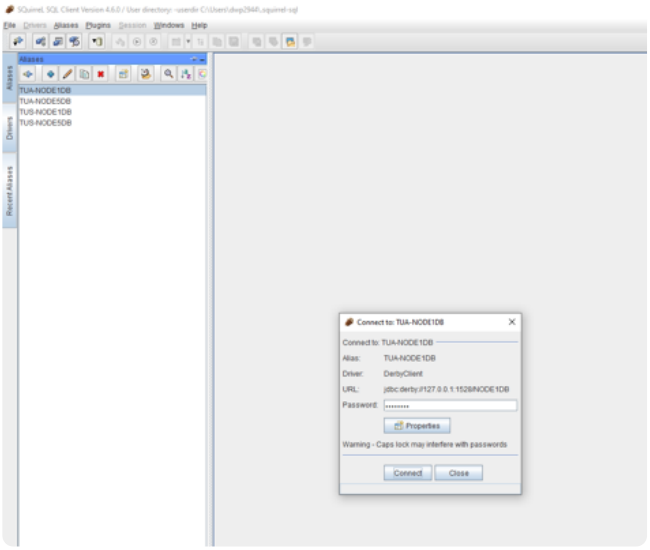

3. Test

You have to check those tables which name is equal with those name of tags in which you create a new service config.



You can also search for the necessary data using a full SQL query, but it's easier and faster to use the "Add/remove..." button in the top menu bar

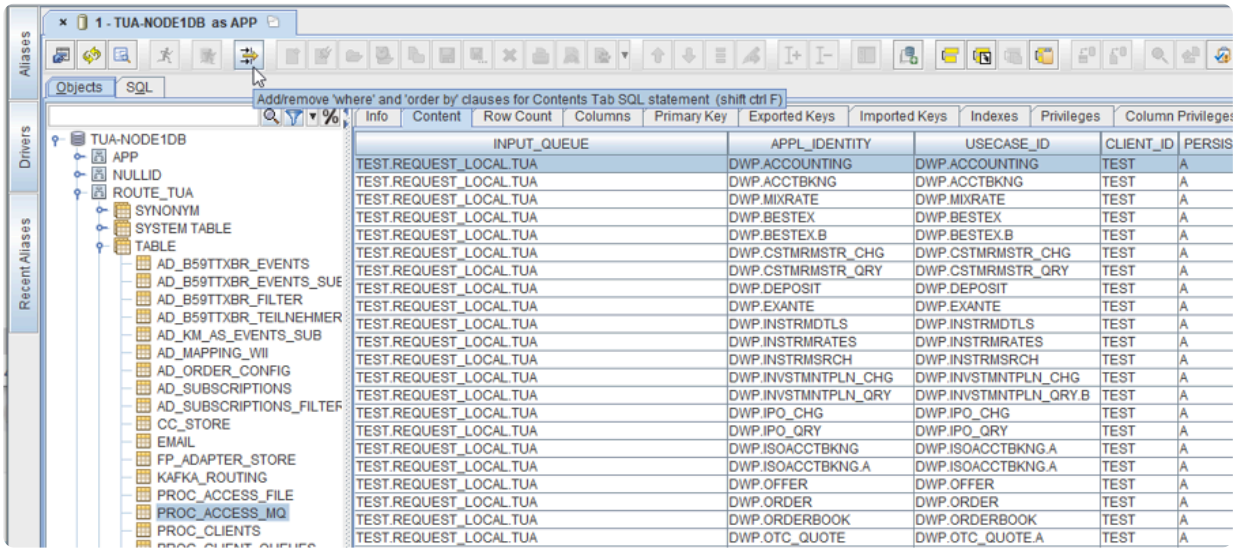

E.g.: We look for USECASE_ID

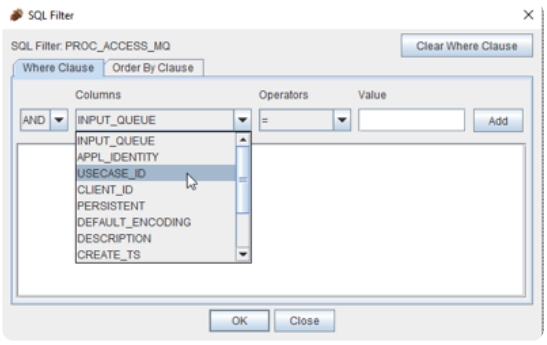

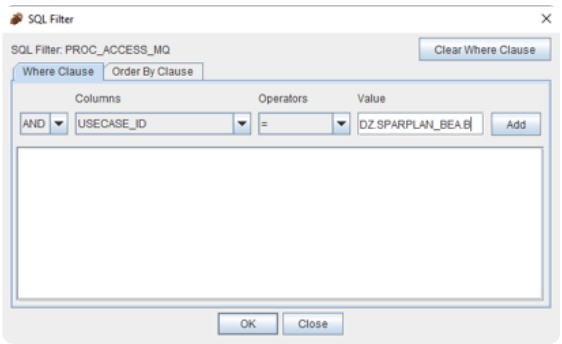

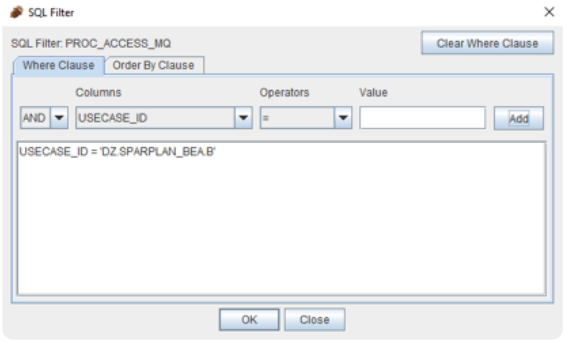
SQL Filter
SQL Filter: PROC_ACCESS_MQ
Clear Where Clause
Where Clause
Order By Clause
Columns
Operators
Value
AND
USECASE_ID
=
Add
USECASE_ID = 'DZ.SPARPLAN_BEA.B'
OK
Close

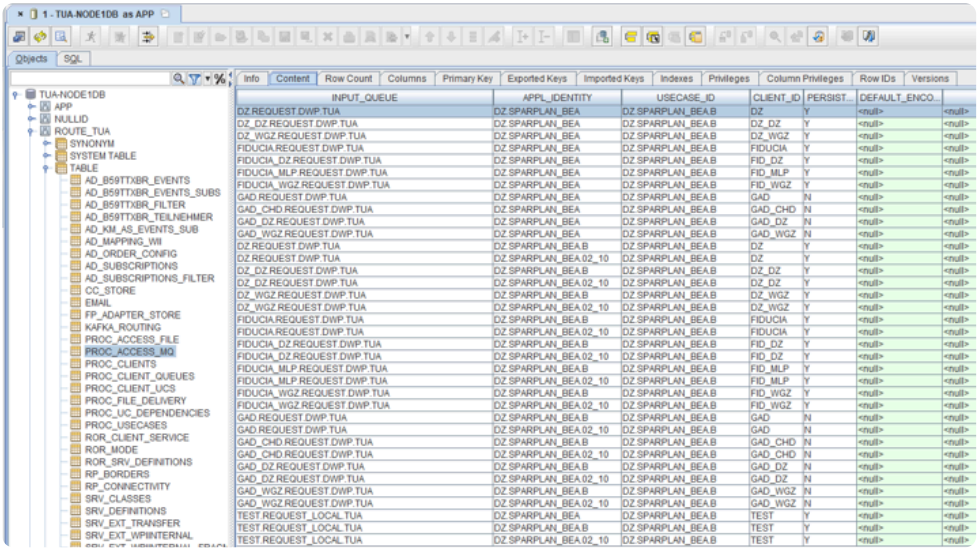
1 - TUA-NODE1DB as APP
Objects
SQL
TUA-NODE1DB
APP
NULLID
ROUTE_TUA
SYNONYM
SYSTEM TABLE
TABLE
AD_B59TTXBR_EVENTS
AD_B59TTXBR_EVENTS_SUBS
AD_B59TTXBR_FILTER
AD_B59TTXBR_TEILNEHMER
AD_KM_AS_EVENTS_SUB
AD_MAPPING_WII
AD_ORDER_CONFIG
AD_SUBSCRIPTIONS
AD_SUBSCRIPTIONS_FILTER
CC_STORE
EMAIL
FP_ADAPTER_STORE
KAFKA_ROUTING
PROC_ACCESS_FILE
PROC_ACCESS_MQ
PROC_CLIENTS
PROC_CLIENT_QUEUES
PROC_CLIENT_UCS
PROC_FILE_DELIVERY
PROC_UC_DEPENDENCIES
PROC_USECASES
ROR_CLIENT_SERVICE
ROR_MODE
ROR_SRV_DEFINITIONS
RP_BORDERS
RP_CONNECTIVITY
SRV_CLASSES
SRV_DEFINITIONS
SRV_EXT_TRANSFER
SRV_EXT_WPIINTERNAL
Info
Content
Row Count
Columns
Primary Key
Exported Keys
Imported Keys
Indexes
Privileges
Column Privileges
Row IDs
Versions
INPUT_QUEUE
APPL_IDENTITY
USECASE_ID
CLIENT_ID
PERSIST...
DEFAULT_ENCO...
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B TEST Y <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B TEST Y <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B TEST Y <null> <null>

Creating a new service channel

I. Changes in jcf-routingdata-services

jcf-routingdata-services

1. Create a new Branch

2. Configure a new channel

- You need to locate the appropriate service folder in the following location: microservices/src/main/resources/
  In our example, the service you are looking for is located in "internal/<SERVICE.NAME>" (e.g.:).

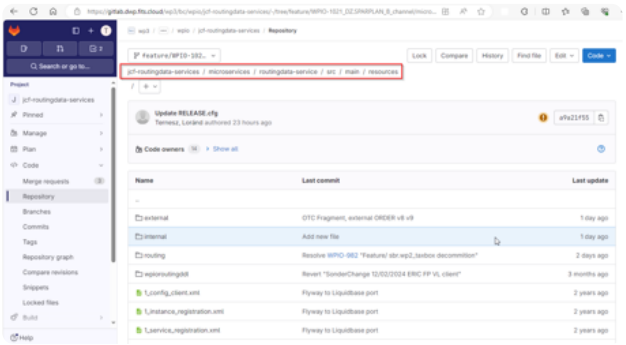

- The new channel folder must be created.

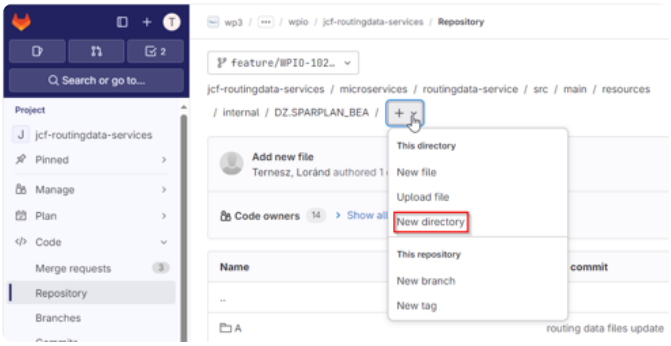

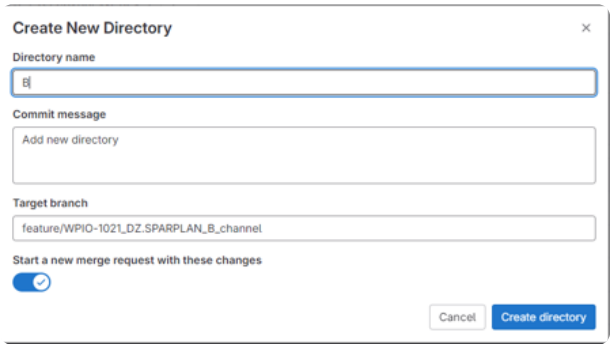

- The easiest way is to copy the files of the existing channel folder and rewrite the references to the channel

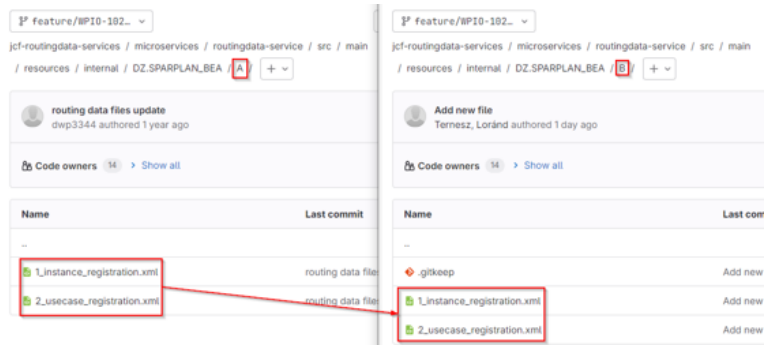

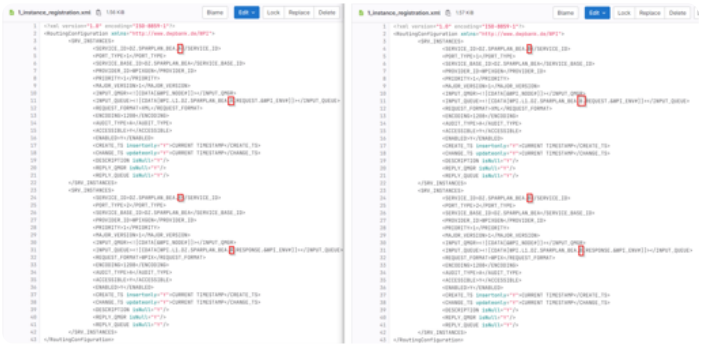

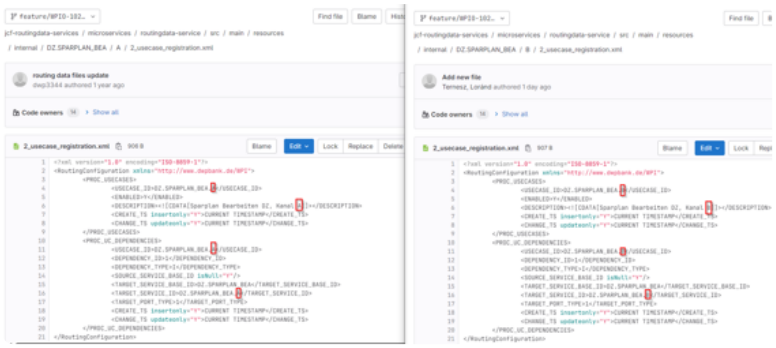

In the RELEASE.cfg file:

path: jcf-routingdata-services/microservices/routingdata-service/src/main/resources/RELEASE.cfg

- You need to find the existing service channel(s) and add the new one:

  e.g.: service install WPIXGEN RR L1 DZ.SPARPLAN_BEA B

```
service install WPIXGEN  RR  L1  DZ.OTC_INSTRM  A
service install WPIXGEN  RR  L1  DZ.OTC_INSTRM  B
service install WPIXGEN  RR  L1  DZ.OTC_QUOTE  A
service install WPIXGEN  RR  L1  DZ.QUOD  A
service install WPIXGEN  RR  L1  DZ.SPARPLAN_BEA  A
service install WPIXGEN  RR  L1  DZ.SPARPLAN_BEA  B
service install WPIXGEN  RR  L1  DZ.SPARPLAN_DET  A
```

II. Configuration in the service

The service configuration files need to be modified for the new channel. This can be done using the existing configuration files, leaving only a few necessary changes.

1. Find the service

In Gitlab Cloud, you can find the service you are looking for as follows:

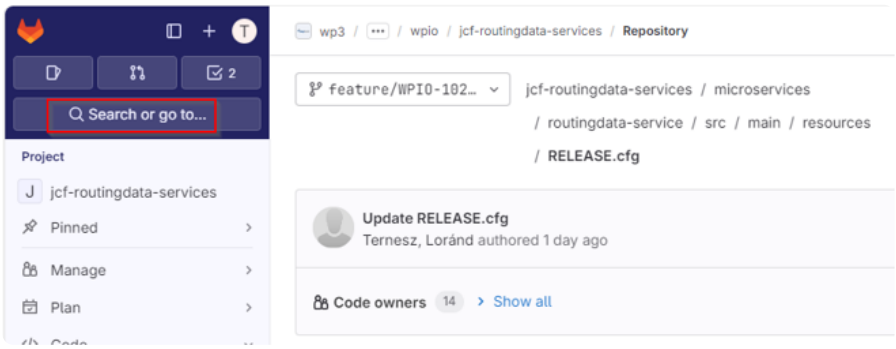

If you have already search it, it will be listed under "Frequently visited projects":

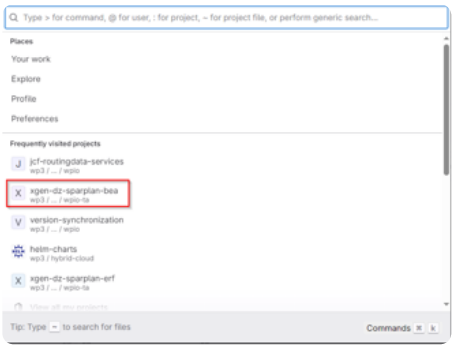

If not, you must enter:

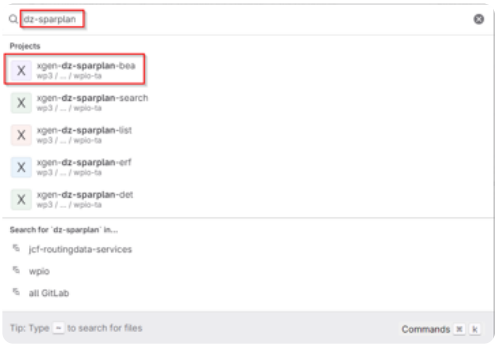

2. Create a new branch

Once the service is found and opened, the new branch must be created, as it is not possible to work directly in the main.

3. SystemSpecification.<channel>.xml

In the new branch, open the SystemSpecification.<channel> xml file and copy its contents to a new one, where the channel designations should be replaced. Also upload the xpk file that will work on the new channel.

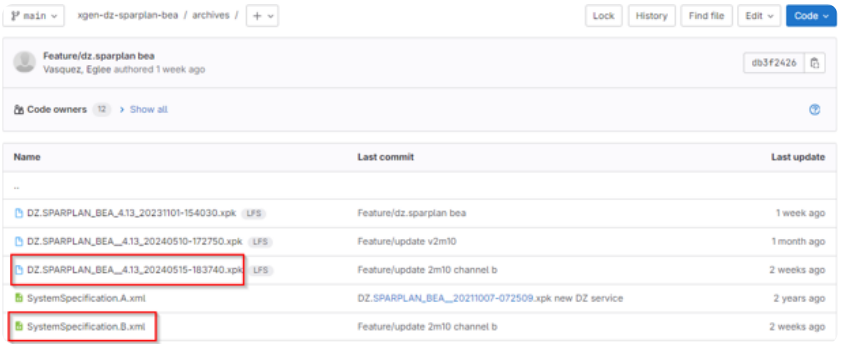

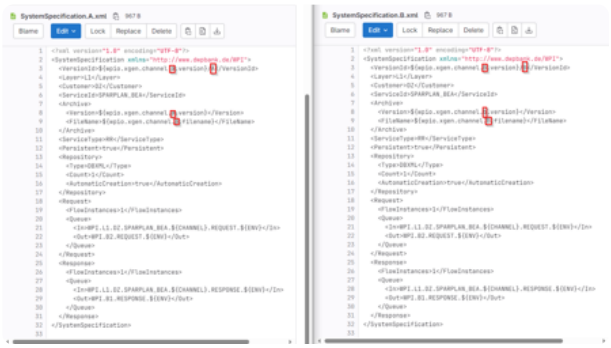

4. Upload XPK file

1. The xpk file must be downloaded from the link provided in the order letter and you must have access to https://netfiles.de/. User name is the employee email address. The password is provided at registration. This does not need to be changed later. A security code will be sent to you by mail upon login.

To download the file, click on the down arrow icon in the top right corner:

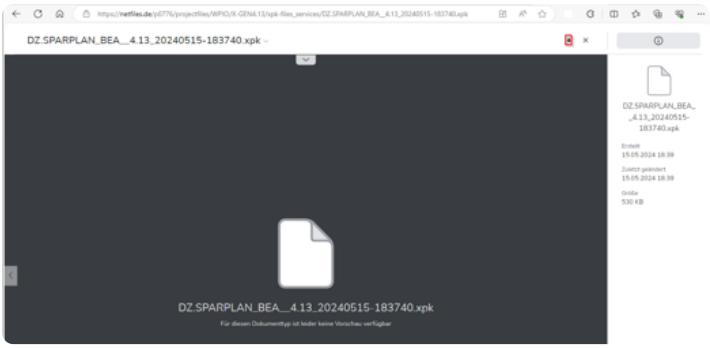

2. In Gitlab Cloud, upload the xpk file for the new channel to the "archives" folder:

Click the + sign, then select "upload file" and drag in the new xpk file

3. change pom file:
   - Replace xpk file name
   - ADM version increase

   You no longer need to change the version, as in the Cloud this role is played by the Tag!

4. wait for the pom.xml modification pipeline to run: build/pipelines
5. merge request creation

- change description with the description received in the mail
- select approvals
- assigne to me

6. merge
7. increase tag version:
   - e.g.: v4.13.2
   - same description as for MR
8. Then you can change the versions in Eclipse in the usual way, adding the new suffix, and expose it to the different environments, tus tua and can

5. Client rights to use the new channel

- It is necessary to find out which clients are already using the existing chat channels of the service.
  - On the one hand, it can be found in the jcf-routingdata-services source code in microservices/routingdata-service/src/main/resources/routing/

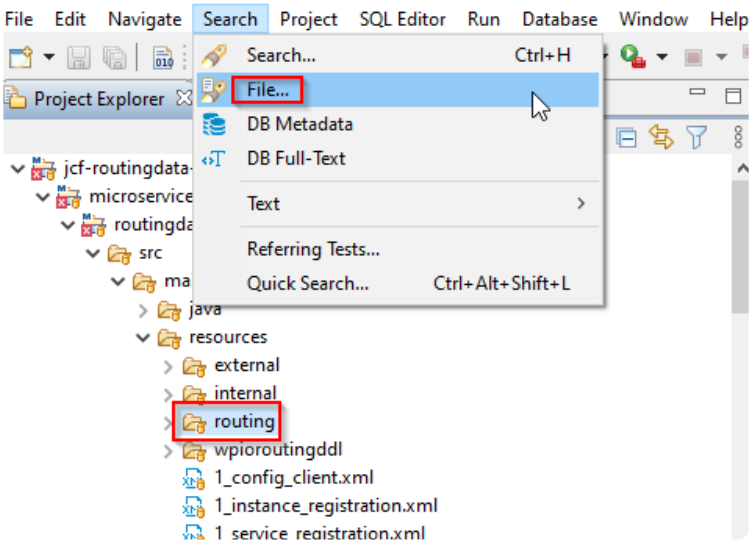

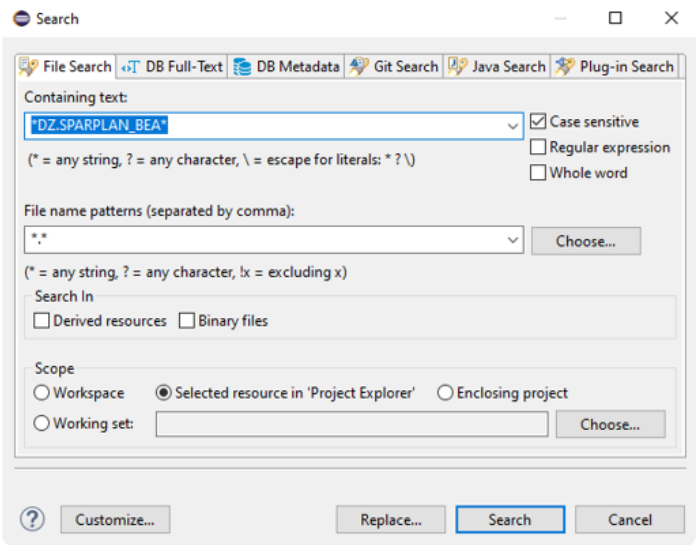

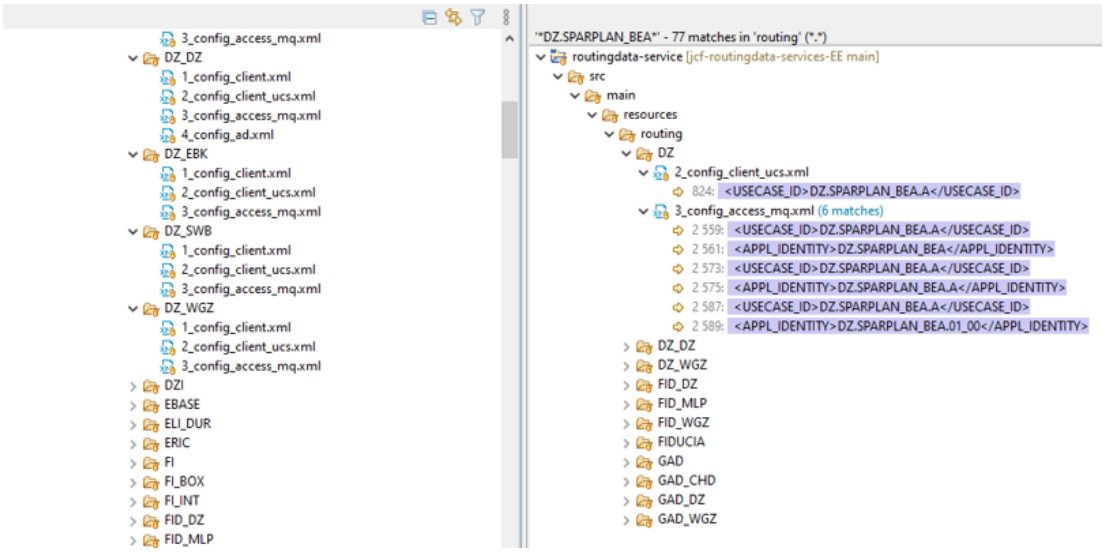

- You can also search the SQuirreL database for (more information about SQuirreL: [How to configure and run SQuirreL])

- SELECT * FROM ROUTE_TUA.PROC_CLIENT_UCS WHERE USECASE_ID='<service-name>'

eg.: SELECT * FROM ROUTE_TUA.PROC_CLIENT_UCS WHERE USECASE_ID='DZ.SPARPLAN_BEA.A'

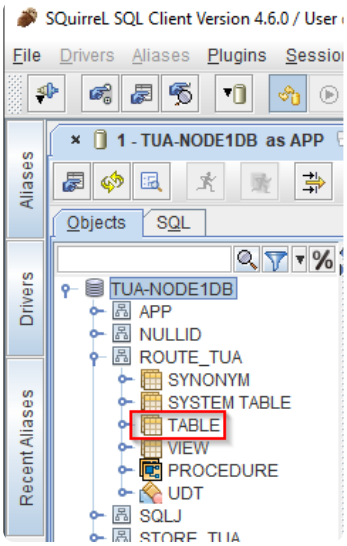

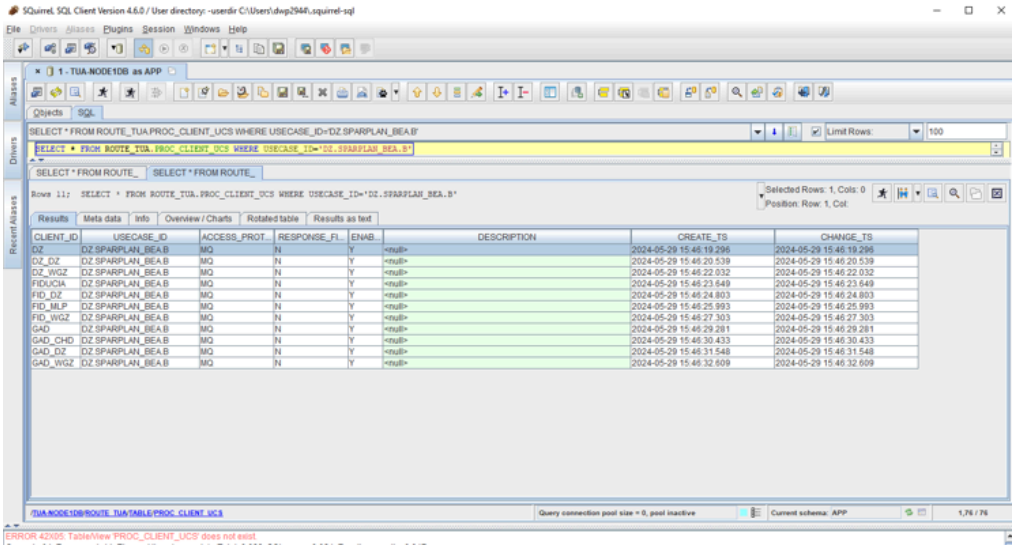

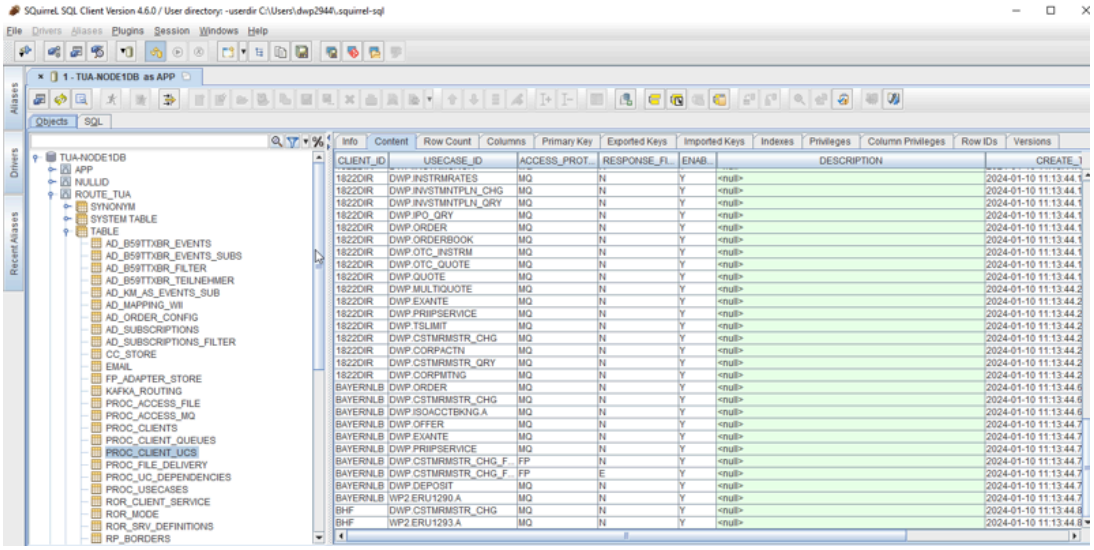

- The changes should be made in the Gitlab Cloud interface

Path: jcf-routingdata-services/microservices/routingdata-service/src/main/resources/routing

Files concerned: 2_config_client_ucs.xml, 3_config_access_fp.xml, 3_config_access_mq.xml, 4_config_ad.xml

Some services are not included in all config files, only in the ones affected by their operation.

In our example, this involves two files for each client:

2_config_client_ucs.xml

3_config_access_mq.xml

The existing channel must also be rewritten (copy and rewrite the channel designation) in both files

We open the file 2_config_client_ucs.xml and search for the existing service channel.

We copy it and change the channel designation to the new one.

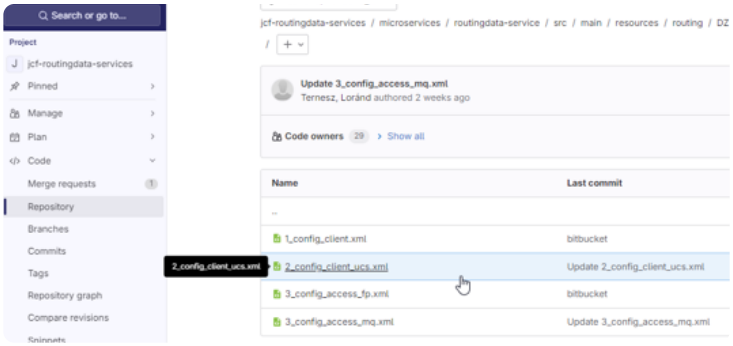

The same is done in 3_config_sccess_mq.xml:

Here you have to make sure that not only the channel designation is changed (in our example from A to B), but also the value in the APPL_IDENTITY tag, which is the AccessID for the new channel (this is included in the request)! In this case: DZ.SPARPLAN_BEA.02_10

5. In the /wpio/roles/xgen/<service type>/vars path, you also need to specify the configuration for the new channel in the services.yaml and services_canary.yaml files

You need to find the rows that belong to the previous channel - if there is one, if not, you need to create a new one based on another one - and copy and update it.

services.yaml

```
services.yaml c39448e (dwp2944)
582      channel: "A"¤¶
583    dz-sparplan-bea-a:¤¶
584      image: "registry.dwp/wpio/xgen-dz-sparplan-bea"¤¶
585      imageEE: "registry.dwp.fits.cloud/wp3/bc/wpio-ta/xgen-dz-sparplan-bea-registry"¤¶
586      version: "{{ xgen_versions_rr[productstage].xgen_dz_sparplan_bea }}"¤¶
587      channel: "A"¤¶
588    dz-sparplan-bea-b:¤¶
589      image: "registry.dwp/wpio/xgen-dz-sparplan-bea"¤¶
590      imageEE: "registry.dwp.fits.cloud/wp3/bc/wpio-ta/xgen-dz-sparplan-bea-registry"¤¶
591      version: "{{ xgen_versions_rr[productstage].xgen_dz_sparplan_bea }}"¤¶
592      channel: "B"¤¶
```

services_canary.yaml

```
services_canary.yaml c39448e (dwp2944)
583    dz-sparplan-bea-a:¤¶
584      image: "registry.dwp/wpio/xgen-dz-sparplan-bea"¤¶
585      imageEE: "registry.dwp.fits.cloud/wp3/bc/wpio-ta/xgen-dz-sparplan-bea-registry"¤¶
586      version: "{{ xgen_versions_rr_canary[productstage].xgen_dz_sparplan_bea }}"¤¶
587      channel: "A"¤¶
588    dz-sparplan-bea-b:¤¶
589      image: "registry.dwp/wpio/xgen-dz-sparplan-bea"¤¶
590      imageEE: "registry.dwp.fits.cloud/wp3/bc/wpio-ta/xgen-dz-sparplan-bea-registry"¤¶
591      version: "{{ xgen_versions_rr_canary[productstage].xgen_dz_sparplan_bea }}"¤¶
592      channel: "B"¤¶
```

III. Request for new MQ in BAMBI

1. Completion of the document to be attached to the Bambi application:

The new channel requires a new MQ, which can be done through BAMBI by submitting a form.

For help on how to create a BAMBI application, see the following page.

https://159.1.118.227:8090/display/EM/ARS+%28BAMBI%29%3A+Software+request

2. Bambi request creation

New MQ request in BAMBI Order type:MQ-Series dwpBank



For help on how to create a BAMBI application, see the following page: ARS (BAMBI): Software request

The Auftragstyp have to be "MQ-Series dwpbank"!

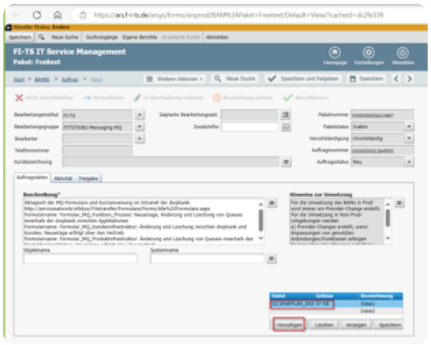

IV. Publishing

1. The process of merging

You can find the description here: Merge Request

2. Publishing for different environments

2.1 Clone the WPIO project

Go to the Git page and clone the wpio project.

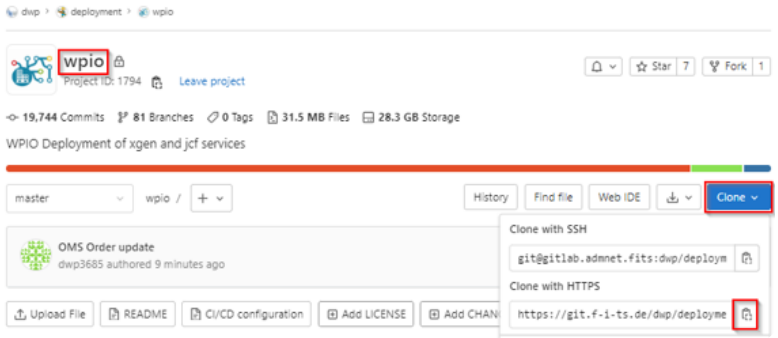

In Eclipse click on the Git Repositories tab and "Clone a Git Repository..." button. Then on the popup window click: "next", "next" and finally "finish" buttons.

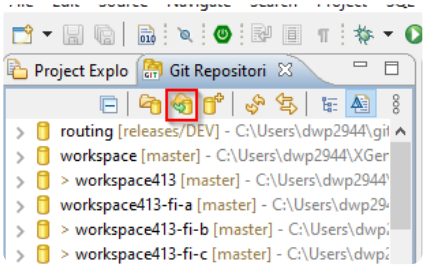

Now you can see the wpio repository.

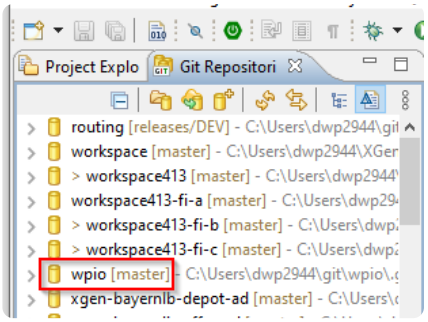

Choose "Project Explorer" tab and right click on the empty space below the tab, then click on the import and import then choose next.

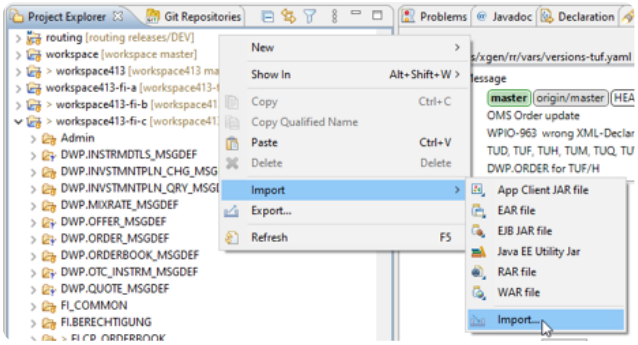

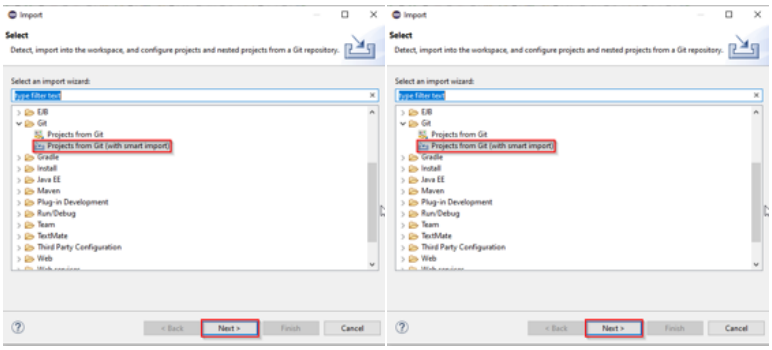

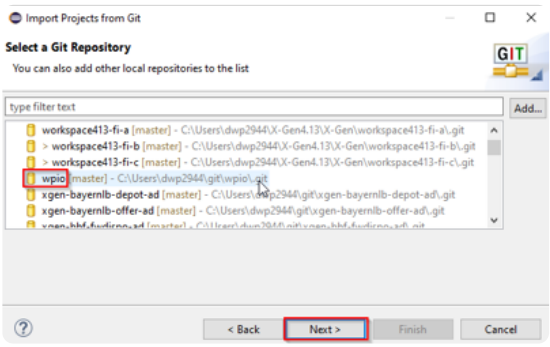



- write a commit
- repeate the pull if the process was long
- add the changes to the staged ones

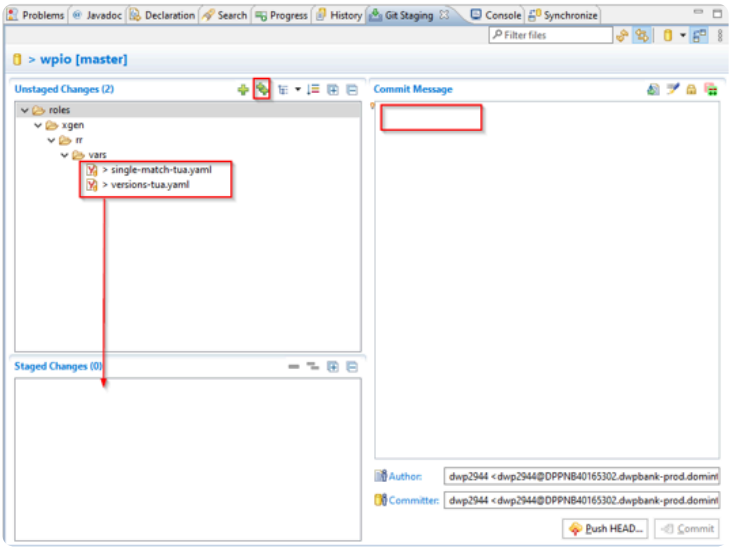

- Click the "Commit and Push" button

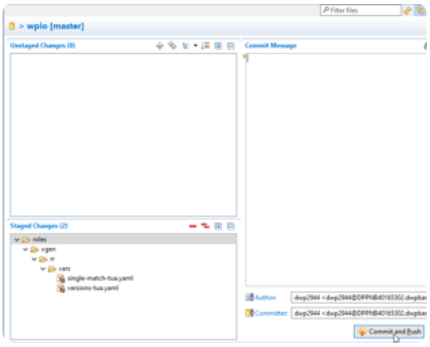

2.3 Create the merge request

2.2.4 Merge Request

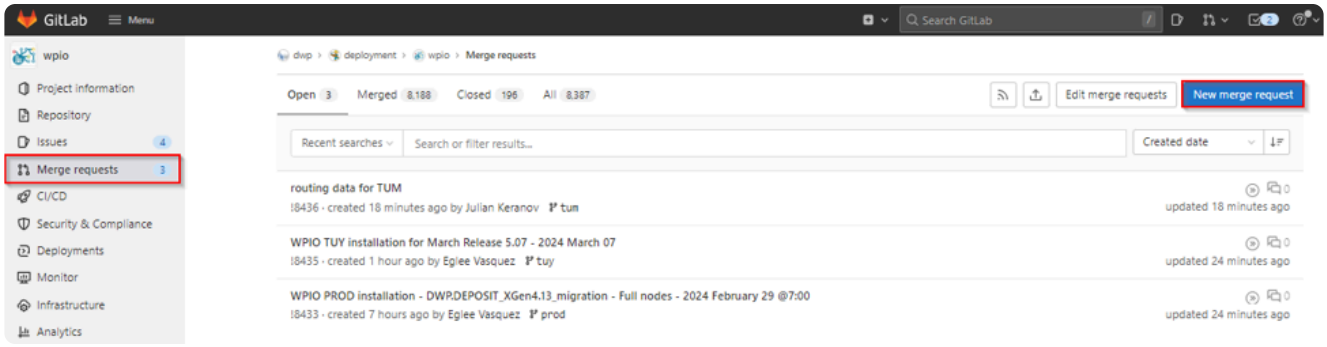

On the "New merge request" page, select the source and target branches. The source is usually master.

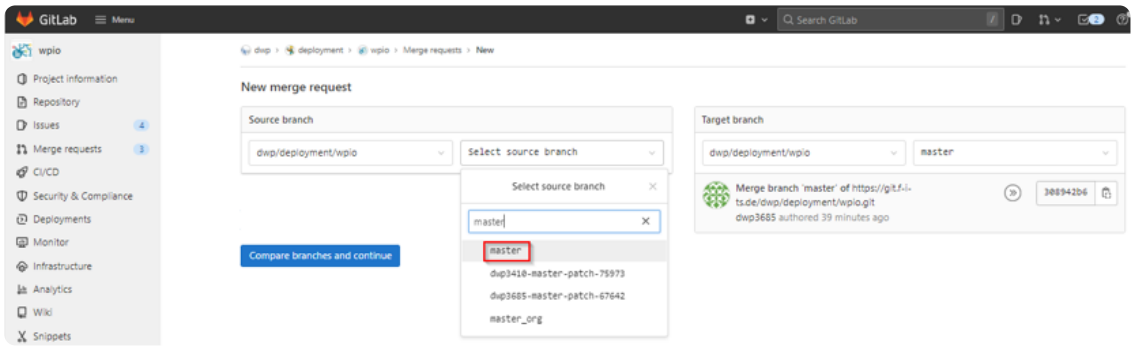

A target a fenti példa esetén TUA, de mindig a megfelelő cél környezetet kell megadni:

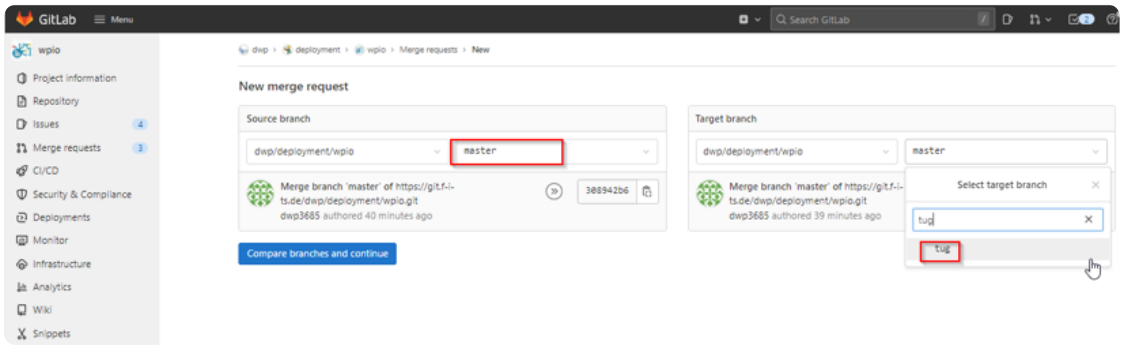

Click the “Compare branches and continue” button:

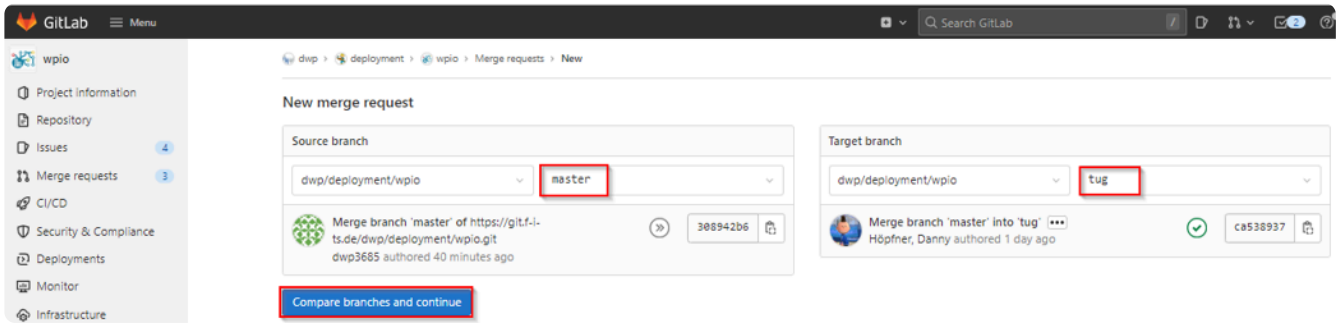

Fill in the "Title" and "Description" fields of the merge request on the page that appears. The "Assign to me" button is necessary when you perform the merge and run the Jobs, which is especially possible when it comes to development environments (TUA and TUS. I this case you do not need create Auftrag). Finally, click the “Create merge request” button:

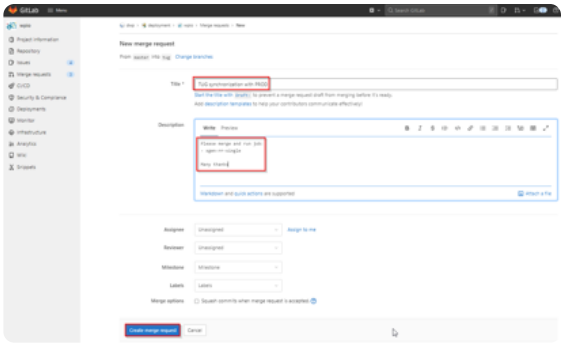

Copy the link of the merge request result page into the auftrag text (see later).

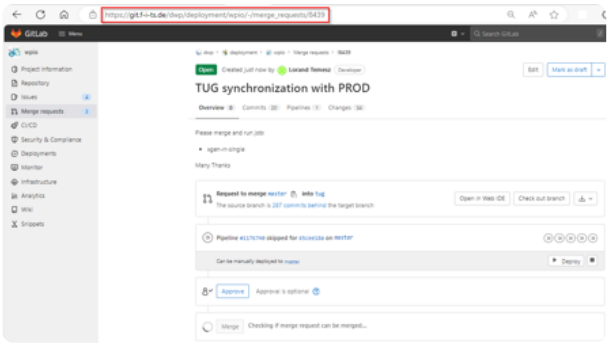

2.2.5 Auftrag

After Merge Request creation you have to create the Auftrag (except in case of TUA or TUS). Login on WPTicket page and navigate to Assignments / New process ticket in the menu.

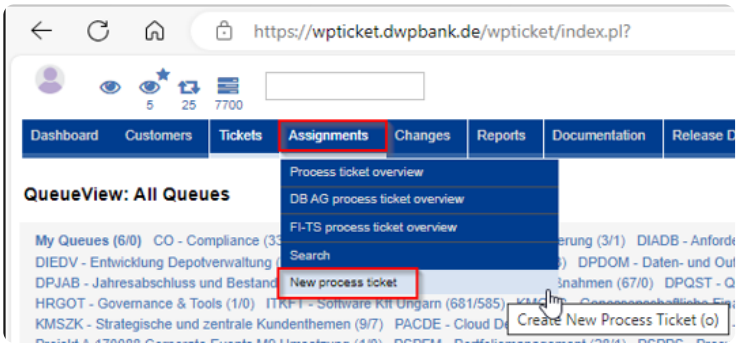

Chose FI-TS Process:

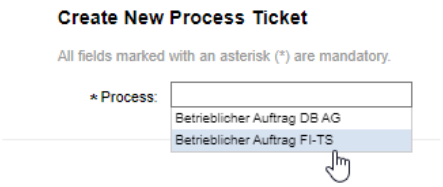

Add title: Új verzió adása esetén általában a "WPIO <ENVIRONMENT> installation" címet szoktuk adni

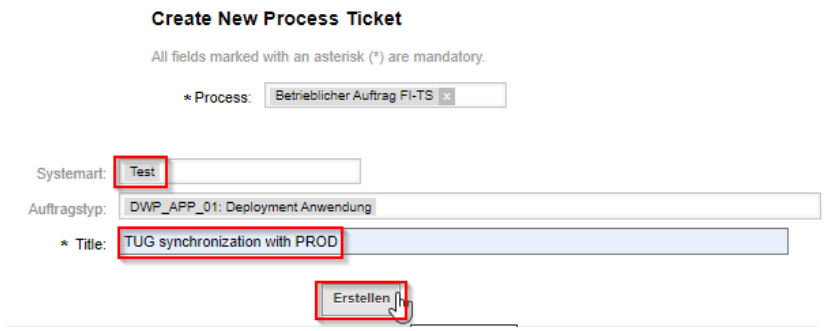

Click on Eingabe:

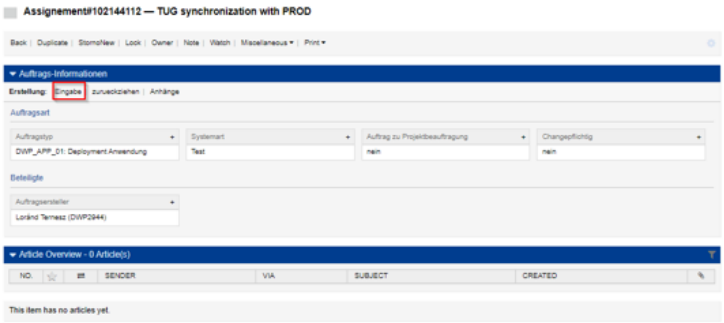

The original text must look like this:

Please merge:

<merge request link>

Please run job(s):

- *<job-name> (e.g. - xgen-rr-single)*
- *<job-name>*
- *...*

Contact person: <your name> <your ID>

Many thanks

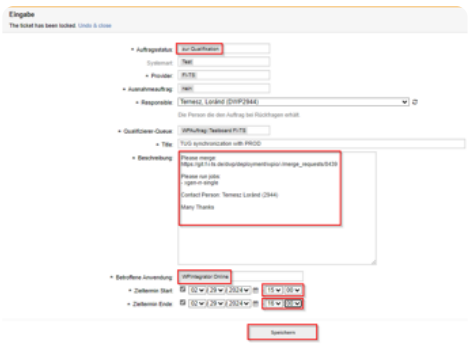

Set Auftragsstatus: "zur Qualification"

Set Betroffene Anwendung: "WPintegrator Online"

Set Start and Ende Zieltermins (you have to add at least 4,5 hour time interval from the current time.)

Finally, click the "Speichern" button.

Hint: You can find job names on Git Pipelines page, if you click on a status button:

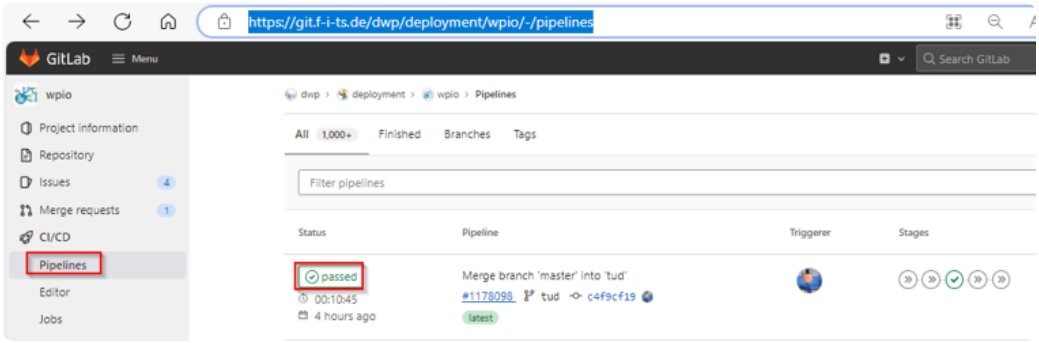

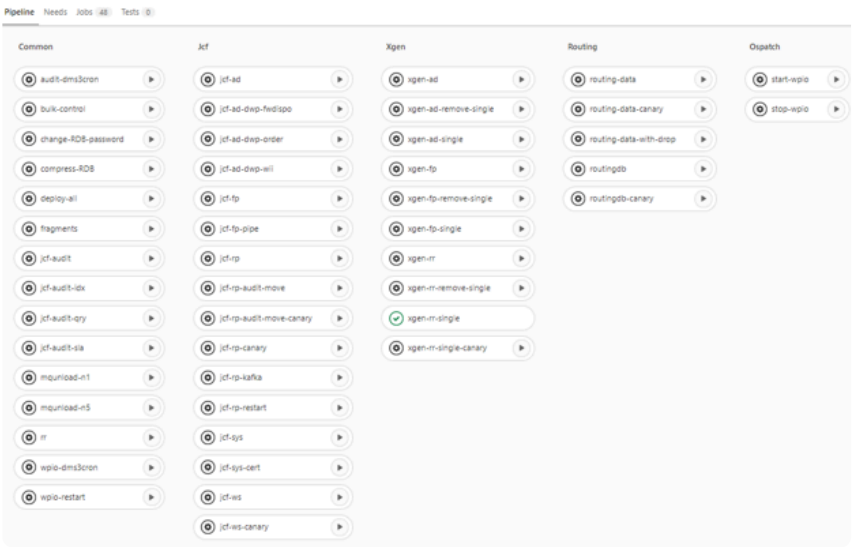

V. Verification

Check in the SQuirreL database program in TUA (and in TUS)

1. Start SQuirreL

How to configure and run SQuirreL

2. Verification in the database

The tables to check are those whose names match the names of the members in the xml files where the changes were made.



You can also search for new channels using a full SQL query, but it's easier and faster to use the "Add/remove..." button in the top menu bar

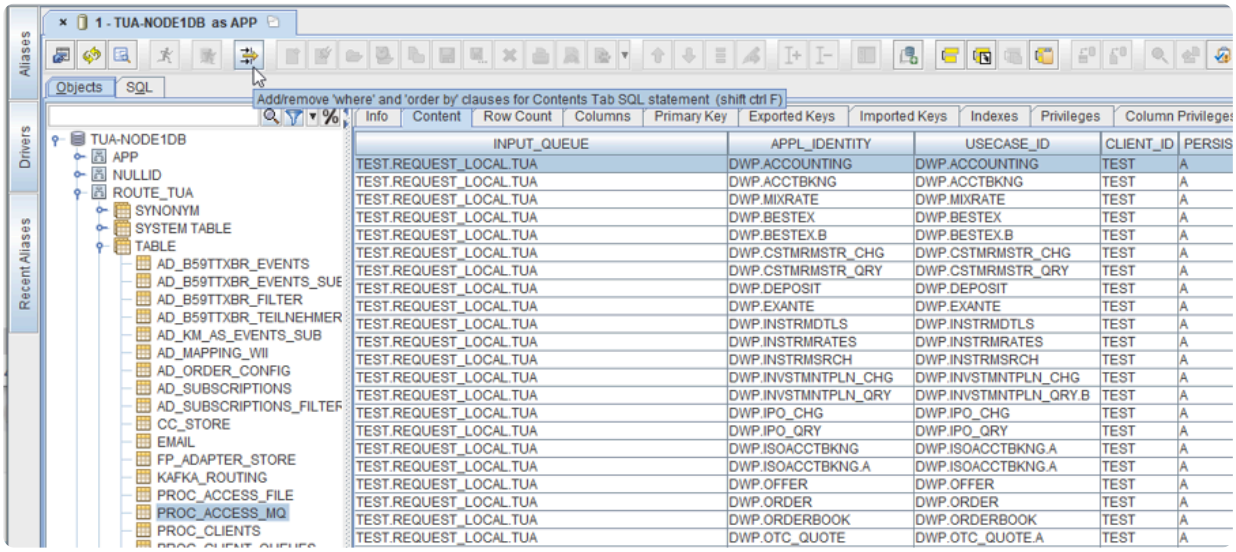

We have to look for USECASE_ID, because it contains the channels

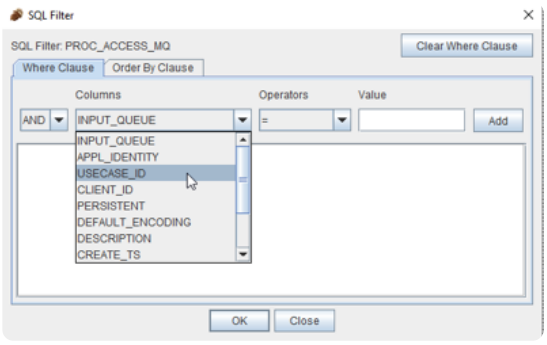

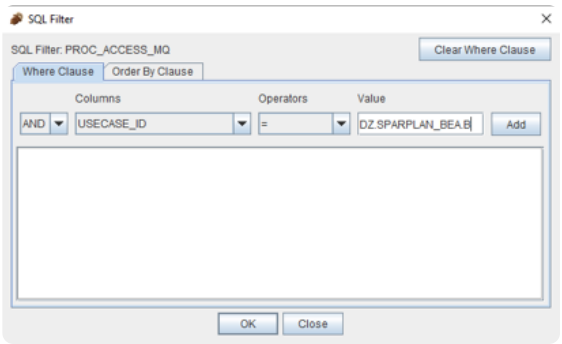

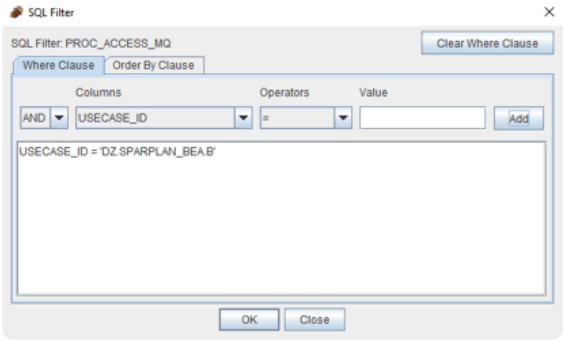
SQL Filter
SQL Filter: PROC_ACCESS_MQ
Clear Where Clause
Where Clause
Order By Clause
Columns
Operators
Value
AND
USECASE_ID
=
Add
USECASE_ID = 'DZ.SPARPLAN_BEA.B'
OK
Close

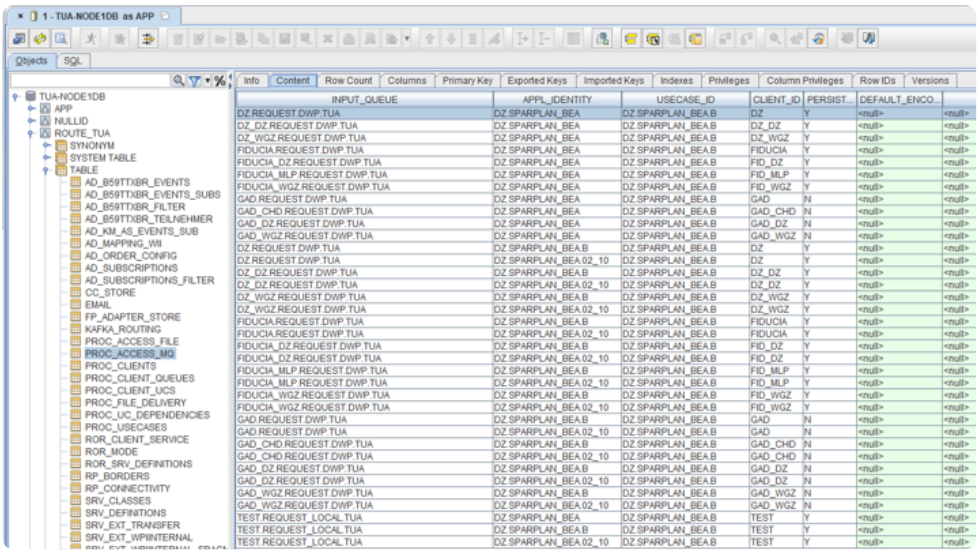
1 - TUA-NODE1DB as APP
Objects
SQL
TUA-NODE1DB
APP
NULLID
ROUTE_TUA
SYNONYM
SYSTEM TABLE
TABLE
AD_B59TTXBR_EVENTS
AD_B59TTXBR_EVENTS_SUBS
AD_B59TTXBR_FILTER
AD_B59TTXBR_TEILNEHMER
AD_KM_AS_EVENTS_SUB
AD_MAPPING_WII
AD_ORDER_CONFIG
AD_SUBSCRIPTIONS
AD_SUBSCRIPTIONS_FILTER
CC_STORE
EMAIL
FP_ADAPTER_STORE
KAFKA_ROUTING
PROC_ACCESS_FILE
PROC_ACCESS_MQ
PROC_CLIENTS
PROC_CLIENT_QUEUES
PROC_CLIENT_UCS
PROC_FILE_DELIVERY
PROC_UC_DEPENDENCIES
PROC_USECASES
ROR_CLIENT_SERVICE
ROR_MODE
ROR_SRV_DEFINITIONS
RP_BORDERS
RP_CONNECTIVITY
SRV_CLASSES
SRV_DEFINITIONS
SRV_EXT_TRANSFER
SRV_EXT_WPIINTERNAL
Info
Content
Row Count
Columns
Primary Key
Exported Keys
Imported Keys
Indexes
Privileges
Column Privileges
Row IDs
Versions
INPUT_QUEUE
APPL_IDENTITY
USECASE_ID
CLIENT_ID
PERSIST...
DEFAULT_ENCO...
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ_DZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
DZ_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B DZ_WGZ Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FIDUCIA Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_DZ Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_MLP.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_MLP Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
FIDUCIA_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B FID_WGZ Y <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_CHD.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_CHD N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_DZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_DZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
GAD_WGZ.REQUEST.DWP.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B GAD_WGZ N <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA DZ.SPARPLAN_BEA.B TEST Y <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA.B DZ.SPARPLAN_BEA.B TEST Y <null> <null>
TEST.REQUEST_LOCAL.TUA DZ.SPARPLAN_BEA.02_10 DZ.SPARPLAN_BEA.B TEST Y <null> <null>

Connect a new customer to a WPIO service

Creation of a new Client / Customer / Provider in WPIO

Definition

New DWP Bank's clients or providers shall be properly configured at the WPIO jcf-routingdata and jcf-rp components in order to be able to get access rights to use the WPIO services.

Here we can observe several ClientID-s and some of the WPIO services they have permissions to call:

Audit Date	Hour	Client ID	Input Service ID	Type	Status	# Requests	Avg Seconds	Min Seconds	Max Secon...
		1822DIR	DWP.PRIIPSERVICE			134	0.8794	0.1344	7.0314
		1822DIR	DWP.QUOTE			80	0.6686	0.1146	3.3473
		AMG	DWP.ERIC_FP.MAP			3	6.4280	4.2848	7.6220
		AXN_DUR	DWP.ORDER			68	0.3768	0.1065	3.8988
		AXN_DUR	DWP.ORDER_AD.DEC.AXN.865			156	0.0000	0.0000	0.0000
		BAYERNLB	BAYERNLB.FWDISPO_AD			14	0.0000	0.0000	0.0000
		BAYERNLB	DWP.CSTMRMSTR_CHG			2	0.0877	0.0862	0.0892
		BAYERNLB	DWP.ISOACCTBKNG			110	0.1649	0.0732	2.7156
		BAYERNLB	DWP.ORDER			84	0.1164	0.0977	0.2704
		BHF	BHF.FWDISPO_AD			403	0.0188	0.0124	0.0717
		BHF	DWP.CSTMRMSTR_CHG			23	0.0931	0.0664	0.1410
		BHF	DWP.ORDER			1282	0.1195	0.0780	0.8715
		BHF	WP2.ERU1290			94	0.2118	0.0291	1.4856
		CBF	CBF.TAXBOX_WP2.MAP			6	13.7320	7.3134	18.1230
		CBF	CBF.WP2_TAXBOX.ID			4	9.0484	7.0196	10.3151
		CBF	CBF.WP2_TAXBOX.MAP			4	403.3227	363.6326	459.6667
		DEKALUX	DWP.ORDER_AD.DKLUX.1010			544	0.0000	0.0000	0.0000
		DEKALUX	DWP.ORDER_AD.DKLUX.1011			1024	0.0000	0.0000	0.0000
		DEKALUX	DWP.ORDER_AD.DKLUX.1014			4	0.0000	0.0000	0.0000
		DEKALUX	DWP.ORDER_AD.DKLUX.1015			3	0.0000	0.0000	0.0000

A client is defined by a Client ID and the ***Client Queue:***

ClientID:

Usually the client name is used for it.

Sample: DKB, EBASE, MLP, INVESTIFY, etc.

Client Queue:

- Client queue is created by FITS MQ team.

- We should raise an ARS MQ request as the first step, to get the client queue created by MQ team.

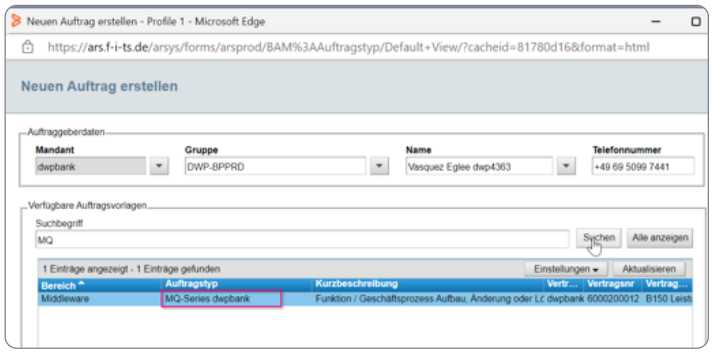

- At the ARS request a spreadsheet (Service Formular_MQ_Produktinfrastruktur.xls) shall be attached with the details of the queues to be created.

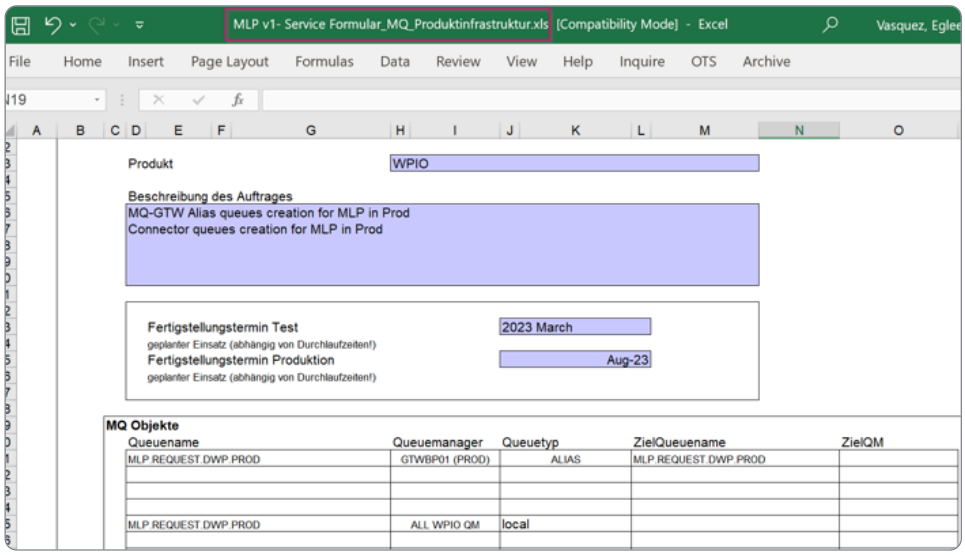



Sample: MLP.REQUEST.DWP.PROD

- Once the client queue is ready, the client configuration at icf-

routingdata and jcf-rp components can be deployed.

- During messages processing, the client queue determines the requesting Client.

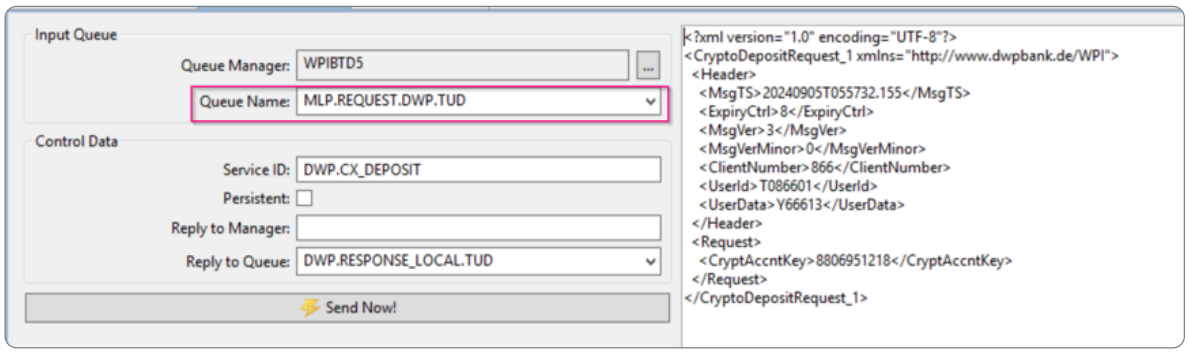

Audit ID	Type	Status	Node ID	Client ID	Input Service ID	Start Time	Proc. Seconds	Error Code
9364027556	D	S	09	MLP	DWP.CX_DEPOSIT	2024-09-05 09:29:23.728131	0.757	
1864993434	D	S	11	MLP	DWP.CX_DEPOSIT	2024-09-05 09:14:24.662467	0.641	
4848932328	D	S	14	MLP	DWP.CX_DEPOSIT	2024-09-05 09:08:58.913669	0.755	
9798726744	D	S	19	MLP	DWP.CX_DEPOSIT	2024-09-05 08:30:07.736443	1.016	
1368069500	D	S	01	MLP	DWP.CX_DEPOSIT	2024-09-05 08:15:50.521133	0.694	
6364318908	D	S	10	MLP	DWP.CX_DEPOSIT	2024-09-05 08:11:09.284883	0.819	

jcf-routingdata configuration

The configuraion happens in 3 files which allows a Client to run the specified Services via Client Queue.

After the setup is done and committed, the routingdata version is created at GitLabEE, the version is set for the intended test environment (or Prod) the job "routingdata" shall be run at GitLab to do the client access rights deployment.

[1_config_client.xml]

The table: PROC_CLIENTS and PROC_CLIENT_QUEUE are updated to create the client.

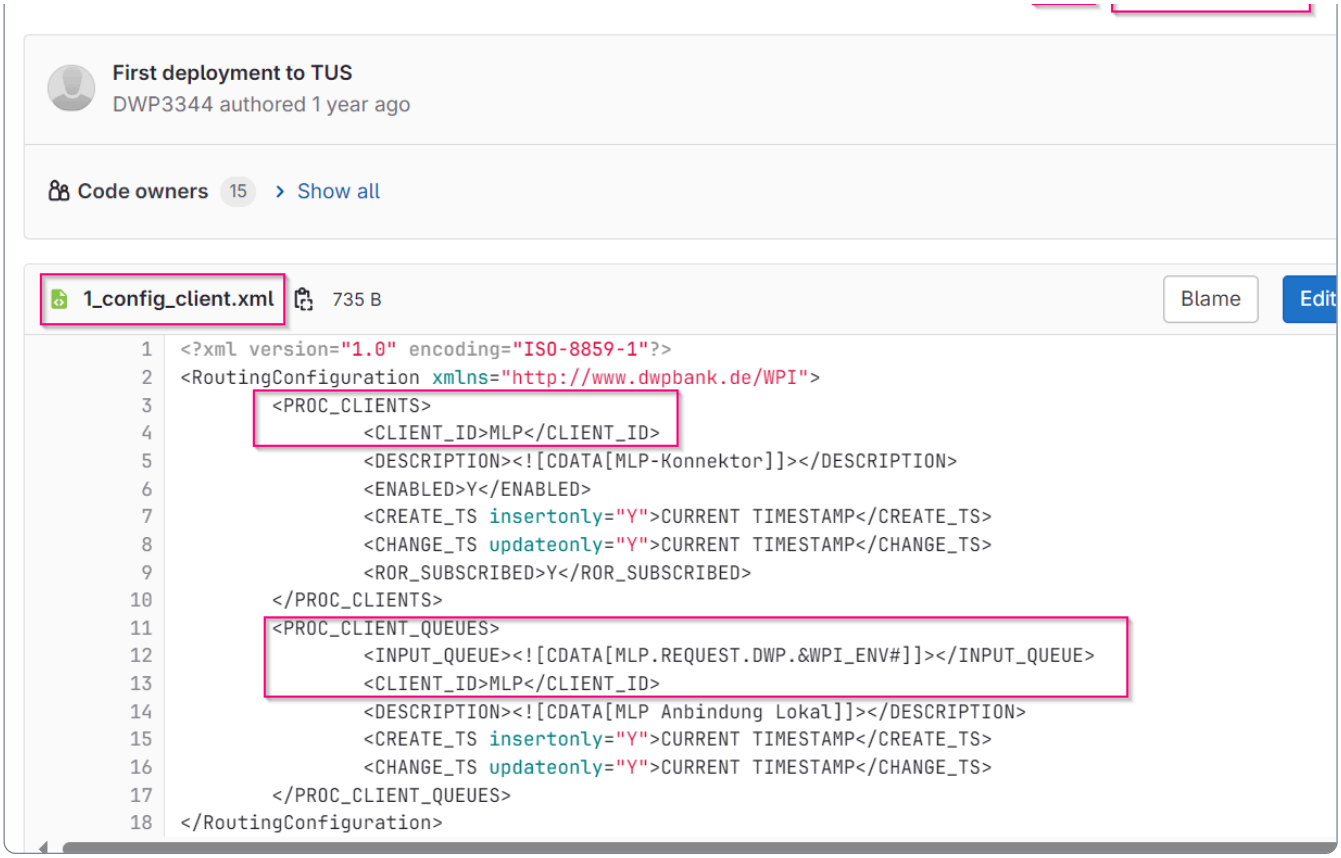

2_config_client_ucs.xml

At table PROC_CLIENT_UCS the ClientId and the service are set.

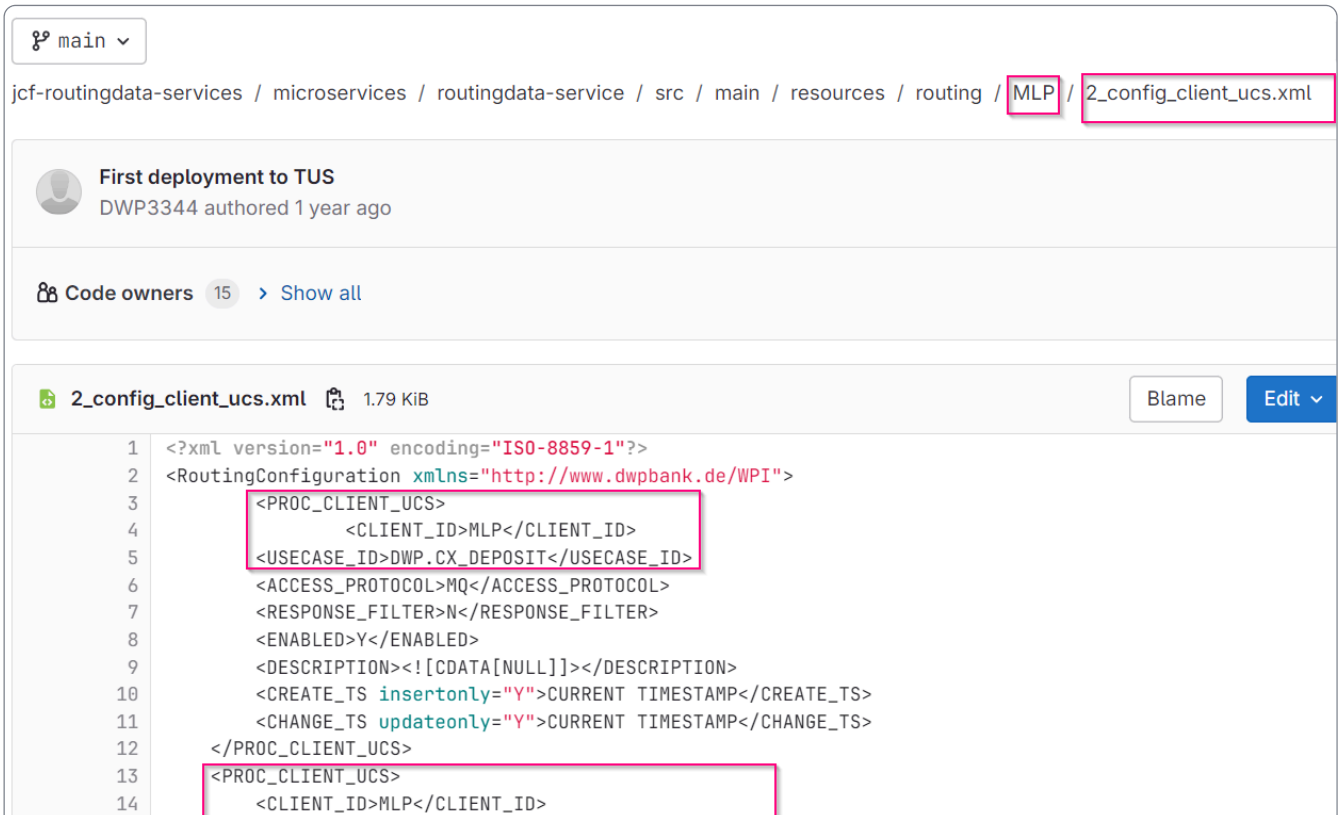

```
        <USECASE_ID>DWP.CX_CSTMRMSTR_CHG</USECASE_ID>
        <ACCESS_PROTOCOL>MQ</ACCESS_PROTOCOL>
        <RESPONSE_FILTER>N</RESPONSE_FILTER>
        <ENABLED>Y</ENABLED>
        <DESCRIPTION><![CDATA[NULL]]></DESCRIPTION>
        <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
        <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
    </PROC_CLIENT_UCS>
    <PROC_CLIENT_UCS>
        <CLIENT_ID>MLP</CLIENT_ID>
        <USECASE_ID>DWP.CX_ORDER</USECASE_ID>
        <ACCESS_PROTOCOL>MQ</ACCESS_PROTOCOL>
        <RESPONSE_FILTER>N</RESPONSE_FILTER>
        <ENABLED>Y</ENABLED>
        <DESCRIPTION><![CDATA[NULL]]></DESCRIPTION>
        <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
        <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
    </PROC_CLIENT_UCS>
    <PROC_CLIENT_UCS>
        <CLIENT_ID>MLP</CLIENT_ID>
        <USECASE_ID>DWP.CX_TRNSCTNHSTRY</USECASE_ID>
        <ACCESS_PROTOCOL>MQ</ACCESS_PROTOCOL>
        <RESPONSE_FILTER>N</RESPONSE_FILTER>
```

[3_config_access_mq.xml]

At table PROC_ACCESS_MQ, the ClientID, the service and the client queue are set.

main

jcf-routingdata-services / microservices / routingdata-service / src / main / resources / routing / MLP / 3_config_access_mq.xml

Revert "Revert "Pull request #94: Feature/integration OCT REL MPL & DECOMM""
DWP4363 authored 11 months ago

Code owners 15 › Show all

3_config_access_mq.xml 2.36 KiB Blame Edit

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<RoutingConfiguration xmlns="http://www.dwpbank.de/WPI">
        <PROC_ACCESS_MQ>
                <USECASE_ID>DWP.CX_DEPOSIT</USECASE_ID>
                <CLIENT_ID>MLP</CLIENT_ID>
                <APPL_IDENTITY>DWP.CX_DEPOSIT</APPL_IDENTITY>
                <INPUT_QUEUE>MLP.REQUEST.DWP.&WPI_ENV#</INPUT_QUEUE>
                <PERSISTENT>N</PERSISTENT>
                <DEFAULT_ENCODING isNull="Y"/>
                <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
                <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
                <DESCRIPTION><![CDATA[NULL]]></DESCRIPTION>
                <THD_MAX_MSG>0</THD_MAX_MSG>
                <THD_MAX_MSG_INTERVAL>0</THD_MAX_MSG_INTERVAL>
                <THD_MSG_DELAY_INTERVAL>0</THD_MSG_DELAY_INTERVAL>
        </PROC_ACCESS_MQ>
        <PROC_ACCESS_MQ>
                <USECASE_ID>DWP.CX_CSTMRMSTR_CHG</USECASE_ID>
                <CLIENT_ID>MLP</CLIENT_ID>
                <APPL_IDENTITY>DWP.CX_CSTMRMSTR_CHG</APPL_IDENTITY>
                <INPUT_QUEUE>MLP.REQUEST.DWP.&WPI_ENV#</INPUT_QUEUE>
                <PERSISTENT>Y</PERSISTENT>
```

```
        <DEFAULT_ENCODING isNull="Y"/>
        <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
        <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
        <DESCRIPTION><![CDATA[NULL]]></DESCRIPTION>
        <THD_MAX_MSG>0</THD_MAX_MSG>
        <THD_MAX_MSG_INTERVAL>0</THD_MAX_MSG_INTERVAL>
        <THD_MSG_DELAY_INTERVAL>0</THD_MSG_DELAY_INTERVAL>
    </PROC_ACCESS_MQ>
    <PROC_ACCESS_MQ>
        <USECASE_ID>DWP.CX_ORDER</USECASE_ID>
        <CLIENT_ID>MLP</CLIENT_ID>
        <APPL_IDENTITY>DWP.CX_ORDER</APPL_IDENTITY>
        <INPUT_QUEUE>MLP.REQUEST.DWP.&WPI_ENV#</INPUT_QUEUE>
        <PERSISTENT>Y</PERSISTENT>
        <DEFAULT_ENCODING isNull="Y"/>
```

jcf-rp (WPIO deployment project - no GitalbEE)

The connector is setup at deployment wpio branch at file: jcf-rp/templates/environmment.conf.j2

The connector id, name, clientId, client queue shall be set in this file for each client.

After the setup is done and committed, the job "jcf-rp" shall be run at GitLab to do the client connector deployment.

Note: No version shall be created for this connector client configuration.

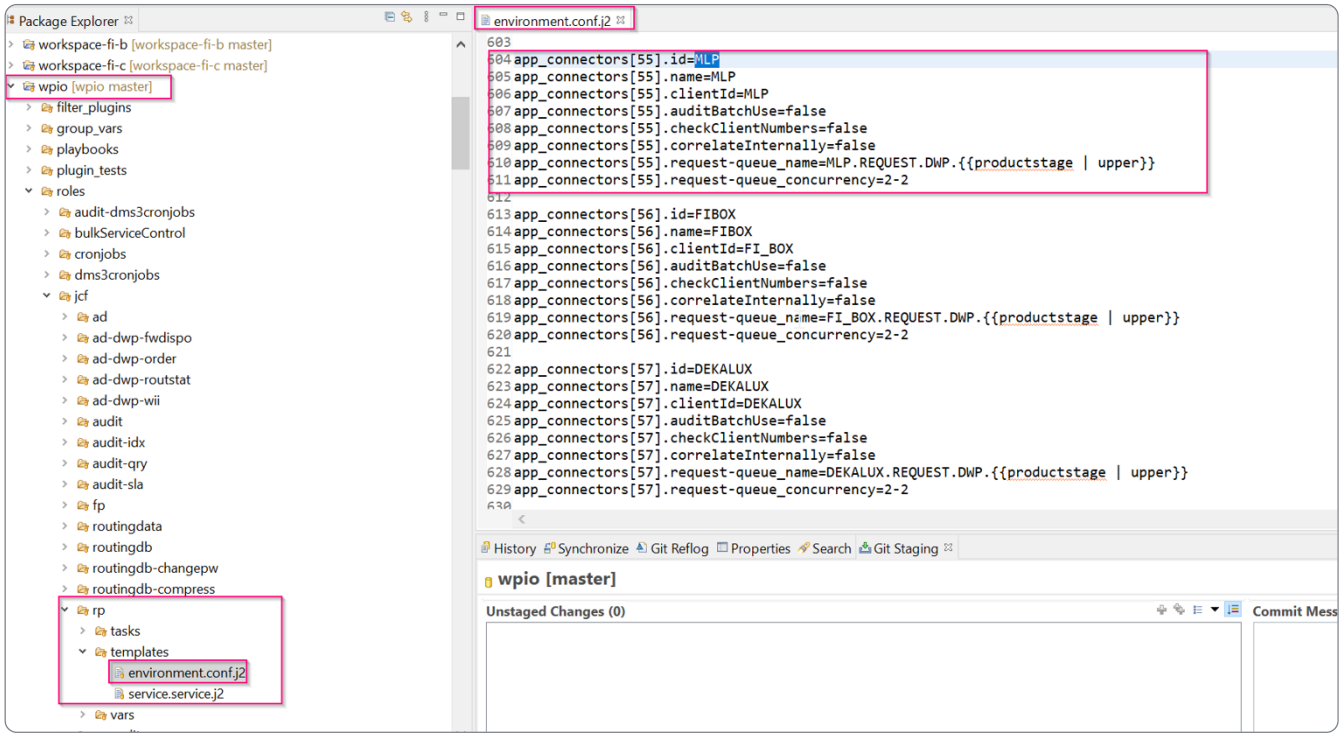

Note: *in case of removal, for example index 5 shall be removed, then it is worth to move the latest one to the index 5 and after that removed the latest.*

The rule is to keep the index sequence without any gaps.

New service configuration

Request for New Repository

New Service Configuration in Routingdata

Create New Branch

Create new service folder into internal

note: It's best to copy the configuration of an existing similar service and replace the necessary data.

- Create 1_dervice_registration.xml
  - 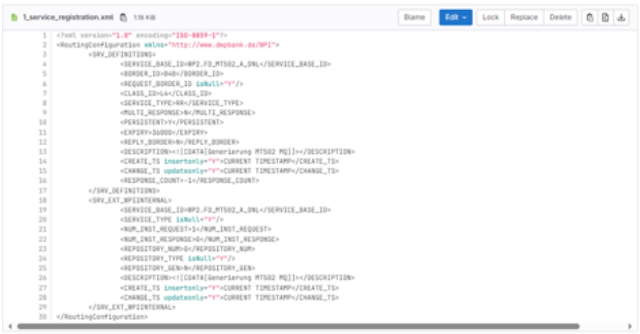
- Create channel folder
  - 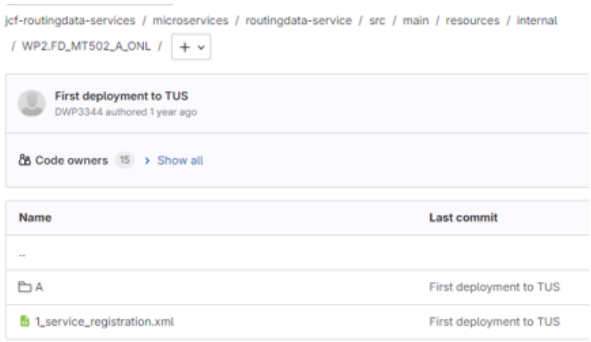

- Create new 1_instance_registration.xml
  - 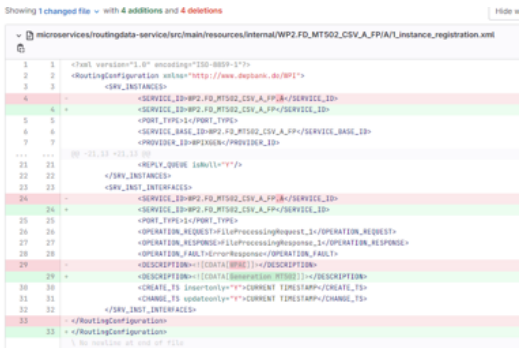
- Create new 2_usercase_registration.xml

- microservices/routingdata-service/src/main/resources/internal/WP2.FD_MT502_CSV_A_FP/A/2_usecase_registration.xml

```
...  ...  @@ -3,7 +3,7 @@
 3    3        <PROC_USECASES>
 4    4                <USECASE_ID>WP2.FD_MT502_CSV_A_FP.MAP</USECASE_ID>
 5    5                <ENABLED>Y</ENABLED>
 6         -              <DESCRIPTION><![CDATA[WPAC]]></DESCRIPTION>
      6    +              <DESCRIPTION><![CDATA[Generierung MT502]]></DESCRIPTION>
 7    7                <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
 8    8                <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
 9    9        </PROC_USECASES>
...  ...  @@ -13,9 +13,9 @@
13   13                <DEPENDENCY_TYPE>I</DEPENDENCY_TYPE>
14   14                <SOURCE_SERVICE_BASE_ID isNull="Y"/>
15   15                <TARGET_SERVICE_BASE_ID>WP2.FD_MT502_CSV_A_FP</TARGET_SERVICE_BASE_ID>
16        -             <TARGET_SERVICE_ID>WP2.FD_MT502_CSV_A_FP</TARGET_SERVICE_ID>
      16   +             <TARGET_SERVICE_ID>WP2.FD_MT502_CSV_A_FP_A</TARGET_SERVICE_ID>
17   17                <TARGET_PORT_TYPE isNull="Y"/>
18   18                <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
19   19                <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
20   20        </PROC_UC_DEPENDENCIES>
21        - </RoutingConfiguration>
          \ No newline at end of file
      21   + </RoutingConfiguration>
```

- Update 2_config_client_ucs.xml
  - You have to create a new PROC_CLIENT_UCS tag configuration for the new services
  - Note: Important the service name length if it is more than 20 (in the error message the maximum length is 24 which to be understood with ".MAP" suffix. (which is why it was later necessary to ask for the name in the example to be changed: `WP2.FD_MT502_CSV_A_FP` → `WP2.FD_MT502_CSV_FP`)
    - microservices/routingdata-service/src/main/resources/routing/WP2/2_config_client_ucs.xml

```
...  ...  @@ -370,6 +370,17 @@
370  370                <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
371  371                <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
372  372        </PROC_CLIENT_UCS>
     373  +     <PROC_CLIENT_UCS>
     374  +             <CLIENT_ID>WP2</CLIENT_ID>
     375  +             <USECASE_ID>WP2.FD_MT502_CSV_A_FP.MAP</USECASE_ID>
     376  +             <ACCESS_PROTOCOL>FP</ACCESS_PROTOCOL>
     377  +             <RESPONSE_FILTER>N</RESPONSE_FILTER>
     378  +             <ENABLED>Y</ENABLED>
     379  +             <DESCRIPTION isNull="Y"/>
     380  +             <CREATE_TS insertonly="Y">CURRENT TIMESTAMP</CREATE_TS>
     381  +             <CHANGE_TS updateonly="Y">CURRENT TIMESTAMP</CHANGE_TS>
     382  +     </PROC_CLIENT_UCS>
     383  +
373  384        <PROC_CLIENT_UCS>
374  385                <CLIENT_ID>WP2</CLIENT_ID>
375  386                <USECASE_ID>WP2.MT540_CASC_A_FP.MAP</USECASE_ID>
...  ...
```

- RELEASE.cfg
  - In the RELEASE.cfg file: You should pay attention to the type of the new service, because within the file it should be put into that group. E.g.: the service WP2.FD_MT502_CSV_FP is L4, so the configuration looks like this:
    service install WPIXGEN RR L4 WP2.FD_MT502_CSV_FP A

    path: jcf-routingdata-services/microservices/routingdata-service/src/main/resources/RELEASE.cfg
    - You need to find the existing service channel(s) and add the new one:
      e.g.: service install WPIXGEN RR L2 DWP.CASHMGMNT A

New Service Configuration in WPIO

- services.yaml
  - path: wpio/roles/xgen/<ad|fp|rr>/vars/services.yaml
    - e.g.: wpio/roles/xgen/<ad|fp|rr>/vars/services.yaml

```
3  wp2-fd-mt502-csv-fp-a:
4    image: "registry.dwp/wpio/wp2-fd-mt502-csv-fp"
5    imageEE: "registry.dwp.fits.cloud/wp3/bc/wpio-sm/xgen-wp2-fd-mt502-csv-fp-registry"
6    version: "{{ xgen_versions_fp[productstage].xgen_wp2_fd_mt502_csv_fp }}"
7    channel: "A"
```

- versions yaml files: You have to add the new service with 0.0.0 version in every! environment (in the unused environments too!). But you don't need to put the name of the service in the single-service file, because the versions yaml configuration with version 0.0.0 is only needed to make the service mentioned in services.yaml exist in versions yaml, otherwise you get an error message.
  - Path: wpio/roles/xgen/<ad|fp|rr>/vars/versions-<environment>.yaml

- e.g.: wpio/roles/xgen/fp/vars/versions-tua.yaml

```
xgen_versions_fp_tua:
  xgen_cbf_taxbox_wp2: "v4.13.6-4.13-DWP-p013-2023@EE"
  xgen_cbf_wp2_taxbox: "v4.13.6-4.13-DWP-p013-2023@EE"
  xgen_dwp_cstmrmstr_chg_fp: "v4.13.5-4.13-DWP-p013-2023@EE"
  xgen_dwp_indcmntcost_fp: "v4.13.4-4.13-DWP-p013-2023@EE"
  xgen_dwp_expost_fp: "v4.13.4-4.13-DWP-p013-2023@EE"
  xgen_dwp_order_fp: "v4.13.4-4.13-DWP-p013-2023@EE"
  xgen_dwp_eric_fp: "v4.13.4-4.13-DWP-p013-2023@EE"
  xgen_dz_awv_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_eqs_insdrmon_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_fi_cstmrmstr_chg_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
- xgen_fi_cstmrmstr_chgc_fp: "v4.13.13-4.13-DWP-p013-2023@EE"
  xgen_nb_order_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_sb_cstmrmstr_chg_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_wp2_awv_fp: "v4.13.2-4.13-DWP-p013-2023@EE"
  xgen_wp2_chtx_wp2_fp: "v4.13.8-4.13-DWP-p013-2023@EE"
  xgen_wp2_crs_fi_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_wp2_elst_exempt_fp: "v4.13.3-4.13-DWP-p013-2023@EE"
  xgen_wp2_fd_mt502_csv_fp: "0.0.0"
  xgen_wp2_fd_mt509_e_fp: "v4.13.8-4.13-DWP-p017-2024@EE"
  xgen_wp2_fd_mt515_e_fp: "v4.13.9-4.13-DWP-p017-2024@EE"
  xgen_wp2_fitax_fp: "v4.13.7-4.13-DWP-p017-2024@EE"
```

Test it in SQuirreL

FP Processes Key

The key is needed in case of:

1. New client which will use an FP service (for example INVESTIFY client will use DWP.ORDER_FP)
2. Old client which already has a key for FP reports still can request:
   a. A new FP file configuration, where the output report will go to a different destination than the destination defined for the already existing key.

Client access rights setup for DWP.ORDER_FP

Routing Configuration

The needed setup is done in routing by updating the following files:

Explanation with DEKALUX client as a sample.

1) **DEKALUX/2_config_client_ucs.xml**

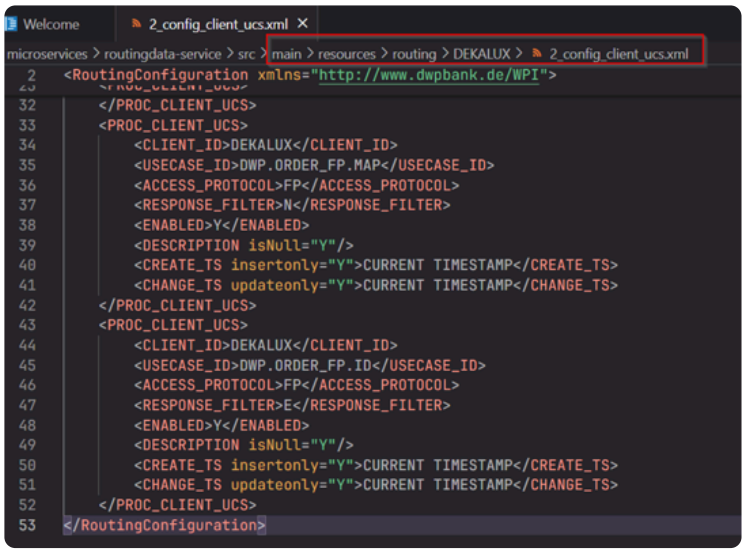

2) **DEKALUX/3_config_access.xml**

- The INPUT_FILENAme and OUTPUT_FILENAME are standard. The 3rd element indicates the Client (DKLUX).
- A key shall be requested from FITS transfer Team. They key is used to send the response file to the Client.
- If the client has already a key for DWP.ORDER_FP, and need a new DWP.ORDER_FP file process, then the same key can be reused (this is the case for INASYS client)

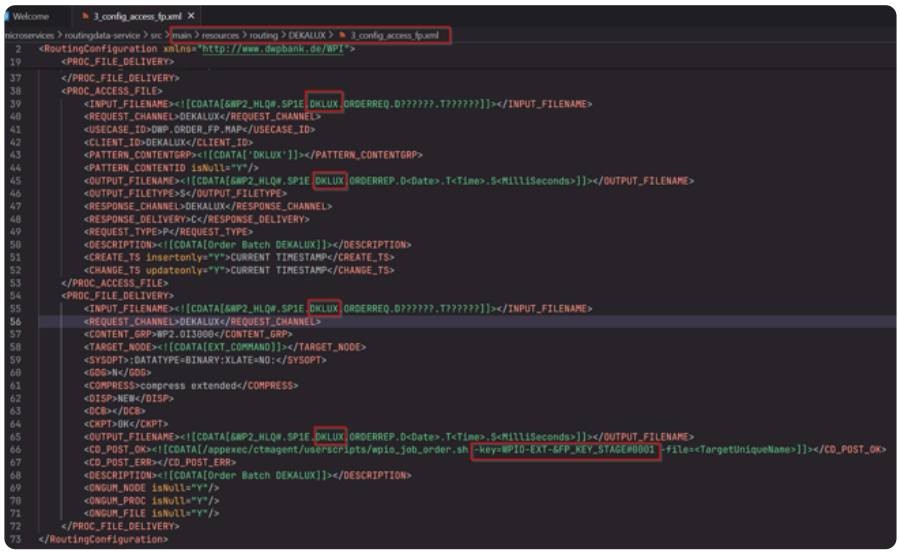

3) **external/WP2.OI3000/1_service_registration.xml**

- The CONTENT_GRP (DKLUX) corresponds to 3rd element of the input file name (WPSB59T.SP1E.**DKLUX**.ORDERREQ.D??????.T??????)
- The key WPIO-ZOS-T0014 is used to send the request to the HOST. The same key is kept for all the DWP.ORDER_FP requests to the Host.

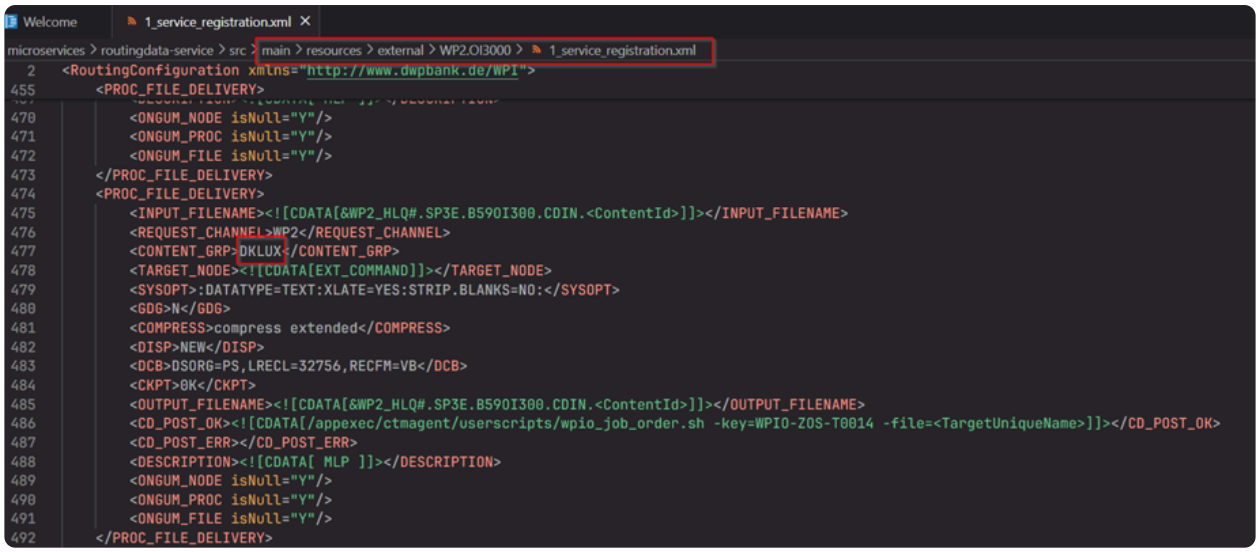

CSV and XSD export

Xgen 4.13

Prerequisite

Highlights

This document focus on the message export, using XGen 4.13, and assumes that it's previously installed. Patch level is considered to be p013. Please refer to documentation how to install XGen in a case it's missing from the target computer.

Background

This document focusses on the exporting XGen message definitions in CSV and XSD format.
This operation is required, for the purpose our clients to be supplied with the up-to-date messages used in our services, in a way for importing them in their system, or building documents for message mappings.

Should be noted, that this operation is required, every time when a change in the message occur.

Location and naming

The result should be stored in the WPIO shared folder, from where the business team can pick them up and work with them. The location of that folder is as follows:

V:\WPIOnline\1B Dokumentation\1B5 Schnittstellen\<Service_Name>

Where <Service_Name> is the service as it's named in our WPIO system.

Files are stored under names with following pattern:

WPI<Leyer>_<Service_Name>_v<Major_version>_M<minor_version><Interface>.<cvs|xsd>

Example:

_WPI_L2_DWP_BESTEX_v1_m0_BestExecutionRequest_1.csv

Regional differences and settings

Although the abbreviation of CSV comes form "Comma Separated Values", the actual separator in Germany it's ";" (semicolon) instead of comma. Therefore, before exporting always the delimiter shall be checked.

The current one can be checked here (Windows 10).

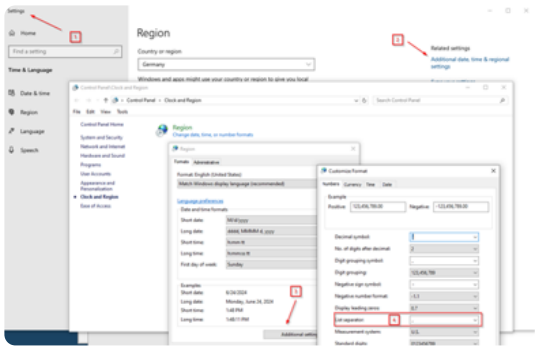

In a case that one would like to open automatically the CSV and to be displayed in a Excel form, that value shall be changed accordingly.

Selecting and exporting messages

Steps to export the message definition.

Identify the message definition which has to be exported from the workspace. Right click on the selected item and from the popup menu select as follows:

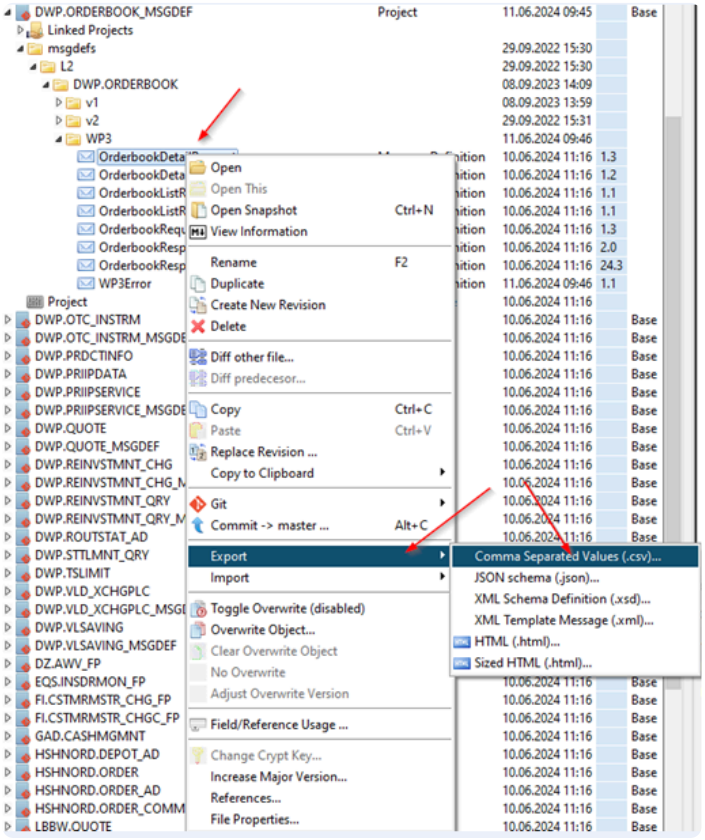

Once you select the CSV export, the following dialog will appear:

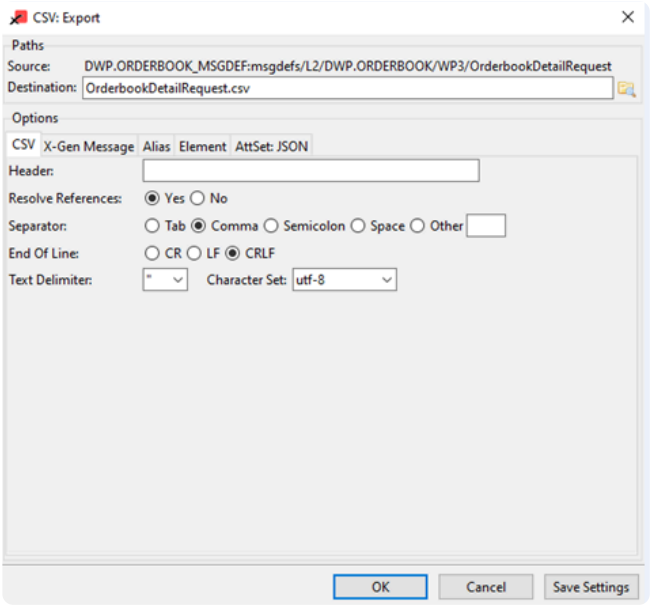

Select the destination and file name, according to the naming convention earlier described.

Most of the meaningful options are in the “CSV” tab. It goes like:

- Header – leave empty
- Resolve References – ‘Yes”
- Separator – here should be considered what shall be used as described in the “Regional differences and settings”
- End of the Line – keep CRLF
- Text delimiter and Character Set – keep as default.

Exporting of the XSDs working on the same way as the CSV

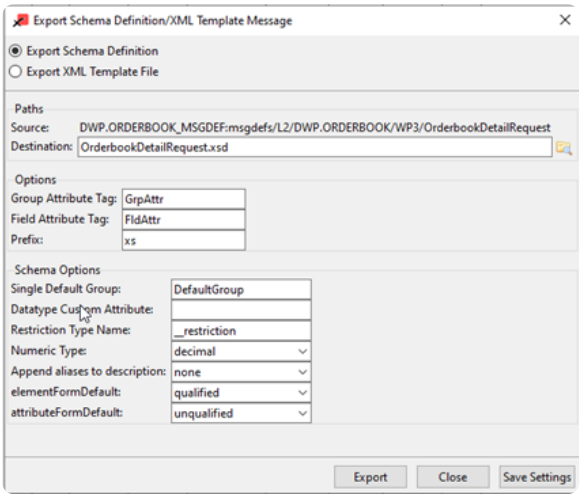

Keep the default values as shown on the picture for export.

The small difference, is that there is another export option. Here it’s possible to export an empty XML file, where values can be put afterwards. This is used, when a test cases for a message definition has to be created.

Valid for the both exports: If a whole folder has to be exported, then not the file is selected, but the folder which contains the files for export.

Final comments

There is a possibility of minor differences in the export process or details, depending of the XGen version. In a case of noted issues inconstancy of the exported data, a ticket to Valantic should be issues.

Xgen 4.8

1. Export MsgDef to XSD

A new Windows PowerShell script was created for pre-processing of a selected XGen MsgDefs files which need to be exported to XSD files.

The name of the script is **UpdMsgDefsForXsd.ps1** and it is saved in the XGen core Git Repository: https://bitbucket.tools.dwpbank.net/scm/wpios/xgen-source.git

The script search all <Field/> tags in the MsgDef file for **XML.Format** attribute's value and when found, it compres it against predefined list of values in the script file.

If a match is found then two additional attributes are added or replaced(if already exist) in the <Field/> tag : **XML.XSType** and **XML.Pattern**.

At the end, every updated MsgDef file is saved to it's original location.

Some of the predefined **XML.Format** patterns in **UpdMsgDefsForXsd.ps1** script at the time it was created:

The Modifiable section can be extended with new XML.Format patterns.

Pre-Processing steps:

- Right click on the script file in your XGen workspace and click on "Run with PowerShell"

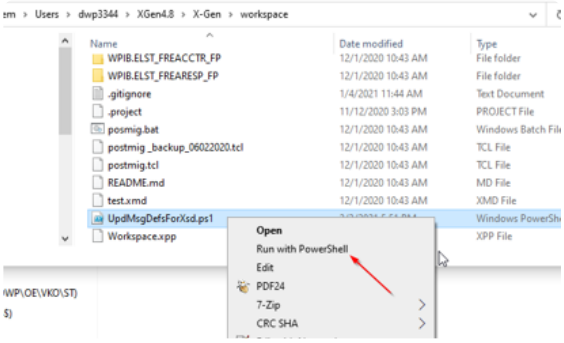

- "Select Message Definition File(s)" dialog window will open - multi selection is allowed:

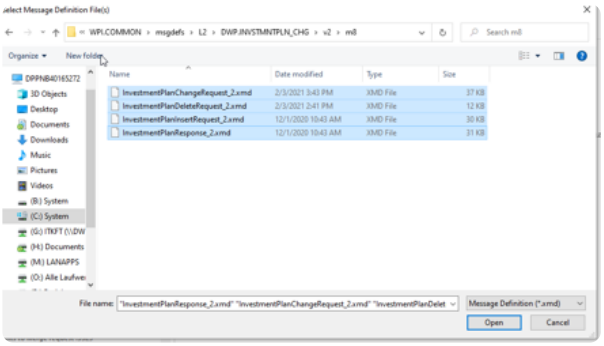

- "Cancel" will stop the processing. "Open" will continue with selected MsgDef files and a new "Target Namespace" window will be shown:

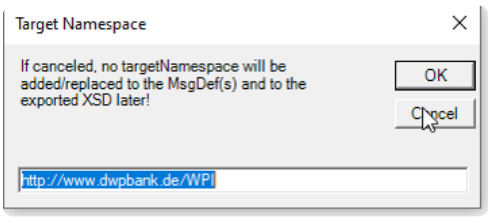

targetNamespace is needed for exported XSD to be valid.. Especially for L2 core services which use WPI namespace!

"Cancel" will not add/replace "targetNamespace" in the MsgDef file.

"Ok" will add/replace targetNamespace" in the MsgDef file.

- At the end an "Info" MsgBox is displayed and Pre-processing is completed:



Exporting MsgDef to XSD steps:

- From XGen 4.8 GUI select:

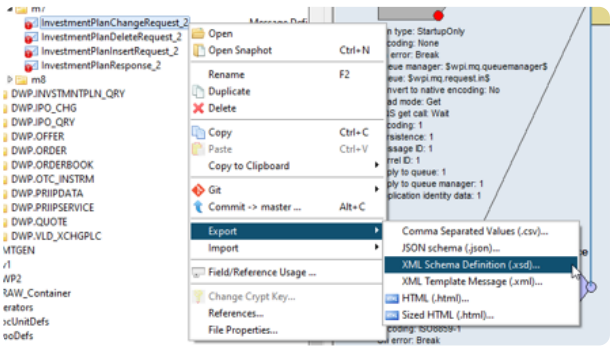

- Make sure the following Export configurations are in place:

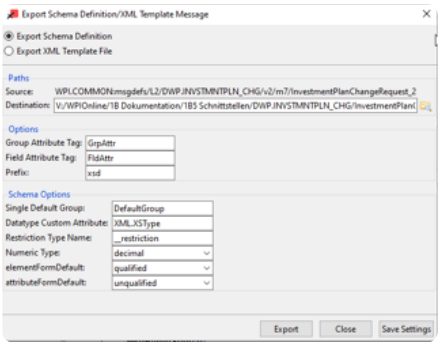

- Use this naming convention! For example:

  msgdefs_L2_DWP_INVSTMNTPLN_CHG_v2_m7_InvestmentPlanChangeRequest_2.xsd

- Validate the new XSD file with XML Spy or other tool:

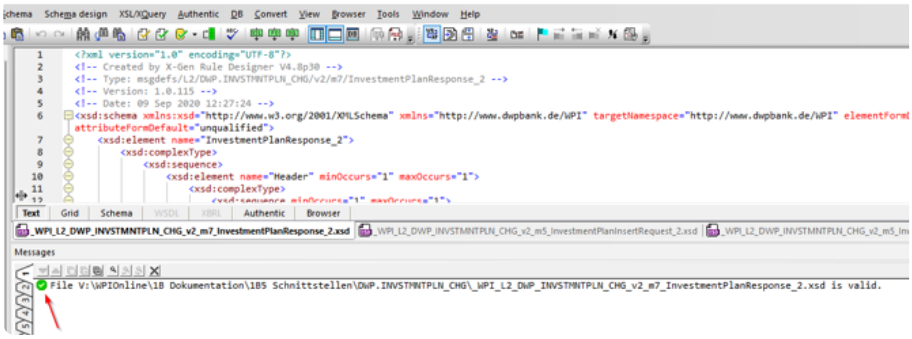

2. Export MsgDef to CSV

In order to keep a similar output as of Xgen 3.5.4.1 the "Export MsgDef to CSV" tool should be configured as following:





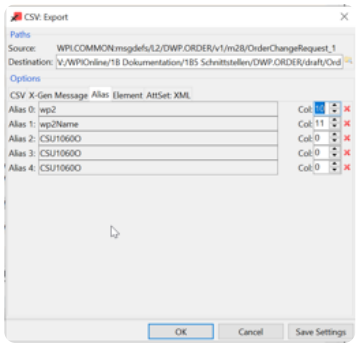

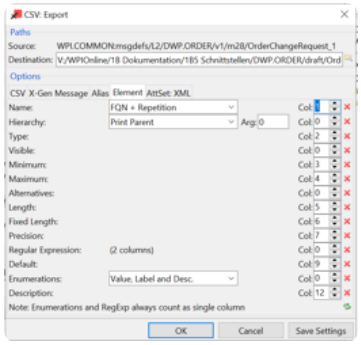

Then press "Save Settings" button!

Code review for XGen services

criticality

"p:_Testdokumentation\#2024_2_Sonder- und E-Changes\ITKFT\TT054068_102137815_HSHNORD.ORDER_AD_Fix_DWP.EXANTE_Fix\Change-Kritikalitäts-Ermittler.xlsx"

	Complexity		
Activity	**low**	**medium**	**high**
German team	(+10% effort for code review)	(+30% effort for code review)	(+60% effort for code review)
BUD team			
change of message definition (RR, FP and AD-Xgen-Servcies)			
up to 15 XML fields	x		
at least 15 XML fields		x	
New Minor version		x	
New xgen service			x
New Major version			x
New custom			x

Code review for XGen services guide lines

CodeReview is always required (based on the related SfO: Code Review.docx / Origigrafxprod**).**

According to sfO instruction 9565 Development and quality assurance process, ***a code review is required for all changes not equal to minimal changes*** *with objects from in-house development of applications with the following classification in the application profile:*
- ***Availability****: very high or high or*
- ***Confidentiality****: very high or high or*
- ***Integrity****: very high or high*

The stakeholder expects a code review to have taken place.

If we unexpectedly find ourselves in a situation where we are short of resources, the stakeholder needs to get permission from IT Change Management or Release Management to "push" something into PROD without a code review.

Code review process based on the complexity

- When the complexity of the change is labeled as “low” (L), then **the CodeReviewer dosen´t need to support the development process at all. Only a short check “at the end” is required.**
- In case of “medium” (M) and “high” (H) a code review should be produced.

Note: please refer to the table to qualify, what is the type of the code review needed.

Operation / PU			
TCL-Comp. change/new			x
Workflow change/new			x
Mapping without message definition			
1-10	x		
11-		x	
Update the Routing-Configuration	**X**		
Any change in the following services increase the complexity by one position: ***) low → medium, medium → high** • Order • Orderbook • CustomerMaster • CustomerMaste		**x***	**x***

Jira – required task attachments

- Label in the Jira task, which points what type of code review is needed. It should be one of the following – “Code_review_low”, “Code_review_medium”, “Code_review_high”
- The decision *about what type of review* should occur, after ~25% of the task is done, together with the reviewer as final. Initial estimation should be included by the developer, which can increase or decrease accordingly.
- Subtask *named “Code review WPIO-XYZ”* attached to the original Jira task should be created, and assigned to the designated reviewer.
- *The filter on the dashboard (WPIO - dwpbank) can show the subtasks with this name.*
- Check point in the subtask should be included *as a* due date, after the development is started.

SAP

SAP should be provided for the reviewer, and should be included in the task estimation in advance.

Basic content of the code review

The basic information should contain:

- List of the changed components (PU/Mappings/MsgDef) (M/H)
- In a case of more sophisticated changes, a screenshot with some description should be included (M/H)
- Test cases would be nice to have if the changes are technical and it’s not covered by business test cases (M/H)
- Comments about the development approach, and reasons why it’s chosen. (H)

Code review process

It is defined by the SfO.

rQuery • CustomerMasterChange • Deposit • Account Booking • ProductInfo • all CX*-Services • DWP.ISOACCTBKNG			
Extension of FP services (additionel criteria)			
mapping change	x		
create a new output file / report	x		
new FP service			x
Extension/new Java AD services			
• Parametrisation / Routing / Filter • additional message definitio		x	

Formal approval from the TIETE team

No change on the approval process. No special "approve" for the Code Review is required.

Code review for routing configuration

If there is a change in the routing configuration a code review has to be performed.

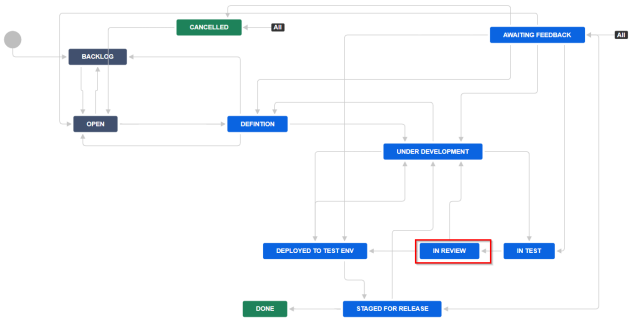

n / Mapping			
new AD-Service (Java)			x
Migration to higher xgen version			x
New Valantic xgen patch			x

Definition:

- THE AUTOMATED TEST TOOL WAS CREATED FOR TESTING RR SERVICES. IT HELPS TO COMPARE THE OUTPUTS GENERATED BY A NEW XGEN VERSION (RUNNING IN TUS) AGAINST THE OUTPUTS GENERATED BY AN OLDER XGEN VERSION RUNNING IN THE MIG DATABASE. THE MIG DATABASE CONTAINS XGEN SERVICES PROCESSES COPIED FROM PROD.
- RR TEST TOOL FETCHES TEST INPUT DATA FROM THE MIG ENVIRONMENT, AND CALLS THE SERVICES ON TUS, BASED ON THE STARTING LOCATION AND THE CONFIGURATION.
- IT IS IMPLEMENTED IN JAVA AND HAS A COMMAND LINE USER INTERFACE WHICH ACCESSES THE WPIEADT DB2 AND WPIO TUS DERBY DATABASES.

Location:

The Request/Response RR TestTool is located at: V:\WPIOnline\XGen 4\08_RR_TestTool

RR Test Tool initialization:

- UNZIP THE FILE: V:\WPIONLINE\XGEN 4\08_TESTTOOL\XGENTESTTOOL_1.3.13.ZIP IN YOUR DEDICATED DIRECTORY (/HOME/DWPXXXX/XGENTESTTOOL).

After the installation it will look like:

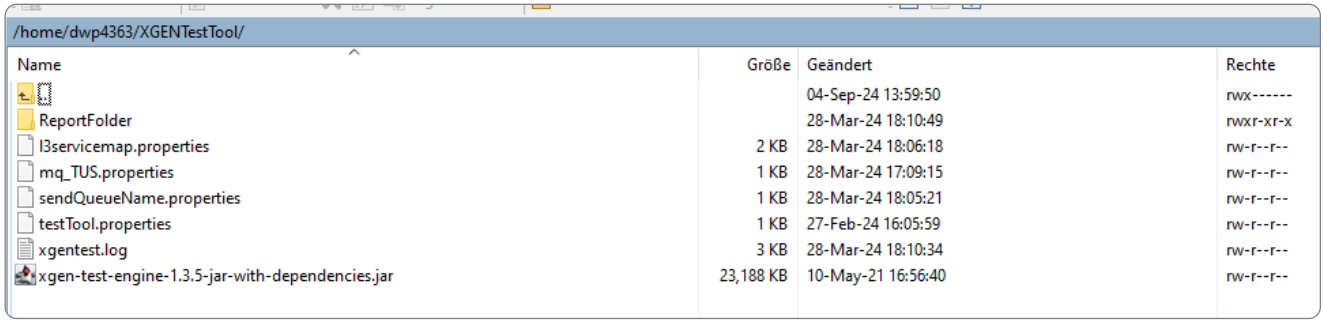

- **CREATE A FOLDER IN YOUR HOME DIRECTORY FOR THE CSV REPORTS THAT WILL BE GENERATED (REPORTFOLDER). IT IS CONVENIENT TO USE THE NAME OF THE SERVICE AS FOLDER NAME.**

- **UPDATE THE CONFIG FILES:**
  - **<u>L3SERVICEMAP.PROPERTIES:</u>**

The service name which will be tested, and its corresponding backend service name (usually the L3 service name) shall be set.

It is observable from Audit Browser:

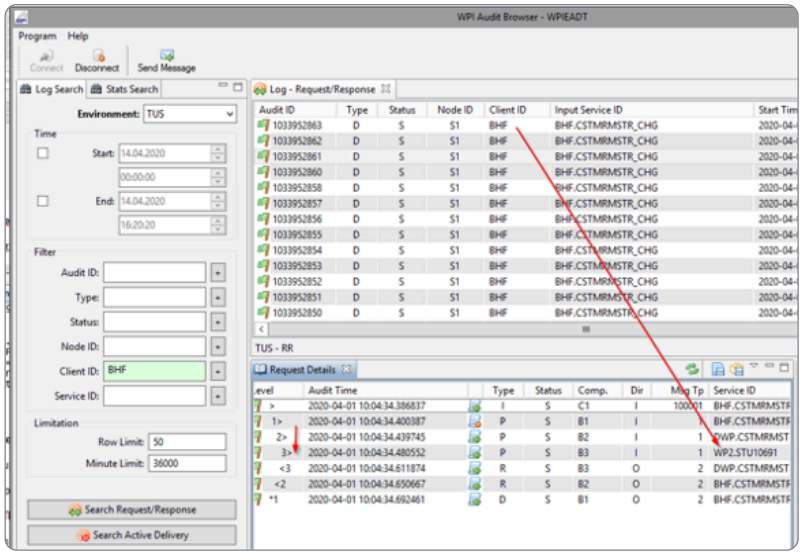

For example:

BHF.CSTMRMSTR_CHG=WP2.STU10691

- **MQ_TUS.PROPERTIES:**

```
host=2.153.29.62
port=14141
#port=14143
#channel=SVR.WPI.WPIBES1.1
channel=AEEXPL.WPIBES1.1
queueManager=WPIBES1
#Message Persistent  0/NO, 1/YES, 2/AS_Q_DEF
msgPersistent=1
```

- **MSGPERSISTENT SHALL BE SET AS PER <PERSISTENT>A</PERSISTENT> AT CLIENT ROUTING CONFIGURATION IN 3_CONFIG_ACCESS_MQ.XML**

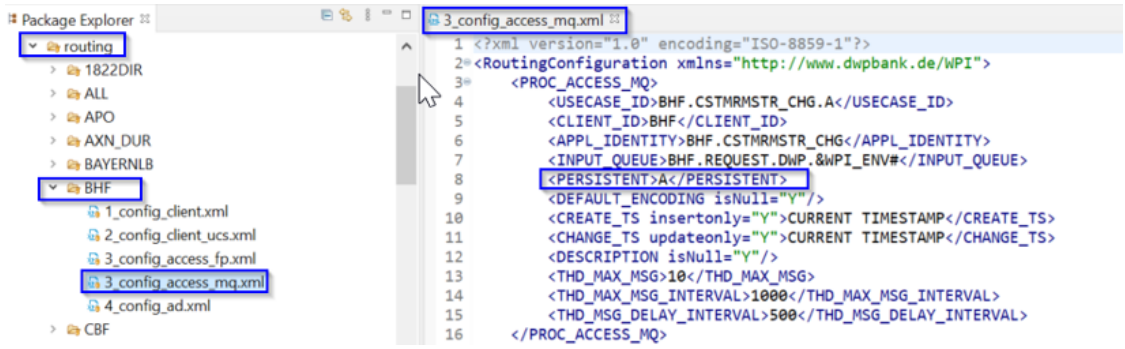

- **PERSISTENT:Y ⇒MSGPERSISTENT=1**
- **PERSISTENT:N ⇒MSGPERSISTENT=0**
- **PERSISTENT:A ⇒MSGPERSISTENT=0 OR 1**
- **SENDQUEUENAME.PROPERTIES:**
- The client queue is set, which has been set in the routing data

```
#RR.sendQueueName=WPDIR.REQUEST.WPIO.{0}
#RR.sendQueueName=WPI.B2.REQUEST.{0}
RR.sendQueueName=DEKA.REQUEST.DWP.{0}
#RR.sendQueueName=DKB.REQUEST.DWP.{0}
#RR.sendQueueName=BAYERNLB.DEPOTUEB.DWP.{0}
#RR.sendQueueName=BAYERNLB.STTLMNT.DWP.{0}
#RR.sendQueueName=HSHNORD.ORDER.DWP.{0}
#RR.sendQueueName=TEST.REQUEST_LOCAL.{0}
#RR.sendQueueName=CU.EMBARGO.SMARAGD.REQUEST.WPI.{0}
#RR.sendQueueName=BHF.REQUEST.DWP.{0}
#RR.sendQueueName=DKB.REQUEST.DWP.{0}
#RR.sendQueueName=DZ_DZ.REQUEST.DWP.{0}
#RR.sendQueueName=DZ_SWB.REQUEST.DWP.{0}
#RR.sendQueueName=DZ_EBK.REQUEST.DWP.{0}
#RR.sendQueueName=FIDUCIA_DZ.REQUEST.DWP.{0}
#RR.sendQueueName=SBR_WFC.REQUEST.DWP.{0}
#RR.sendQueueName=1822DIR.REQUEST.DWP.{0}
#RR.sendQueueName=WP2.REQUEST.WPI.{0}
#RR.sendQueueName=WPDIR.REQUEST.WPIO.{0}
#SWIFT.sendQueueName=WP2B.REQUEST.WPI.{0}
#SWIFT.sendQueueName=WPI.B4.REQUEST.{0}
```

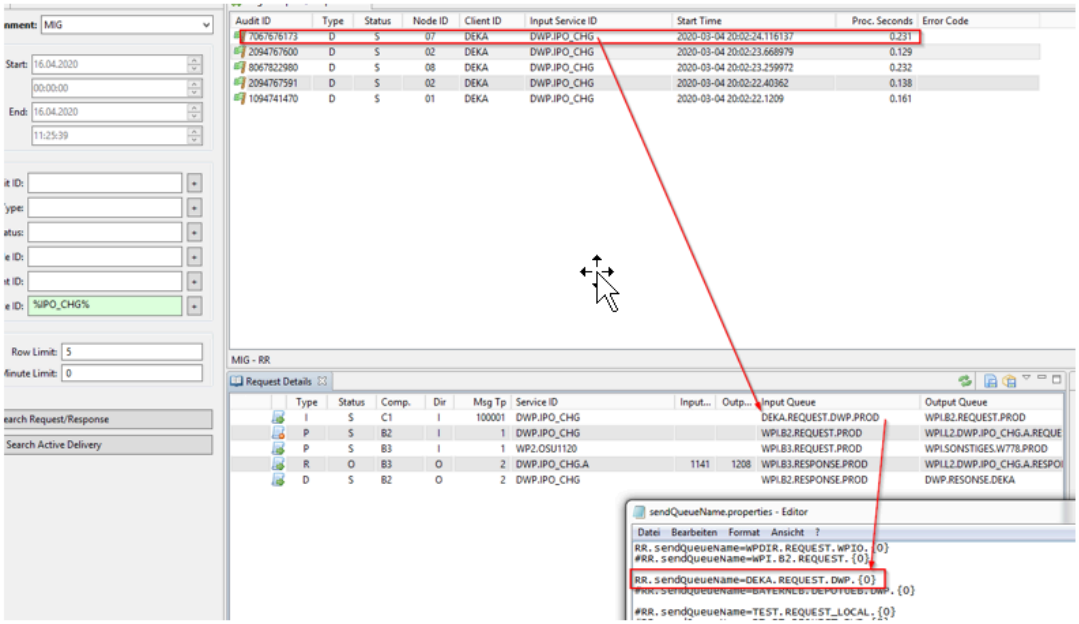

-
-
  - **TESTTOOL.PROPERTIES:**

Setup the schemaName and envFromName:

```
schemaName=EGLEE
envFromName=MIG
```

The schema shall be created previously in the Derby database

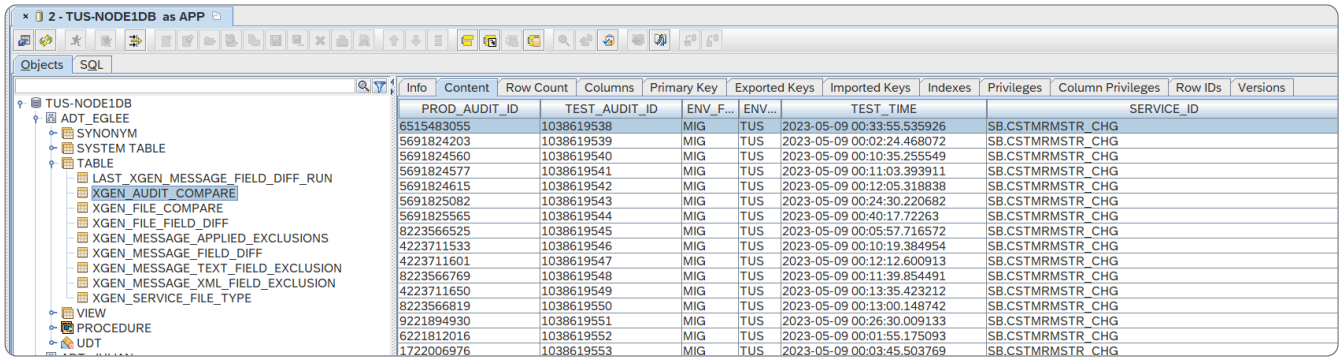

Run RR TestTool

Before starting the test, make sure that the XGEN service to be tested is up and running, via command line in TUS or via WPI Admin:

1) Submit the test:

- **FROM TUS COMMAND LINE GO TO THE RR TESTTOOL DIRECTORY: [DWP4363@DWPTUSAPPE01 ~]$ CD XGENTESTTOOL/**
- **SUBMIT COMMAND:**

  java -cp xgen-test-engine-1.3.5-jar-with-dependencies.jar de.dwpbank.test.xgen.XGenTest *<from to> <ServiceName>* DWP.AD_LOCAL.TUS DWP.RESPONSE_LOCAL.TUS *<isRRService> <clientID_optional>*

Variable example:

<from to>: 2023050918:45:00 2023050918:56:00

<ServiceName>: DWP.OTC_INSTRM

<isRRService>: true

Sample:

java -cp xgen-test-engine-1.3.5-jar-with-dependencies.jar de.dwpbank.test.xgen.XGenTest 2023050918:45:00 2023050918:56:00 'DWP.OTC_INSTRM' DWP.AD_LOCAL.TUS DWP.RESPONSE_LOCAL.TUS true

2) Compare results New vs. Old

- SUBMIT COMMAND: JAVA -CP XGEN-TEST-ENGINE-1.3.5-JAR-WITH-DEPENDENCIES.JAR DE.DWPBANK.TEST.XGEN.XGENCOMPARE

3) Generate the comparison report csv file:

- SUBMIT COMMAND: JAVA -CP XGEN-TEST-ENGINE-1.3.5-JAR-WITH-DEPENDENCIES.JAR DE.DWPBANK.TEST.XGEN.XGENREPORT *<REPORTFOLDERNAME>*

Sample:

java -cp xgen-test-engine-1.3.5-jar-with-dependencies.jar de.dwpbank.test.xgen.XGenReport *ReportFolder*

4) Analyse the report

The reports will be available under the defined *<reportFolderName>*

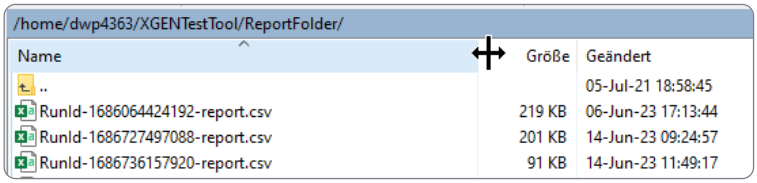

Check if the differences are acceptable, for example Timestamp differences, UserId differences, etc. In other cases the reason of the difference shall be analyzed.

Sample Report:

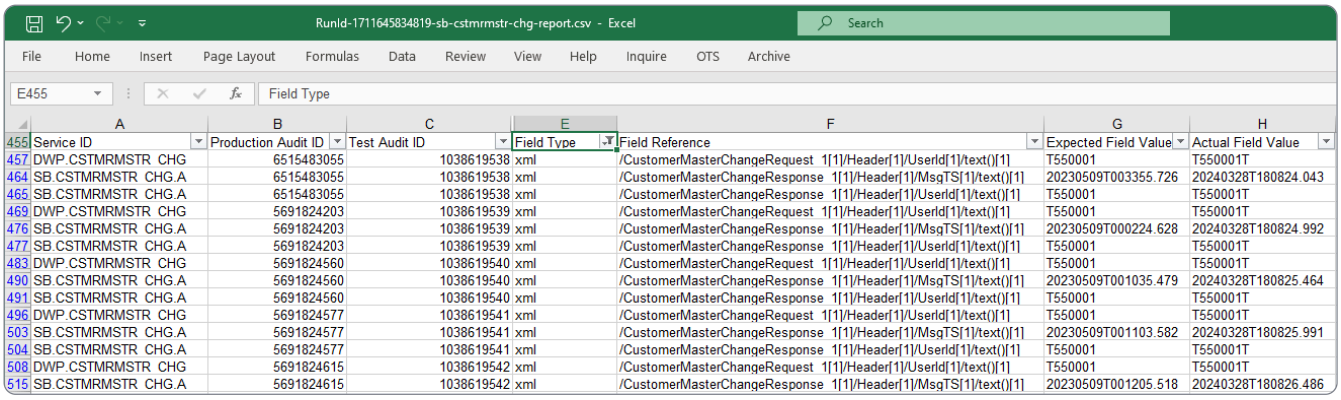

	A	B	C	E	F	G	H
456	Service ID	Production Audit ID	Test Audit ID	Field Type	Field Reference	Expected Field Value	Actual Field Value
457	DWP.CSTMRMSTR_CHG	6515483055	1038619538	xml	/CustomerMasterChangeRequest_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
464	SB.CSTMRMSTR_CHG.A	6515483055	1038619538	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/MsgTS[1]/text()[1]	20230509T003355.726	20240328T180824.043
465	SB.CSTMRMSTR_CHG.A	6515483055	1038619538	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
469	DWP.CSTMRMSTR_CHG	5691824203	1038619539	xml	/CustomerMasterChangeRequest_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
476	SB.CSTMRMSTR_CHG.A	5691824203	1038619539	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/MsgTS[1]/text()[1]	20230509T000224.628	20240328T180824.992
477	SB.CSTMRMSTR_CHG.A	5691824203	1038619539	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
483	DWP.CSTMRMSTR_CHG	5691824560	1038619540	xml	/CustomerMasterChangeRequest_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
490	SB.CSTMRMSTR_CHG.A	5691824560	1038619540	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/MsgTS[1]/text()[1]	20230509T001035.479	20240328T180825.464
491	SB.CSTMRMSTR_CHG.A	5691824560	1038619540	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
496	DWP.CSTMRMSTR_CHG	5691824577	1038619541	xml	/CustomerMasterChangeRequest_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
503	SB.CSTMRMSTR_CHG.A	5691824577	1038619541	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/MsgTS[1]/text()[1]	20230509T001103.582	20240328T180825.991
504	SB.CSTMRMSTR_CHG.A	5691824577	1038619541	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
508	DWP.CSTMRMSTR_CHG	5691824615	1038619542	xml	/CustomerMasterChangeRequest_1[1]/Header[1]/UserId[1]/text()[1]	T550001	T550001T
515	SB.CSTMRMSTR_CHG.A	5691824615	1038619542	xml	/CustomerMasterChangeResponse_1[1]/Header[1]/MsgTS[1]/text()[1]	20230509T001205.518	20240328T180826.486

FI client - L1 xgen development

You can see the latest document under wpio folder \1B Dokumentation\1B2 Konzeption\OsplusNeo

Word document which was presented is OsplusNeo_FI_Introduce_Channel_handling_for_versioning_V2.1_20240917.doc

WPIO FI L1 Common ErrorMsgHandling

Presentation summary Outline:

- *Title:* ***FI_COMMON/metamappings/V23.1/ErrorMsgHandling usages***
- *Date: 28 October 2025*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

The presentation focused on exploring the current implementation of the WPIO **FI_COMMON/metamappings/V23.1/ErrorMsgHandling** xgen Meta Mapping via an real example.

. The main objective was to introduce common error message handling on FI client.

Key points and trails

- Overview of definition of error message xls which is coming from the business
- Overview processing of the meta mapping

Attachments:

You can see the latest document under wpio folder WPIO:\1B Dokumentation\1B2 Konzeption\OsplusNeo

The latest XLS which describes common error messages regarding [ORDERINPUT-31] A.240025 Sollbild Dispohinweise mapping in ErrorMessages mapping - dwpbank



PowerPoint used for conduction the presentation

X-Gen base image - Configuration

TCL language & XGen implementation

DWP.WP2_CHTX_FP service tcl component

Presentation summary Outline:

- *Title:* ***DWP.WP2_CHTX_FP service tcl component***
- *Date: 04 February 2025*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

The presentation focused on exploring the current implementation of the TCL language in WPIO DWP.WP2_CHTX_FP xgen service via an real example.

. The main objective was to introduce TCL processing in the xgen flow.

Key points and trails

- Overview of msg definitions
  - Input file
  - Output file
  - STF52001_Header
  - STF52001_Detail
  -STF52001
  -ELMA
- Overview processing of the xgen flow
- Overview and discuss tcl component

Attachments:

PowerPoint used for conduction the presentation

WPIO_WP2_CHTX_FP_tcl_component_internal_training_20250204.ppt

ERIC usages

DWP.ERIC_PASS_FP passthrough

You can see the latest document under wpio folder \1B Dokumentation\1B2 Konzeption\Elster

ppt document which was presented is



WPIO ERIC service via WPIB solution

Presentation summary Outline:

- *Title:* ***WPIB.ELST_FREACCTR_FP, WPIB.ELST_FREARESP_FP service Elster calling***
- *Date: 04 March 2025*

Attendees:

- Ilian Nakov
- Eglee Vasquez
- Laszlo Kerepeszki
- Julian Keranov

Presentation Overview

The presentation focused on exploring the current implementation of the WPIO **WPIB.ELST_FREACCTR_FP, WPIB.ELST_FREARESP_FP** xgen service via an real example.

. The main objective was to introduce ERIC calling including TCL processing in the xgen flow.

Key points and trails

- Overview of architecture
- Overview processing of the xgen flows
- Overview and discuss tcl component

Attachments:

You can see the latest document under wpio folder WPIO:\1B Dokumentation\1B2 Konzeption\Elster

PowerPoint used for conduction the presentation

ppt document which was presented is

WPIO_WPIB_E... 304.ppt
02 Jun 2026, 06:54 PM

SSL Connection with Certificate + Private Key

FI.CASHMGMNT Service

The service uses certificates + private key to communicate with the REST endpoint on the FI-TS side.

The certificate files(.crt) and key files(.key) are stored externally and are injected in the service container during the deployment.

In TMU the files are stored in the deployment project:

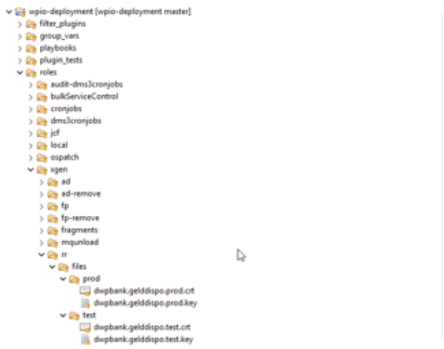

The .key files are encrypted and the real values are extracted during deployment from ansible vault.

Steps of replacing the certificate and key files:

1. Update the .crt file directly in the deployment project.
2. Ask FI-TS to update the value in ansible vault and to provide the encrypted .key file which should be updated in the deployment project as well.
3. Redeploy the service.

In Cloud environment the files are stored in a kubernetes secret - `fi-cashmgmnt-cert-secret in "xgen-fi-cashmgmnt-config" project`**:** **bounded-context/values-default.yaml · main · wp3 / bc / wpio-di / xgen-fi-cashmgmnt-config · GitLab**

Steps of replacing the certificate and key files:

1. Provide the new .crt and .key files to AppOps/Cloud team by creating a Jira ticket here: [M4INF-9512] Metrics for new DBs are missing in GRAFANA - dwpbank
2. The .key file should not be taken from the TMU WPIO deployment project because it is encrypted. Instead the FI=TS colleagues should be asked to provide the real .key file to AppOps. Usually they will send it as a passwd

protected zip file!

3. In the the description of the ticket ask for update of "`fi-cashmgmnt-cert-secret".`
4. After the task is completed check i if the service is working correctly on the Cloud environment.

STANDARD.SMARAGD Service

Relevant for X-Gen 4.13!

The FI certificate is stored in a truststore file and the location of the file is provided as a JVM startup parameter - javax.net.ssl.trustStore:

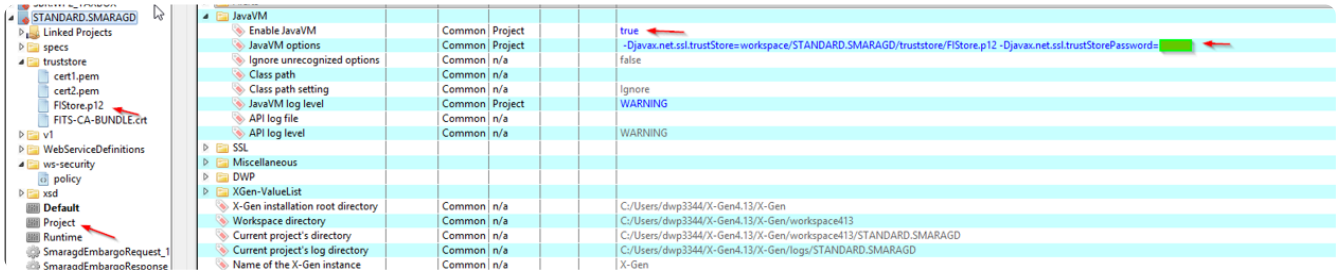

Creating a truststore file from FI certificate:

1. Create a p12 truststore file from provided .crt file, using java keytool command - for example:

keytool -importcert -file FITS-CA-BUNDLE.crt -alias <alias-name> -keystore FIStore.p12 -storetype PKCS12

2. Provide a password when prompted.

3. Update the values in the "JavaVM options" property in Project profile file:

-Djavax.net.ssl.trustStore=workspace/STANDARD.SMARAGD/truststore/FIStore.p12 -Djavax.net.ssl.trustStorePassword=<passwd>

No private.key is used with this service!

XGen services migration to a higher version

4.13 → 4.17

Based on the analysis: [WGC-1791] Review X-Gen 4.17 release notes and analyze impact - dwpbank



Migration steps....1.docx
15 Jul 2026, 10:22 AM

4.8 → 4.13

- Create an xpk file of the service at XGen 4.8. Save it in a specific folder for the migration.



- Read the x-gen-4.13-release-notes.pdf to be aware about what has changed in comparison with our previous XGen version.
- Install at the local c:/ drive XGen root folder *(c:\Users\dwpxxxx\X-Gen4.13\X-Gen\)*:
  - XGen version 4.13 - The package for the installation is located at v:\WPIOnline\1Z Softwarepakete\X-Gen-4.13\X-Gen-4.13-p007-Windows-64bit.zip
  - XGen patches available.
  - Copy the Workspace.xpp file
  - Check that Admin folder was generated under folder c:\Users\dwpxxxx\X-Gen4.13\X-Gen\workspace\

- Open the XGen4.13 rule designer and check that it works fine.
  - Install the xpk service which was created at previous version.

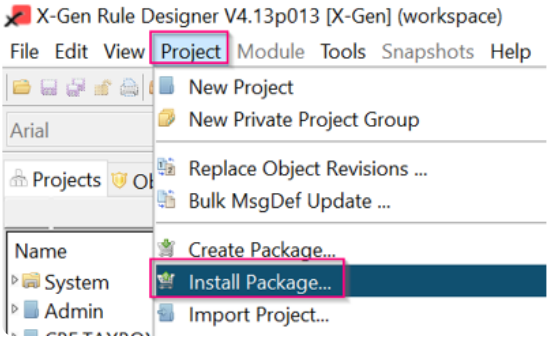

  - Once the service installation is finished, do "Recreate database"
  - Open one by one the msgdefs and accept the 'Update Attribute Set'

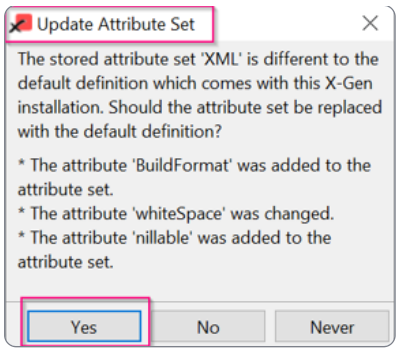

- Accept the new version. Save the msgdef.

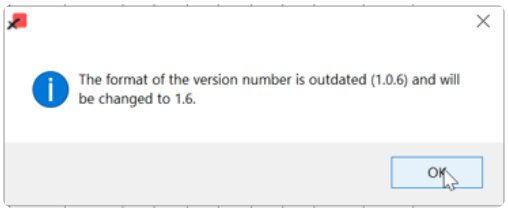

- Open one by one the mappings and accept the new version. Save the mapping.

- Replace the deprecated operators with the new operators.

- Open the Flows and check that all the mappings are properly referenced and can be opened without issues.
- Run a local test without messages with the purpose of creating the test messages folder and for catching any upcoming error due to the migration.
- Prepare test cases for different clients, minors, and for each interface of the service.
- Run local tests with the test case's messages. Compare the results: The generated messages at the new version must be exactly the same as the ones from the old version.
  - If the test results are the same, prepare the service xpk for further TUA installation.

        - If the result is not the same, the process shall be debugged to find the source of the discrepancies.
            - Issue could also be caused due to:
                - Operators behave differently than in previous version
                - Operator has a bug. In this case a Valantic ticket shall be opened.
    - After successful TUA test, install the service in TUD, TUM, TUH, TUV, TUZ to allow the service been tested as much as possible by different projects and clients.
        - Keep monitoring, look after the errors and check if they were caused by the migration or not. If yes:
            - the service failing shall be rollbacked to previous version in order to avoid further issues at the test environment.
            - the migrated service shall be fixed.
    - Use the Test Tool to carry out massive testing in TUS.

XGen 4.17 Quick start

Overview

This page explains how to complete the installation of XGen 4.17, start XPM, and access Rule Designer.

XGen 4.17 is distributed through the Software Center, either as:

- a standalone software package, or
- part of the regular monthly company software release.

The XGen 4.17 installation is divided into two main parts:

- **XGen417** — the main application files
- **XGen417_WS** — user-specific workspaces, configuration files, logs, scripts, and other writable files

Installation locations

Main application

The main XGen 4.17 application is installed in:

C:\Program Files\XGen417 (For German user interface - C:\Programme\XGen417)

This directory contains the main software distribution and WPIO packaging software.

User-specific files and workspaces

Writable and user-specific content is stored in:

C:\Users\<User_ID>\XGen417_WS

The directory can contain multiple XGen workspaces directly in its root.

Example:

```
C:\Users\<User_ID>\XGen417_WS\
├── <workspace>\
├── <workspace_2>\
├── <workspace_3>\
├── logs\
├── ....
├── traces\
├── xgen_dwp.ini
├── xgen_dwp.ini_template.txt
├── readme.txt
```

```
└── xpm.bat
```

The example shows only the files and folders relevant to this guide. Additional folders may also be present.
Important files include:

File	Description
xgen_dwp.ini	User-specific XGen configuration file based on the original xgen.ini
xgen_dwp.ini_template.txt	Backup template for the customized configuration
README.txt	Basic project information and additional technical details
xpm.bat	Main startup script for XPM and Rule Designer

The folder contains various subfolders, and initially a single “workspace”.

Additional workspaces you can create trough File/Create Workspace in the Rule Designer.

Complete the installation

After installing or updating XGen 4.17 from the Software Center, you must either:

- sign out of Windows and sign in again, or
- restart the computer.

This step is required because the Windows login script completes the user-specific part of the installation.

> **Important**
> Do not start XPM immediately after the Software Center installation. Sign out or restart first.

After signing in again, verify that the following directory exists:
C:\Users\<User_ID>\XGen417_WS
(For German localized Windows “Users” folder is “Benutzer”)
Also verify that it contains xpm.bat and xgen_dwp.ini.

Start XPM

XPM is started using:
C:\Users\<User_ID>\XGen417_WS\xpm.bat

To start XPM:

1. Open File Explorer.
2. Navigate to C:\Users\<User_ID>\XGen417_WS.
3. Double-click xpm.bat.

First start

The initially distributed xgen_dwp.ini file contains placeholders.
When xpm.bat is started for the first time, the script automatically processes the configuration file and replaces the placeholders with values associated with the current Windows user.
No manual changes to the placeholders are required.
After the first successful start, xgen_dwp.ini contains the user-specific configuration required by XPM.

> **Important**
> Do not manually edit or replace placeholders before the first start unless instructed by the support team.

Verify that XPM is running

When XPM starts successfully, its icon appears in the Windows system tray.
The system tray is located on the right side of the Windows taskbar. Some icons may be hidden under the Show hidden icons arrow.
To verify that XPM is running:

1. Check the Windows system tray.
2. Open the hidden icons area if necessary.
3. Locate the XPM icon.

If the XPM icon is visible, the application is running.

Start Rule Designer

Rule Designer is started from the XPM system tray menu.

1. Confirm that XPM is running.
2. Locate the XPM icon in the Windows system tray.
3. Right-click the icon.
4. Select the Rule Designer option from the context menu.

Rule Designer should then start using the current XGen 4.17 configuration.

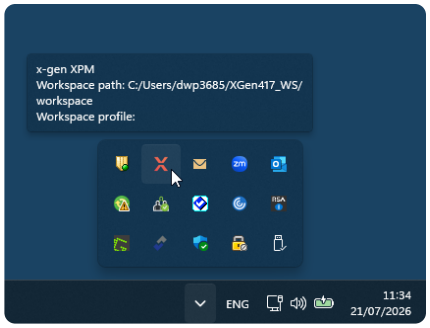

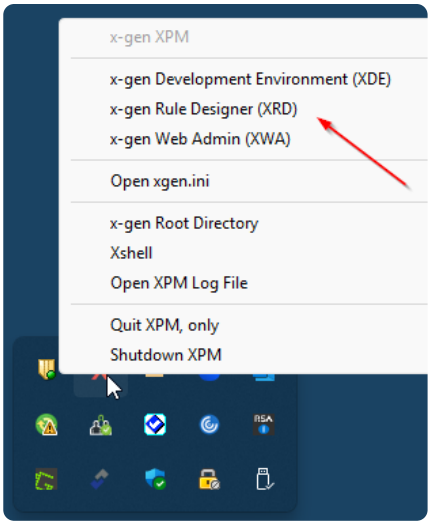

Migrating from XGen 4.13

XGen 4.13 was previously installed entirely under:

C:\Users\<User_ID>

XGen 4.17 uses a different installation structure. The application files are stored under C:\Program Files, while writable and user-specific files are stored in XGen417_WS.

Do not copy an existing XGen 4.13 installation directly into the XGen 4.17 directories.

For instructions on migrating a service from XGen 4.13 to XGen 4.17, see:

[XGen 4.13 to XGen 4.17 migration instructions]

Delivery of a new patch with FITS

There is known issue, regarding that automated FITS delivery.

Sometimes, there is a case, when there is new patch delivery for XGen, but the monthly software release is still pending.

In such cases, it's recommended the monthly release to be applied first and then the custom delivered patch for XGen.

Another one good practice is to keep a backup of your .ini as backup before apply the monthly patch.

> **Important:** Before apply any of the patches, be sure that the XGen XPM/Rule Designer are not running!
> In a case it does, the new software couldn't be possible to be applied.

Troubleshooting

XGen417_WS is missing

If C:\Users\<User_ID>\XGen417_WS is not present after installation:

1. Sign out of Windows and sign in again.
2. If the folder is still missing, restart the computer.
3. Verify that XGen 4.17 is listed as installed in the Software Center.
4. Contact the relevant support team if the problem continues.

xpm.bat is missing

Verify that you are checking: **C:\Users\<User_ID>\XGen417_WS**
Do not look for the startup script under C:\Program Files\XGen417.
If the file is still missing after signing out or restarting, contact the relevant support team.
XPM does not appear in the system tray
Check whether the icon is hidden under Show hidden icons.
If it is not present:

1. Start xpm.bat again.
2. Check whether an error message or command window appears.
3. Review the available logs and traces under XGen417_WS.
4. Contact the relevant support team and provide the relevant error and log information.

XPM can’t start

If you’re getting a message that XPM can’t start and another instance is running, but in the same time, you can’t see the icon in the system tray, then most probably it crashed, but some of the sub-processes are running. You can do some of the following:

- logout/restart - that should clear the processes. Or
- start the task manger, find the XPM processed and terminate them.

> **Note:** In a case of crash, many times .lock file still persist, which will prevent the start of a new instance. For that purpose, go in your /xmp folder and delete the .lock file.

Rule Designer cannot be started

Confirm that XPM is running and that its icon is visible in the system tray.
Rule Designer should be started from the right-click menu of the XPM tray icon.

Technical background

The XGen 4.17 IDE distribution package is maintained in the GitLab EE project:

xgen-417-ide-build

More details about that topic will be shared in a different Confluence page.

Synchronization Process

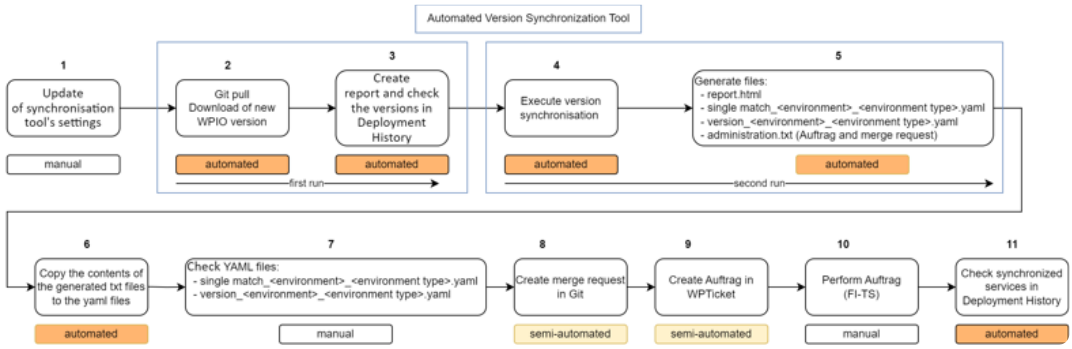

1. Introduction

After new versions are released on the prod environment it must be transferred to test environments, and in some cases such synchronization may also be required from one test environment to another. In the post product environment - this is the TUG - this must happen immediately, in the test and dev environments there can be a delay of 1-2 days, but the synchronization must happen there as soon as possible. The process can be done manually, I will show this on this page. A Version Synchronization Tool program can be downloaded from Gitlab Cloud, I will refer to its link and manual.

2. Manual Process

2.1 Preparations

The following programs will be needed to complete the task:

- IDE: Eclipse or IntelliJ
- Versioning Control tools: Git and Gitlab Cloud
- The access right can be granted Darvish, Bahman Ali <BahmanAli.Darvish@f-i-ts.de>

(On this page, I will present it in Eclipse)

2.1.1 Clone the WPIO project

Go to the Git page and clone the wpio project.

gitlab_clone.png

In Eclipse click on the Git Repositories tab and "Clone a Git Repository..." button. Then on the popup window click: "next", "next" and finally "finish" buttons.

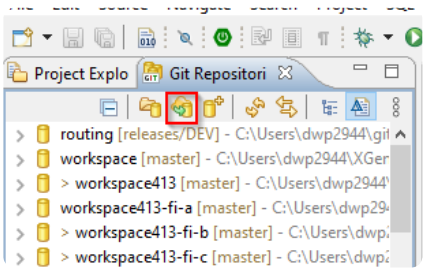

Now you can see the wpio repository.

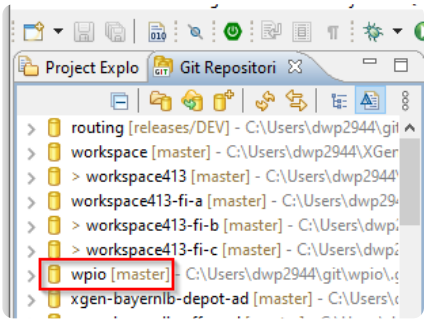

Choose "Project Explorer" tab and right click on the empty space below the tab, then click on the import and import then choose next.

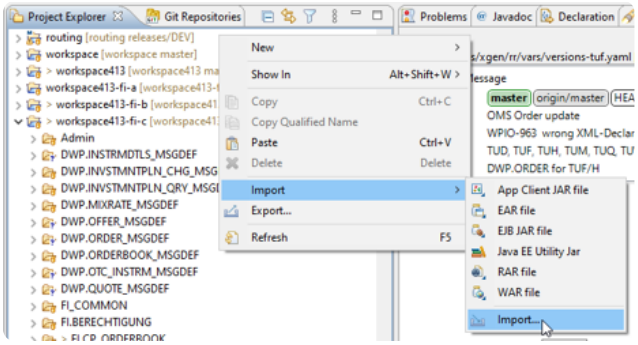

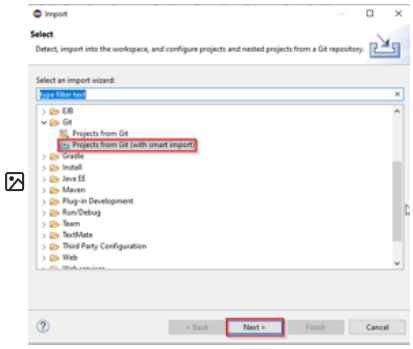

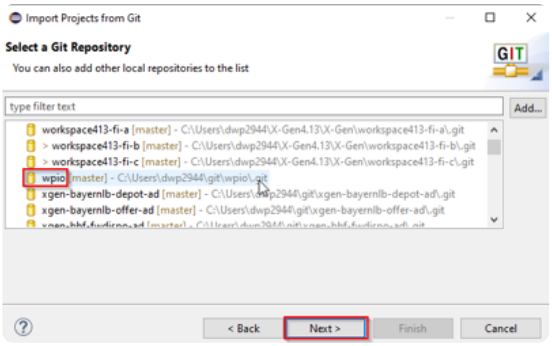

2.2 The Process

2.2.1 Check the status of the merge request in Git

You need to check in Git that the Merge Request has actually run for the environment you want to synchronize to (usually PROD).

If it is still in the open Merge Requests, it cannot be synchronized yet.

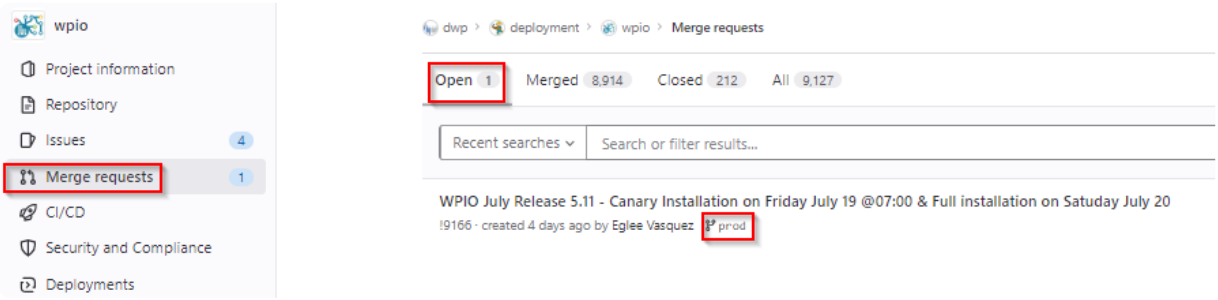

If it is in the list in the Merged tab, you can now sync to it.

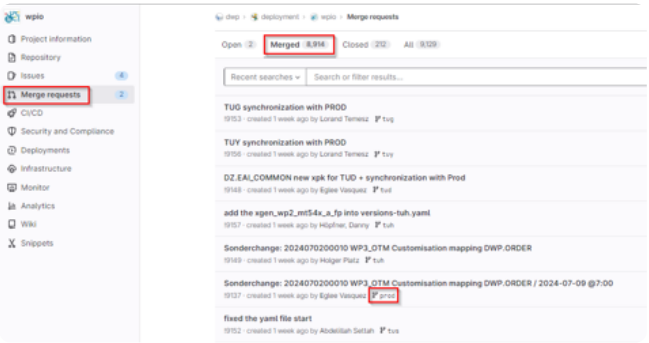

Alternatively, you can check the Deployment History for the environment to be synchronized by checking the versions of the servers in question, one by one, to see if the deployment has actually taken place.

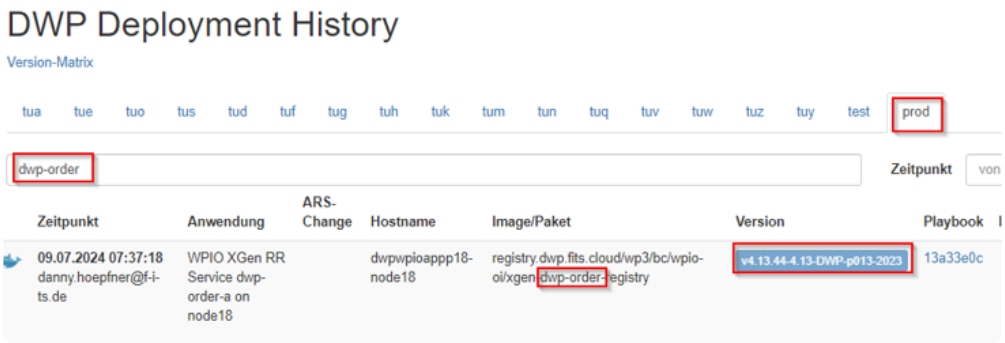

2.2.2 Git pull

See 2nd point in the workflow

The source files must be updated before each synchronization. In Eclipse, right-click the wpio workspace and select Team from the pop-up menu, then Pull.

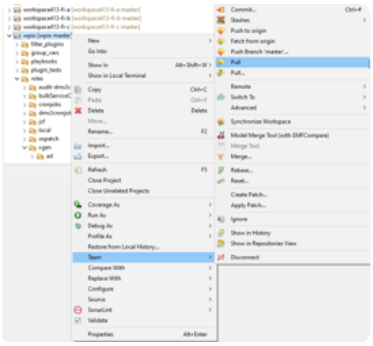

2.2.3 Version Comparison

See 6th point in the workflow

Find the versions yaml file of the environment you want to synchronize and compare it with the environment you want to synchronize with. Press Ctrl + click on the both yaml files. In the example shown in the picture, we compare the versions-tug.yaml file with the versions-prod.yaml file.

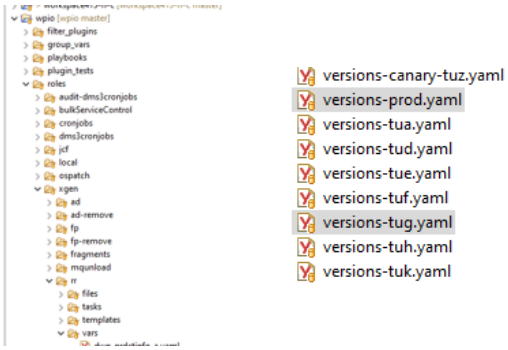

Find the service to be synchronized and copy the versions. (This is easy if we know what actually needs to be synchronized and that the version in the yaml file is actually the installed version).

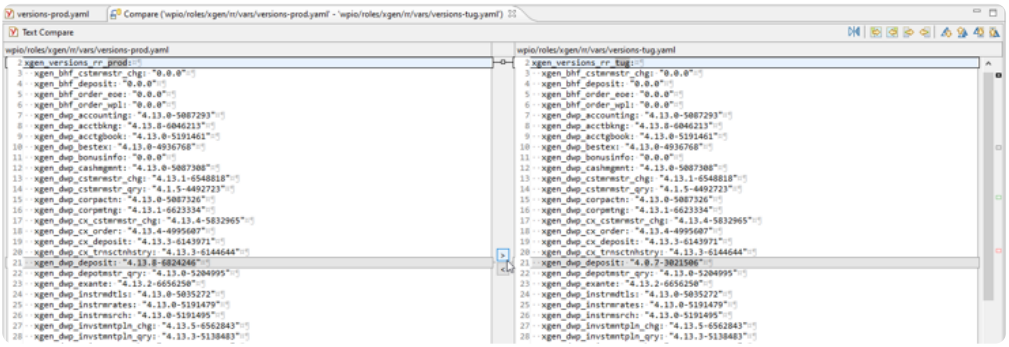

After you synchronize the service versions you have to add the service names to the associated single-match file, without "xgen_" prefix and change the "_" to "-". E.g.: xgen_dwp_deposit → dwp-deposit



Important, you have to stay an empty row at the end of the file!

On Git Staging view (Window / Show View / Other... / Git / Git Staging) add Unstaged Changes to Staged Changes with green cross or crosses, write Commit Message then click "Push HEAD..." button.

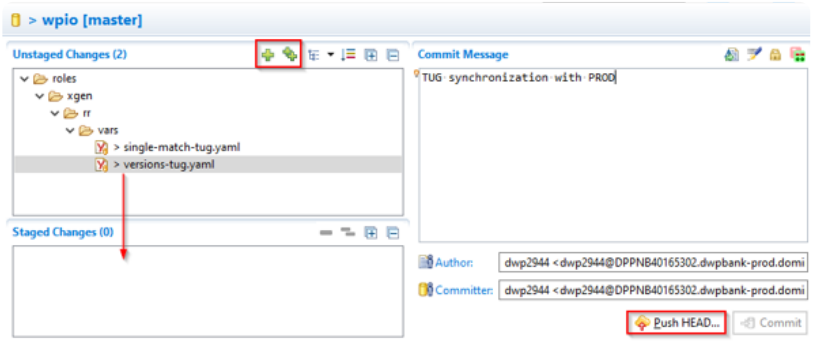

2.2.4 Merge Request

See 7th point in the workflow

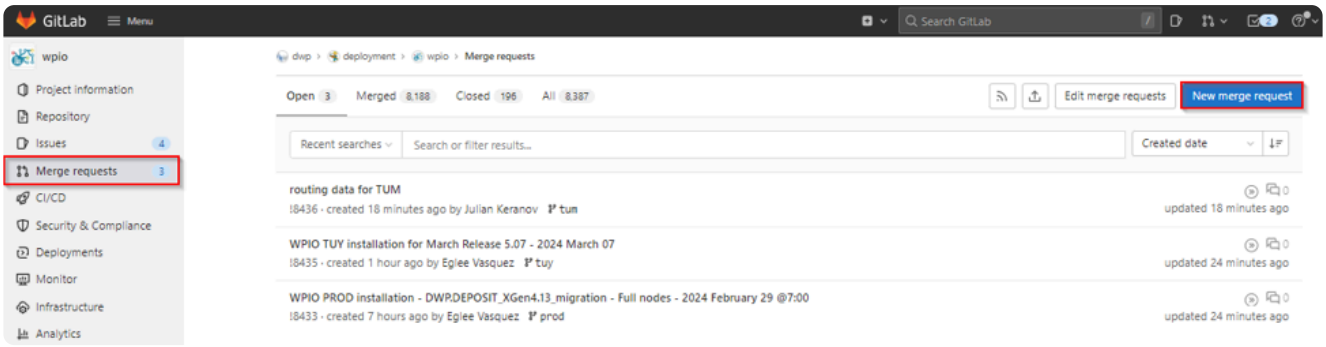

On the "New merge request" page, select the source and target branches. The source is usually master.

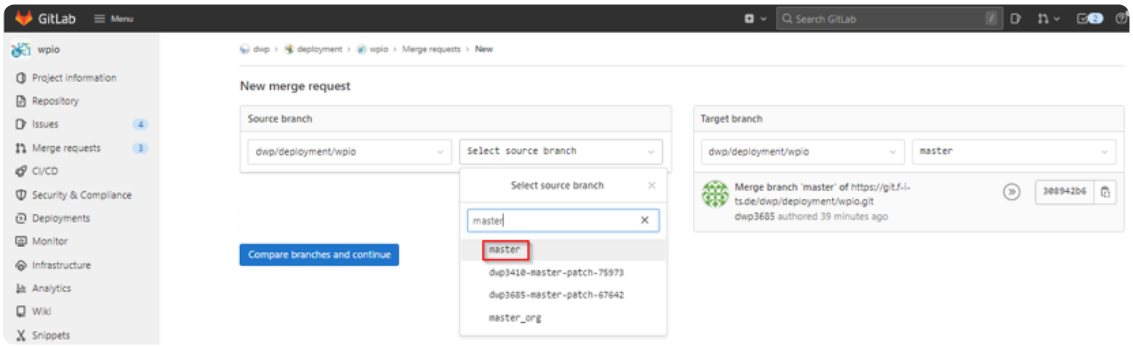

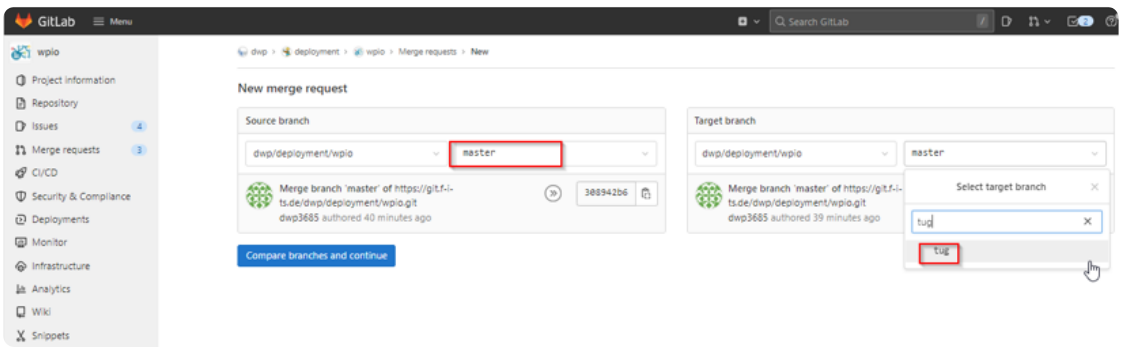

Click the “Compare branches and continue” button:

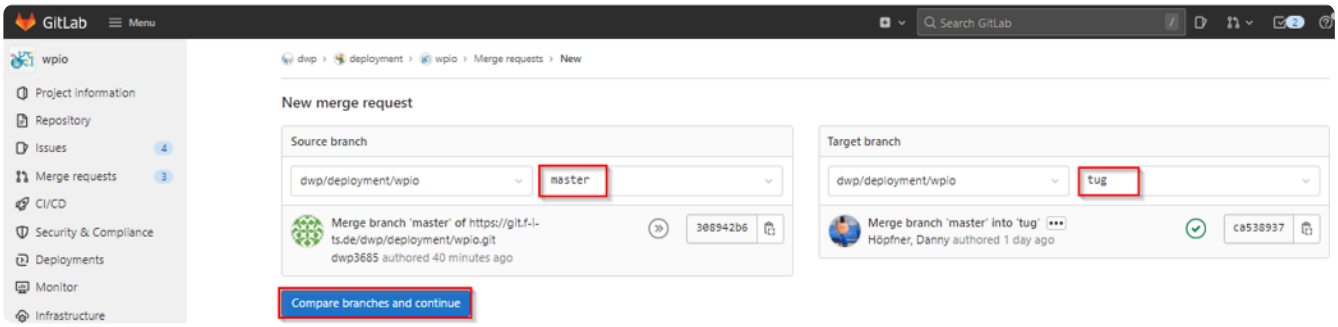

Fill in the "Title" and "Description" fields of the merge request on the page that appears. The "Assign to me" button is necessary when you perform the merge and run the Jobs, which is especially possible when it comes to development environments (TUA and TUS. I this case you do not need create Auftrag). Finally, click the “Create merge request” button:

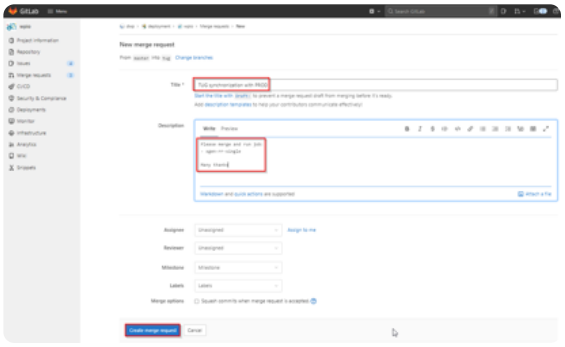

Copy the link of the merge request result page into the auftrag text (see later).

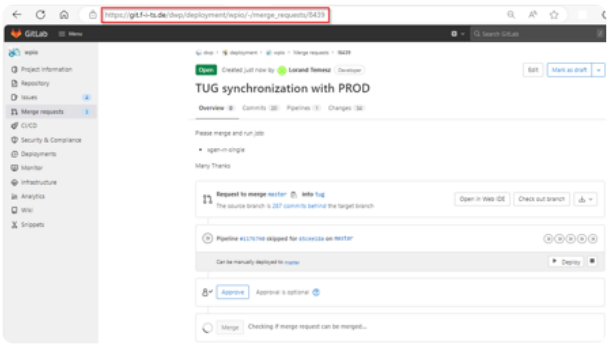

2.2.5 Auftrag

See 8th point in the workflow

After Merge Request creation you have to create the Auftrag. Login on WPTicket page and navigate to Assignments / New process ticket in the menu.

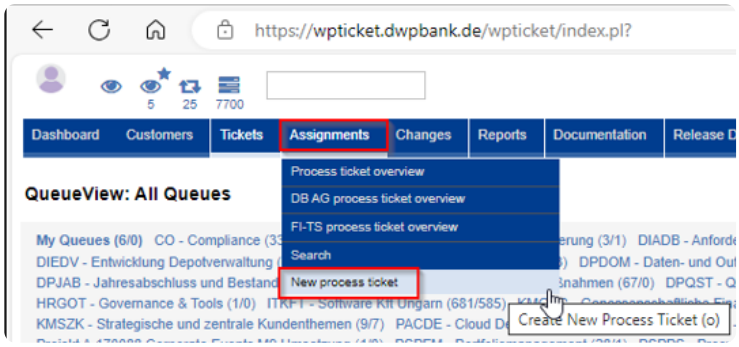

Chose FI-TS Process:

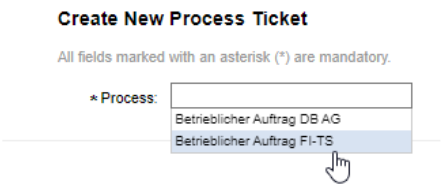

Add title: "<environment> synchronization with <environment>" then click on Erstellen

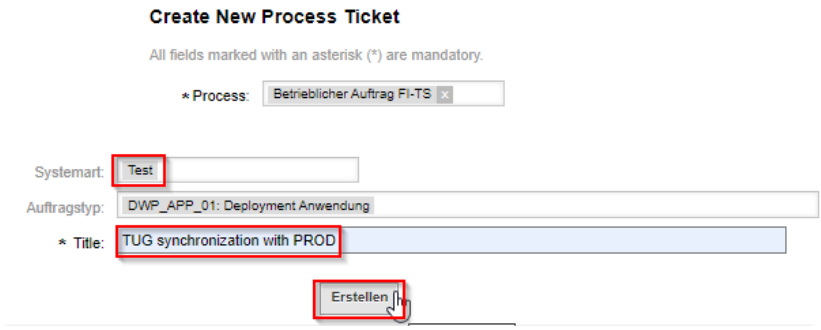

Click on Eingabe:

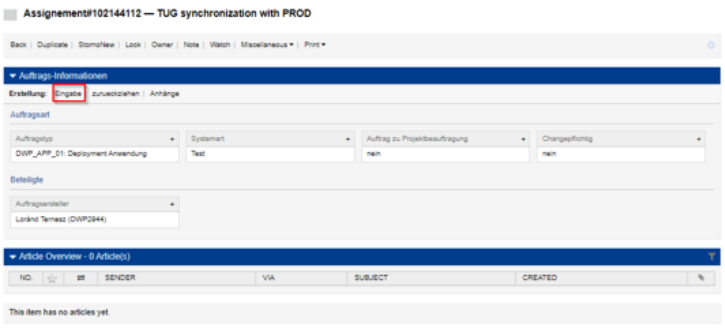

The original text must look like this:

Please merge:

<merge request link>

Please run job(s):

- *<job-name> (e.g. - xgen-rr-single)*
- *<job-name>*
- *...*

Contact person: <your name> <your ID>

Many thanks

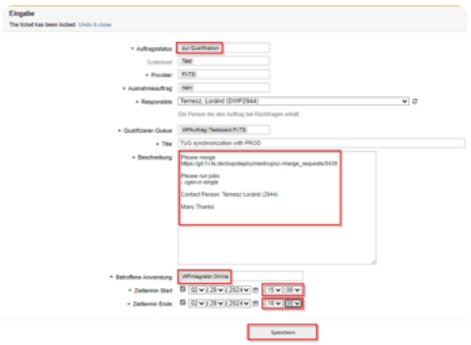

Set Auftragsstatus: "zur Qualification"

Set Betroffene Anwendung: "WPintegrator Online"

Set Start and Ende Zieltermins (you have to add at least 4,5 hour time interval from the current time.)

Finally, click the "Speichern" button.

Hint: You can find job names on [Git Pipelines page](), if you click on a status button:

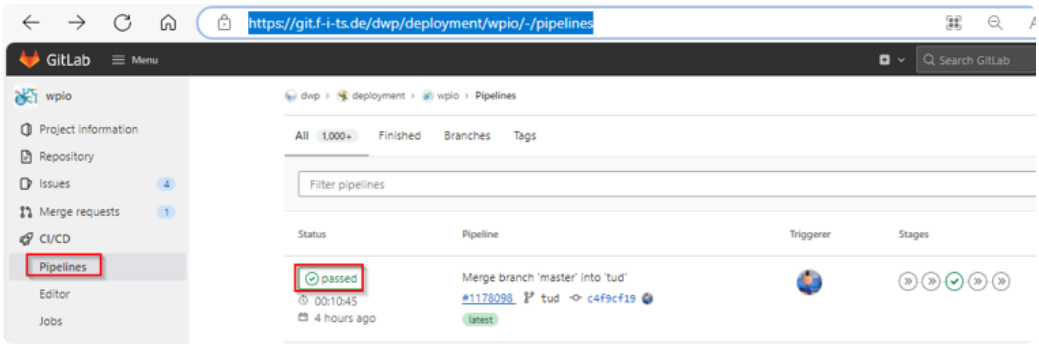

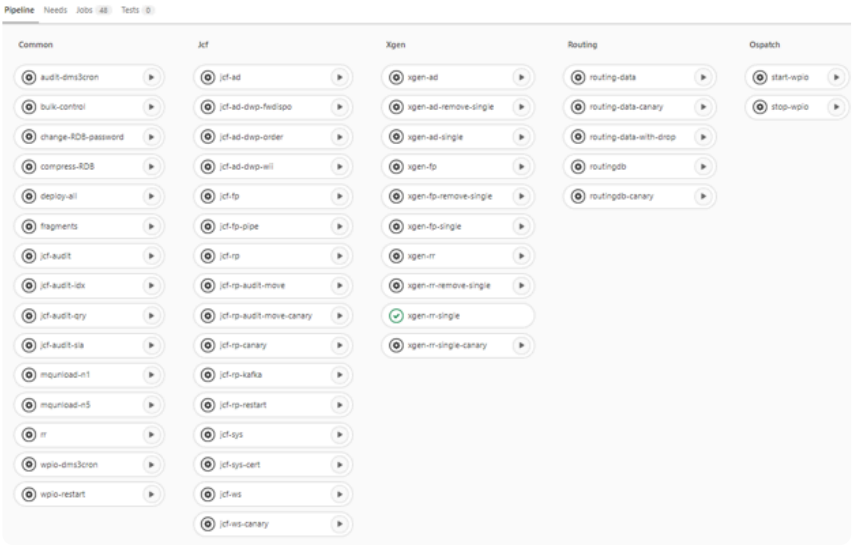

Hint 2.: If the synchronizable services are more than about 15-20 pieces on ad, fp or rr, you need to use the job names without single because of the limited resources.

2.2.6 Check synchronized services in Deployment History

See 9th-10th points in the workflow

Once the synchronisation job is complete, it is necessary to check that all environments have indeed been upgraded for all services. This is done using the Deployment History. By entering the names of the services and selecting the corresponding environments, the version seen there is compared with the expected one.

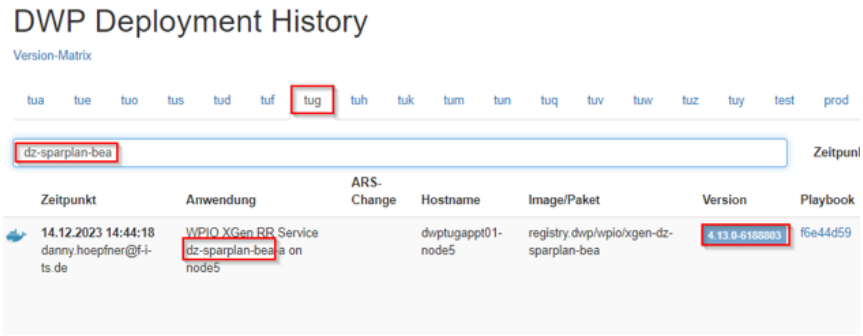

3. Version Synchronization Tool

See 3th-5th points in the workflow

There is a Synchronization Tool which helps to compare and synchronize the environments. This is a standalone runnable jar file with a necessary folders and properties files. You can find it here (in zip form which contains the manual too):

Version Synchronization 1.2

Manual version: 1.3



Workflow

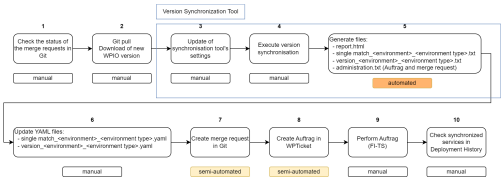

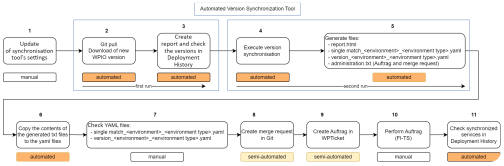

Open points:

- Would it be possible to use the Git API?
- Do we need additional permissions (OIM rights) for using Git API? How to request the access rights?
- Which programming language would be suitable? (Java, bash, ...)

Create Version Synchronization Jira Issue

1. Title: Version Synchronization
2. Description: List of services
3. Add Date of Release
4. Assignee: person responsible for synchronisation

WII (WebSphere Integrator Informer)

WII architecture

Architecture

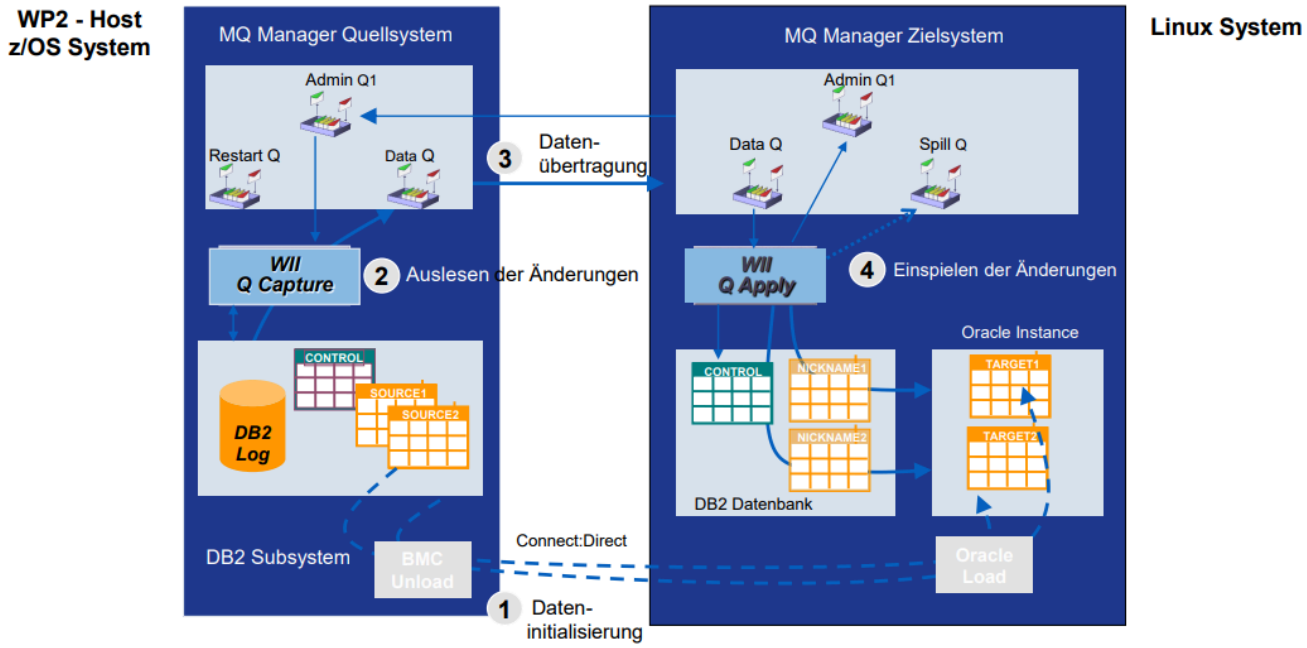

Arbeitsschritte /Arbeitsprozesse

- Konfiguration (WII Standard)
  - DB2/WII: Ablage der Konfigurationsinformationen in DB2 Kontrolltabellen
  - WebSphere MQ: Konfiguration von Queues für den Datentransport
  - Oracle Zielsystem: Anlage der Zieltabellen für das Replikat
- Dateninitialisierung (dwpbank Optimierung)
  - BMC Unload: Erstellen eines Entladebestandes in Dateiform
  - Connect:Direct: Übermittlung des Entladebestandes auf das Zielsystem
  - Oracle SQLLoader: Laden der Daten in das Replikat
  - Anlehnung an Verfahren von WPDynamic
- Änderungsreplikation (WII Standard)
  - Q Capture: Auslesen der Datenänderungen aus dem DB2 Log
  - WebSphere MQ: Übermitteln der Datenänderungen in das Zielsystem
  - Q Apply: Einspielen der Änderungen in das Replikat

WII - Contact persons

The contact persons are listed in the "Betriebshandbuch" document.

The location of the document: WII:\1B Dokumentation\1B4 Betrieb\Betriebskonzept\WII_Betriebskonzept_V4.7_Prod.doc

Last update on this chapter on 25.04.2022

dwpbank / Dwp Software Kft

Following persons from the dwpbank build the WII team:

Department	Contact person	contact data
BPPRD	**Laszlo Kerepeszki** Contact person for WII product; Coordination of the WII development & WII Test	+49 69 5099 7416 Laszlo.Kerepeszki@dwpbank.de
BPPRD	**Ilian Nakov** - deputy of László Kerepeszki	
BPPRD	**Julian Keranov** - deputy of László Kerepeszki	
STINO	**Frank Schmidt-Burr** Responsible for the operation of WII on the host	+49 69 5099 5099 frank.schmidt-burr@dwpbank.de

Last update on this chapter: 31.10.2024

FI-TS contacts

At fi-ts the”Application Management Securities I” team is responsible for running the application WII.

Department	Contact person	contact data

56051 **Application Management Securities I**		ZZG-FITS-WII@f-i-ts.de
56051 **Application Management Securities I**	Sergej Paulsen	sergej.paulsen@f-i-ts.de Tel: +49 69 94511- 6741 | Mobil: +49 151 168 226 88

WII Introduction

You can see the latest document under wpio folder WII:\2A Präsentationen

ppt document which was presented is

Sonderchanges, eChanges

Sonderchange, e-Change creation - english version:

Change_Anleitung_2024_v2.0 de en.docx

ARS (BAMBI): Software request

Get ARS credentials:

In order to log in to ARS / BAMBI, first you need to receive your credentials by calling 2500 and requesting ARS credentials.

You will receive a *Secure mail* from Arsystem (if you haven't set SecMail up yet, you will receive an email which contains the login page, user ID and password for SecMail).

In the SecMail mailbox you should have a mail from Arsystem containing the username and password.

With the received credentials you can login to ARS / BAMBI (and will be prompted to update password after the first login).

Please follow this process for logging in to the Secure Mail („Sicheres Postfach“): DWP-BLF-Zugangsdaten-undAnmeldung-für_ARS-1.pdf

Log in to BAMBI

Link to the site: https://ars.f-i-ts.de/arsys/shared/login.jsp?/arsys/

click on "*zum Modul*" and then "*Neuer Auftrag*"

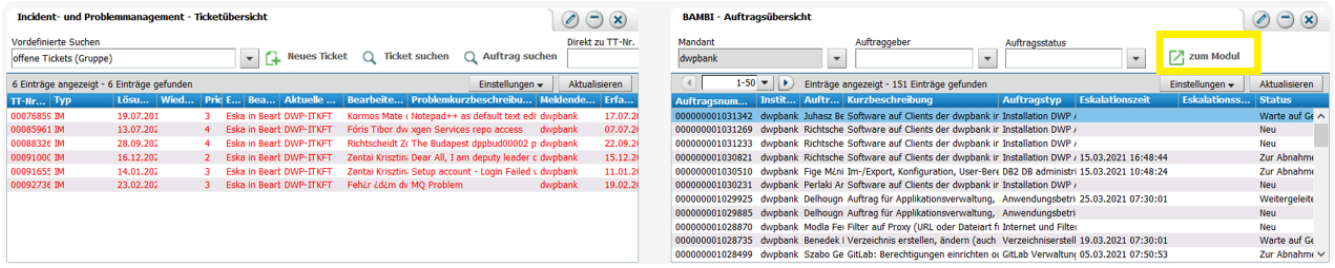

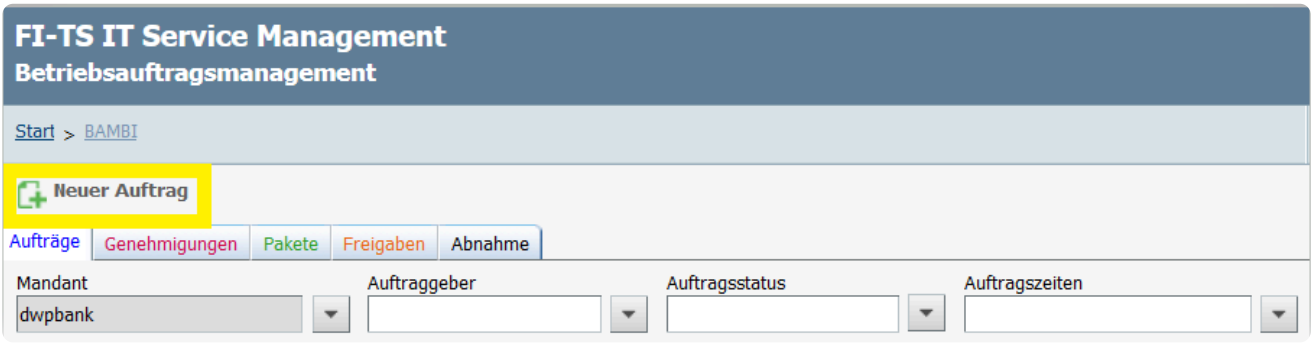

This opens a section of all the type of requests - click for the alphabetical order on "*Auftragstyp*" and look for ***Installation DWP Anwendungen FAT-Client*** and alternatively can find the software in the list of the ***Installation***

DWP Anwendungen FAT-Client (Einzelplatzlizenz)

Choose one and hit "*Auftrag erstellen*".

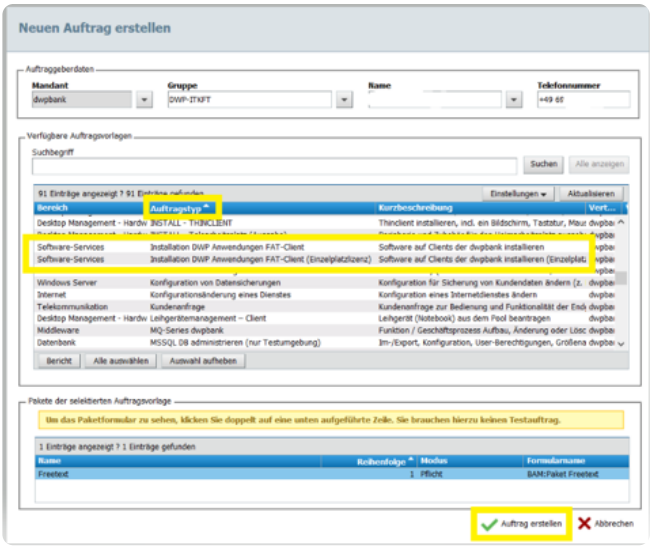

Double-click on the marked section to open up the subticket which will be sent to FI-TS and where the SW can be specified

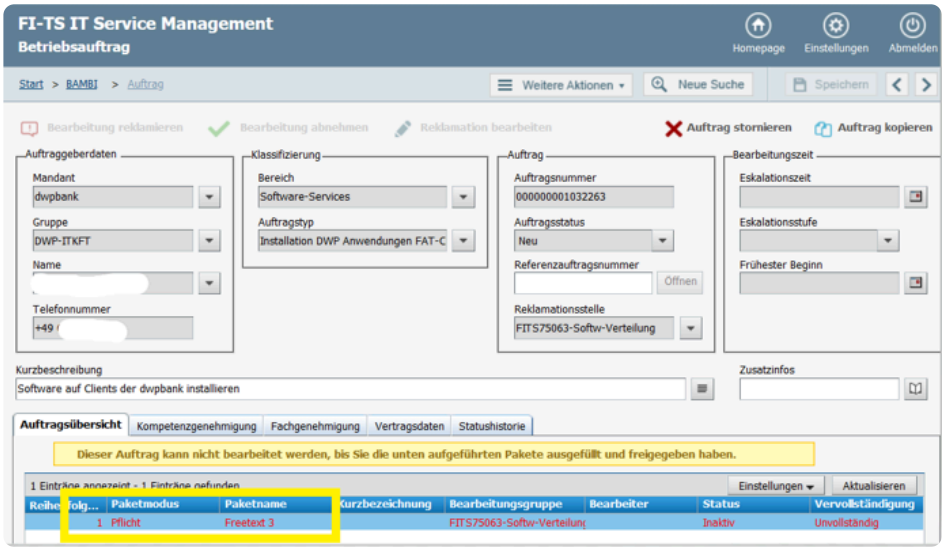

Fill out your *Computer Name* at the marked section (Should be *DPPNB and 8 numbers*)

Choose the *software* from the list shown with the tiny arrow (this example used *IntelliJ*)

After you are ready with your request hit "*Speichern und freigeben*"

Mark the *Auftragsnummer* as you would need an approval from **Zentai Krisztina** to get your SW installed

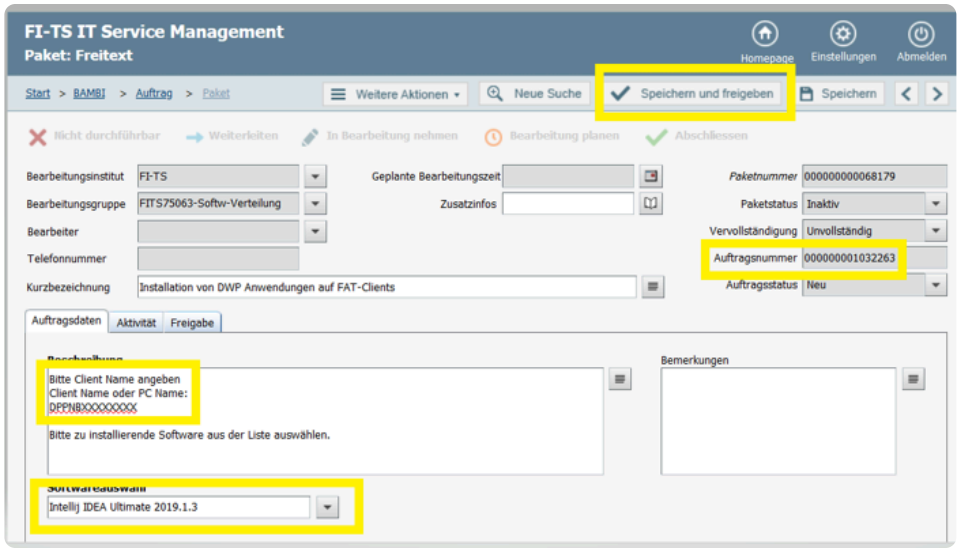

after you hit "*Speichern und freigeben*" it will propose a timewindow for the request completion - fill it meaningfully

hit Erdledigungstermin bestätigen und Auftrag started

send Zentai Krisztina an email with a short explanation and the ask to approve the SW installation request from ARS with the marked *Auftragsnummer*

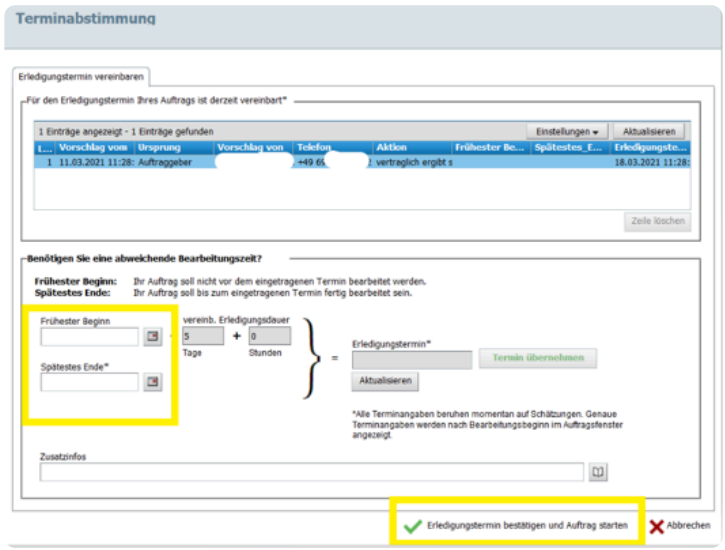

Audit browser



WPIO Architecture

Architecture

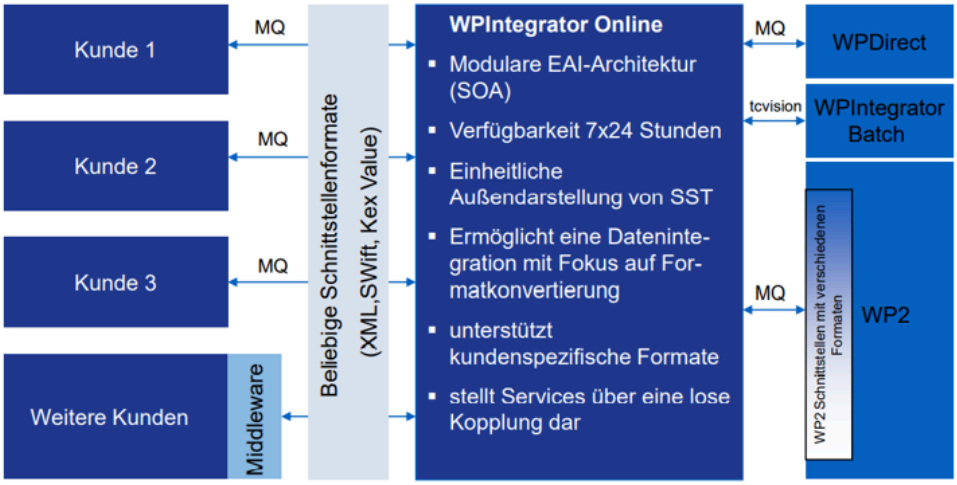

Components:

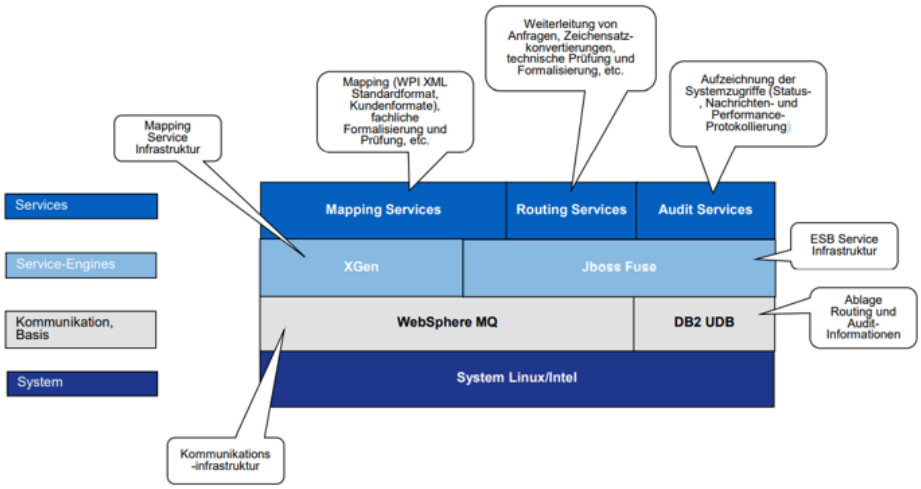

Architecture / Service Concept:

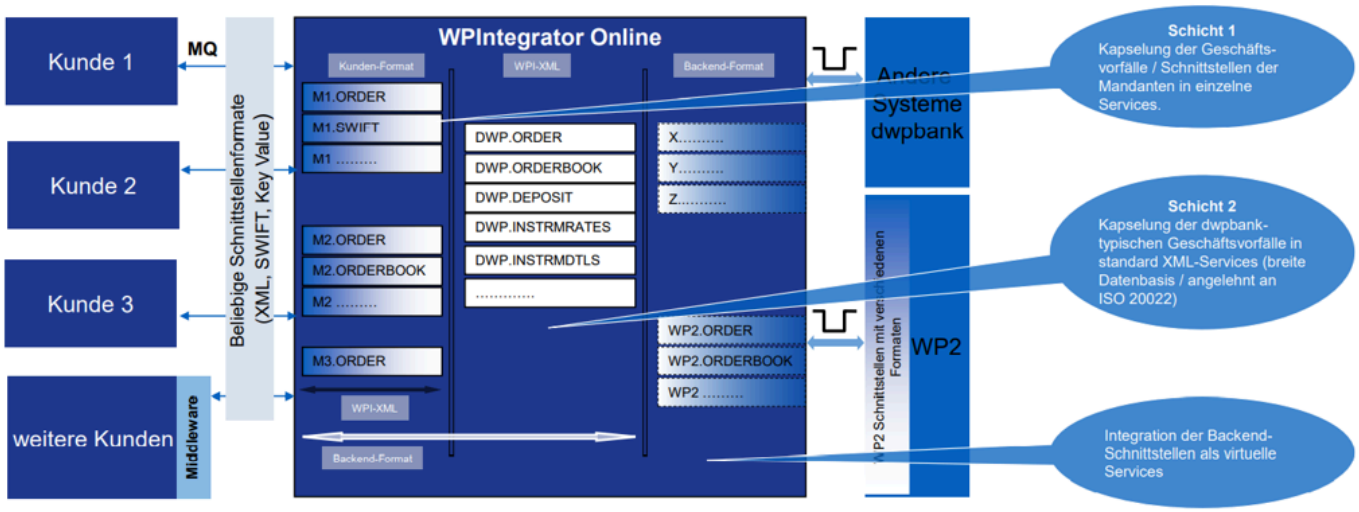

Entkopplung der Systeme durch mehrere Ebenen von Schnittstellen:

- Schicht 1 – Kundenspezifische Schnittstellen
  - von Kunden verantwortet und ggfls. gepflegt
  - von dwpbank betrieben
  - für jeden Kunden individuell
- Schicht 2 – dwpbank standard XML-Serviceschnittstellen
  - generische Schnittstelle
  - identisch für alle Kunden
  - sorgt für Entkopplung zwischen Kundensystemen und dwpbank internen Schnittstellen.
- Schicht 3 – interne dwpbank Schnittstelle
  - dwpbank interne Schnittstelle zu den In-House Systemen

Main functions:

- Darstellung der Geschäftsvorfälle des Online-Wertpapiergeschäfts über XML-Services mit Anlehnung an ISO 20022-
  Standard

- Verarbeitung unterschiedlicher Formate möglich (z. B. XML, SWIFT, Key Value etc.)
- Parametrisierung Felder und Formate, Selektion Anpassung von Geschäftsprozessen
- „Request-Response-Funktion“ und aktive Datenbelieferung auf Basis definierbarer Ereignisse
- Zudem besteht die Möglichkeit kundenspezifische Zugriffe zu entwickeln und zu verwalten.
- Grafische Oberfläche zum Gestalten und Testen von Schnittstellen
- Serviceunabhängige, automatische Protokollierung aller Nachrichten
- Zentrale Überwachung aller Services

WPIO XML Services - main services

- Orderabrechnung (DWP.ACCOUNTING) Abrechnungsvorschau zu ausgeführter Order
- Depotbuchung (DWP.ACCTBKNG) Erfassung/Änderung/Löschung Depotüberträge
- Best Execution (DWP.BESTEX) Ermitteln BestEx Handelsplatz aus Orderdaten
- Gelddispositionsanfrage (DWP.CASHMGMNT) Ausgehend aus WP2 an Mandantensystem bzgl. Geldverfügbarkeit
- Stammdatenänderung (DWP.CSTMRMSTR_CHG) Kunde, Depot, Adressen, Vollmachten, ...
- Stammdatenabfrage aus Kundensicht (DWP.CSTMRMSTR_QRY)
- Stammdatenabfrage aus Depot-Sicht (DWP.DEPOTMSTR_QRY) Nur Vollmachten
- Depotbestandsabfrage (DWP.DEPOSIT) Abfrage auf Depotebene
- Aktive Belieferung über Depotänderungen (DWP.DEPOT_AD) Depotstammdatenänderungen aktiv melden
- Aktive Belieferung zu Fremdwährungsinformationen (FXI) (DWP.FWDISPO_AD) - Währungsinformationen für Disposition FW
- Wertpapierdetails (DWP.INSTRMDTLS) Gattungsabfrage
- Kursabfrage (DWP.INSTRMRATES) - Börsenkurse zu Gattung
- Gattungssuche (DWP.INSTRMSRCH) - grobe Suche einer Gattung (nach Name etc.)
- Sparplanpflege (DWP.INVSTMNTPLN_CHG) - Insert, Change, Delete
- Sparplanabfrage (DWP.INVSTMNTPLN_QRY) - Abfrage Sparpläne
- Abfrage Emissionen (DWP.IPO_QRY)
- Offertenpflege (DWP.OFFER)
- Orderpflege (DWP.ORDER) - OrderSST Insert, Change, Storno, Delete
- Aktive Belieferung über Orderänderungen (DWP.ORDER_AD)
- Orderbuchabfrage (DWP.ORDERBOOK) - Orderabfragen nach verschiedenen Kriterien (auch offen/abgerechnet)
- Settlement Statusabfrage (DWP.STTLMNT_QRY)
- Direkthandel - Handelspartnerabfrage (DWP.OTC_INSTRM)
- Direkthandel - Quoteabfrage (DWP.QUOTE)

Introduction to WPIO

Presentation_WPIO_V1.11.Eng.pptx

Brainstorming topics

Topics	Topic responsible	Priority	Deadline
Improvement of error logging			
Risk identification and mitigation			

WPIO goes Cloud

Die Migration der kompletten Plattform WPIntegrator Online Framework inkl. aller darauf betriebenen fachlichen Services erfolgt in mehreren großen Blöcken (im Programm Topics genannt):

1. Verlagerung aller bestehenden Queuemanager in die AIX MQ Farm. Damit können in einem ersten Schritt bereits Kostenvorteile durch reduzierte MQ-Kosten erzielt werden.
2. Aufnahme eines zusätzlichen Online-Knotens (RR) in den bestehenden WPIO-Cluster. Dadurch besteht die Möglichkeit, Erfahrungen zu sammeln mit dem Betrieb der WPIO-Komponenten unter Kubernetes. Bei Auffälligkeiten oder Störungen kann dieser Cloud-Knoten jederzeit aus der Verteilung genommen werden.
3. Bewertung des aktuellen Knotenbetriebs bzgl. Stabilität und Lastfähigkeit und Aufbau weiterer Cloud-Knoten bei gleichzeitigem Abbau von Bestandsknoten
4. Migration der Audit-Funktionalität (ADT) nach Kubernetes
5. Migration der Dateiverarbeitungs-Funktionalität (FP) nach Kubernetes
6. Migration der Funktionalität "Aktive Belieferung" (AD) nach Kubernetes

Alle diese Schritte werden im besten Fall ohne Änderungsaufwand und Auswirkungen auf Kundenseite durchgeführt.

Kostenoptimierung MQ-Betrieb:

Key	Summary	Type	Due date	Priority	Status
WGC-1428	FI-TS contract for QM migration to AIX farm			Major - Prio 2	Done
WGC-1345	[Concept] Move WPIO TMU Queuemanagers to AIX farm			Major - Prio 2	Done

Synced just now • 2 items

Erster Online-Knoten (RR) in der Cloud in Produktion:

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1292	Provide WPIO alerts & runbooks			Major - Prio 2	In Progress
WGC-746	Clarify processes for the parallel phase			Major - Prio 2	In Progress
WGC-562	Refactor ROR switching process			Major - Prio 2	Analyse

Synced just now • 3 items

Vollständige Sicht: 37 Issues

Bewertung/Ausbau Online-Knoten (RR):

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1988	Evaluate capabilities of one WPIO Online (RR) node in the MSCP			Major - Pri...	Backlog
WGC-1856	Enable HTTP Connectivity on the Cloud node			Major - Pri...	Analyse
WGC-1588	[Concept] Meaningful LuP tests in a cloud environment		May 1, 2026	Major - Pri...	In Progress
WGC-1382	[Concept] (Canary) Deployment			Major - Pri...	To Do
WGC-1212	wp2-nrtmrates: support multiple pods			Minor - Pri...	Backlog
WGC-1177	Introduce POD autoscaling			Minor - Pri...	In Progress
WGC-1168	Operate all Online (RR) nodes on MSCP			Major - Pri...	In Progress

Synced just now • 7 items

Vollständige Sicht: 7 Issues

Migration Audit (ADT):

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1949	[S] concept - Audit migration activities			Major - Prio 2	Backlog
WGC-1638	ESB GenAudit: Use Postgres instead of IBM DB2			Minor - Prio 3	Backlog
WGC-1420	Establish Cloud readiness for Audit components			Major - Prio 2	In Progress
WGC-455	WPIO Audit: Use Postgres instead of IBM DB2			Minor - Prio 3	Backlog

Synced just now • 4 items

Vollständige Sicht: 4 Issues

Migration Dateiverarbeitung (FP):

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1711	FP: Clarify processes			Major - Pri...	Backlog
WGC-1421	WPIO File Processing (FP): provide K8S configuration			Major - Pri...	Backlog
WGC-468	WPIO FP: Use S3 instead of shared filesystem			Major - Pri...	In Progress
WGC-462	Run FP functionality on its own			Major - Pri...	Done

Synced just now • 4 items

Vollständige Sicht: 4 Issues

Migration Aktive Belieferung (AD):

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1643	Run AD functionality on a node on its own			Major - Prio 2	Backlog
WGC-1423	ad/dwp-order: use Postgres instead of Oracle			Minor - Prio 3	Backlog
WGC-1422	WPIO Active Delivery (AD): provide K8S configuration			Major - Prio 2	Backlog

Synced just now • 3 items

Vollständige Sicht: 3 Issues

Parallel zu den eigentlichen Cloud-Aktivitäten ist Teil des Projektes, die WPIO-Framework-Komponenten mit automatisierten Testfällen auf Basis Gauge zu versehen:

Automatisierte Gauge-Tests:

Ausstehende Arbeiten:

Key	Summary	Type	Due date	Priority	Status
WGC-1823	DRAFT Gauge tests for business Services			Minor - Prio 3	Backlog
WGC-1427	Gauge tests for BC AD			Minor - Prio 3	Backlog
WGC-1426	Gauge tests for BC FP			Minor - Prio 3	Backlog
WGC-1425	Gauge tests for BC Audit			Major - Prio 2	Backlog

Synced just now • 4 items

Vollständige Sicht: 8 Issues

Autoscaling für WPIO

Zielsetzung

Für alle WPIO-Komponenten, die die Online-Funktionalität RR ausmachen, soll ein standardisiertes, cloudfähiges Autoscaling-Konzept definiert werden, das:

- Lastspitzen automatisch erkennt
- Pods dynamisch skaliert
- Ressourcenverbrauch optimiert
- Stabile Verarbeitung garantiert
- Betriebsaufwand reduziert

Die technische Umsetzung erfolgt über KEDA in Verbindung mit Kubernetes.

1. Architekturübersicht

Zielarchitektur

Eingehende MQ-Nachrichten → QueueManager → KEDA → Kubernetes HPA → Dynamische Podskalierung

Eingehende HTTP-Requests → HTTP/SOAP ⟶ Custom Metrics / Metrics API → KEDA → Kubernetes HPA → Dynamische Podskalierung

2. Grundprinzipien

2.1 Event-getriebenes scaling

Autoscaling erfolgt ausschließlich anhand tatsächlicher Lastindikatoren:

- MQ Queue Depth
- HTTP Request Load
- Technische Verarbeitungslast

Keine reine CPU-/Memory-basierte Skalierung.

2.2 Horizontale Skalierung

Es werden ausschließlich Pods horizontal skaliert:

1 Pod → N Pods

Keine vertikale Skalierung geplant.

3. Komponentenanalyse

3.1 MQ-basierte Komponenten

Betroffene Komponenten

Komponente	Skalierung sinnvoll	Begründung
router	Ja	Queue-basierte Kernverarbeitung

kafka-adapter	Ja	MQ Input vorhanden
state-controller	Nein	Administrationsskomponente
audit-pipe-and-metrics	Ja	Queue-basierte Verarbeitung, wird vermutlich im gleichen Rythmus wie router skalieren
X-Gen Services	Ja	Hohe Parallelisierbarkeit

4. Scaling-Konzept MQ-basierter Komponenten

4.1 Technische Umsetzung

Verwendung von:

KEDA Scaler für IBM-MQ und HTTP via Metrics-API

siehe:

https://keda.sh/docs/2.18/scalers/ibm-mq

4.2 Scaling-Metrik

Queue Depth

KEDA überwacht:

CURRENT_Q_DEPTH

der jeweiligen MQ Queue.

4.3 Mehrere Input Queues

Scaling erfolgt anhand:

max(queue_depth)

also der am stärksten belasteten Queue.

Begründung:

- Verhindert Unterdimensionierung
- Deterministisches Verhalten

4.4 Beispiel

```
triggers:
  - type: ibmmq
    metadata:
      queueName: WPIO.INPUT.Q1
      queueDepth: "100"
  - type: ibmmq
    metadata:
      queueName: WPIO.INPUT.Q2
      queueDepth: "100"
```

KEDA skaliert bereits bei hoher Last einer einzelnen Queue.

4.5 Scaling-Verhalten

Beispielwerte

Queue Depth	Pods
0-50	1
50-500	2-5
>500	5-20

Finale Werte müssen mittels LuPs bestimmt werden.

4.6 Wichtige Randbedingungen

MQ Connection Limits

Zu beachten:

- MQ Channel Limits
- Session Limits
- Hikari DB Connection Pooling

Mehr Pods erzeugen mehr MQ und DB Connections.

5. Kafka-Adapter

Designentscheidung

Der kafka-adapter erhält Last von:

- IBM MQ
- Kafka

Entscheidung

Scaling erfolgt ausschließlich anhand MQ-Last.

Begründung:

- MQ ist primärer Engpass
- Kafka Consumer Groups skalieren intern bereits effizient
- Vermeidung konkurrierender Scaling-Signale

6. HTTP-/SOAP-basierte Komponenten

Betroffene Komponenten

Komponente	Scaling sinnvoll
http-adapter	Ja
soap-adapter	Ja

7. Problemstellung HTTP Scaling

KEDA bietet derzeit kein produktionsreifes natives HTTP Autoscaling

für den gewünschten Use Case.

8. Evaluierte Alternativen

8.1 Prometheus Scaler

Vorteile

- Standardisiert
- Flexibel

Nachteile

- Zusätzliche Abhängigkeit
- Indirekte Lastmessung
- Risiko bei fehlenden Metrics

Bewertung

Nicht bevorzugt

8.2 PostgreSQL Scaler

Idee

Scaling anhand steigender Anzahl an Store-Tabelle-Einträgen

Vorteile

- Einfache technische Integration
- Daten bereits vorhanden

Nachteile

- Indirekte Lastmessung
- Verzögerte Reaktion
- Datenbank als zusätzlicher Engpass

Bewertung

Nur als Fallback denkbar?

8.3 Externe scaler

Idee

WPIO-spezifischer External Scaler Service:

HTTP Load → WPIO Metrics Service → KEDA External Scaler

Der Service kennt:

- Aktive Requests
- Queueing

- Thread Pool Auslastung
- Fachliche Last
- Request Duration

Vorteile

- Höchste Flexibilität
- Fachlich präzise
- Erweiterbar

Nachteile

- Zusätzlicher Entwicklungsaufwand (Go oder JavaScript)
- Zusätzlicher Betriebsaufwand

Bewertung

Technisch geeignet, ist aber aufwendig

8.4 Metrics API Scaler

Idee

Custom Metrics via eines beliebigen HTTP-Endpunkt

KEDA kann z.B fachliche Metriken ablesen:

- Requests/sec
- Queuetiefen
- Processing Duration

direkt.

Vorteile

- Fachliche Präsize
- Keine zusätzliche fachliche Komponente notwendig
- Würde bereits vorhandene Metriks-Endpunkte (actuator) nutzen
- Geringer Betriebsaufwand

Nachteile

- Initiale Implementierung notwendig
- Genaue Metrikdefinition erforderlich

Bewertung

Bevorzugte Lösung

9. Entscheidung HTTP Scaling

HTTP-basierte Skalierung erfolgt über:

KEDA + Kubernetes Metrics API mittels Custom Metrics.

10. HTTP Scaling Metriken

Primäre Metriken

Metrik	Beschreibung
Active requests	Aktive Requests
Requests per second	Eingangsrate
Worker pool utilization	Threadpool-Auslastung

11. Skalierungsstrategie

Beispiel

Requests/sec	Pods
0-20	1
20-100	2-5
>100	5-20

12. Kubernetes/KEDA Architektur

Komponenten

Komponente	Aufgabe
KEDA Operator	Scaling Controller
Kubernetes HPA	Pod Scaling
IBM MQ Scaler	MQ Monitoring
Metrics API	HTTP Load Metrics

13. Betriebsaspekte

13.1 Cooldown-Zeiten

Empfohlen:

Parameter	Wert
pollingInterval	15s
cooldownPeriod	5m

Verhindert:

- Thrashing
- Ständiges Hoch-/Herunterskalieren

13.2 Min/Max Pod Limits

Setting	Beispiel
minReplicaCount	1
maxReplicaCount	20

Werte müssen im Team diskutiert/festgelegt werden

13.3 Graceful Shutdown

Pflicht für alle skalierbaren Services:

- Laufende MQ Messages fertig verarbeiten
- Offene HTTP Requests abschließen
- Consumer sauber unregistrieren

14. Risiken

Risiko	Gegenmaßnahme
Zu aggressive Skalierung	Cooldown + Limits
MQ Connection Exhaustion	Connection Limits
Fehlende Metrics	Fallback Alerts
Thrashing	Stabilization Window +hohes Cooldown
Datenbankengpässe	DB Monitoring?

15. Empfehlungen

Kurzfristig

MQ

- IBM MQ Scaler einsetzen
- Queue Depth als Trigger

HTTP

- Metrics API Ansatz implementieren

Mittelfristig

- LuPs durchführen
- Optimale Thresholds bestimmen
- KEDA Tuning

16. Finales Zielbild

Bereich	Lösung
MQ Scaling	KEDA IBM MQ Scaler
HTTP Scaling	Metrics API
Podsteuerung	Kubernetes HPA
Skalierungsart	Horizontal
Betriebsmodell	Event-driven autoscaling

Angestrebtes Ergebnis

Mit diesem Konzept erhält WPIO:

- Automatische Lastanpassung
- Bessere Ressourcennutzung
- Höhere Stabilität
- Bessere Betriebsfähigkeit
- Zukunftsfähige Architektur

BC restructuring - ESB

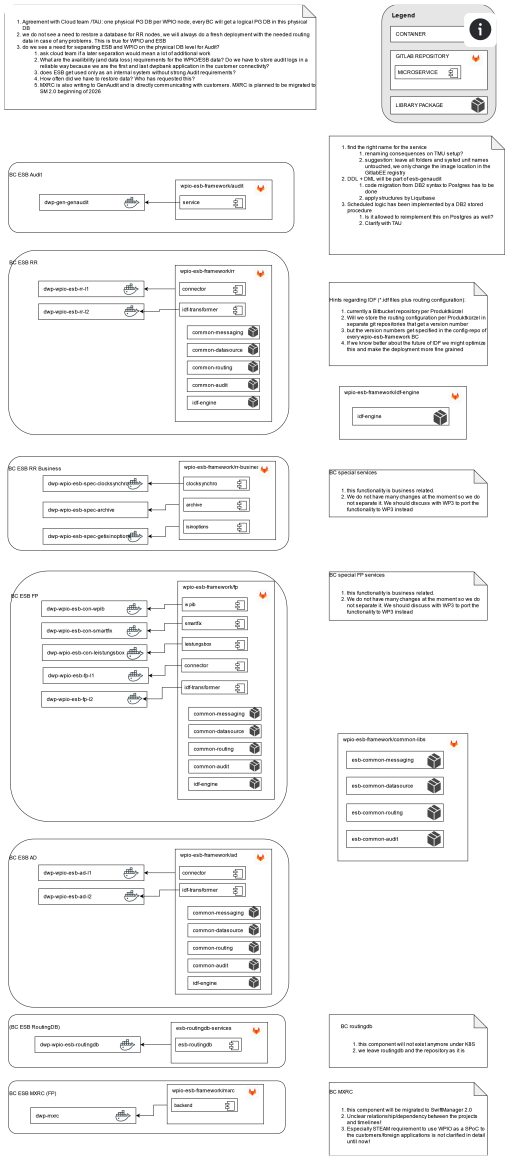

BC restructuring - WPIO

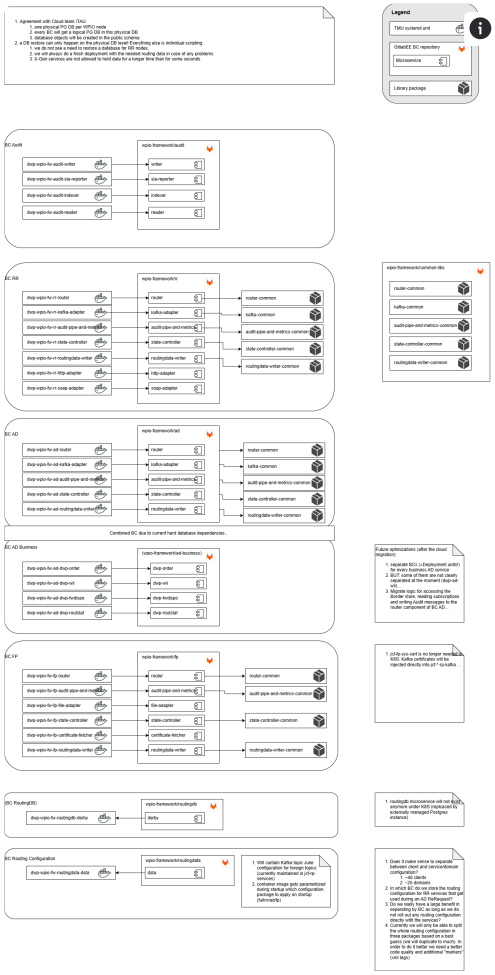

Routingdata relationship

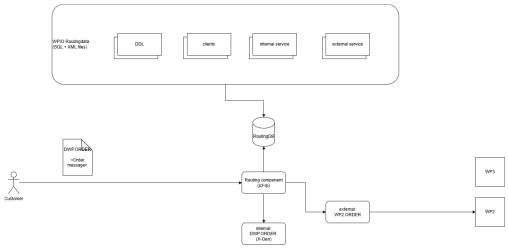

Cloud Monitoring

The intention of this page is to provide an overview of the monitoring setup for the cloud operation. For the sake of completeness and to illustrate the differences the setup of the legacy TMU platform is also displayed.

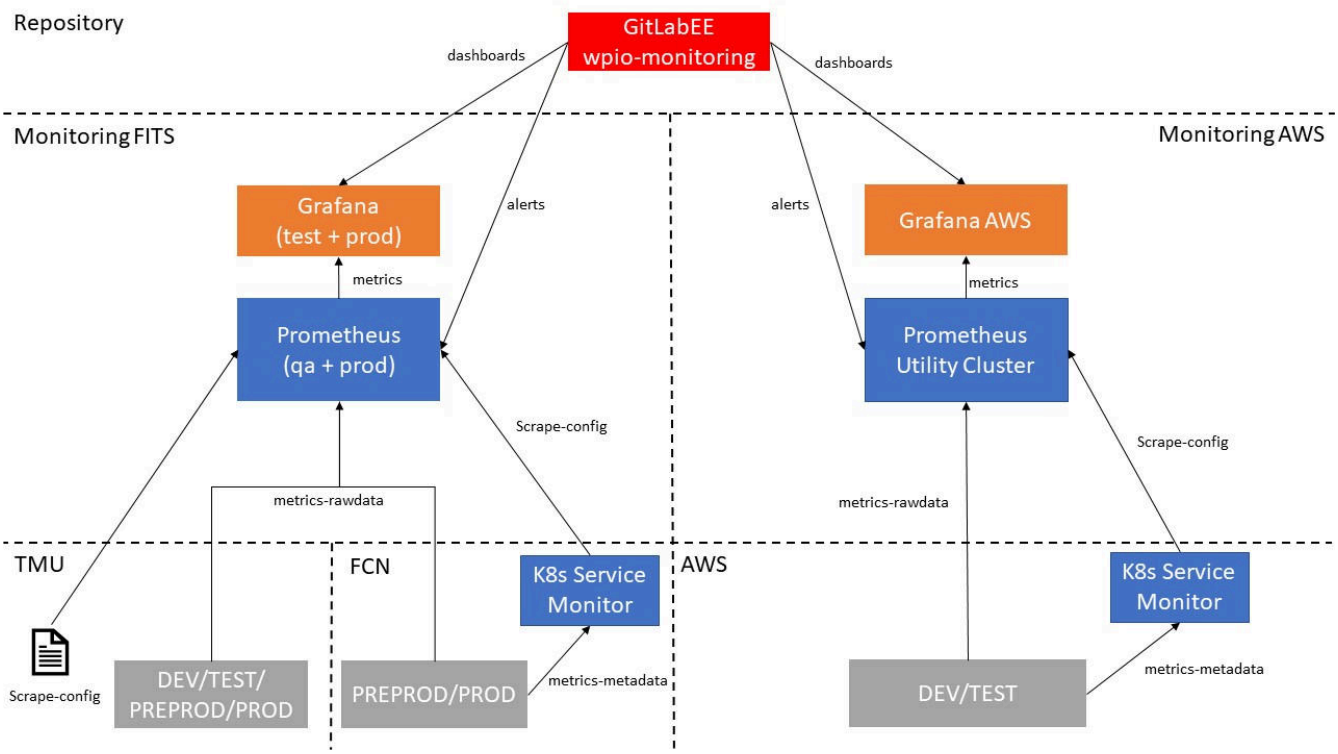

- the "wpio-monitoring" repository in the WPIO BC is the central source of our dahsboards, alerts and runbooks
- there are two monitoring setups (= Prometheus + Grafana). one for the operating platforms at FITs and one for the operating platform at AWS
  - the FITS monitoring setup provides metrics for all stages (DEV, TEST, PREPROD, PROD) of the legacy TMU platform and for the stages PREPROD and PROD from the FCN
  - the AWS monitoring setup only provides metrics for the stages DEV and TEST at AWS
- there is no exchange of metrics between the FITS and AWS monitoring setup, therefore an extra login to the AWS Grafana instance for the monitoring of the AWS environments is necessary
- the deployment of the wpio-monitoring repository is carried out in parallel to the FITS and AWS setup
- for the cloud platforms FCN and AWS, there is no need for a scrape-config which has to be edited manually. This will be done in a generic way by kubernetes via "k8s service monitor"

Open Questions

- Are there MQ metrics from AIX-Farm of FITS available in the AWS Prometheus?
- The monitoring of stage DEV/TEST is more complex due to two different dashboards during parallel phase.

    - Is this acceptable for our stakeholders (XGen/FW-Developers, Testmanagement)?
    - How do our stakeholders use our dashboards in DEV/TEST? Do they use them at all?
    - Maybe provide AWS prometheus metrics in FITS prometheus (**not** the other way around)?
- How about the monitoring for DZ Bank (Federated Prometheus)?
    - In wessen Verantwortung liegt dieses Thema? Es liegt nicht bei WPIO.

To Dos

- we need to adjust our existing dashboards once: https://gitlab.dwp.fits.cloud/wp3/doku/hybrid-cloud-onboarding-guide/-/blob/master/src/doc/index.adoc?ref_type=heads#user-content-grafana-dashboards

URLs

System	Link
GitLabEE wpio-monitoring	https://gitlab.dwp.fits.cloud/wp3/bc/wpio/wpio-monitoring
FITS Grafana test	https://grafana-k8s.test.dwpbank.net/
FITS Grafana prod	https://grafana-k8s.dwpbank.net/
AWS Grafana	https://grafana.utility.private.dwpbank.io/

Further Readings

- https://dwpbank.atlassian.net/wiki/pages/viewpage.action?spaceKey=PPUA&title=Monitoring-Prometheus-Stack
- https://observability.thomasriley.co.uk/prometheus/configuring-prometheus/using-service-monitors/

AWS Monitoring Alert Configuration

Innerhalb von https://gitlab.dwp.fits.cloud/wp3/bc/wpio-framework wird nur ein Monitoring Repo benötigt.
Mehrere Repos sind schwer zu administrieren und bei übergreifenden Änderungen muss je Repo ein seperater MR (Auftrag) gestellt werden.

BC's können hier eingesehen werden: WPIO Bounded-Context Overview - WPIO - Confluence

z.B. ad-monitoring, audit-monitoring.

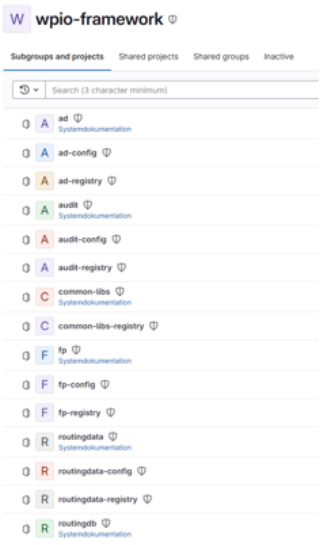

ad-monitoring



alerts:



rules:

ad.rules.yaml:

application_group is "wpio" for **app** "wpiofw"

from dev/tua/wpio-rr-01.yaml · master · wp3 / deployment / apps-test · GitLab

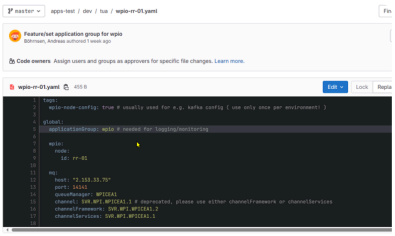

Alert Definition Description can be found here: Definition Alerts - PA/CDE - Plattform- und Anwendungsmanagement - Confluence

Example for Label and alert definition for wpio:

```
groups:
  - name: wpiofw-ad
    rules:
      - alert:
dwp.wpiofw.ad.router.expir
y_totalmessages
        expr: sum by (app,
```

```
dwp_bounded_context,
service, environment,
productstage, topic,
client_id)
(kafka_consumer_fetch_mana
ger_records_lag{dwp_bounde
d_context="caep"}) >= 1
        for: 2h
        labels:
          app: "wpiofw"

dwp_bounded_context: "ad"

application_group: "wpio"
          severity: warn
          fits_email:
"true"

send_mail_from_qa: "false"

mc_tool_rule_receiver: DWP

mc_tool_rule_priority: "3"

mc_tool_rule_on_call_duty:
"false"
          zem_disabled:
"true"
        annotations:
          description: |
            Kafka consumer
konnte Nachrichten auf
topic {{ `{{ $labels.topic
}}` }} nicht abarbeiten:
Stage {{ `{{
$labels.productstage }}`
}}
          message: |
            Kafka consumer
{{ `{{ $labels.client_id
}}` }} konnte Nachrichten
auf topic {{ `{{
$labels.topic }}` }} nicht
innerhalb 2h abarbeiten.
Service {{ `{{
```

```
$labels.service }}` }} in
Umgebung {{ `{{
$labels.environment }}`
}}.
          runbook_url:
'https://gitlab.dwp.fits.c
loud/wp3/bc/ce/caep-
monitoring/-/blob/main/run
books/ce-rules/dwp-ce-
caep-schnittstellen-
daten_werden_nicht_rechtze
itig_abgearbeitet.md'

      - alert:
dwp.wpiofw.ad.kafka-
adapter.error_totalmessage
s
        expr:
kafka_connect_connector_me
trics{connector="jdbc_caep
_cai_sink",status="running
"} != 1
        for: 10m
        labels:
          app: "wpiofw"

dwp_bounded_context: "ad"

application_group: "wpio"
          severity: error
          fits_email:
"true"

send_mail_from_qa: "false"

mc_tool_rule_receiver: DWP

mc_tool_rule_priority: "3"

mc_tool_rule_on_call_duty:
"false"
          zem_disabled:
"true"
        annotations:
          description: |
```

```
            Der {{ `{{
$labels.connector }}` }}
auf {{ `{{ $labels.host
}}` }} ist down: Stage {{
`{{ $labels.productstage
}}` }}
          message: |
            Der {{ `{{
$labels.connector }}` }}
auf {{ `{{ $labels.host
}}` }} ist down: Stage {{
`{{ $labels.productstage
}}` }}. Bitte
Fehlerursache überprüfen
und {{ `{{
$labels.connector }}` }}
wieder starten.
          runbook_url:
'https://gitlab.dwp.fits.c
loud/wp3/bc/ce/caep-
monitoring/-/blob/main/run
books/ce-rules/dwp-c
e-caep-jdbc
```

Mail Alert Definition

Problem and Incidentmanagement

wpio_wp3@dwpbank.de

Eventmanagement

Example:

- app = wpioframework
- boundedcontext = fp, rr, ad, audit
- service= router, kafka, etc.

Pattern for mail: **alerts.(nonprod | prod).<app>-<bc>@dwpbank.de** *see below* **alert-mail-resolving**

<app>:= app_service like "***mp_ce***"

<bc>:=bounded_context like "***kundeninfo***"

Required:

- alerts-nonprod-wpiofw_fp-router
  mail: alerts.nonprod.wpiofw_fp-router@dwpbank.de
- alerts-nonprod-wpiofw_fp-router
  mail: alerts.nonprod.wpiofw_fp.router@dwpbank.de
- alerts-prod-wpiofw_fp-router
  mail: alerts.prod.wpiofw_fp-router@dwpbank.de
- alerts-prod-wpiofw_fp-router
  mail: alerts.prod.wpiofw_fp-router@dwpbank.de

Optional **sms**:

- alerts-sms.nonprod.wpiofw_fp-router
  mail: alerts-sms.nonprod.wpiofw_fp-router@dwpbank.de
- alerts-sms.prod.wpiofw_fp-router
  mail: alerts-sms.prod.wpiofw_fp-router@dwpbank.de

Each row in this table defintion means that every component in the bc wpiofw delivers a metric which could trigger an alert.
The defintions follows: BC restructuring - WPIO - WPIO - Confluence

First suggestions to be discussed

app	bc	service	name definition	mail address	• **<app>.<bc>.rules.yaml:** • **alert example**
wpiofw	rr	router	alerts-prod-wpiofw_rr-router alerts-nonprod-wpiofw_rr-router	alerts.prod.wpiofw_rr-router@dwpbank.de alerts.nonprod.wpiofw_rr-router@dwpbank.de	rules: • alert: dwp.wpiofw.rr.router.<*>.<*> • alert: dwp.wpiofw.rr.router.<*>.<*>
		kafka	alerts-prod-wpiofw_rr-kafka alerts-nonprod-wpiofw_rr-kafka	alerts.prod.wpiofw_rr-kafka@dwpbank.de alerts.nonprod.wpiofw_rr-	

				kafka@dwpbank.de	
		soap	alerts-prod-wpiofw_rr-soap alerts-nonprod-wpiofw_rr-soap	alerts.prod.wpiofw_rr-soap@dwpbank.de alerts.nonprod.wpiofw_rr-soap@dwpbank.de	
wpiofw	ad		alerts-prod-wpiofw_ad alerts-nonprod-wpiofw_ad	alerts.prod.wpiofw_ad@dwpbank.de alerts.nonprod.wpiofw_ad@dwpbank.de	
		dwp-order	alerts-prod-wpiofw_ad-dwp-order alerts-nonprod-wpiofw_ad-dwp-order	alerts.prod.wpiofw_ad-dwp-order@dwpbank.de alerts.nonprod.wpiofw_ad-dwp-order@dwpbank.de	
wpiofw	audit	writer	alerts-prod-wpiofw_audit-writer alerts-nonprod-wpiofw_audit-writer	alerts.prod.wpiofw_audit-writer@dwpbank.de alerts.nonprod.wpiofw_audit-writer@dwpbank.de	
		sla-reporter	alerts-prod-wpiofw_audit-sla-reporter alerts-nonprod-wpiofw_audit-sla-reporter	alerts.prod.wpiofw_audit-sla-reporter@dwpbank.de alerts.nonprod.wpiofw_audit-sla-reporter@dwpbank.de	
		indexer	alerts-prod-wpiofw_audit-indexer alerts-nonprod-wpiofw_audit-indexer	alerts.prod.wpiofw_audit-indexer@dwpbank.de alerts.nonprod.wpiofw_audit-indexer@dwpbank.de	
wpiofw	fp	router	alerts-prod-wpiofw_fp-router alerts-nonprod-wpiofw_fp-router	alerts.prod.wpiofw_fp-router@dwpbank.de alerts.nonprod.wpiofw_fp-router@dwpbank.de	

Mail Definitions based on WPIO Bounded-Context Overview - WPIO - Confluence

app	bc	name definition	mail address
wpio-framework	rr	alerts-prod-wpio-framework_rr alerts-nonprod-wpio-framework_rr	alerts.prod.wpio-framework_rr@dwpbank.de alerts.nonprod.wpio-framework_rr@dwpbank.de
wpio-framework	ad	alerts-prod-wpio-framework_ad alerts-nonprod-wpio-framework_ad	alerts.prod.wpio-framework_ad@dwpbank.de alerts.nonprod.wpio-framework_ad@dwpbank.de
wpio-framework	audit	alerts-prod-wpio-framework_audit alerts-nonprod-wpio-framework_audit	alerts.prod.wpio-framework_audit@dwpbank.de alerts.nonprod.wpio-framework_audit@dwpbank.de
wpio-framework	fp	alerts-prod-wpio-framework_fp alerts-nonprod-wpio-framework_fp	alerts.prod.wpio-framework_fp@dwpbank.de alerts.nonprod.wpio-framework_fp@dwpbank.de

wpio-framework	routingdata	alerts-prod-wpio-framework_routingdata alerts-nonprod-wpio-framework_routingdata	alerts.prod.wpio-framework_routingdata@dwpbank.de alerts.nonprod.wpio-framework_routingdata@dwpbank.de

- Do we need a seperate routingdb mail alerter ? No
- Do we need a seperate ad-business mail alerter ? No
- Makes it sense to setup an alert mail for "alerts-prod-wpiofw" only for events that will be generated on the app level ? No
- Do we need sms mail definitions ? No

Decision 13.06.2025 DDF Meeting: Mail Definition List

app	display name definition ("-" = "." in mail address)	mail address
wpio-framework	alerts-prod-wpio_framework alerts-nonprod-wpio_framework	alerts.prod.wpio_framework@dwpbank.de alerts.nonprod.wpio_framework@dwpbank.de
wpio-esb-framework	alerts-prod-wpio_esb_framework alerts-nonprod-wpio_esb_framework	alerts.prod.wpio_esb_framework@dwpbank.de alerts.nonprod.wpio_esb_framework@dwpbank.de
wpio-ao	alerts-prod-wpio_ao alerts-nonprod-wpio_ao	alerts.prod.wpio_ao@dwpbank.de alerts.nonprod.wpio_ao@dwpbank.de
wpio-br	alerts-prod-wpio_br alerts-nonprod-wpio-br	alerts.prod.wpio_br@dwpbank.de alerts.nonprod.wpio_br@dwpbank.de
wpio-ca	alerts-prod-wpio_ca alerts-nonprod-wpio_ca	alerts.prod.wpio_ca@dwpbank.de alerts.nonprod.wpio_ca@dwpbank.de
wpio-cs	alerts-prod-wpio_cs alerts-nonprod-wpio_cs	alerts.prod.wpio_cs@dwpbank.de alerts.nonprod.wpio_cs@dwpbank.de
wpio-cu	alerts-prod-wpio_cu alerts-nonprod-wpio_cu	alerts.prod.wpio_cu@dwpbank.de alerts.nonprod.wpio_cu@dwpbank.de
wpio-di	alerts-prod-wpio_di alerts-nonprod-wpio_di	alerts.prod.wpio_di@dwpbank.de alerts.nonprod.wpio_di@dwpbank.de
wpio-dp	alerts-prod-wpio_dp alerts-nonprod-wpio_dp	alerts.prod.wpio_dp@dwpbank.de alerts.nonprod.wpio_dp@dwpbank.de
wpio-fitax	alerts-prod-wpio_fitax alerts-nonprod-wpio_fitax	alerts.prod.wpio_fitax@dwpbank.de alerts.nonprod.wpio_fitax@dwpbank.de
wpio-gt	alerts-prod-wpio_gt alerts-nonprod-wpio_gt	alerts.prod.wpio_qt@dwpbank.de alerts.nonprod.wpio_qt@dwpbank.de
wpio-je	alerts-prod-wpio_je alerts-nonprod-wpio_je	alerts.prod.wpio_je@dwpbank.de alerts.nonprod.wpio_je@dwpbank.de
wpio-kry	alerts-prod-wpio_kry alerts-nonprod-wpio_kry	alerts.prod.wpio_kry@dwpbank.de alerts.nonprod.wpio_kry@dwpbank.de
wpio-kv	alerts-prod-wpio_kv alerts-nonprod-wpio_kv	alerts.prod.wpio_kv@dwpbank.de alerts.nonprod.wpio_kv@dwpbank.de

wpio-oi	alerts-prod-wpio_oi alerts-nonprod-wpio_oi	alerts.prod.wpio_oi@dwpbank.de alerts.nonprod.wpio_oi@dwpbank.de
wpio-or	alerts-prod-wpio_or alerts-nonprod-wpio_or	alerts.prod.wpio_or@dwpbank.de alerts.nonprod.wpio_or@dwpbank.de
wpio-qr	alerts-prod-wpio_qr alerts-nonprod-wpio_qr	alerts.prod.wpio_qr@dwpbank.de alerts.nonprod.wpio_qr@dwpbank.de
wpio-sm	alerts-prod-wpio_sm alerts-nonprod-wpio_sm	alerts.prod.wpio_sm@dwpbank.de alerts.nonprod.wpio_sm@dwpbank.de
wpio-smaragd-tcm	alerts-prod-wpio_smaragd_tcm alerts-nonprod-wpio_smaragd_tcm	alerts.prod.wpio_smaragd_tcm@dwpbank.de alerts.nonprod.wpio_smaragd_tcm@dwpbank.de
wpio-sp	alerts-prod-wpio_sp alerts-nonprod-wpio_sp	alerts.prod.wpio_sp@dwpbank.de alerts.nonprod.wpio_sp@dwpbank.de
wpio-st	alerts-prod-wpio_st alerts-nonprod-wpio_st	alerts.prod.wpio_st@dwpbank.de alerts.nonprod.wpio_st@dwpbank.de
wpio-ta	alerts-prod-wpio_ta alerts-nonprod-wpio_ta	alerts.prod.wpio_ta@dwpbank.de alerts.nonprod.wpio_ta@dwpbank.de
wpio-tq	alerts-prod-wpio_tq alerts-nonprod-wpio_tq	alerts.prod.wpio_tq@dwpbank.de alerts.nonprod.wpio_tq@dwpbank.de
wpio-wam	alerts-prod-wpio_wam alerts-nonprod-wpio_wam	alerts.prod.wpio_wam@dwpbank.de alerts.nonprod.wpio_wam@dwpbank.de
wpio-ws	alerts-prod-wpio_ws alerts-nonprod-wpio_ws	alerts.prod.wpio_ws@dwpbank.de alerts.nonprod.wpio_ws@dwpbank.de

#alert-mail-resolving

How the alert mail will be resolved

From Alert Labels und Routing - PA/CDE - Plattform- und Anwendungsmanagement - Confluence

Alarm an Mail / SMS Routing

Alerts werden mit Hilfe der genannten Labels geroutet, und zwar wie folgt:

Alarm an Mail gehen an eMail-Verteiler[1] mit dem Prefix alerts. Das Label productstage wird hierbei reduziert auf die Ausprägungen “prod“ und “nonprod“[2].

1. Alle Alerts für {prod|nonprod} gehen an
   alerts-{prod|nonprod}
   alerts.{prod|nonprod}@dwpbank.de

2. Alle Alerts für {prod|nonprod} und app gehen an
   alerts-{prod|nonprod}-${app}
   alerts.{prod|nonprod}.${app}@dwpbank.de

3. Alle Alerts für {prod|nonprod}, app und dwp_bounded_context gehen an
   alerts-{prod|nonprod}-${app}-${dwp_bounded_context}
   alerts.{prod|nonprod}.${app}.${dwp_bounded_context}@dwpbank.de

Je nach Verfügbarkeit der Labels kann es sein, dass ein Alarm gleichzeitig an zwei oder drei Verteiler gesendet wird.

Analog zu Alarm an Mail gehen SMS-Alerts an eMail-Verteiler mit dem Prefix alerts-sms (statt alerts).

- Hier steht allerdings nur der detaillierteste Verteiler analog zu Nr. 3 zur Verfügung:
  alerts-sms-{prod|nonprod}-${app}-${dwp_bounded_context}
  alerts-sms.{prod|nonprod}.${app}.${dwp_bounded_context}@dwpbank.de

BEISPIEL 1

Ein Alert mit folgenden Labels:

app: mp_ce
dwp_bounded_context: kundeninfo
service: kundeninfo-cae-pruefung
productstage: test
environment: tuv

würde geroutet an alle folgenden eMail-Verteiler / eMail-Adressen (falls eMail-Versand bzw. SMS-Versand für den Alert aktiviert ist):

- alerts-nonprod
  alerts.nonprod@dwpbank.de
- alerts-nonprod-mp_ce
  alerts.nonprod.mp_ce@dwpbank.de
- alerts-nonprod-mp_ce-kundeninfo
  alerts.nonprod.mp_ce.kundeninfo@dwpbank.de
- alerts-sms.nonprod.mp_ce-kundeninfo
  alerts-sms.nonprod.mp_ce.kundeninfo@dwpbank.de

Die genannten eMail-Adressen werden in Outlook/Exchange als Mailverteiler angelegt. In diese Mailverteiler tragen sich dann die Mail-Empfänger[3] bzw. SMS-Empfänger[4] auf Seiten der dwpbank ein.

> **Wichtig:** Bevor eine weitere app oder ein neuer dwp_bounded_context zum Einsatz kommt (spätestens vor dem erstem Deployment nach Stage Test), müssen die entsprechenden Mailverteiler eingerichtet worden sein[5]! Zum Vorgehen vgl. Einrichtung eMail-Verteiler und SMS-Verteiler, bzw. „Einrichtung Kontakte / Verteiler für eMail-/SMS-Versand“ und „Einrichtung Kontakte / Verteiler für SMS-Versand“ im PDF in Z- Archive wiki.tools.dwpbank.net/dokuwiki/Monitoring.

CMDB

This page displays all CIs (= Configuration Items) which have been created by the WGC project. The CIs are ordered by stage and environment.

An overview of the legacy Queue-Managers can be found here: V:\WPIOnline\1B Dokumentation\WPIO_Qmgr-Aufstellung.xlsx

Dev / LUP

IBM MQ					
Queue-Manager	**IP**	**Channel App**	**Port App**	**Channel MQExplorer**	**Port MQExplorer**
WGCLUP	2.153.33.74	SVR.LUP.WGCLUP.1	1414	AEEXPL.WGCLUP.1	14143

Linux Server	
Name	**IP**
dwpwpioappe01	2.153.29.90

Dev / TUA

S3	
Hint: the S3 server is used for stage DEV and TEST. The credentials are also identical. https://dwpbank.atlassian.net/wiki/display/PPUA/S3	
Server	**Buckets**
s3.prod-02-stg-kkw701.fits.cloud (212.34.89.149)	• tua.wpio.fragments

IBM MQ					
Queue-Manager	**IP**	**Channel App**	**Port App**	**Channel MQExplorer**	**Port MQExplorer**
WPICEA1	2.153.33.75	• SVR.WPA.WPICEA1.1 (X-Gen-FW) • SVR.WPA.WPICEA1.2 (jcf)	14141		

Configuration Migration from TMU to Cloud

`This page describes how to migrate the old TMU configuration to the Cloud using the Helm syntax.`

TMU Configuration Repository

Link

roles/jcf · master · dwp / deployment / wpio · GitLab

Login

dwp user id and LDAP password

Which variables to migrate

First, check which variables are in use in the **application.yml** for each microservice.

Check **templates/environment.conf.j2** and identify the variables.

For each environment, check **vars/service-tua.yaml** etc.

Cloud Configuration Repository

Link

Each repository corresponds to a source code repository and has the -config suffix. For example: https://gitlab.dwp.fits.cloud/wp3/bc/wpio-framework/audit and https://gitlab.dwp.fits.cloud/wp3/bc/wpio-framework/audit-config

Login

dwp user id and OIM password

For Helm values-*.yaml configuration, check the Hybrid Cloud Onboarding guide to understand the hierarchy and how values are overriden.

Helm Syntax and Pitfalls

Underscores

Watch out for the underscores! Helm treats each variable separated by _ as a separate variable. `SPRING_PROFILES_ACTIVE` is not the same as `SPRING-PROFILES-ACTIVE!`

Array Syntax

Old:

```
audit.input-queues[0].name=TMU Node 01 Audit Messages Online
```

New:

```
 AUDIT_INPUT-QUEUES_0_NAME: "TMU Node 01 Audit Messages Online"
```

ℹ️ It can also be lowercase.

Example:

```
audit-idx:
  queues-in:
    audit-name: WPI.AUDIT.INDEX
```

It becomes:

```
 AUDIT-IDX_QUEUES-IN_AUDIT-NAME: "WPI.AUDIT.INDEX"
```

⚠️ Pay attention to the underscores and dashes!

Gauge Tests Setup Know-How

This page describes the process how to set up the Gauge infrastructure locally and integrate the tests into the CI/CD pipeline.

Local Setup

Folder structure

Create a folder called **tests** under the project´s root directory:

Add modules in the tests´s pom.xml. For example, a module named *audit*:

```
  <modules>
       <module>audit</module>
   </modules>
```

Dependencies

- Main projects´s pom.xml:

Gauge

```
<dependencyManagement>
  <dependencies>
    <dependency>
<!-- https://search.maven.org/artifact/com.thoughtworks.gauge/gauge-java -->
       <artifactId>gauge-java</artifactId>
       <groupId>com.thoughtworks.gauge</groupId>
       <scope>test</scope>
       <version>CHECK IT</version>
    </dependency>
  </dependencies>
 </dependencyManagement>
```

- Child pom.xml for the test module (e.g. *tests/audit/pom.xml*):

  Gauge Maven Dependency

```
       <dependency>
           <artifactId>gauge-java</artifactId>
           <groupId>com.thoughtworks.gauge</groupId>
           <scope>test</scope>
       </dependency>
```

- Properties for the Gauge maven plugin (e.g. in tests/audit/pom.xml):

These properties are used by the cloud environment to set up the Kubernetes containers.

Pom Properties for Gauge Maven Plugin

```
    <properties>
        <jib.skip>true</jib.skip>
        <sonar.skip>true</sonar.skip>
        <skip.gauge>false</skip.gauge>
        <skip.git-commit-id-plugin>true</skip.git-commit-id-plugin>
        <propnamespace>gauge-default</propnamespace>
        <service-shortname>audit</service-shortname>
        <testscenario>scenario-${service-shortname}</testscenario>
        <prophelmreleasename>${propnamespace}-${service-shortname}</prophelmreleasename>
        <fullnamespace>${propnamespace}-${testscenario}</fullnamespace>
        <service-url-suffix>${fullnamespace}.svc.cluster.local:8080</service-url-suffix>
    </properties>
```

- Gauge Plugin Configuration (e.g. in tests/audit/pom.xml):

Gauge Plugin Config

```
    <profiles>
        <profile>
            <id>gitlab-ci</id>
            <activation>
                <property>
                    <name>env.CI</name>
                </property>
            </activation>
            <build>
                <plugins>
                    <plugin>
                        <groupId>com.thoughtworks.gauge.maven</groupId>
                        <artifactId>gauge-maven-plugin</artifactId>
                        <configuration>
                            <specsDir>specs</specsDir>
                            <environmentVariables>
                                <CI_ENABLED>true</CI_ENABLED>
                                <SPRING_PROFILES_ACTIVE>integrationtest</SPRING_PROFILES_ACTIVE>
                              <!--Any custom variables you need -->
                                <BASE_URL>http://${service-
shortname}.${fullnamespace}.svc.cluster.local:8080</BASE_URL>

<JMS_BROKER_URL>tcp://activemq.${fullnamespace}.svc.cluster.local:61616</JMS_BROKER_URL>
                            </environmentVariables>
                        </configuration>
                    </plugin>
                </plugins>
            </build>
        </profile>
    </profiles>
```

- gitops.yaml

The CI/CD needs this file for the execution of the gauge tests

GitOps YAML

```yaml
bcs:
  - app: app group id # e.g. wpio-framework
    bc: bounded context # e.g. audit
    revision: v2025.12.0-4.0.0 or feature/branch-from-config-repo # use a tag or a feature branch
    scenario: scenario name # It has to match with the scenario name you defined in pom.xml <testscenario>, e.g.
scenario-audit
```

- Create env/default folder (e.g. *tests/audit/env/default/*)

This directory is needed for the local testing where you define the local environment variables.

Add a **api.properties** file:

Example:

```
BASE_URL=http://localhost:8080 # corresponds to the variable defined in the pom.xml under <environmentVariables>
for the Gauge maven plugin
```

⚠️ Write the Java code to read these properties! Alternatively, use a YAML, XML based file and load it in the Gauge Java application to retrieve the properties.

Add a **default.properties** file contains environment variables for Gauge:

Gauge Default Properties

```
# default.properties
# properties set here will be available to the test execution as environment variables

# sample_key = sample_value

# The path to the gauge reports directory. Should be either relative to the project directory or an absolute path
gauge_reports_dir=target/gauge/reports

# Set as false if gauge reports should not be overwritten on each execution. A new time-stamped directory will be created on each execution.
overwrite_reports = true

# Set to false to disable screenshots on failure in reports.
screenshot_on_failure = false

# The path to the gauge logs directory. Should be either relative to the project directory or an absolute path
logs_directory = logs

# Set to true to use multithreading for parallel execution
enable_multithreading = false

# The path the gauge specifications directory. Takes a comma separated list of specification files/directories.
gauge_specs_dir = specs

# The default delimiter used read csv files.
csv_delimiter = ,

# Allows steps to be written in multiline
allow_multiline_step = false

# increase startup timeouts because of DF's CICD sometimes can be slow
runner_connection_timeout 200000
runner_request_timeout 500000
```

Add a **java.properties** file:

It contains environment variables for Java:

Java Gauge Properties

```
# Specify an alternate Java home if you want to use a custom version
gauge_java_home =

# IntelliJ and Eclipse out directory will be usually autodetected
# Use the below property if you need to override the build path
gauge_custom_build_path =

# specify the directory where additional libs are kept
# you can specify multiple directory names separated with a comma (,)
gauge_additional_libs = libs/*

# JVM arguments passed to java while launching. Enter multiple values separated by comma (,) eg. Xmx1024m, Xms128m
gauge_jvm_args =

# specify the directory containing java files to be compiled
# you can specify multiple directory names separated with a comma (,)
gauge_custom_compile_dir =

# specify the level at which the objects should be cleared
# Possible values are suite, spec and scenario. Default value is scenario.
gauge_clear_state_level = scenario
```

Optional: ActiveMQ Setup

Steps for projects that use IBM MQ.

Since **IBM MQ** is not supported in the pipelines due to license restrictions, **ActiveMQ** should be used instead. **Spring Profiles** allow you to switch between the environments.

Steps:

1. Add the activemq depndency to the root pom.xml:

```
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-activemq</artifactId>
        <version>${version.spring-boot}</version>
    </dependency>
```

2. Add the ActiveMQ Beans. Example Java code:

ActiveMQ Java Component

```java
import lombok.Data;
import org.springframework.boot.context.properties.ConfigurationProperties;
import org.springframework.context.annotation.Profile;
import org.springframework.stereotype.Component;
import org.springframework.validation.annotation.Validated;

@Component
@ConfigurationProperties("spring.activemq")
@Data
@Profile("integrationtest")
@Validated
public class ActiveMQConfigProperties {

  private String brokerUrl;
  private String user;
  private String password;
}
```

ActiveMQ Java Configuration

```java
import jakarta.jms.ConnectionFactory;
import lombok.extern.slf4j.Slf4j;
import org.apache.activemq.ActiveMQConnectionFactory;
import org.springframework.boot.autoconfigure.jms.DefaultJmsListenerContainerFactoryConfigurer;
import org.springframework.context.annotation.Bean;
import org.springframework.context.annotation.Configuration;
import org.springframework.context.annotation.Primary;
import org.springframework.context.annotation.Profile;
import org.springframework.jms.annotation.EnableJms;
import org.springframework.jms.config.DefaultJmsListenerContainerFactory;
import org.springframework.jms.connection.CachingConnectionFactory;

import java.util.List;

@Configuration
@EnableJms
@Profile("integrationtest")
@Slf4j
public class ActiveMQConfiguration {

    @Bean
    public DefaultJmsListenerContainerFactory mqFactory(
            CachingConnectionFactory activeMQConnectionFactory,
            DefaultJmsListenerContainerFactoryConfigurer configurer) {
        DefaultJmsListenerContainerFactory factory = new DefaultJmsListenerContainerFactory();
        factory.setErrorHandler(t -> log.error("Error in JMS container", t));
        configurer.configure(factory, activeMQConnectionFactory);
```

```
        return factory;
    }

    @Bean
    public ActiveMQConnectionFactory activeMQConnectionFactory(ActiveMQConfigProperties properties) {
        log.info("App starting with activeMQ");
        ActiveMQConnectionFactory connectionFactory = new ActiveMQConnectionFactory();
        connectionFactory.setTrustedPackages(List.of("de.dwpbank.wpio.framework.audit.indexer"));
        connectionFactory.setBrokerURL(properties.getBrokerUrl());
        connectionFactory.setUserName(properties.getUser());
        connectionFactory.setPassword(properties.getPassword());
        return connectionFactory;
    }

    @Bean
    @Primary
    public CachingConnectionFactory cachingConnectionFactory(
            ConnectionFactory connectionFactory) {
        CachingConnectionFactory cachingConnectionFactory = new CachingConnectionFactory();
        cachingConnectionFactory.setTargetConnectionFactory(connectionFactory);
        cachingConnectionFactory.setSessionCacheSize(25);
        cachingConnectionFactory.setReconnectOnException(true);
        return cachingConnectionFactory;
    }

}
```

- Adjust your existing **MQConfiguration** to run outside integrationtest:

```
@Configuration

@Profile("!integrationtest")
```

- Add to the main resources **application-integrationtest.yaml.** It contains the needed configuration for the integration tests. Example:

```
spring:
  activemq:
    broker-url : tcp://localhost:61616
    user: artemis
    password: artemis
```

- Add the **specs** folder. It contains the *.spec* files for the Gauge tests. Visit the Gauge Documentation for more details.

Example:

```
# Application health specification

### Check actuator health endpoints
* Verify all configured services have healthy actuator endpoints
```

⚠️ The logic is written in Java classes that correspond to the specs scenario.

- The gauge script file (e.g. *tests/audit/rungauge.sh)* starts the gauge tests:

```
#!/usr/bin/env bash
export SPRING_PROFILES_ACTIVE=integrationtest
mvn test gauge:execute
```

Running the tests locally

- Start the local infrasctruture, e.g. activemq, db etc. using docker-compose or kind.
- Start the microservice with the *integrationtest* profile.
- Run the *rungauge.sh* script.

You will see the output in the Terminal.

CI/CD Pipeline Integration

Setting up the config repository

Folder structure

```
└──bounded-context #parent folder
    ├──integrationtest # integration tests folder
    │   └──scenario-audit # the name of the scenario should match the one in gitops.yaml and the pom.xml as mentioned earlier!

            └──values-scenario-audit.yaml # the values for the gauge tests which will override values-integrationtest.yaml. Not manadatory.

        └──Chart.yaml # contains the helm charts for the gauge tests

        └──values-integrationtest.yaml # the main values for the gauge tests
```

Chart.yaml example:

Chart.yaml

```yaml
apiVersion: v2
appVersion: 1.0.0
name: wpio-framework-audit
description: wpio-framework-audit
version: &chart_version 4.4.5
maintainers:
  - name: Steffen Flick
    email: steffen.flick@dwpbank.de
dependencies:
  - name: activemq
    version: 1.0.0
    repository: oci://registry.dwp.fits.cloud/wp3/dev-utils/integrationtest-helm-charts
    condition: activemq.enabled
  - name: bc-config
    version: 0.4.0
    repository: oci://registry.dwp.fits.cloud/wp3/hybrid-cloud/helm-charts
  - name: testhelper
    version: 1.0.0
    repository: oci://registry.dwp.fits.cloud/wp3/dev-utils/integrationtest-helm-charts
    condition: testhelper.enabled
  - name: microservice
    version: *chart_version
    repository: oci://registry.dwp.fits.cloud/wp3/hybrid-cloud/helm-charts
    alias: indexer
    condition: indexer.enabled
```

Example values-integrationtest.yaml:

```
indexer:
  image:
    repository: wp3/bc/wpio-framework/audit # use repository only if you want to deploy a feature branch otherwise no need to include this key
```

```
    name: indexer
  env:
    SPRING_PROFILES_ACTIVE: integrationtest
#add any variables to override
```

Running the tests in the pipeline

1. Push the changes in the config repo first. Wait for the pipeline to finish.
2. Push the changes in the source code repo. The gauge job will be triggered automatically. Make sure in **.gitlab-ci.yml** the gauge tests are enabled:

```yaml
variables:
BUILD_SKIP_GAUGE: "false" # or remove this line
```

Debugging

In case of issues, check the logs of the **gauge-trigger** pipeline job. Expand the "Executing ArgoCD to create Gauge Infrastructure" section to find the URL to Git CI ArgoCD. It will be something like https://argocd.gitlab-ci.private.dwpbank.io/applications/it-5698084-scenario-audit

The environment is auto-deleted after the tests have run. So, if you dont check the logs immediately, you have to rerun the failed job and click on the link before ArgoCD deletes the pods!

If you have Gauge test failures, expand the "Executing Gauge Tests" line in the gauge-trigger log. These logs are not deleted, and you can find them even after the pipeline fails.

How to Access Postgres TUA Database

Please check the attached file: postgres-users.csv.txt .

If the credentials are changed over time, this is how to get them via kubectl:

kubectl get secret -n {the name of the namespace you need the secret for} {the name of the secret} -o jsonpath='{.data.ACCESS_KEY_ID}' | base64 --decode | more
kubectl get secret -n {the name of the namespace you need the secret for} {the name of the secret} -o jsonpath='{.data.SECRET_ACCESS_KEY}' | base64 --decode | more

Tipp: If you dont know the name of the secret, you can check it like this:

kubectl get secrects -n {the name of the namespace you need the secret for}

Important: You need to have a VPN connection via WireGuard to be able to access the database!

How to browse S3 Buckets in TUA Kubernetes Cluster from the DF Laptop

Prerequisites

1. Install VPN Wireguard:

https://gitlab.dwp.fits.cloud/wp3/doku/hybrid-cloud-onboarding-guide/-/blob/master/src/doc/index.adoc#user-content-wireguard

2. Set up access to the AWS network:

https://gitlab.dwp.fits.cloud/wp3/doku/hybrid-cloud-onboarding-guide/-/blob/master/src/doc/index.adoc#user-content-zugang

3. Install kubectl to interact with k8s clusters:

https://gitlab.dwp.fits.cloud/wp3/doku/hybrid-cloud-onboarding-guide/-/blob/master/src/doc/index.adoc#user-content-kubectl

4. Set up kubectl config and context to connect to TUA: https://kubeconfig.tua.private.dwpbank.io/

5. Install minio client to interact with S3:

GitHub - minio/mc: Unix like utilities for object store

1. Set up minio alias for dev and test S3 environments:

mc alias set s3-fits-dev https://s3.prod-02-stg-kkw701.fits.cloud DEV_ACCESS_KEY DEV_ACCESS_KEY_SECRET

mc alias set s3-fits-test https://s3.prod-02-stg-kkw701.fits.cloud TEST_ACCESS_KEY TEST_ACCESS_KEY_SECRET

Ask for the access and secret keys privately. But if you have a K8S TUA role, you can get query the credentials like this:

kubectl get secret -n *{bounded context namespace and name}* credential-fits-s3-filetransfer -o jsonpath='{.data.ACCESS_KEY_ID}' | base64 --decode | more
kubectl get secret -n *{bounded context namespace and name}* credential-fits-s3-filetransfer -o jsonpath='{.data.SECRET_ACCESS_KEY}' | base64 --decode | more

Steps to list S3 files

1. // start wireguard

sudo wg-quick up wg0

2. // list fragments

./minio-binaries/mc stat --recursive s3-fits-test/tua.wpio.fragments

```
Name     : tua.wpio.fragments/DWP.VWS_ONLINE_V2
Date     : 2025-02-10 06:17:05 CET
Size     : 1.9 MiB
ETag     : 34c5a390737ada0b1a4e15c78b075997
Type     : file
Metadata :
  Content-Type: application/octet-stream

Name     : tua.wpio.fragments/DWP.WP3_ORDER
Date     : 2024-08-19 14:31:10 CEST
Size     : 2.6 KiB
ETag     : 7af60bd50bd5db15719e01ec33fd94c0
Type     : file
Metadata :
  Content-Type: application/octet-stream
```

3. (Optional) // stop wireguard

sudo wg-quick down wg0

How to Modify Remote Postgres Database Tables

`This page describes the process how to modify the remote Postgres database.`

DEV Environments

The developer can manually change the database tables. See How to Access Postgres TUA Database - WPIO - Confluence to access Postgres locally.

TEST Environments

The developer has no write access to Postgres on stages like TUH, TUM, TUD, etc. The execution of the SQL statements (**update, delete, truncate, drop**) has to be requested via the **ScrubDaddy** self-service.

⚠️ ScrubDaddy is not a replacement of Liquibase!

The steps how to use the self-service is well described here: Scrub-Daddy#Step-by-StepGuideforScrub-DaddyUsage

For example, a table update script would look like this:

```
- app: wpio-framework # taken from wp3/bc/wpio-framework/rr
  bc: rr # taken from wp3/bc/wpio-framework/rr

  # Database Management
  databases:
    - name: wpio-framework # taken from credential-pg-app-user secretkeyref
      method: manual
      statements:
        -  UPDATE Table SET Column=value where condiditon;
```

PreProd and Prod Environments

Follow Scrub-Daddy (FCN - TUY/Prod)#Step-by-StepGuideforScrub-DaddyUsage for the concrete steps.

ℹ️ The process the same as for the TEST environments. The only difference is in the MR approval process. The MR has to be sent via WPAuftrag (possible with change) or in the microservice installation guide.

How to obtain a JWT Token from Keycloak for REST Tests on TUA

`This page describes how to test REST-Service calls with "technicalUser" privileges on TUA.`

1. Request a **technicalUser** by following the example [M4INF-9821] Rest Users for TUA Keycloak testing - dwpbank
2. Enable **ingress**, **oidc**, and **keycloak** in the service config repo:

```
soap-adapter:
  oidc:
    enabled: true
    isClient: true # creates a KeycloakClient resource in Kubernetes
  ingress:
    enabled: true #exposes the service endpoint outside the cluster
  env:
    SPRING_SECURITY_OAUTH2_CLIENT_PROVIDER_KEYCLOAK_TOKEN-URI: "$(KEYCLOAK_TOKEN_URL)"
    SPRING_SECURITY_OAUTH2_CLIENT_PROVIDER_KEYCLOAK_AUTHORIZATION-URI:
"$(KEYCLOAK_BASE_URL)/auth/realms/dwpbank/protocol/openid-connect/authorize"
    SPRING_SECURITY_OAUTH2_RESOURCESERVER_JWT_JWK-SET-URI:
"$(KEYCLOAK_BASE_URL)/auth/realms/dwpbank/protocol/openid-connect/certs"


```

You should see these new resources in ArgoCD:

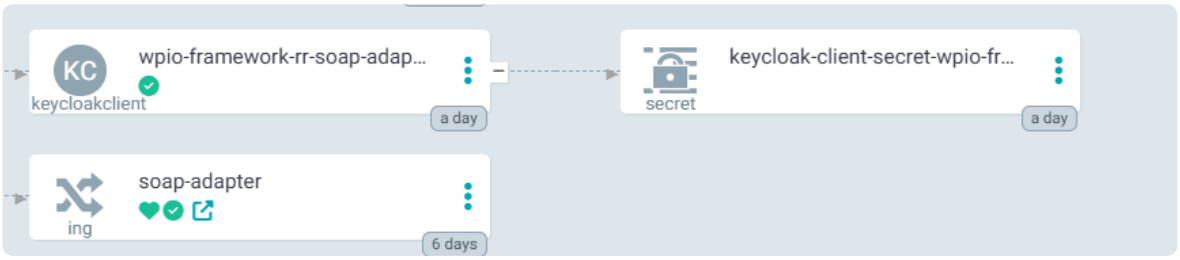

3. After deployment, you should see a new secret in the service namspace, Decode the **client_id** and the **client_secret**:

```
kubectl get secrets/keycloak-client-secret-wpio-framework-rr-soap-adapter --template={{.data.CLIENT_ID}} | base64
-d
kubectl get secrets/keycloak-client-secret-wpio-framework-rr-soap-adapter --template={{.data.CLIENT_SECRET}} |
base64 -d
```

4. Obtain the token from the Keycloak realm using the **ClientCredentials** flow.

> The Client Credentials flow is an OAuth 2.0 mechanism for machine-to-machine (M2M) authentication, where an application authenticates itself directly with an authorization server using its client ID and secret to obtain an access token. It is designed for system-to-system communication without user interaction, commonly used for backend services, daemons, or cron jobs.

In Postman:

Create a new request

Go to Authorization tab

Type: OAuth 2.0

Grant Type: Client Credentials

Fill in:

Access Token URL → token endpoint

Client ID → from Kubernetes secret

Client Secret → from Kubernetes secret

Scope → only if required (often empty)

Click Get New Access Token

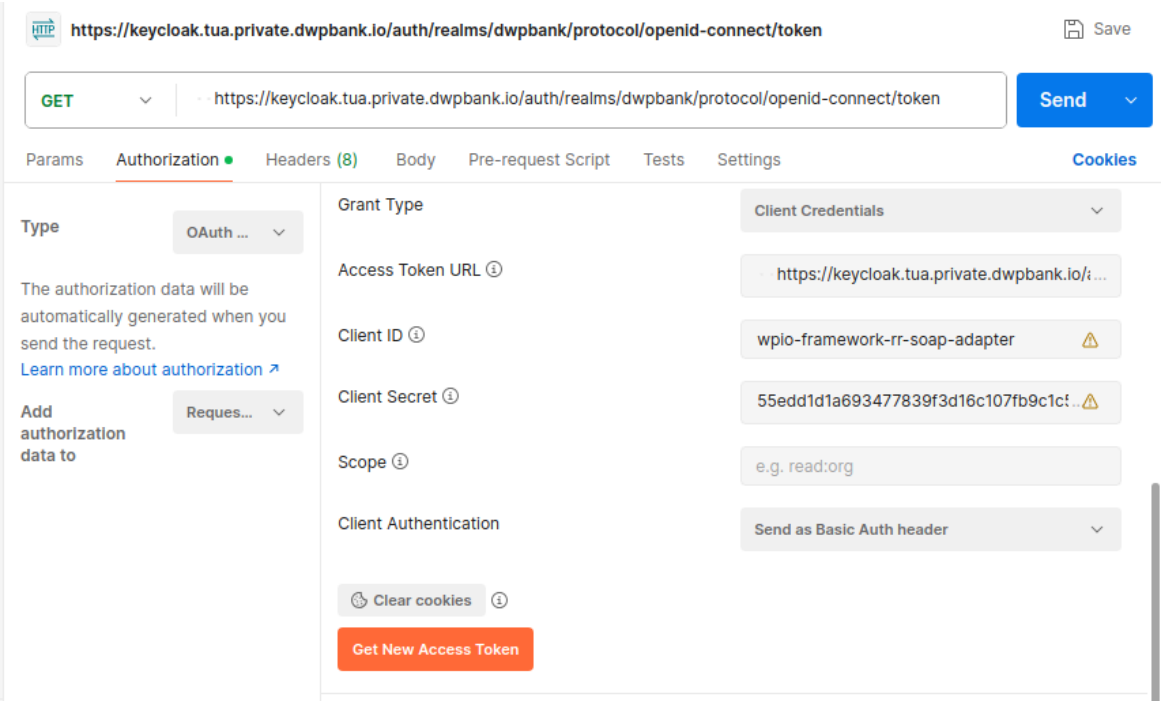

Copy the token.

5. Send a REST request to the service using the token in the **Bearer Token** field under **Authorization**:

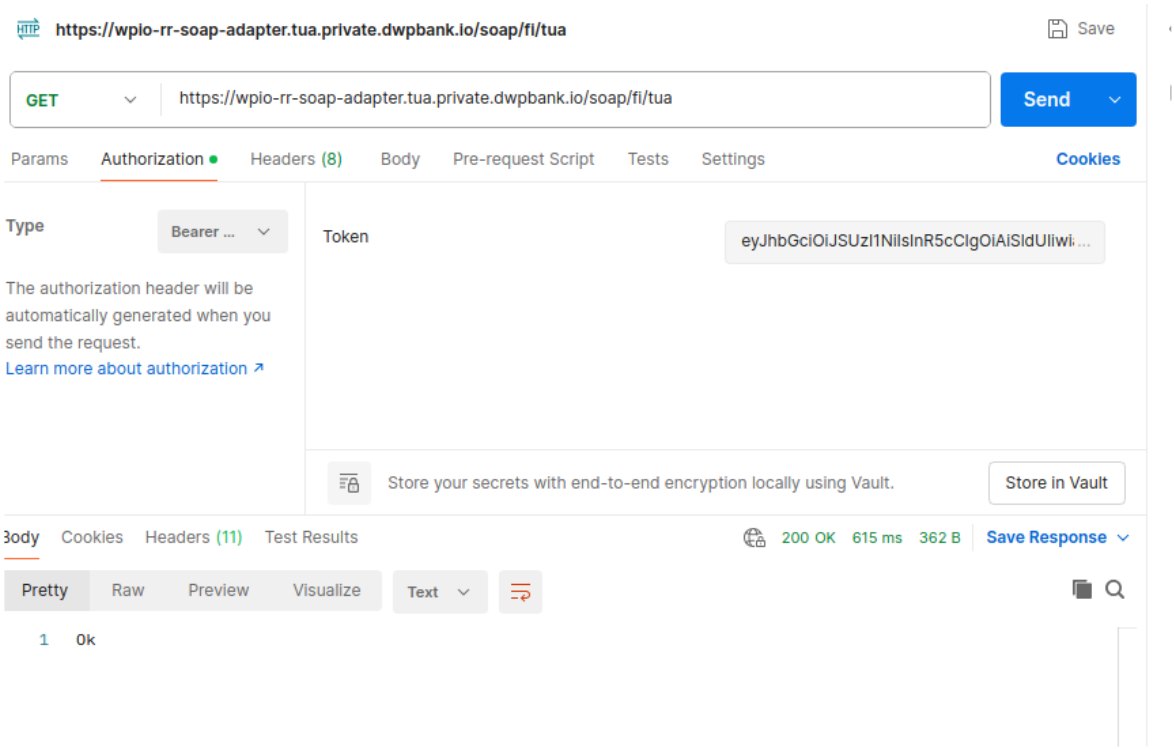

Flow:

> Client ID + Client Secret → proves who the app is in Kubernetes
>
> Keycloak token endpoint → issues a short-lived access token (JWT)
>
> Access token (Bearer) → sent to the app in Authorization: Bearer <token>

Infrastructure Activity List to activate a single cloud node

Process is explained on the example of setting up WPICEA1 (TUA) and WPICEH1 (TUH)
Use "Setup Environment" Chapter to enhance all CMDB Information and ordered Infrastructure changes or deployed components.

ToDo:

clarify the procces to order:

- [ ] AWS Security Group Change based on the K-Matrix
- [ ] FCN ClusterWideNetworkPolicies based on the K-Matrix
- [x] How to request S3 Bucket creation per environment. See also: [WGC-1129] Request S3 bucket for TUA - dwpbank

From cloud-team required activities

WPIO: Prepare a new stage - PA/CDE - Plattform- und Anwendungsmanagement - Confluence

---

S3-Bucket

For Stages DEV & TEST (TMU-Setup):

1. **Request required Bucket** via ARS, example: 000000001366054
   Text:
   <env>, <env>.wpio.fragments

   Zugriff für s3-test User erforderlich: nein

   Der Prozess mit dem auf den Bucket schreibend zugegriffen werden soll, nutzt den technischen User: jcft

2. **Extend Allowlist on dwp proxy** so that a service can connect to the F-I-TS S3 cluster via ARS, example: 000000001456810
   Text:

   Das Projekt WPIO goes Cloud (appl 146) benötigt von der <env> aus einen Zugriff auf die S3 Server in Stuttgart. Der Zugriff erfolgt über den Proxy 172.27.192.10:3128. Bitte auf dem dwp proxy 172.27.192.10:3128 die folgenden URLs freischalten:

   Quelle: <server-name> (<server-ip>)
   Ziel: für den Zugriff auf S3 Stuttgart (s3.prod-02-stg-kkw701.fits.cloud, 212.34.89.149)

   Die folgenden URLs freischalten: https://*.fits.cloud:443

3. **put S3 secrets into Ansible Vault**

Fragment files

Some services need the fragment files to be able to run.

follow tasks are required:

- [ ] Request S3 bucket for the environment (see also: [WGC-1129] Request S3 bucket for TUA - dwpbank)
- [ ] activate the file-adapter to forward the fragment files to S3 as well
- [ ] order following departments to trigger the initial load:

-
  - [ ] SWIFT → Platz, Schmelzer
  - [ ] OMS / WP3 → Emmrich, Meisel, Kytzia
  - [ ] Static data (Stammdaten) → Khosravi, Oruc
  - [ ] Order Input → Emmrich, Kytzia

MQ-QueueManager

Order a new QueueManager

- [ ] Fill out the following template (VOPL): IT-Anforderungscheckliste_dwpbank Aufbau neuer TUA-MQ-Server_WgC_Parallelbetrieb.xlsx
- [ ] Send the template via mail to MailIn: Providermanagement-Angebotsanfragen-FITS@dwpbank.de
- [ ] FITS will send back a VOPL in between up to 4 weeks
- [ ] Check and approve the VOPL and order via Providermanagement.

Time Estimation: ~5 weeks

Order new FW-Rules

A general description of how to proceed and what's needed to order FW rule can be found here: 🔥Firewall Beauftragung, Regeln und Rezertifizierung - WPIO - Confluence.

- [ ] FITS will provide all needed rules in form of a K-Matrix (Excel).
  Example from WPICEA1: FW-Rules-WPICEA1.zip
- [ ] Order the FW-Rules over a Firewall-Change (example: Firewallfreischaltung FITS-Citrix zu den WPIO-QueueManager WPICEA1 wegen AuditBrowser zugriff - Inhalt - Change - WPTicket 6.0)

Time Estimation: ~2-4 weeks (depends strongly on given times in the FW Order Process)

Order new Whitelisting (Allowlist)

Each Queuemanager needs to be accessable. Therefor the access from FCN on the Qmgr. must be cleared also (TUY/PROD).

- [ ] Order via ARS-BAM for MQ Qmgr. Configuration to allow access to the Qmgr from FCN Cluster (TUY/PROD).
- [ ] AppOps Jumphost has to be able to access the MQ channel "'SVR.CSTCMD.*", port 14144?, in order to suspend/resume the queue manager

MQ-Monitoring

- [ ] Check and order new FW-Rules for Prometheus
- [ ] Check and update Grafana-Dashboards

Time Estimation: ~2-4 weeks (depends strongly on given times in the FW Order Process)

Application-Layer "Online-Nodes" (POD)

soap-adapter and http-adapter

F5-Loadbalancer

- [ ] Define with the FITS the IP:PORT for both POD´s
- [ ] FITS will provide all needed K-Matrix.
- [ ] Order the FW-Rules over a Firewall-Change
- [ ] Order FITS to add the endpoint into the F5-Loadbalncer configuration
- [ ] SSL Certificates will be delivered by F-I-TS, but must be requested. For internal purposes the CA Provider is used, for external purposes it needs to be ordered.

  Time Estimation: ~2-6 weeks (depends strongly on given times in the FW Order Process plus Certificate process)

Xgen-Services

via http/Rest connection

From AWS we connect to external resources over the internet.

Following services ***need to be refactored and provide a "no_proxy" parameterization***

- [ ] wp2-nrtmrates
- [ ] dwp-prdctinfo
- [ ] dwp-cx-* (requires specific K8S secret to be created by cloud team)
- [ ] standard-smaragd
- [ ] dwp-acctgbook (requires specific K8S secret to be created by cloud team)
- [ ] fi-cashmgmnt

Time Estimation: ~1 PT

Initial Deployment of all X-Gen Services

- [ ] Fill Table per environment under Setup Environments.

Deployment Process

1. Create a release version in the BC specific *-config repository
2. Test if this version deploys correctly on TUA by executing the deploy job for TUA
3. Request deployment to TUH for the same version by executing the deploy job to TUH.
   This will create a MR in Files · master · wp3 / deployment / apps-test · GitLab
4. PO has to approve this MR in Files · master · wp3 / deployment / apps-test · GitLab, then the installation should happen automatically
5. Check in https://argocd.tuh.private.dwpbank.io/ if the component has started properly
6. Check in https://search-test.private.dwpbank.io/ if the logs for the component are present

---

ESB

- [ ] Order the FW-Rules to access several systems over a Firewall-Change
- [ ] Order Credentials for access PowerlinkDB and MixDB (AWS/FCN)

Example for TUA: K-Matrix_TUA_AWS_v3.xlsm

Time Estimation: ~2-6 weeks (depends strongly on given times in the FW Order Process plus Certificate process)

Application-Layer "AD-Node" (POD)

- [ ] Order the FW-Rules to access the OracleDB over a Firewall-Change
- [ ] Order Credentials for access PowerlinkDB (AWS/FCN)

Application-Layer "AUDIT-Node" (POD)

- [ ] Order the FW-Rules to access the OracleDB over a Firewall-Change

Setup Environments

FCN_PROD

CHANGES

WPIO: Firewall Change - Aufbau WPIO in Microservice Clustern TUY und Prod - Inhalt - Change - WPTicket 7.0

CH061955 WPIO rr-01 Erster Knoten PROD Vorbereitung Infrastruktur - Inhalt - Change - WPTicket 7.0

ESB: Firewall Change - WPIO goes Cloud Aufbau Kubernetes TUY und Prod - Inhalt - Change - WPTicket 7.0

FW unlocking (K-Matrix)

direction	change	done	tested	desc.
FCN → MQ	✅	✅		
ESB → MixDB	✅	✅		Oracle
ESB → PowerlinkDB	✅	✅		Oracle
ESB → ECS CAS und S3 Store	✅	✅		Archive
TMU → S3	✅	✅		
WPIO (AD - node5)				PowerlinkDB (Oracle)
REST TMU → FCN				Status-Request Node ESB
Loadbalancer → FCN				http/soap → wpio-rr

Proxy Whitelisting

direction	change	done	tested	desc.
TMU → S3	✅	✅		If this is the normal system proxy then the connection is already established
wp2-nrtmrates				configure Proxy in the X-Gen-Services
fwp-prdctinfo				configure Proxy in the X-Gen-Services
fi-cashmgmnt				configure Proxy in the X-Gen-Services

MQ

- Order a new QueueManager (FCN)
- unlock FW rules

FCN → MQ & Whitelisting (Microservice CLuster → Proxy → QMgr.)

- **Unlocking FW**: Requested on 30.06.2025 per Change. ✅ Change **2025063000012**
- **Allowlist**: Based on the FW Change, F-I-TS will order direct on this an internal BAMBI for "allowlisting (whitelist)" the request from microservice cluster against the Qmgr.. ✅ BAMBI; 1466062

Lfd Nr	Aktion	Beschreibung der Quelle	IP Quelle	NAT IP Quelle	Beschreibung des Ziels	IP Ziel	NAT IP Ziel	Protokoll	Ports
2	Erlauben	Microservice Cluster Prod - WPIO Anwendung	100.127.131.128/26		Queue Manager WPIBP16	2.153.1.131	100.127.14.112	tcp	14141

Initial Deploy

- [ ] ...of all X-Gen Services

NOTE: Copy/Paste from the TUY-Confluence-Page. Check Services and Versions for PROD

Name	Service Name	Cloud Ready Version	Prod Version	Cloud Ready Base Image	TUY MR ready	Installed on cloud TUY	TUY Cloud Status	Installed on TMU
	xgen-dwp-acctbkng	`v4.13.20-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dwp-cstmr mstr-qry	`v4.13.19-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-depo sit	`v4.13.21-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-ipo-qry	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-offer	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-order book	`v4.13.27-4.13-1.8-DWP-p017-2024`	v4.13.21-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-acco untin g	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cstmr mstr-chg	`v4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cstmr mstr-prt	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cstmr mstr-qry	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-deposit	`4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-instrumentrates	`v4.13.11-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-orderbook-det	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-orderbook-sac	`v4.13.7-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-order-erf	`v4.13.16-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-otc-instrm	`v4.13.15-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-gattung	`v4.13.12-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-order-neuemi	`v4.13.17-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-fi-order-offerte	`v4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-hshnord-order	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-inheritance-tax-fi	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-instibestand	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-instigeschaeft	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-institrnsktnhr	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cx-cstmrmst-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-cx-order-erf	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cx-wallet	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-cx-umsatz-histo	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-cashmgmnt	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-accounting	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-acctgbook	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-bestex	`4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cashmgmnt	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dwp-corpactn	`4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-corpmtng	`v4.13.6-4.13-1.8-DWP-p017-2024`	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cstmrmstr-chg	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-cstmrmstr-chg	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-deposit	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-order	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-cx-trnsctnhstry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-depotmstr-qry	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dwp-exante	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-instrmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-invstmntpln-chg	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-invstmntpln-qry	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-ipo-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-isoacctbkng	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	mixrate							
	xgen-dwp-multiquote	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-order	v4.13.65-4.13-1.8-DWP-p017-2024	v4.13.52-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-otc-instrm	v4.13.15-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-prdctinfo	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-priipdata	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-priipservice	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-berechtigung	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-corpactn	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-cp-deposit	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-fi-cp-orderbook	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-cstmrmstr-chg-n	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-directhndl	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-dokumente	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-gat-std	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-konto	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-mifid2wpab	v4.13.22-4.13-1.8-DWP-p017-2024	v4.13.20-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-order	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-own-offer	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-	v4.13.21-4.13-1.8-DWP-p017-2024	v4.13.19-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	reinvstmnt							
	xgen-fi-sparplan	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.14-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-umrechnung	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-vlvertrag	v4.13.34-4.13-1.8-DWP-p017-2024	v4.13.30-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-wphg	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-fi-wpsuche	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-gad-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-lbbw-quote	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-san-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-sb-cstmrmstr-chg	v4.13.25-4.13-1.8-DWP-p017-2024	v4.13.22-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-standard-smaragd	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-nrtmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-quote	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-swiftorder	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-swiftbox-smaragd	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-attrax-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-attrax-mt509-e-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-attrax-mt51	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	5-e-onl							
	xgen-wp2-fd-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mt515-ka-e-onl	v4.13.14-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mt564-ca-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mt565-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mt567-caip-onl	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mt5xx-xml-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-wp2-mtgen-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-wp2-mtgen-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-quote	v4.13.12-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-reinvstmnt-chg	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-reinvstmnt-qry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-tslimit	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-vld-xchgplc	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dwp-vlsaving	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-depotmstr-qry	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-eai-common	v4.13.10-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-ebk-xpass	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-exante	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-exante-sp	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-fa-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-ipo-query	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-ipo-query-det	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-murexdz-leihe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-mure xdz-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-order-bea	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-order-loe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-orderbook-ban	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-orderbook-per	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-otc-quote	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-quod	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-sparplan-bea	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-sparplan-det	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-sparplan-erf	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-sparplan-list	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-sparplan-loe	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-sparplan-search	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-stp-order	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-swb-xpass	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
	xgen-dz-xpass-deals	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

	xgen-dz-xpassdzms-order	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

FCN_TUY

Changes

WPIO: Firewall Change - Aufbau WPIO in Microservice Clustern TUY und Prod - Inhalt - Change - WPTicket 7.0

ESB: Firewall Change - WPIO goes Cloud Aufbau Kubernetes TUY und Prod - Inhalt - Change - WPTicket 7.0

FW unlocking (K-Matrix) ⚠

direction	change	done	tested	descr.
FCN → MQ	✅	✅		
ESB → MixDB	✅	✅		Oracle
ESB → PowerlinkDB	✅	✅		Oracle
ESB → ECS CAS und S3 Store	✅	✅		Archive
TMU → S3	✅	✅		If this is the normal system proxy then the connection is already established
WPIO (AD - node5)				PowerlinkDB (Oracle)
REST TMU → FCN				Status-Request Node ESB
Loadbalancer → FCN				http/soap → wpio-rr

Proxy Whitelisting ⚠

direction	change	done	tested	descr.
TMU → S3	✅	✅		
wp2-nrtmrates				configure Proxy in the X-Gen-Services
fwp-prdctinfo				configure Proxy in the X-Gen-Services
fi-cashmgmnt				configure Proxy in the X-Gen-Services

MQ ⚠

- ✅ Order a new QueueManager (FCN)
- unlock FW rules

Qmgr.

ENV	Applikation (dwptusappe01, 2.153.29.52)	Queuemanager (Qmgr) TUS	MQ-Client-Channel Applikation (APP)	Qmgr IP	MQ-Client-Channel Applikation (APP) Port	MQ-Gruppe für technischen User	MQ-Client-Channel MQExplorer	MQ-Client-Channel MQExplorer - Port	Application IP
TUY	WPIO WPIO (AD & FT)	WPIBA01 WPIBA02 WPIBA05	SVR.WPI.WPIBA01.1 (WPIO) SVR.WPI.WPIBA01.2 (ESB)	2.153.11.62 2.153.11.63 2.153.11.64	14141	mqwpi mqwpi mqwpia	AEEXPL.WPIBA01.1 AEEXPL.WPIBA02.1 AEEXPL.WPIBA05.1	14143	2.153.11.62 2.153.11.63 2.153.11.64

			SVR.WPA.WPIBA01.1 (WPAUDIT) SVR.WPI.WPIBA02.1 (WPIO) SVR.WPI.WPIBA02.2 (ESB) SVR.WPA.WPIBA02.1 (WPAUDIT) SVR.WPI.WPIBA05.1 (WPIO) SVR.WPI.WPIBA05.2 (ESB) SVR.WPA.WPIBA05.1 (WPAUDIT)						
TUY	WPIO-AUDIT	WPIABA01	SVR.WPI.WPIABA01.1	2.153.11.65	14141	mqwpi	AEEXPL.WPIABA01.1	14143	2.153.11.65

FCN → MQ & Whitelisting (Microservice Cluster → NAT ZIEL IP → QMgr.)

- **Unlocking FW**: Requested on 30.06.2025 per Change.
- **Allowlist**: Based on the FW Change, F-I-TS will order direct on this an internal BAMBI for "allowlisting (whitelist)" the request from microservice cluster against the Qmgr..

Lfd Nr	Aktion	Beschreibung der Quelle	IP Quelle	NAT IP Quelle	Beschreibung des Ziels	IP Ziel	NAT IP Ziel	Protokoll	Ports
1	Erlauben	Microservice Cluster TUY - WPIO Anwendung	100.127.131.64/26		Queue Manager WPIBA02	2.153.11.63	100.127.3.77	tcp	14141

S3

- Bucket ✅
- Credential ✅
- Add secret to Vault
- Add Server to Allowlist (Whitelist) to access S3

Whitelisting over Proxy ✅

[BAM 1457451]

Das Projekt WPIO goes Cloud (Appl 146) benötigen von der TUY aus einen Zugriff auf die S3 Server in Stuttgart. Der Zugriff erfolgt über den dwp Proxy 172.27.192.10:3128. Bitte die folgenden URLs freischalten:

Quelle: dwpwpioappa05 (2.153.11.64)
Ziel: für den Zugriff auf S3 Stuttgart (s3.prod-02-stg-kkw701.fits.cloud, 212.34.89.149)

die folgenden URLs freischalten: https://*.fits.cloud:443

Lfd Nr	Aktion	Beschreibung der Quelle	IP Quelle	NAT IP Quelle	Beschreibung des Ziels	IP Ziel	NAT IP Ziel	Protokoll	Ports
1	Erlauben	Testserver in Stage Test dwpwpioappa05	2.153.11.64		Proxy	172.27.192.10		tcp	3128

S3	
Hint: the S3 server is used for stage DEV and TEST. The credentials are also identical. https://dwpbank.atlassian.net/wiki/display/PPUA/S3	
Server	**Buckets**
s3.prod-02-stg-kkw701.fits.cloud (212.34.89.149)	• tuy.wpio.fragments

---

Fragment Files ⚠

- ✅ Request S3 bucket for the environment (see also: [WGC-1129] Request S3 bucket for TUA - dwpbank)
- activate the file-adapter to forward the fragment files to S3 as well
- order following departments to trigger the initial load:
  - SWIFT → Platz, Schmelzer
  - OMS / WP3 → Emmrich, Meisel, Kytzia
  - Static data (Stammdaten) → Khosravi, Oruc
  - Order Input → Emmrich, Kytzia

F5-Loadbalancer (soap-adapter and http-adapter) ⚠

- Define with the FITS the IP:PORT for both POD´s
- FITS will provide all needed K-Matrix.
- Order the FW-Rules over a Firewall-Change
- Order FITS to add the endpoint into the F5-Loadbalncer configuration
- SSL Certificates will be delivered by F-I-TS, but must be requested. For internal purposes the CA Provider is used, for external purposes it needs to be ordered.

X-Gen Services ⚠

Following services ***need to be refactored and provide a "no_proxy" parameterization***

- wp2-nrtmrates
- dwp-prdctinfo
- dwp-cx-* (requires specific K8S secret to be created by cloud team)
- standard-smaragd
- dwp-acctgbook (requires specific K8S secret to be created by cloud team)
- fi-cashmgmnt

Initial Deploy

- ...of all X-Gen Services

1	Name	Service Name	Cloud Ready Version	Prod Version	Cloud Ready Base Image	TUY MR ready	Installed on cloud TUY	TUY Cloud Status	Installed on TMU
2	IN	xgen-dwp-acctbkng	`v4.13.20-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
3	IN	xgen-dwp-cstmrmstr-qry	`v4.13.19-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
4	IN	xgen-dwp-deposit	`v4.13.21-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
5	IN	xgen-dwp-ipo-qry	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
6	IN	xgen-dwp-offer	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
7	IN	xgen-dwp-orderbook	`v4.13.27-4.13-1.8-DWP-p017-2024`	v4.13.21-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
8	IN	xgen-dz-accounting	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
9	IN	xgen-dz-cstmrmstr-chg	`v4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
10	IN	xgen-dz-cstmrmstr-prt	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
11	IN	xgen-dz-cstmrmstr-qry	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
12	IN	xgen-dz-deposit	`4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
13	IN	xgen-dz-instrumentrates	`v4.13.11-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
14	IN	xgen-dz-orderbook-det	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
15	IN	xgen-dz-orderbook-sac	`v4.13.7-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
16	IN	xgen-dz-order-erf	`v4.13.16-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
17	IN	xgen-dz-otc-instrm	`v4.13.15-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
18	IN	xgen-fi-gattung	`v4.13.12-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
19	IN	xgen-fi-order-neuemi	`v4.13.17-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

20	IN	xgen-fi-order-offerte	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
21	IN	xgen-hshnord-order	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
22	IN	xgen-wp2-inheritance-tax-fi	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
23	AS	xgen-dwp-cx-insti-bestand	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
24	AS	xgen-dwp-cx-insti-geschaeft	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
25	EV	xgen-dwp-cx-insti-trnsktnhr	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
26	AS	xgen-dz-cx-cstmrmst-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
27	AS	xgen-dz-cx-order-erf	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
28	EV	xgen-dz-cx-wallet	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
29	AS	xgen-dz-cx-umsatz-histo	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
30	EV	xgen-fi-cashmgmnt	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	No		
31	AS	xgen-dwp-accounting	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
32	IN	xgen-dwp-acctgbook	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
33	IN	xgen-dwp-bestex	4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
34	IN	xgen-dwp-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
35	IN	xgen-dwp-corpactn	4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
36	IN	xgen-dwp-corpmtng	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
37	IN	xgen-dwp-cstmrmstr-chg	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
38	IN	xgen-dwp-cx-cstmrmstr-chg	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
39	AS	xgen-dwp-cx-deposit	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
40	IN	xgen-dwp-cx-order	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
41	EV	xgen-dwp-cx-trnsctnhstry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
42	IN	xgen-dwp-depotmstr-qry	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

43	AS	xgen-dwp-exante	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
44	AS	xgen-dwp-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
45	AS	xgen-dwp-instrmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
46	AS	xgen-dwp-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
47	AS	xgen-dwp-invstmntpln-chg	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
48	AS	xgen-dwp-invstmntpln-qry	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
49	AS	xgen-dwp-ipo-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
50	IN	xgen-dwp-isoacctbkng	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
51	AS	xgen-dwp-mixrate	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
52	AS	xgen-dwp-multiquote	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
53	IN	xgen-dwp-order	v4.13.65-4.13-1.8-DWP-p017-2024	v4.13.52-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
54	AS	xgen-dwp-otc-instrm	v4.13.15-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
55	AS	xgen-dwp-prdctinfo	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
56	AS	xgen-dwp-priipdata	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
57	EV	xgen-dwp-priipservice	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
58	EV	xgen-fi-berechtigung	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
59	EV	xgen-fi-corpactn	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
60	EV	xgen-fi-cp-deposit	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
61	EV	xgen-fi-cp-orderbook	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
62	EV	xgen-fi-cstmrmstr-chg-n	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
63	EV	xgen-fi-directhndl	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
64	EV	xgen-fi-dokumente	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
65	EV	xgen-fi-gat-std	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

66	EV	xgen-fi-konto	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
67	EV	xgen-fi-mifid2wpab	v4.13.22-4.13-1.8-DWP-p017-2024	v4.13.20-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
68	EV	xgen-fi-order	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
69	EV	xgen-fi-own-offer	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
70	EV	xgen-fi-reinvstmnt	v4.13.21-4.13-1.8-DWP-p017-2024	v4.13.19-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
71	EV	xgen-fi-sparplan	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.14-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
72	EV	xgen-fi-umrechnung	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
73	EV	xgen-fi-vlvertrag	v4.13.34-4.13-1.8-DWP-p017-2024	v4.13.30-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
74	EV	xgen-fi-wphg	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
75	EV	xgen-fi-wpsuche	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
76	EV	xgen-gad-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
77	EV	xgen-lbbw-quote	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
78	EV	xgen-san-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
79	EV	xgen-sb-cstmrmstr-chg	v4.13.25-4.13-1.8-DWP-p017-2024	v4.13.22-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
80	EV	xgen-standard-smaragd	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
81	IN	xgen-wp2-nrtmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
82	EV	xgen-wp2-quote	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
83	EV	xgen-dwp-swiftorder	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
84	EV	xgen-swiftbox-smaragd	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
85	EV	xgen-wp2-attrax-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
86	EV	xgen-wp2-attrax-mt509-e-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
87	EV	xgen-wp2-attrax-mt515-e-onl	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
88	EV	xgen-wp2-fd-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		

89	EV	xgen-wp2-mt515-ka-e-onl	v4.13.14-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
90	EV	xgen-wp2-mt564-ca-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
91	EV	xgen-wp2-mt565-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
92	EV	xgen-wp2-mt567-caip-onl	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
93	EV	xgen-wp2-mt5xx-xml-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
94	EV	xgen-wp2-mtgen-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
95	EV	xgen-wp2-mtgen-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
96	EV	xgen-dwp-quote	v4.13.12-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
97	EV	xgen-dwp-reinvstmnt-chg	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
98	EV	xgen-dwp-reinvstmnt-qry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	No		
99	EV	xgen-dwp-tslimit	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
100	EV	xgen-dwp-vld-xchgplc	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
101	EV	xgen-dwp-vlsaving	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
102	EV	xgen-dz-depotmstr-qry	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
103	EV	xgen-dz-eai-common	v4.13.10-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
104	EV	xgen-dz-ebk-xpass	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
105	EV	xgen-dz-exante	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
106	EV	xgen-dz-exante-sp	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
107	EV	xgen-dz-fa-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
108	EV	xgen-dz-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
109	EV	xgen-dz-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

110	EV	xgen-dz-ipo-query	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
111	IN	xgen-dz-ipo-query-det	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
112	EV	xgen-dz-murexdz-leihe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
113	EV	xgen-dz-murexdz-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
114	EV	xgen-dz-order-bea	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
115	EV	xgen-dz-order-loe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
116	EV	xgen-dz-orderbook-ban	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
117	EV	xgen-dz-orderbook-per	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
118	EV	xgen-dz-otc-quote	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
119	EV	xgen-dz-quod	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
120	EV	xgen-dz-sparplan-bea	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
121	EV	xgen-dz-sparplan-det	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
122	EV	xgen-dz-sparplan-erf	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
123	EV	xgen-dz-sparplan-list	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
124	EV	xgen-dz-sparplan-loe	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
125	EV	xgen-dz-sparplan-search	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
126	EV	xgen-dz-stp-order	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
127	EV	xgen-dz-swb-xpass	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
128	EV	xgen-dz-xpass-deals	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		
129	EV	xgen-dz-xpassdzms-order	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	No		

TUA

FW unlocking (K-Matrix) ✅

- ✅ FW-Freischaltung MQ Controller Client→ MQ

- ✅ FW-Freischaltung WPIO (AD - node5) → PowerlinkDB (Oracle-based)
- ✅ FW-Freischaltung ESB → MixDB (Oracle-based)
- ✅ FW-Freischaltung ESB → PowerlinkDB (Oracle-based)
- ✅ FW-Freischaltung ESB (GenAudit) → ECS CAS und S3 Store (Dell Archive Storage)

- ✅ FW Freischaltung TMU → S3 (If this is the normal system proxy then the connection is already established)
- ✅ Proxy Whitelisting TMU → S3

- ✅ X-Gen:
  - wp2-nrtmrates: Proxy Whitelisting (configure Proxy in the X-Gen-Services)
  - fwp-prdctinfo: Proxy Whitelisting, (configure Proxy in the X-Gen-Services)
  - fi-cashmgmnt: Proxy Whitelisting, (configure Proxy in the X-Gen-Services)

MQ ✅

- ✅ Order a new QueueManager (AWS) : WPICEA1
- ✅ unlock FW rules

ENV	Applikation (dwptusappe01, 2.153.29.52)	Queuemanager (Qmgr) TUS	MQ-Client-Channel Applikation (APP)	Qmgr IP	MQ-Client-Channel Applikation (APP) Port	MQ-Gruppe für technischen User	MQ-Client-Channel MQExplorer	MQ-Client-Channel MQExplorer - Port
TUA	WPIO WPIO (AD & FT) WPIO Cloud	WPIBEA1 WPIBEA5 WPICEA1	SVR.WPI.WPIBEA1.1 (WPIO) SVR.WPI.WPIBEA1.2 (ESB) SVR.WPA.WPIBEA1.1 (WPAUDIT) SVR.WPI.WPIBEA5.1 (WPIO) SVR.WPI.WPIBEA5.2 (ESB) SVR.WPA.WPIBEA5.1 (WPAUDIT) SVR.WPI.WPICEA1.1	2.153.29.86 2.153.29.88 2.153.33.75	14141	mqwpia mqwpia mqwpiaa	AEEXPL.WPIBEA1.1 AEEXPL.WPIBEA5.1 AEEXPL.WPICEA1.1	14143

			(WPIO) SVR.WPI.WPICEA1.2 (ESB) SVR.WPA.WPICEA1.1 (WPAUDIT)					
TUA	WPIO-AUDIT	WPIABEA1	SVR.WPI.WPIABEA1.1	2.153.29.87	14141	mqwpia	AEEXPL.WPIABEA1.1	14143

S3

- ✅ Bucket
- ✅ Credential
- ✅ Add secrets to Vault
- ✅ Add Server to Allowlist (Whitelist) to access S3

(Whitelisting over Proxy) ✅

Wir benötigen von der TUA aus einen Zugriff auf die S3 Server in Stuttgart. Der Zugriff erfolgt über Proxy 172.27.192.10:3128. Info von den Kollegen bei der FI-TS: Bitte auf dem dwp proxy 172.27.192.10:3128 die folgenden URLs freischalten:

Quelle: **dwptuaappe01** (2.153.29.82)
Ziel: für den Zugriff auf S3 Stuttgart (s3.prod-02-stg-kkw701.fits.cloud, 212.34.89.149)

die folgenden URLs freischalten: entweder dediziert oder https://*.fits.cloud

Lfd Nr	Aktion	Beschreibung der Quelle	IP Quelle	NAT IP Quelle	Beschreibung des Ziels	IP Ziel	NAT IP Ziel	Protokoll	Ports
1	Erlauben	Testserver in Stage DEV dwptuaappe01	2.153.29.82		Proxy	172.27.192.10		tcp	3128

S3	
Hint: the S3 server is used for stage DEV and TEST. The credentials are also identical. https://dwpbank.atlassian.net/wiki/display/PPUA/S3	
Server	**Buckets**
s3.prod-02-stg-kkw701.fits.cloud (212.34.89.149)	• tua.wpio.fragments

---

Fragment Files ✅

- ✅ Request S3 bucket for the environment (see also: [WGC-1129] Request S3 bucket for TUA - dwpbank)
- ✅ activate the file-adapter to forward the fragment files to S3 as well
- ✅ order following departments to trigger the initial load:

- SWIFT → Platz, Schmelzer
- OMS / WP3 → Emmrich, Meisel, Kytzia
- Static data (Stammdaten) → Khosravi, Oruc
- Order Input → Emmrich, Kytzia

F5-Loadbalancer (soap-adapter and http-adapter) ✅

- ✅ Define with the FITS the IP:PORT for both POD´s
- ✅ FITS will provide all needed K-Matrix.
- ✅ Order the FW-Rules over a Firewall-Change
- ✅ Order FITS to add the endpoint into the F5-Loadbalncer configuration
- ✅ SSL Certificates will be delivered by F-I-TS, but must be requested. For internal purposes the CA Provider is used, for external purposes it needs to be ordered.

X-Gen Services ✅

Following services ***need to be refactored and provide a "no_proxy" parameterization***

- ✅ wp2-nrtmrates
- ✅ dwp-prdctinfo
- ✅ dwp-cx-* (requires specific K8S secret to be created by cloud team)
- ✅ standard-smaragd
- ✅ dwp-acctgbook (requires specific K8S secret to be created by cloud team)
- ✅ fi-cashmgmnt

Initial Deployment

☑ ... of all relevant X-Gen Services

	Name	Service Name	Cloud Ready Version	Prod Version	Cloud Ready Base Image	Installed on cloud TUA	TUA Cloud Status	Installed on TMU
2	IN	xgen-dwp-acctbkng	`v4.13.20-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
3	IN	xgen-dwp-cstmrmstr-qry	`v4.13.19-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
4	IN	xgen-dwp-deposit	`v4.13.21-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
5	IN	xgen-dwp-ipo-qry	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

6	IN	xgen-dwp-offer	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
7	IN	xgen-dwp-orderbook	`v4.13.27-4.13-1.8-DWP-p017-2024`	v4.13.21-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
8	IN	xgen-dz-accounting	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
9	IN	xgen-dz-cstmrmstr-chg	`v4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
10	IN	xgen-dz-cstmrmstr-prt	`v4.13.9-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
11	IN	xgen-dz-cstmrmstr-qry	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
12	IN	xgen-dz-deposit	`4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
13	IN	xgen-dz-instrumentrates	`v4.13.11-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
14	IN	xgen-dz-orderbook-det	`v4.13.10-4.13-1.8-DWP-p017-2024`	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
15	IN	xgen-dz-orderbook-sac	`v4.13.7-4.13-1.8-DWP-p017-2024`	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
16	IN	xgen-dz-order-erf	`v4.13.16-4.13-1.8-DWP-p017-2024`	v4.13.12-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
17	IN	xgen-dz-otc-instrm	`v4.13.15-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
18	IN	xgen-fi-gattung	`v4.13.12-4.13-1.8-DWP-p017-2024`	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
19	IN	xgen-fi-order-neuemi	`v4.13.17-4.13-1.8-DWP-p017-2024`	v4.13.15-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
20	IN	xgen-fi-order-offerte	`v4.13.13-4.13-1.8-DWP-p017-2024`	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
21	IN	xgen-hshnord-order	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
22	IN	xgen-wp2-inheritance-tax-fi	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
23	AS	xgen-dwp-cx-insti-bestand	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
24	AS	xgen-dwp-cx-insti-geschaeft	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
25	EV	xgen-dwp-cx-insti-trnsktnhr	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.0-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

26	AS	xgen-dz-cx-cstmrmst-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
27	AS	xgen-dz-cx-order-erf	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
28	EV	xgen-dz-cx-wallet	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
29	AS	xgen-dz-cx-umsatz-histo	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
30	EV	xgen-fi-cashmgmnt	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
31	AS	xgen-dwp-accounting	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
32	IN	xgen-dwp-acctgbook	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
33	IN	xgen-dwp-bestex	`4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
34	IN	xgen-dwp-cashmgmnt	`v4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
35	IN	xgen-dwp-corpactn	`4.13.4-4.13-1.8-DWP-p017-2024`	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
36	IN	xgen-dwp-corpmtng	`v4.13.6-4.13-1.8-DWP-p017-2024`	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
37	IN	xgen-dwp-cstmrmstr-chg	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
38	IN	xgen-dwp-cx-cstmrmstr-chg	`v4.13.8-4.13-1.8-DWP-p017-2024`	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
39	AS	xgen-dwp-cx-deposit	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
40	IN	xgen-dwp-cx-order	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
41	EV	xgen-dwp-cx-trnsctnhstry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
42	IN	xgen-dwp-depotmstr-qry	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
43	AS	xgen-dwp-exante	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
44	AS	xgen-dwp-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
45	AS	xgen-dwp-instrmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

46	AS	xgen-dwp-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
47	AS	xgen-dwp-invstmntpln-chg	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
48	AS	xgen-dwp-invstmntpln-qry	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
49	AS	xgen-dwp-ipo-chg	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
50	IN	xgen-dwp-isoacctbkng	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
51	AS	xgen-dwp-mixrate	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
52	AS	xgen-dwp-multiquote	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
53	IN	xgen-dwp-order	`v4.13.63-4.13-1.8-DWP-p017-2024`	v4.13.52-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
54	AS	xgen-dwp-otc-instrm	v4.13.15-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
55	AS	xgen-dwp-prdctinfo	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
56	AS	xgen-dwp-priipdata	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
57	EV	xgen-dwp-priipservice	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
58	EV	xgen-fi-berechtigung	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
59	EV	xgen-fi-corpactn	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
60	EV	xgen-fi-cp-deposit	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
61	EV	xgen-fi-cp-orderbook	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
62	EV	xgen-fi-cstmrmstr-chg-n	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
63	EV	xgen-fi-directhndl	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
64	EV	xgen-fi-dokumente	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
65	EV	xgen-fi-gat-std	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

66	EV	xgen-fi-konto	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
67	EV	xgen-fi-mifid2wpab	v4.13.22-4.13-1.8-DWP-p017-2024	v4.13.20-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
68	EV	xgen-fi-order	v4.13.20-4.13-1.8-DWP-p017-2024	v4.13.18-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
69	EV	xgen-fi-own-offer	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
70	EV	xgen-fi-reinvstmnt	v4.13.21-4.13-1.8-DWP-p017-2024	v4.13.19-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
71	EV	xgen-fi-sparplan	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.14-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
72	EV	xgen-fi-umrechnung	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
73	EV	xgen-fi-vlvertrag	v4.13.34-4.13-1.8-DWP-p017-2024	v4.13.30-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
74	EV	xgen-fi-wphg	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
75	EV	xgen-fi-wpsuche	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
76	EV	xgen-gad-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
77	EV	xgen-lbbw-quote	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
78	EV	xgen-san-cashmgmnt	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
79	EV	xgen-sb-cstmrmstr-chg	v4.13.25-4.13-1.8-DWP-p017-2024	v4.13.22-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
80	EV	xgen-standard-smaragd	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
81	IN	xgen-wp2-nrtmrates	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
82	EV	xgen-wp2-quote	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
83	EV	xgen-dwp-swiftorder	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
84	EV	xgen-swiftbox-smaragd	v4.13.16-4.13-1.8-DWP-p017-2024	v4.13.11-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
85	EV	xgen-wp2-attrax-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

86	EV	xgen-wp2-attrax-mt509-e-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
87	EV	xgen-wp2-attrax-mt515-e-onl	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
88	EV	xgen-wp2-fd-mt502-a-onl	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
89	EV	xgen-wp2-mt515-ka-e-onl	v4.13.14-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
90	EV	xgen-wp2-mt564-ca-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
91	EV	xgen-wp2-mt565-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
92	EV	xgen-wp2-mt567-caip-onl	v4.13.13-4.13-1.8-DWP-p017-2024	v4.13.8-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
93	EV	xgen-wp2-mt5xx-xml-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
94	EV	xgen-wp2-mtgen-a-onl	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
95	EV	xgen-wp2-mtgen-e-onl	v4.13.11-4.13-1.8-DWP-p017-2024	v4.13.6-4.13-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
96	EV	xgen-dwp-quote	v4.13.12-4.13-1.8-DWP-p017-2024	v4.13.9-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
97	EV	xgen-dwp-reinvstmnt-chg	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.5-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
98	EV	xgen-dwp-reinvstmnt-qry	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-1.5-DWP-p017-2024	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
99	EV	xgen-dwp-tslimit	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
100	EV	xgen-dwp-vld-xchgplc	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
101	EV	xgen-dwp-vlsaving	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.4-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
102	EV	xgen-dz-depotmstr-qry	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
103	EV	xgen-dz-eai-common	v4.13.10-4.13-1.8-DWP-p017-2024	v4.13.7-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
104	EV	xgen-dz-ebk-xpass	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
105	EV	xgen-dz-exante	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes

106	EV	xgen-dz-exante-sp	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
107	EV	xgen-dz-fa-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
108	EV	xgen-dz-instrmdtls	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
109	EV	xgen-dz-instrmsrch	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
110	EV	xgen-dz-ipo-query	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
111	IN	xgen-dz-ipo-query-det	v4.13.4-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
112	EV	xgen-dz-murexdz-leihe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
113	EV	xgen-dz-murexdz-trades	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
114	EV	xgen-dz-order-bea	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
115	EV	xgen-dz-order-loe	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.2-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
116	EV	xgen-dz-orderbook-ban	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
117	EV	xgen-dz-orderbook-per	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
118	EV	xgen-dz-otc-quote	v4.13.6-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
119	EV	xgen-dz-quod	v4.13.5-4.13-1.8-DWP-p017-2024	v4.13.3-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
120	EV	xgen-dz-sparplan-bea	v4.13.9-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
121	EV	xgen-dz-sparplan-det	v4.13.8-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
122	EV	xgen-dz-sparplan-erf	v4.13.7-4.13-1.8-DWP-p017-2024	v4.13.04-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes
123	EV	xgen-dz-sparplan-list	v4.13.3-4.13-1.8-DWP-p017-2024	v4.13.1-4.13-DWP-p013-2023	4.13-1.8-DWP-p017-2024	Yes	Ok	Yes