


CONTIGUOUS




MEMORY

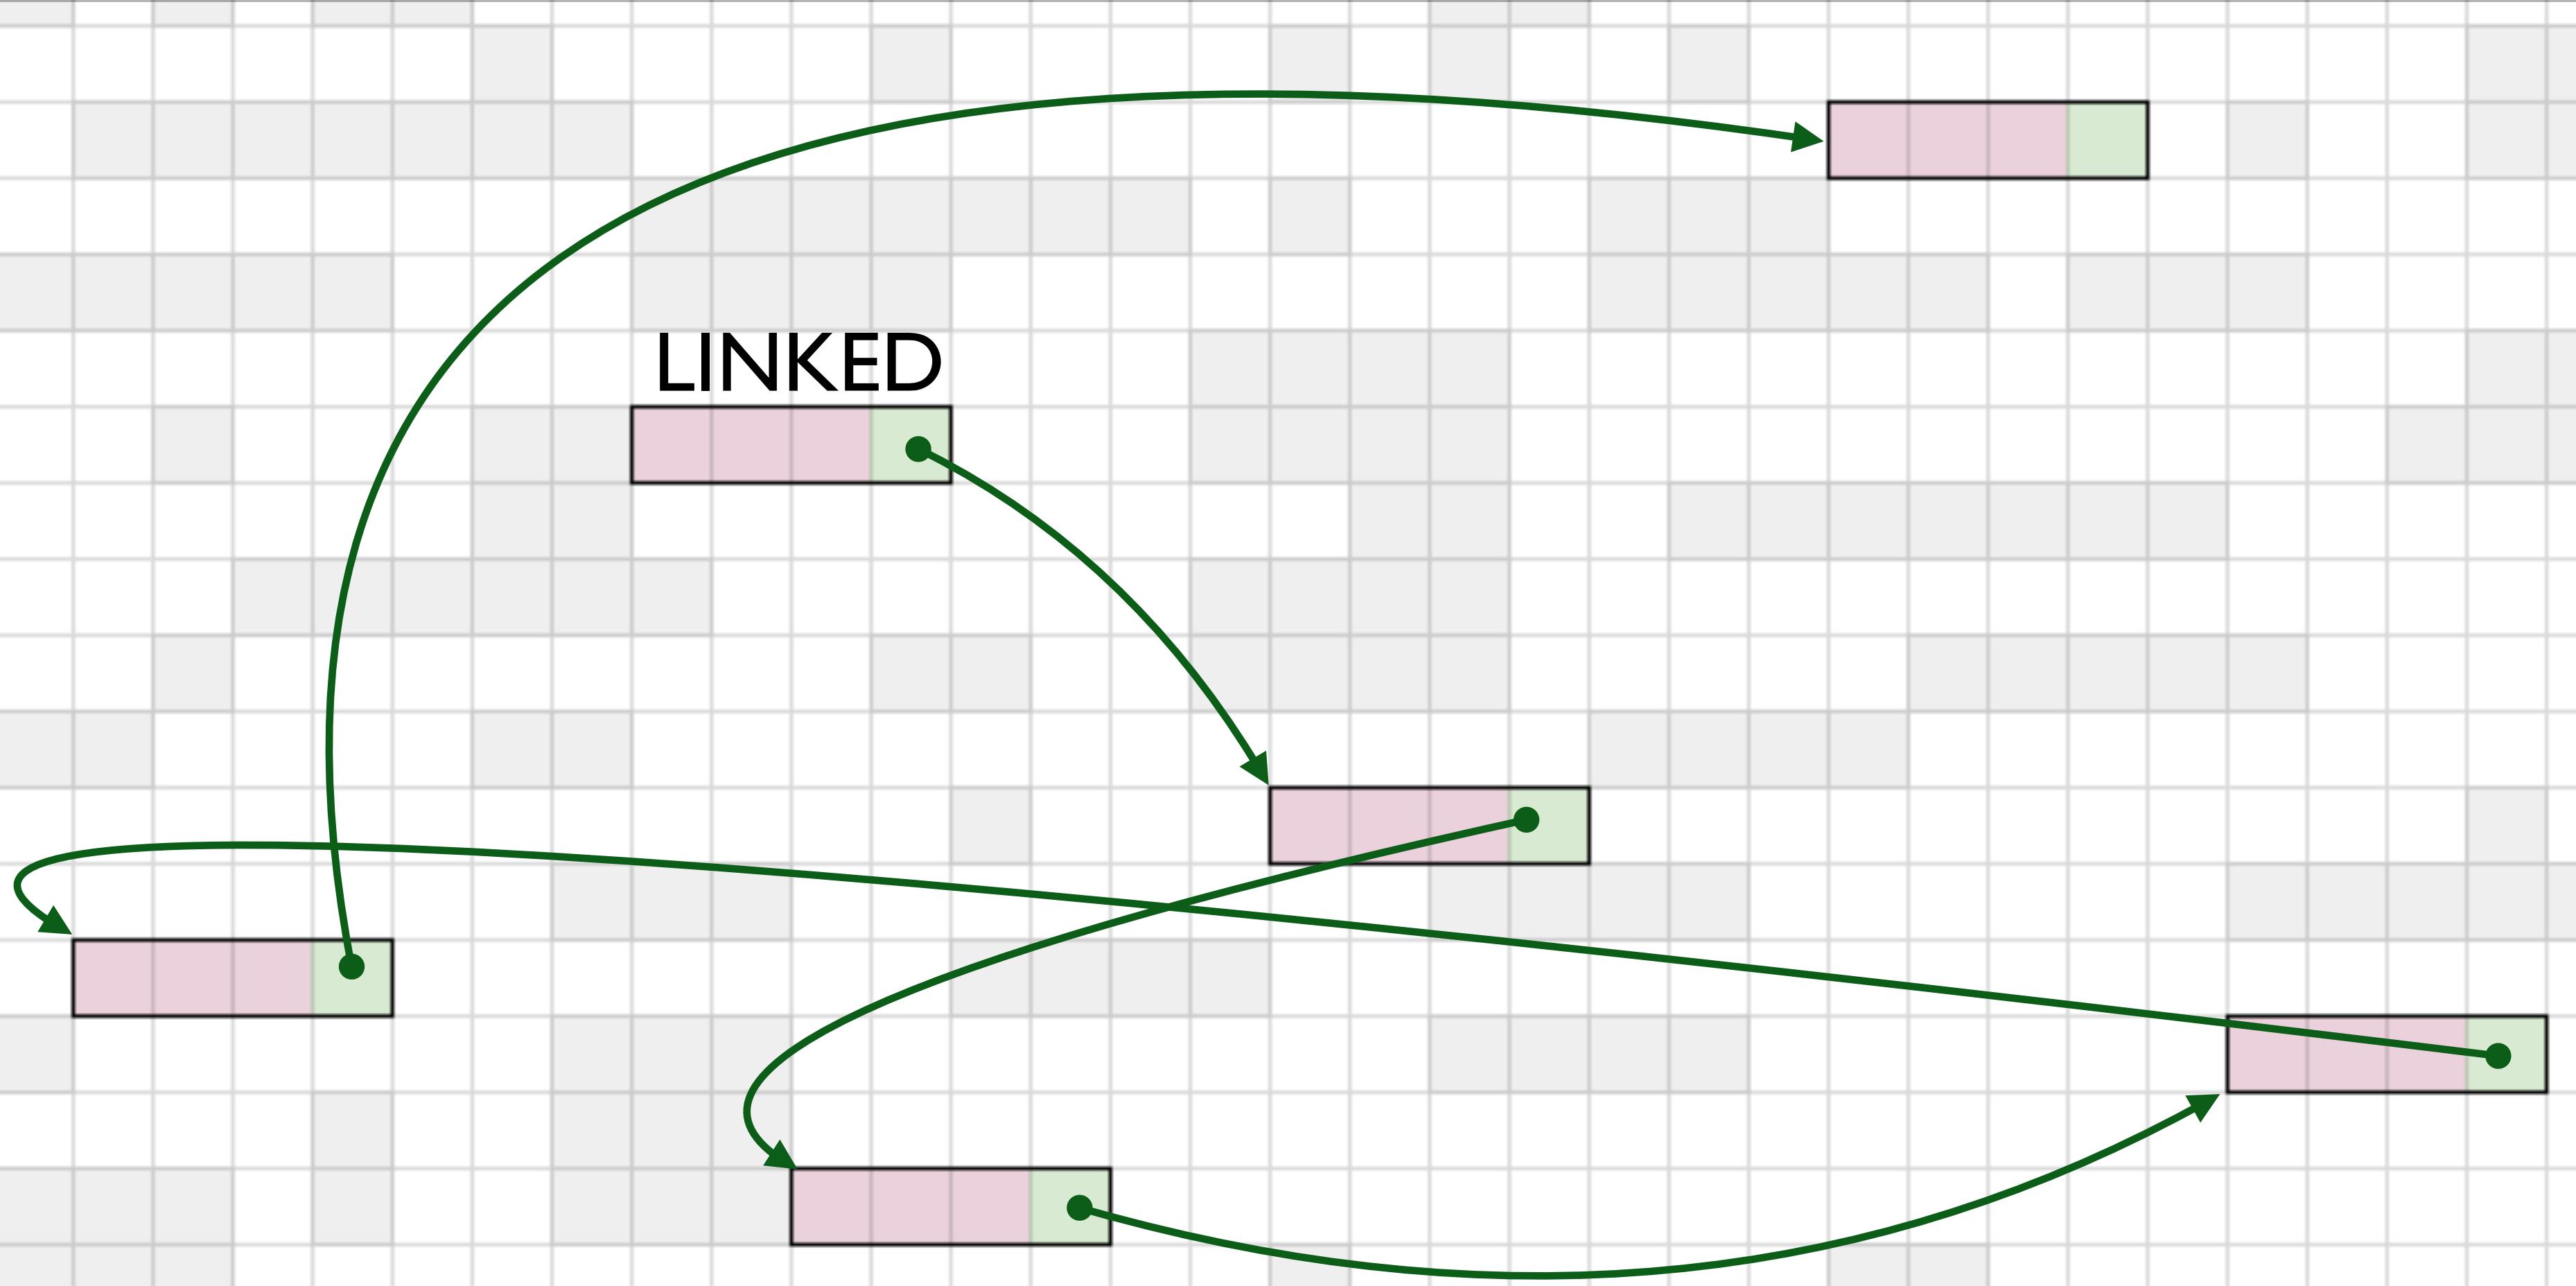


Your application



Operating System

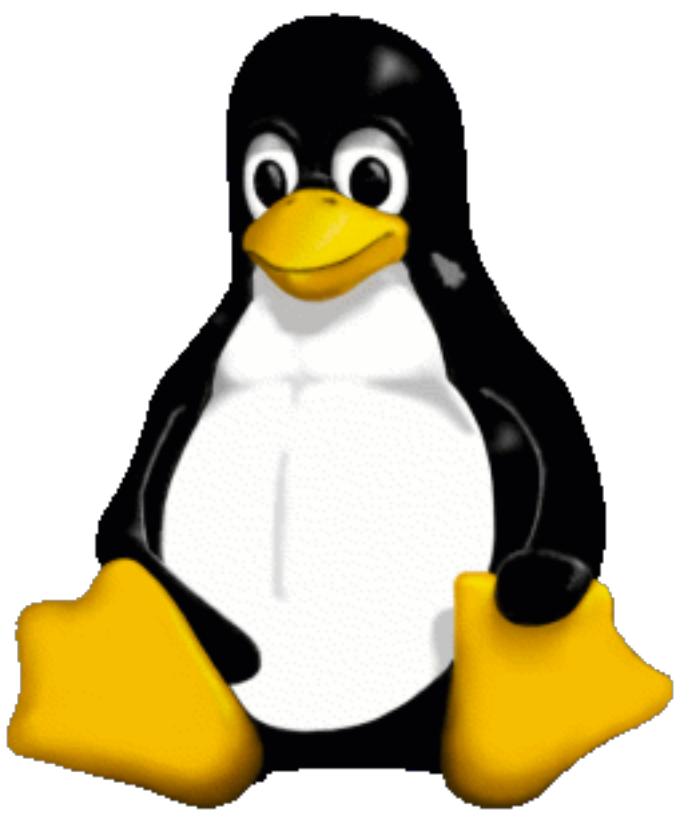


Memory

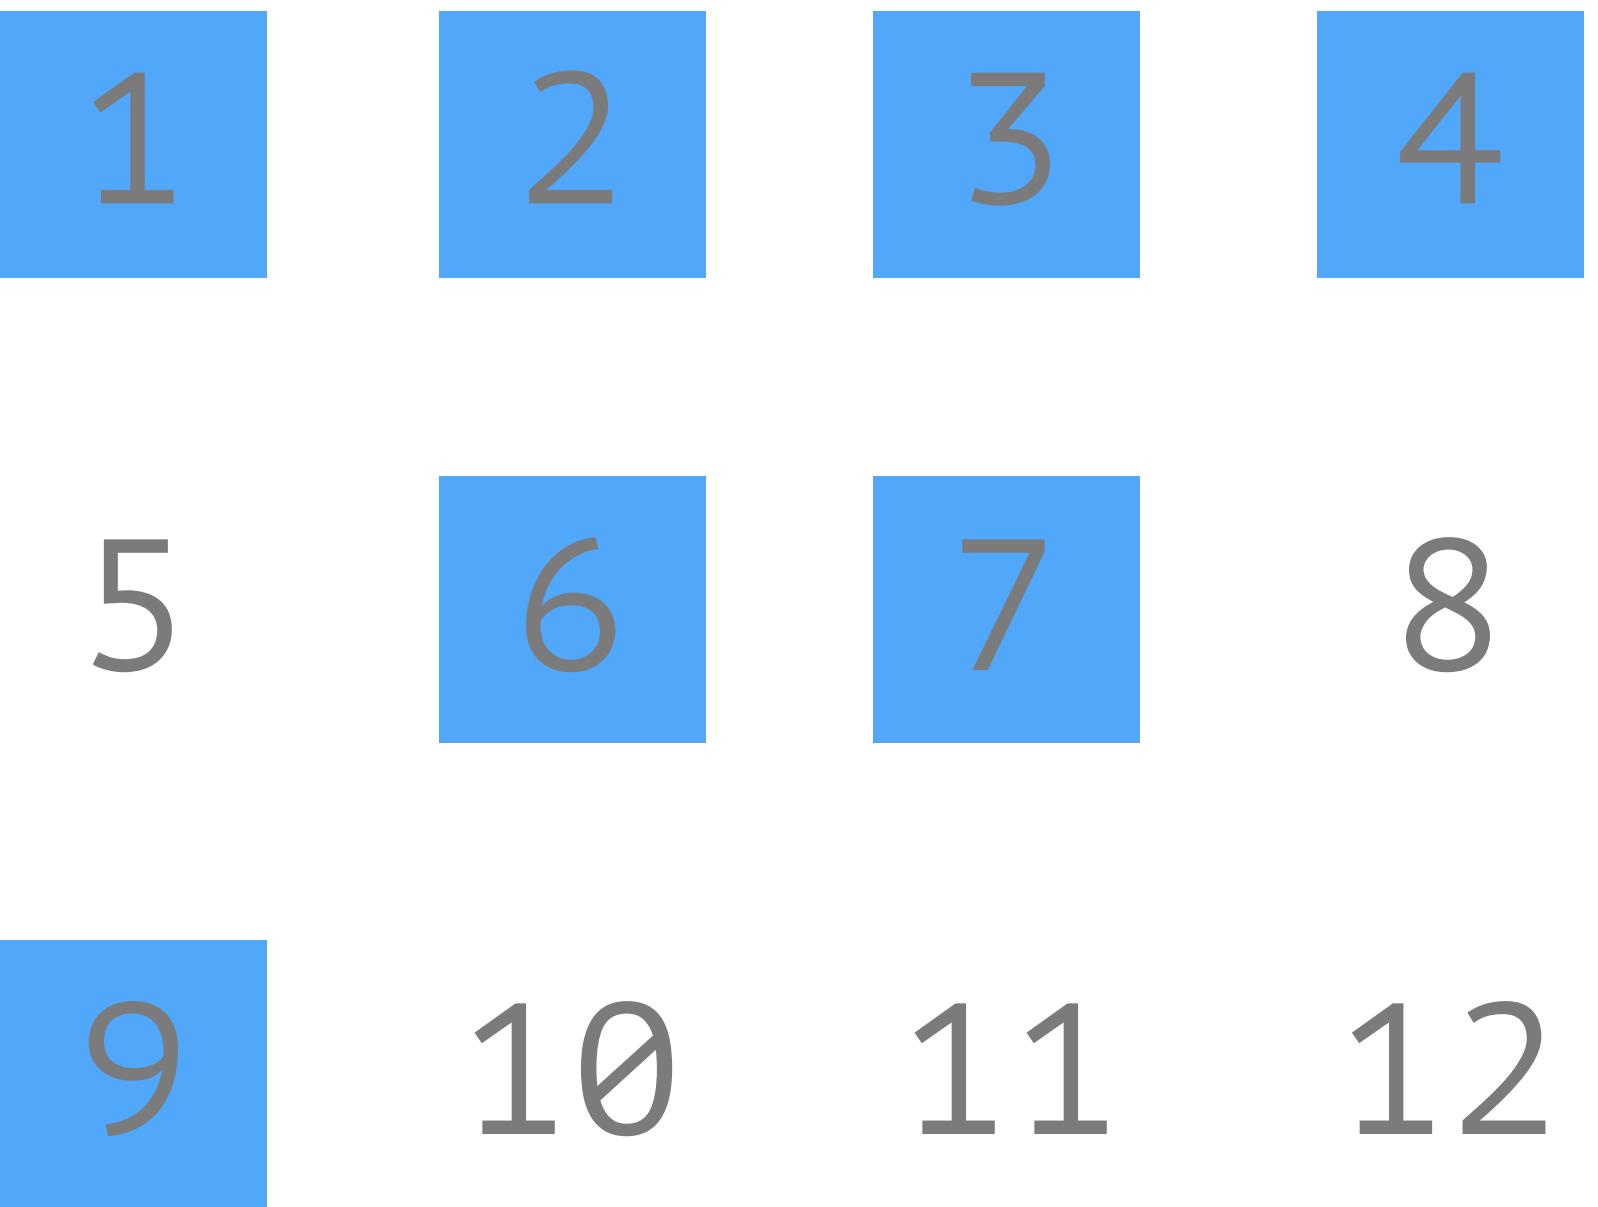


Your application



Operating System

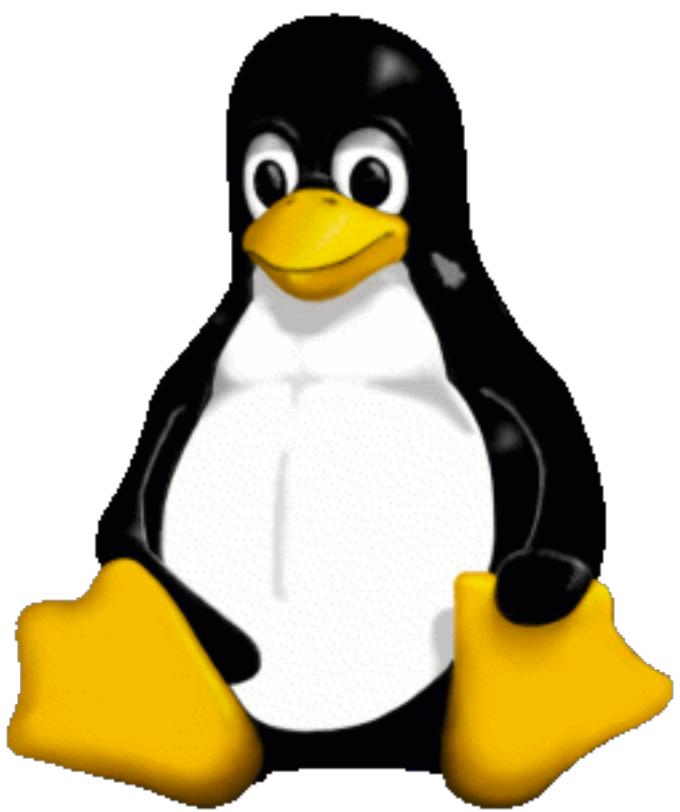

Memory

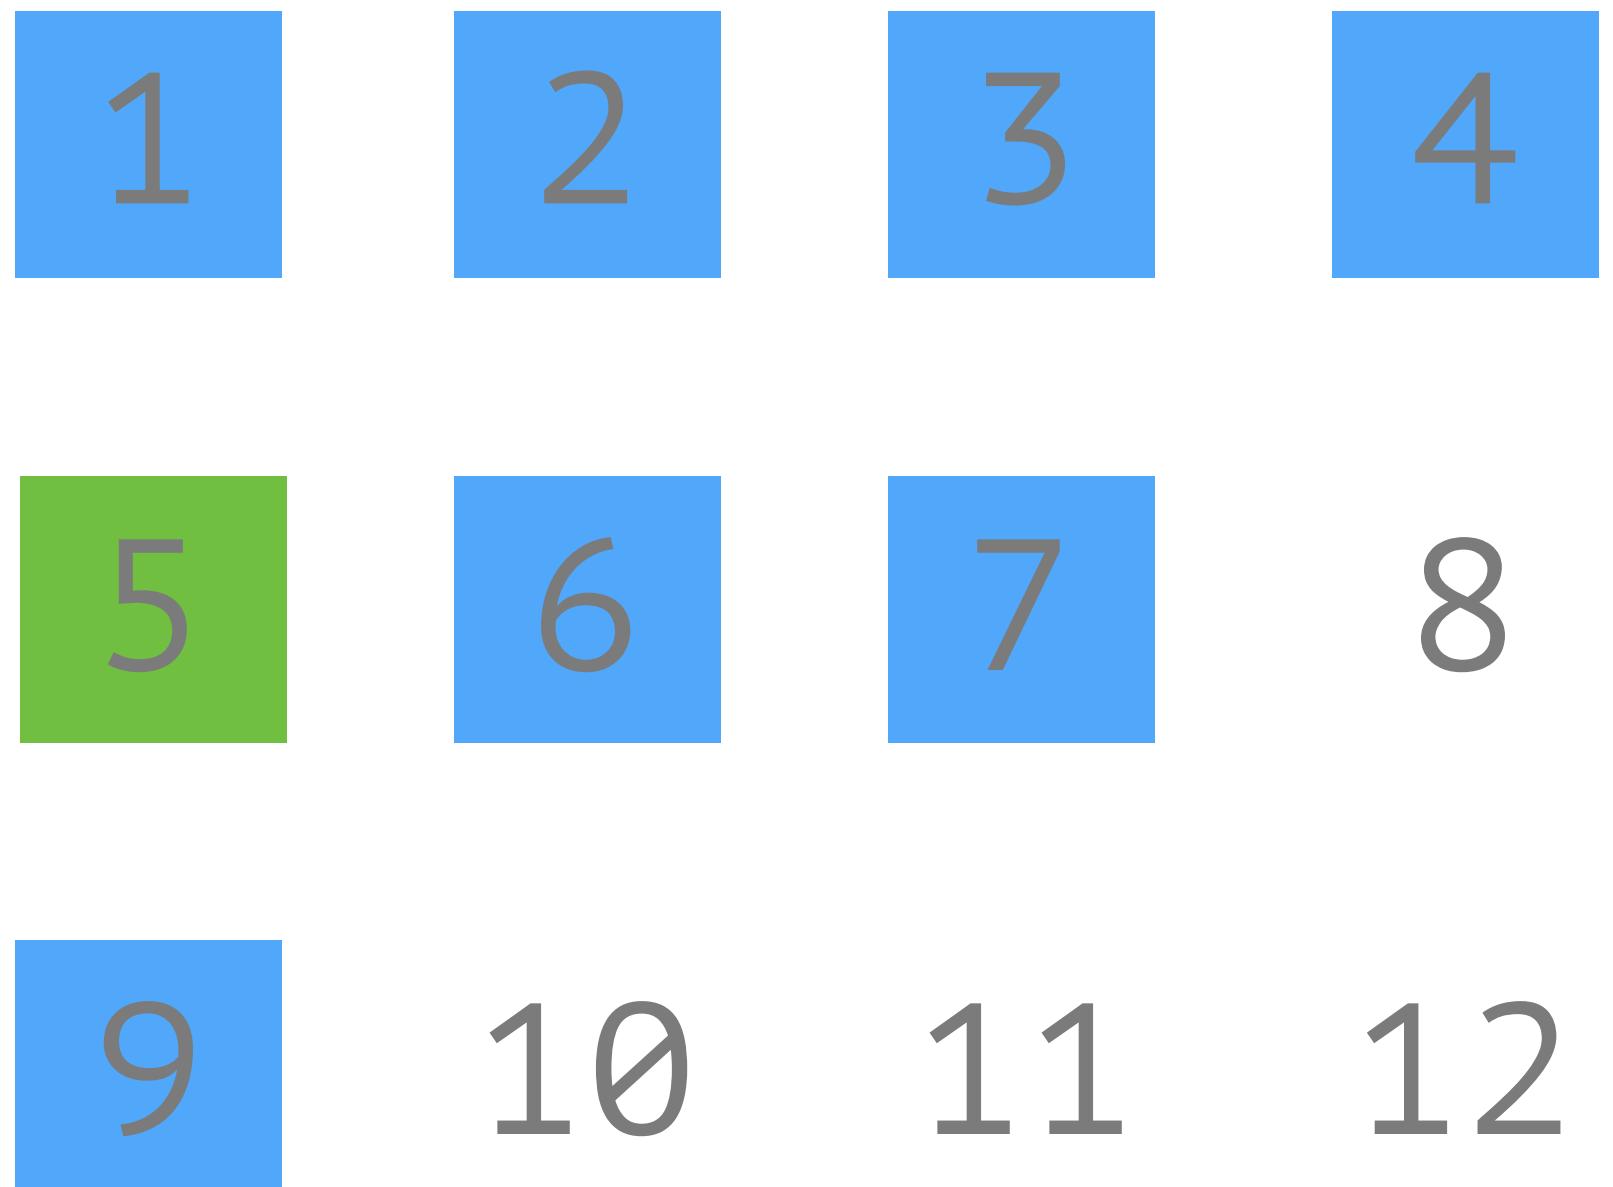


I just need one
block of memory for
now...doesn't matter
where!


Your application



Operating System

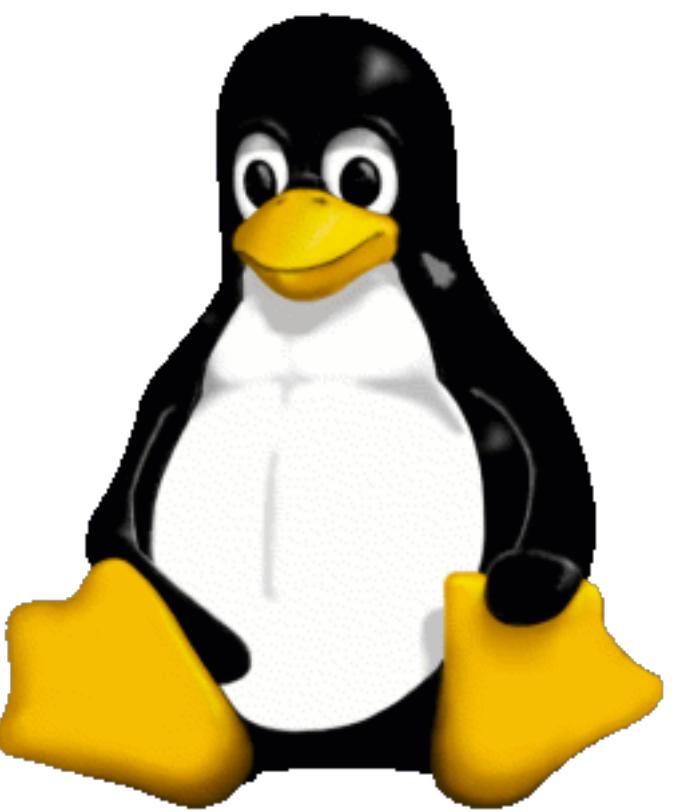

Memory

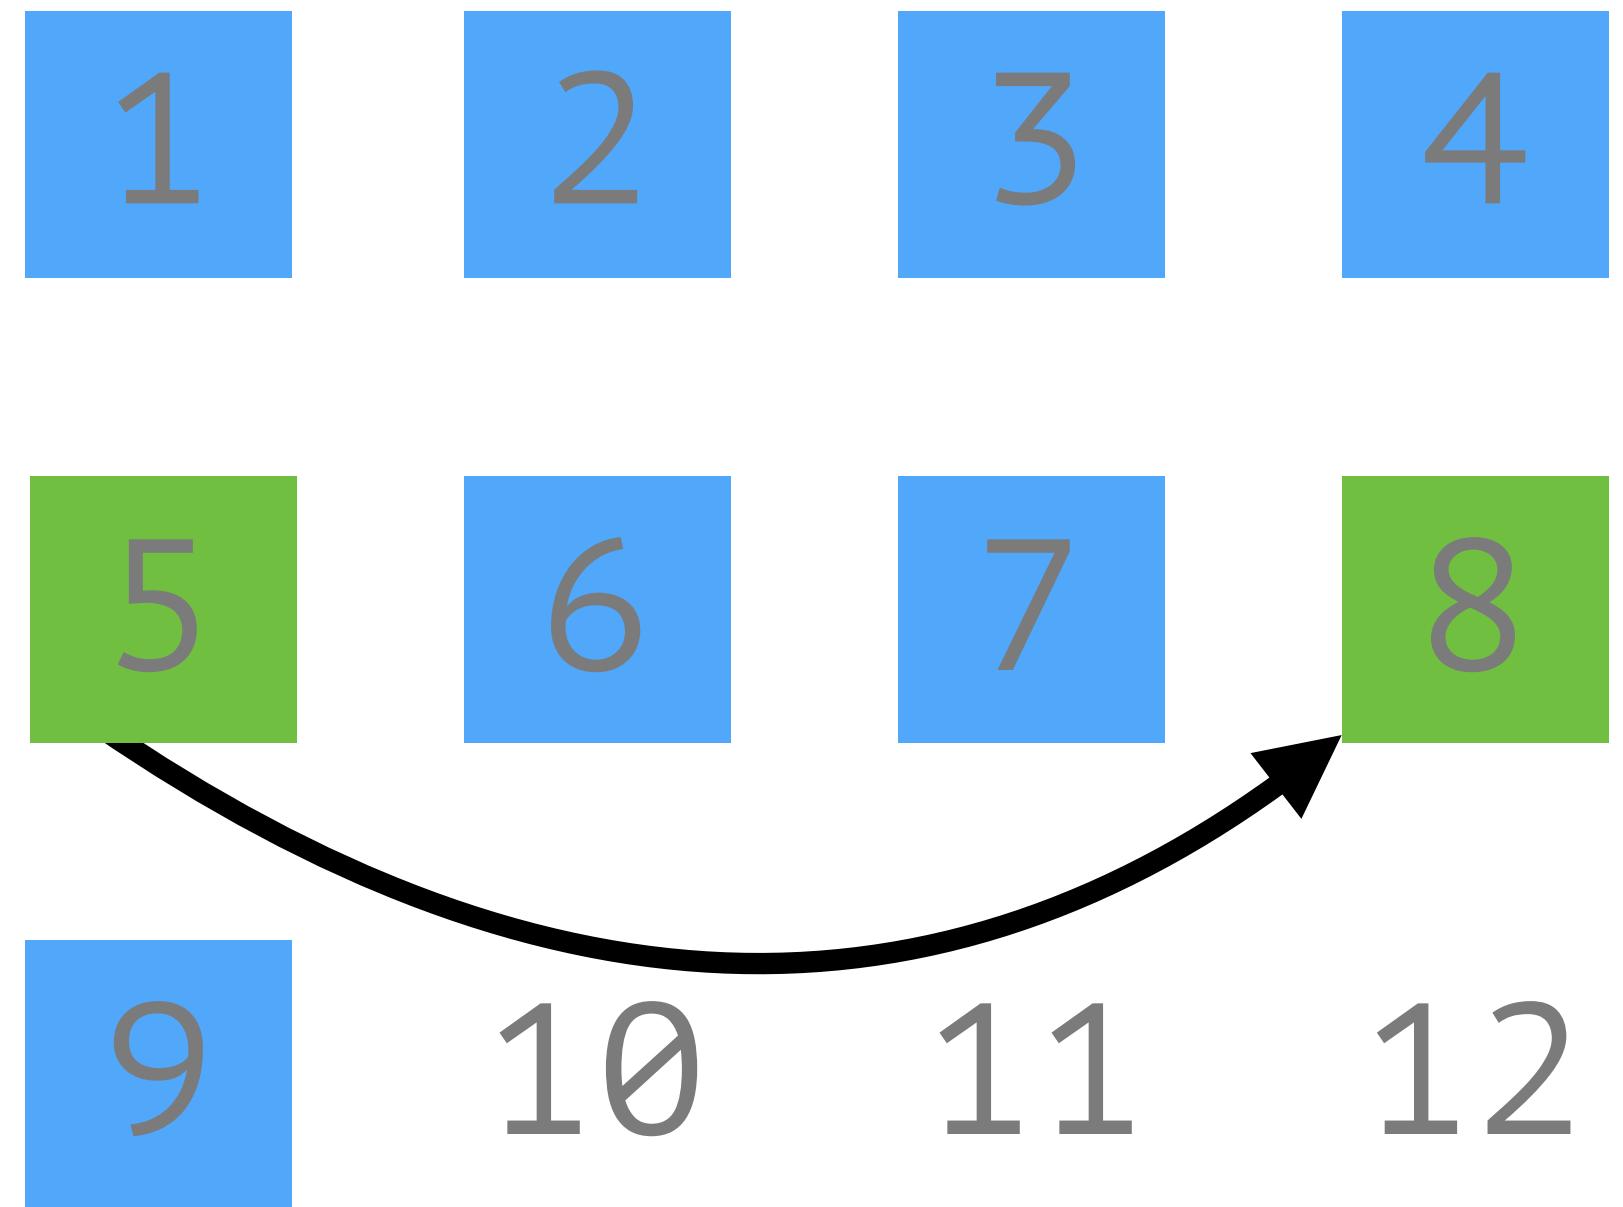

Okay, I'm adding a new item. I'll use the previous cell you gave me to point to the next

LINKED LISTS



The Linked List DS

- Data structure used for *list, stack, queue, deque* ADTs etc.
- Uses **nodes** which encapsulate a **value** and pointer(s)
- Main entity holds reference(s) to just a head and/or tail node
 - the "**handle(s)**"
- Each node then *points to the next and/or previous node*
 - "**singly-linked**" (unidirectional) vs. "**doubly-linked**" (bidirectional)






Linked List

Head:



Linked List

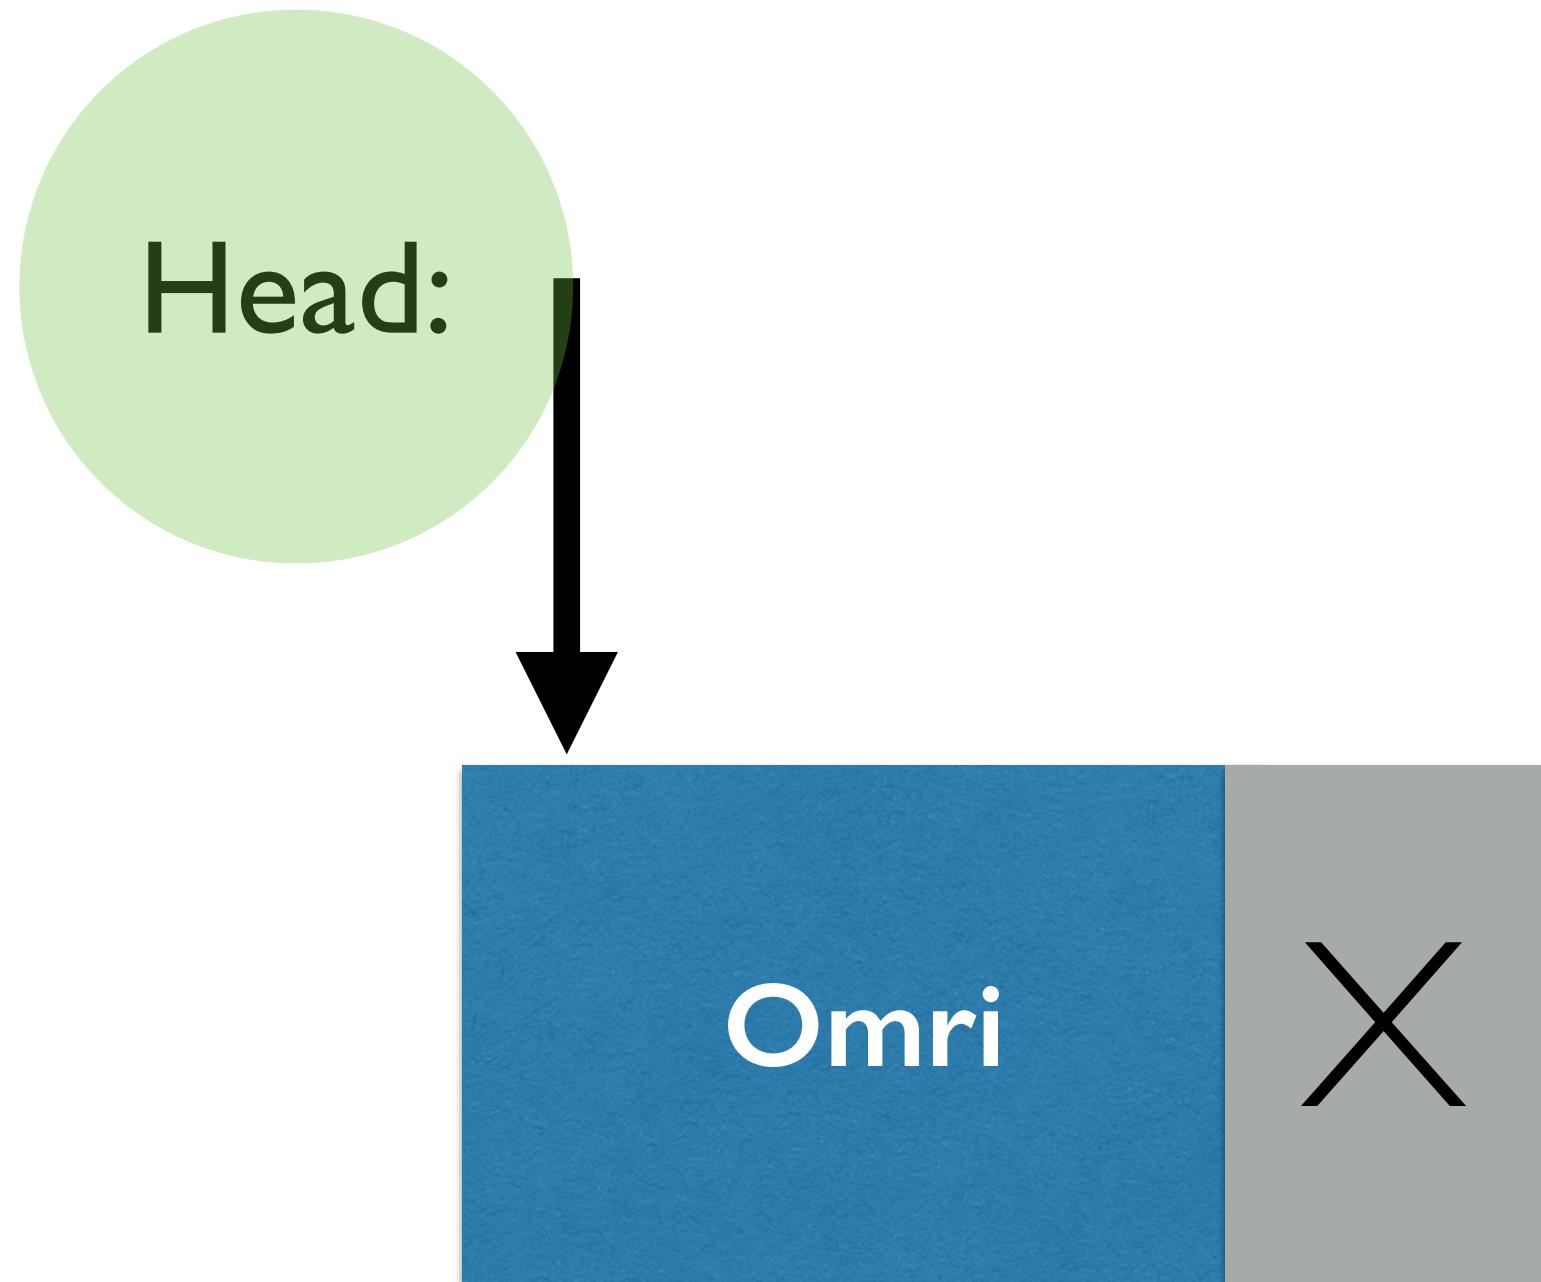




Linked List






Linked List

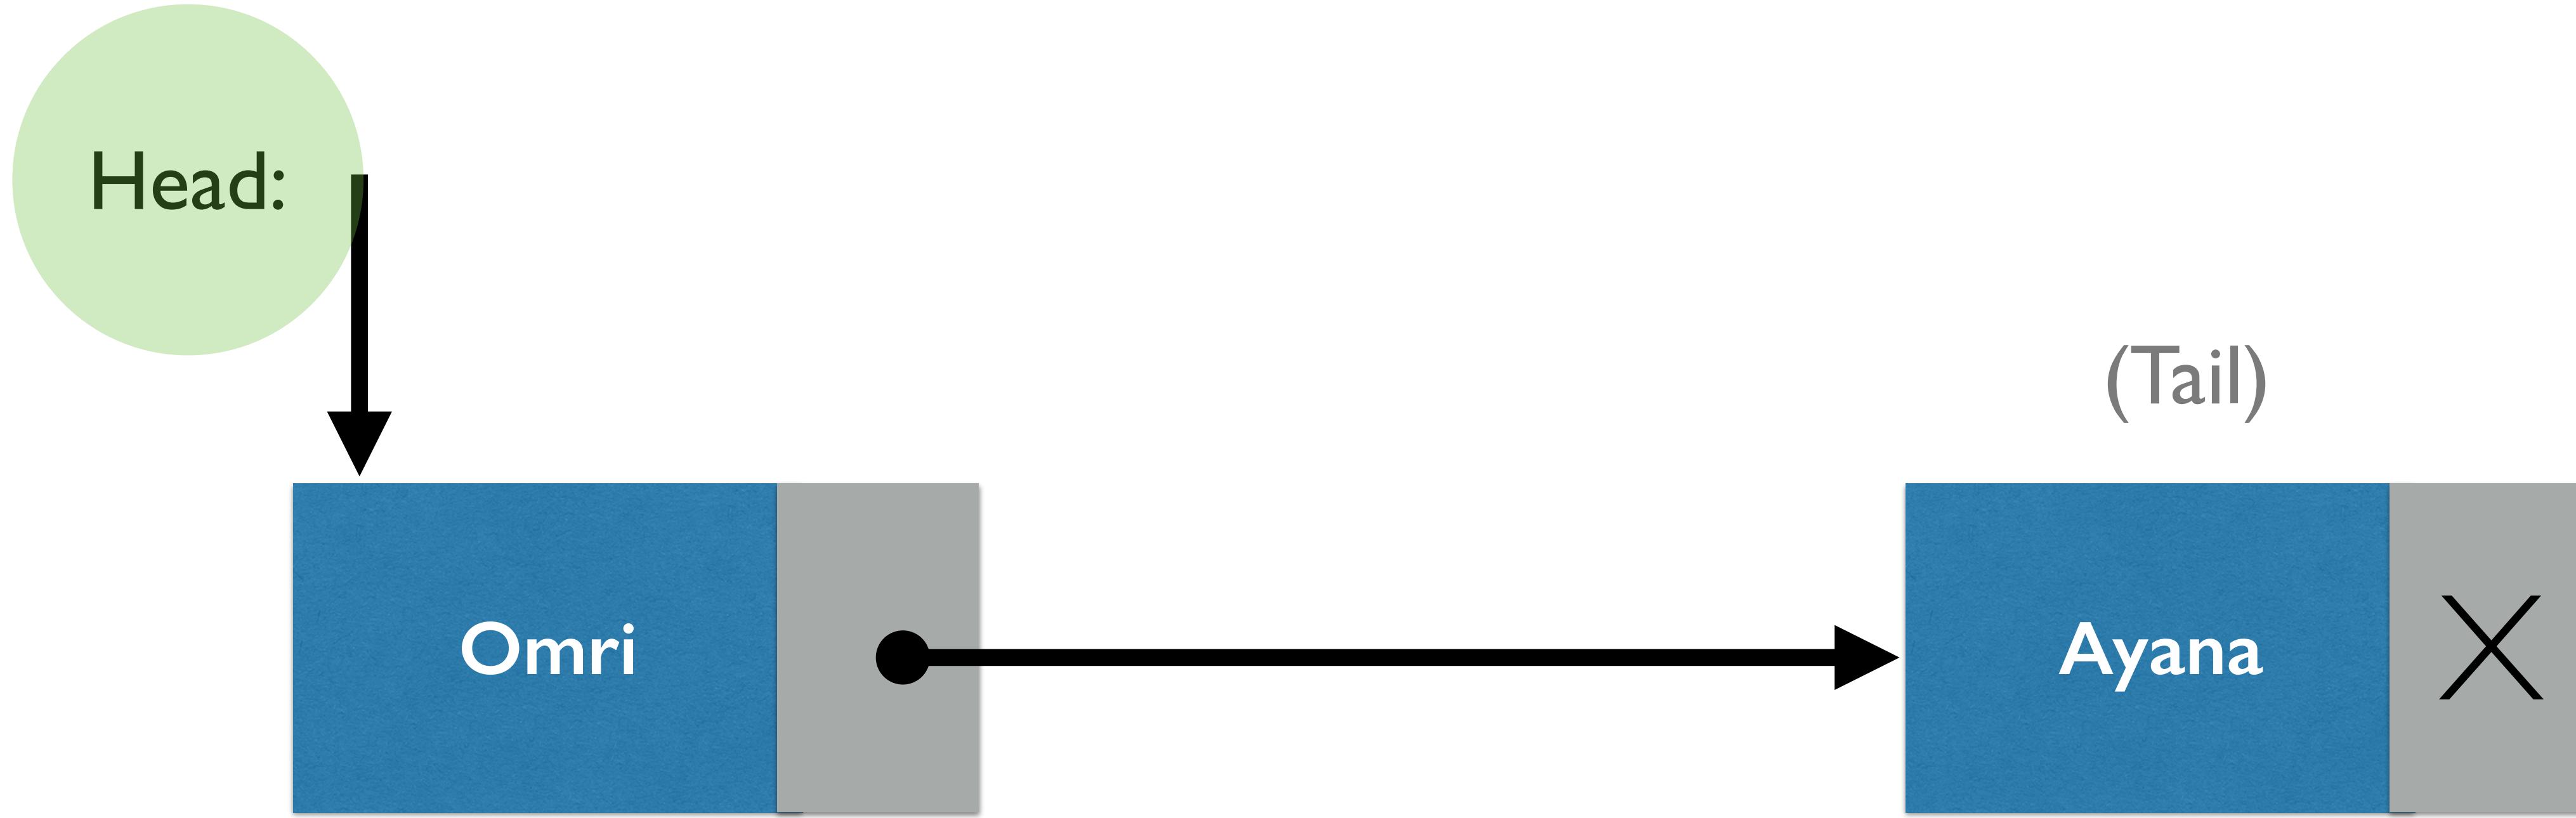




Linked List

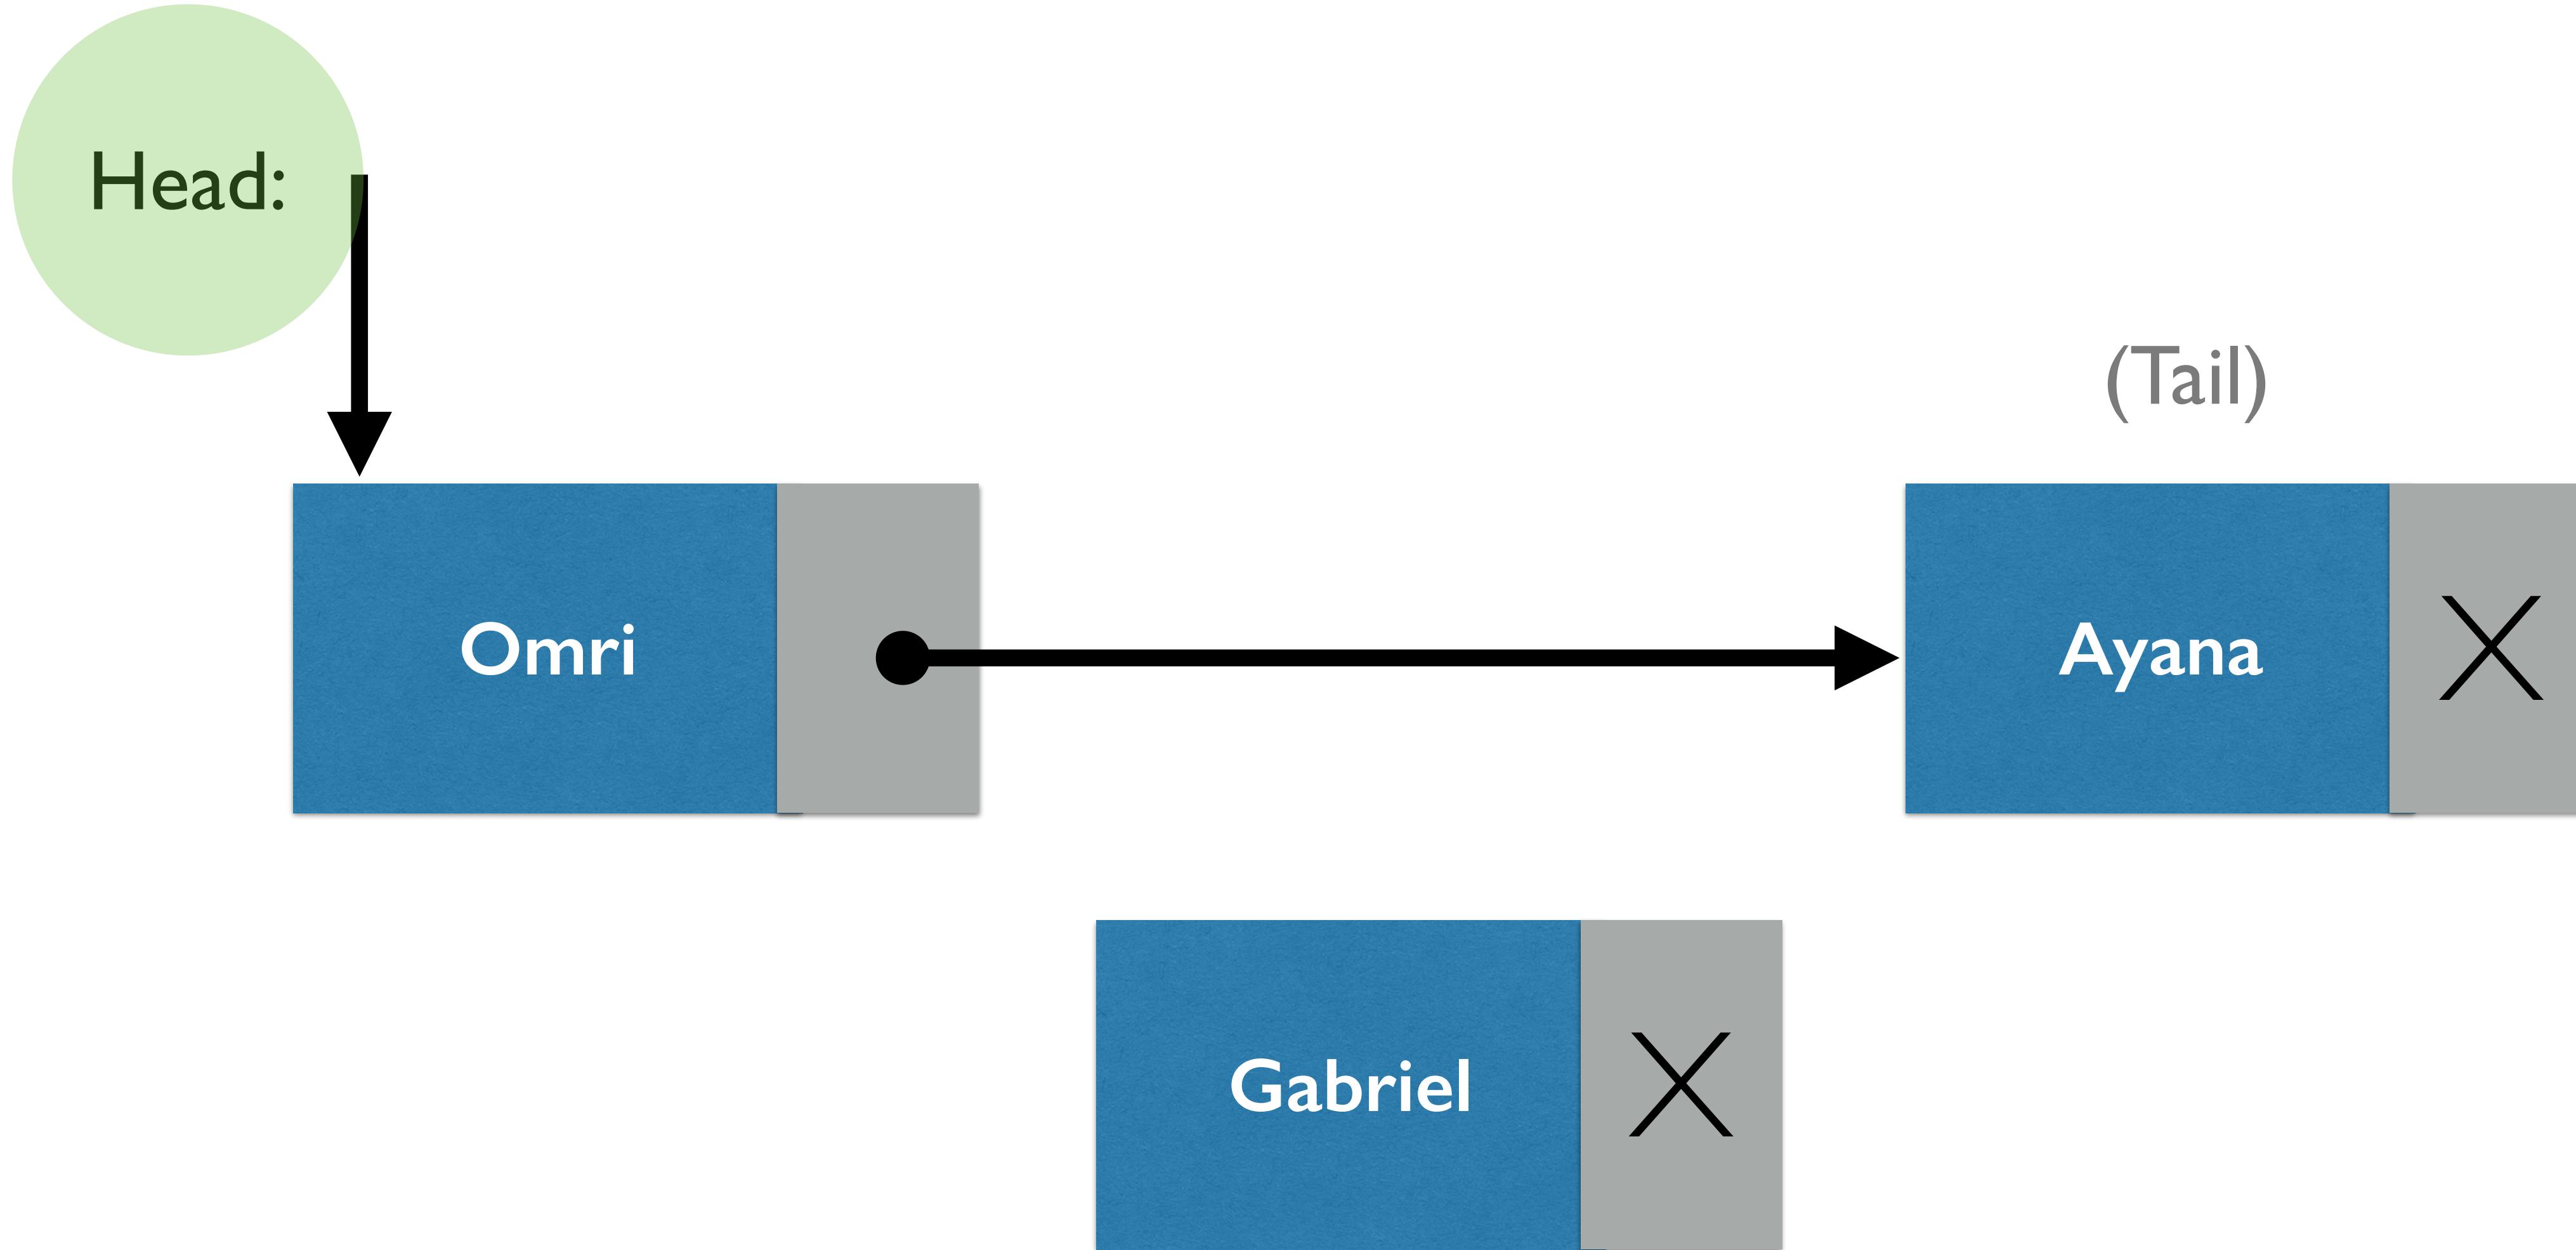




Linked List

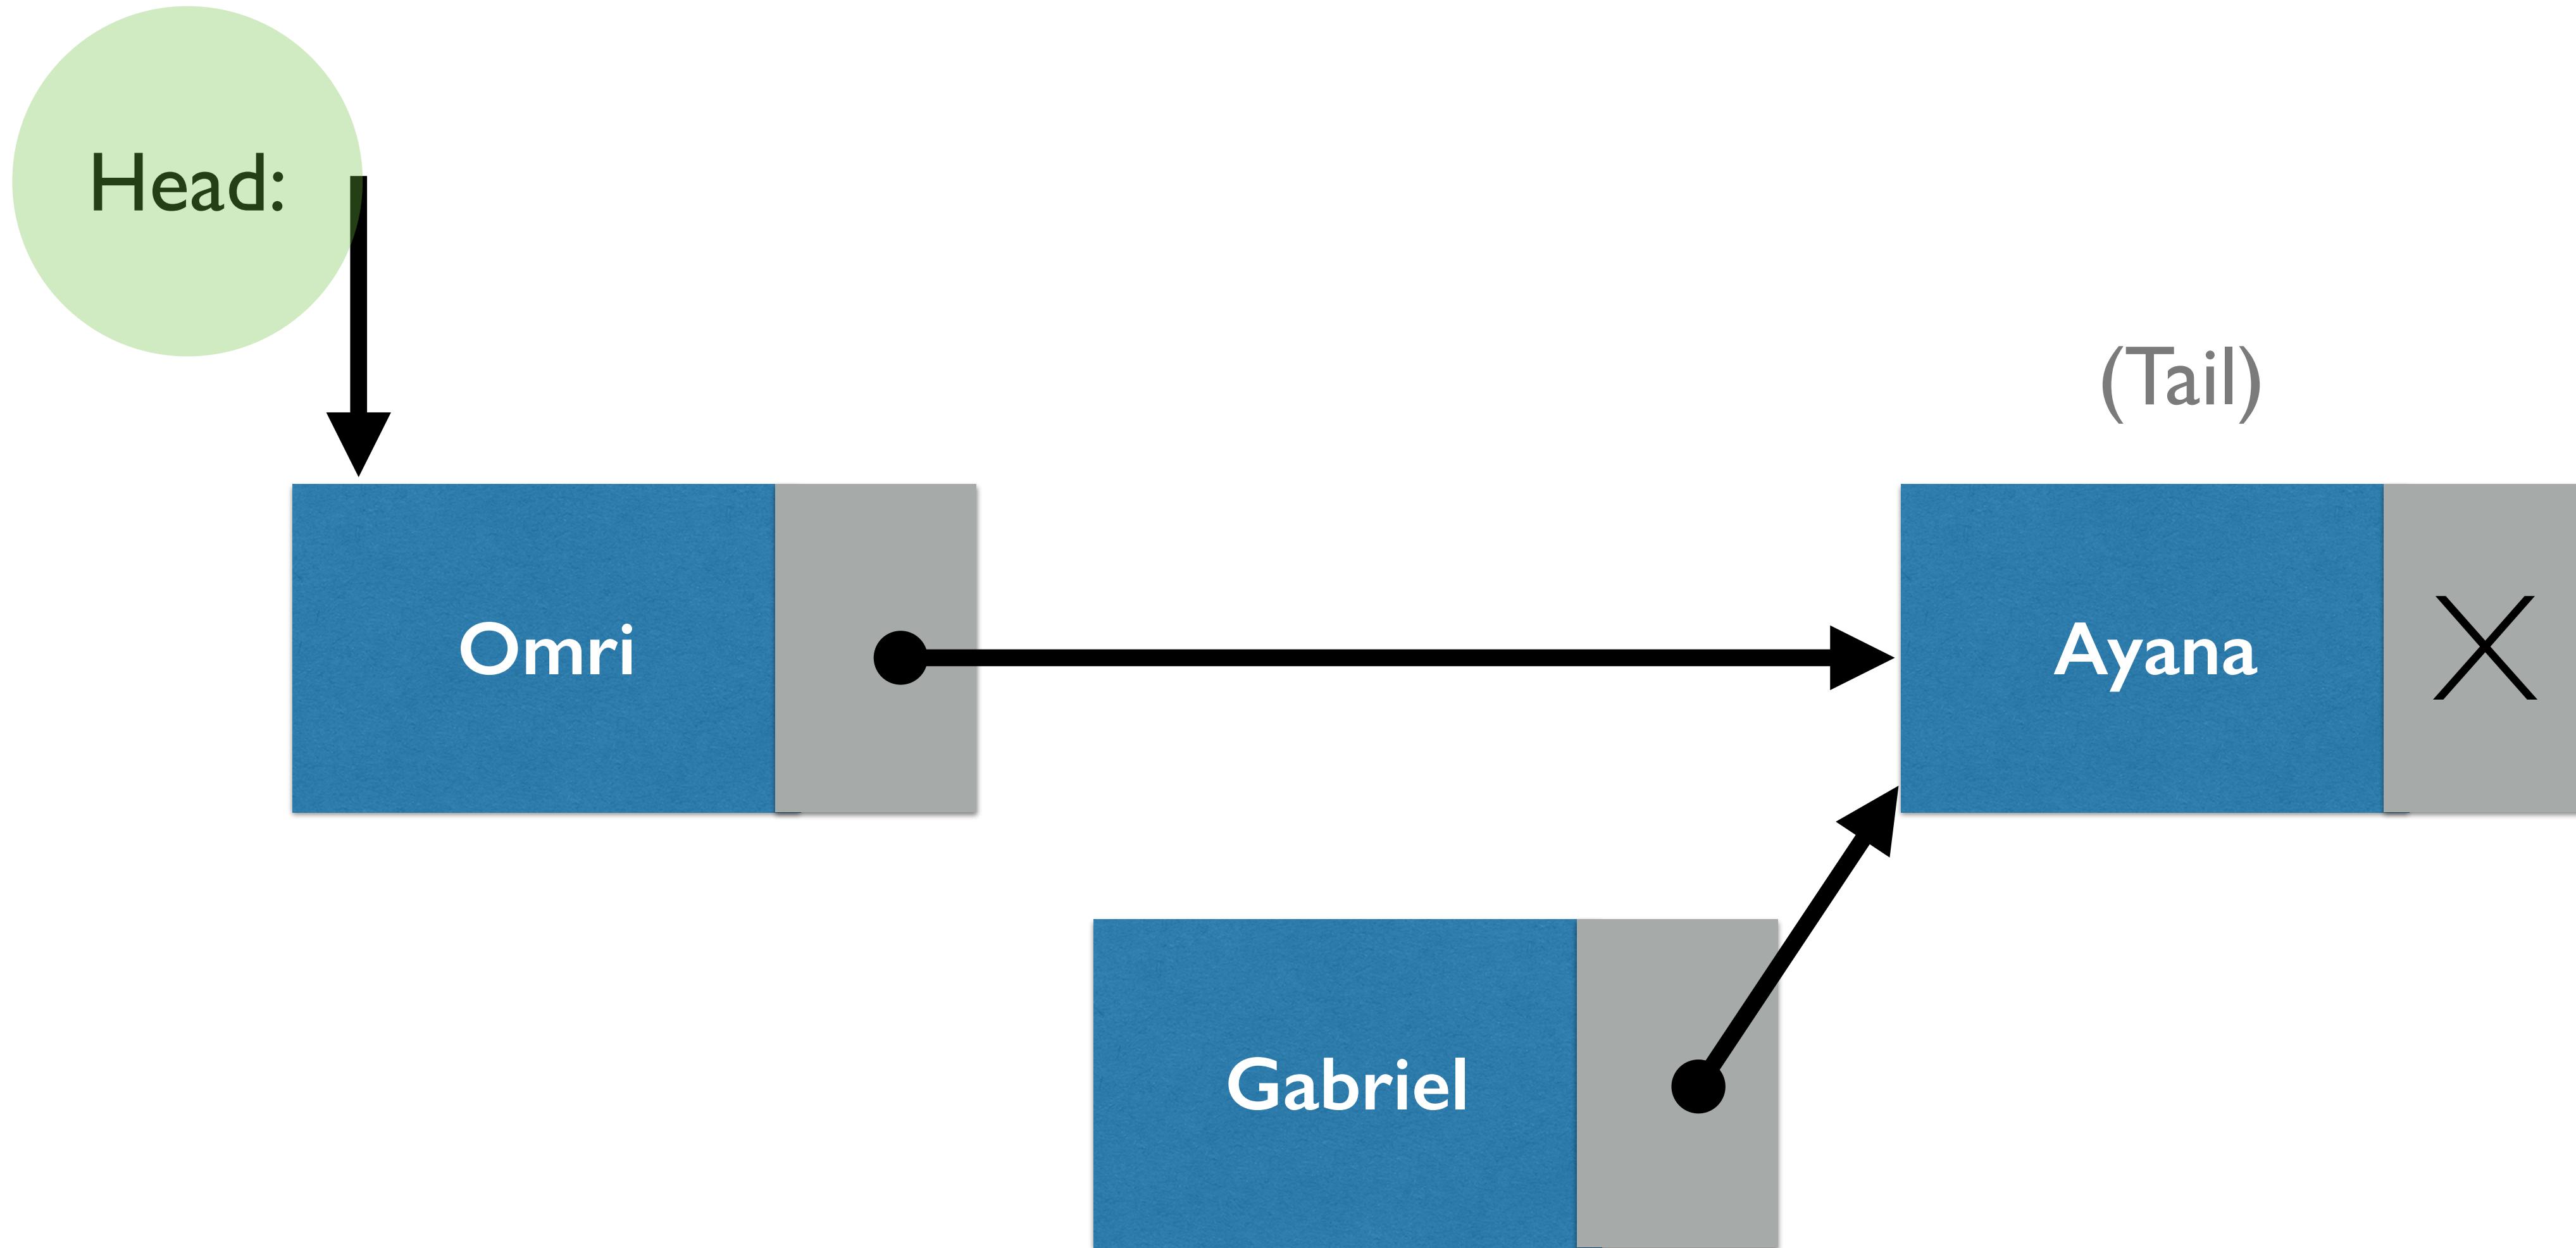




Linked List

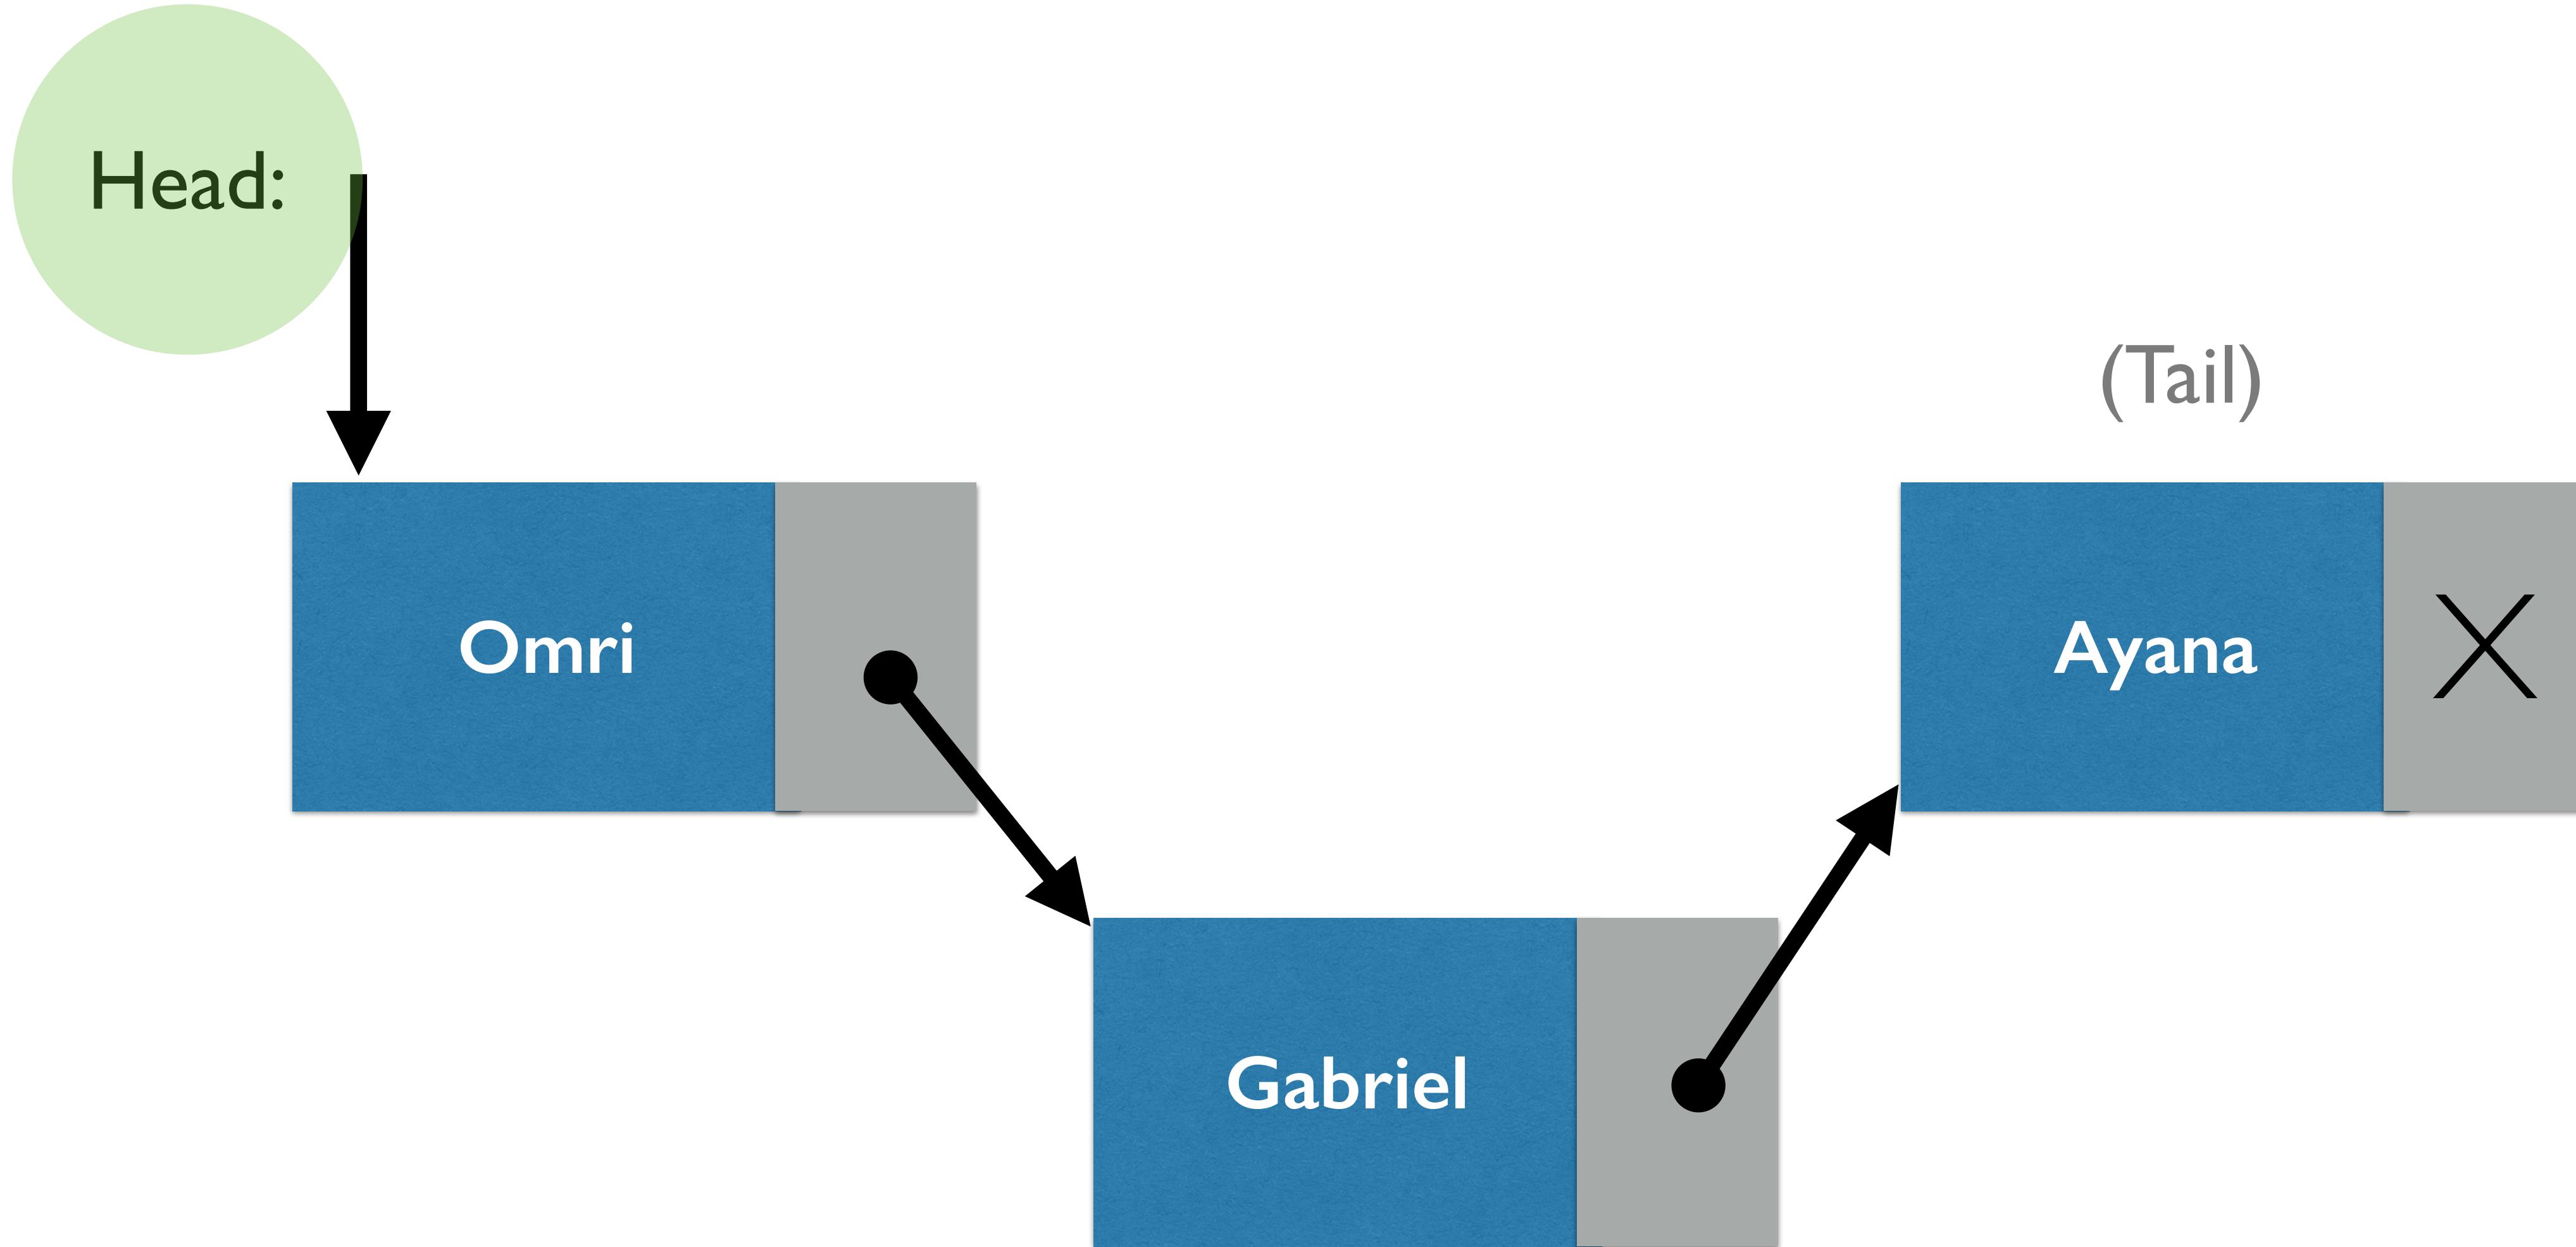




Linked List

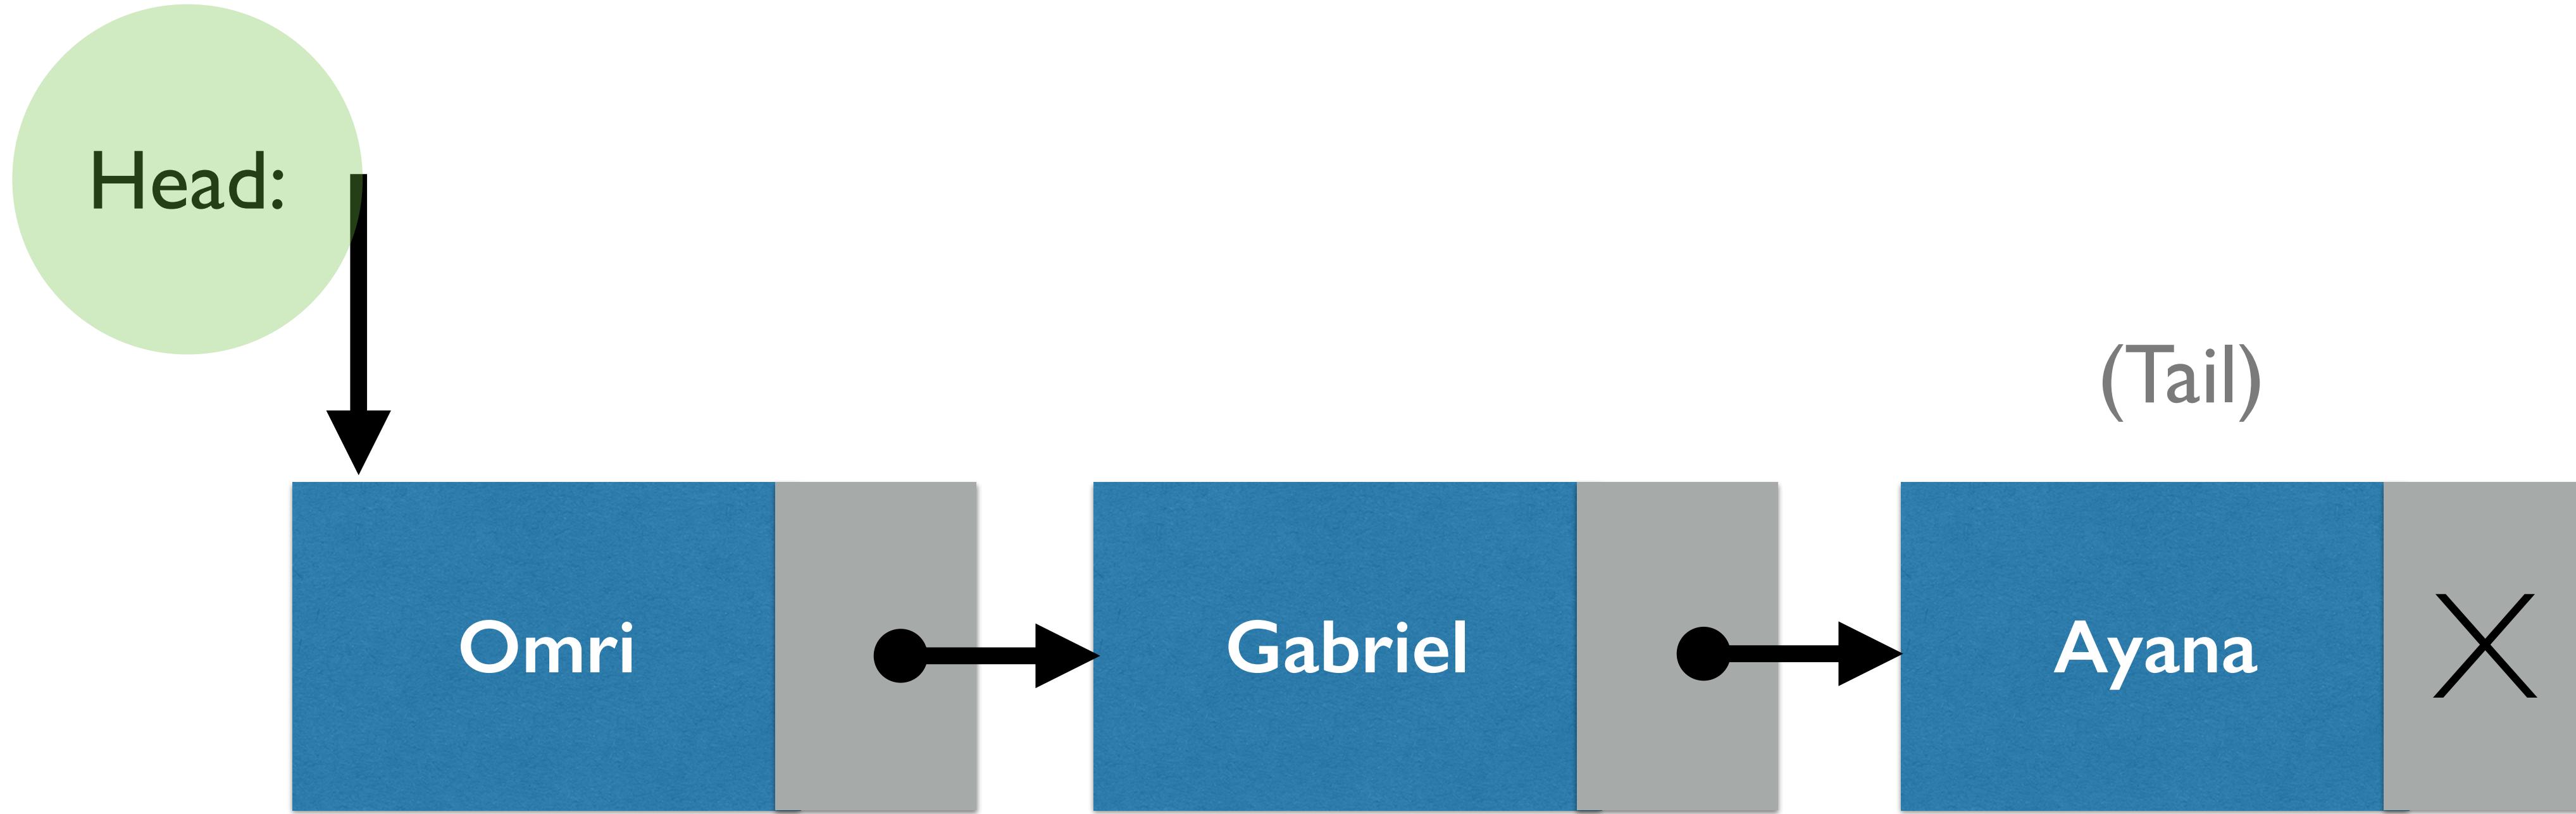



Linked List

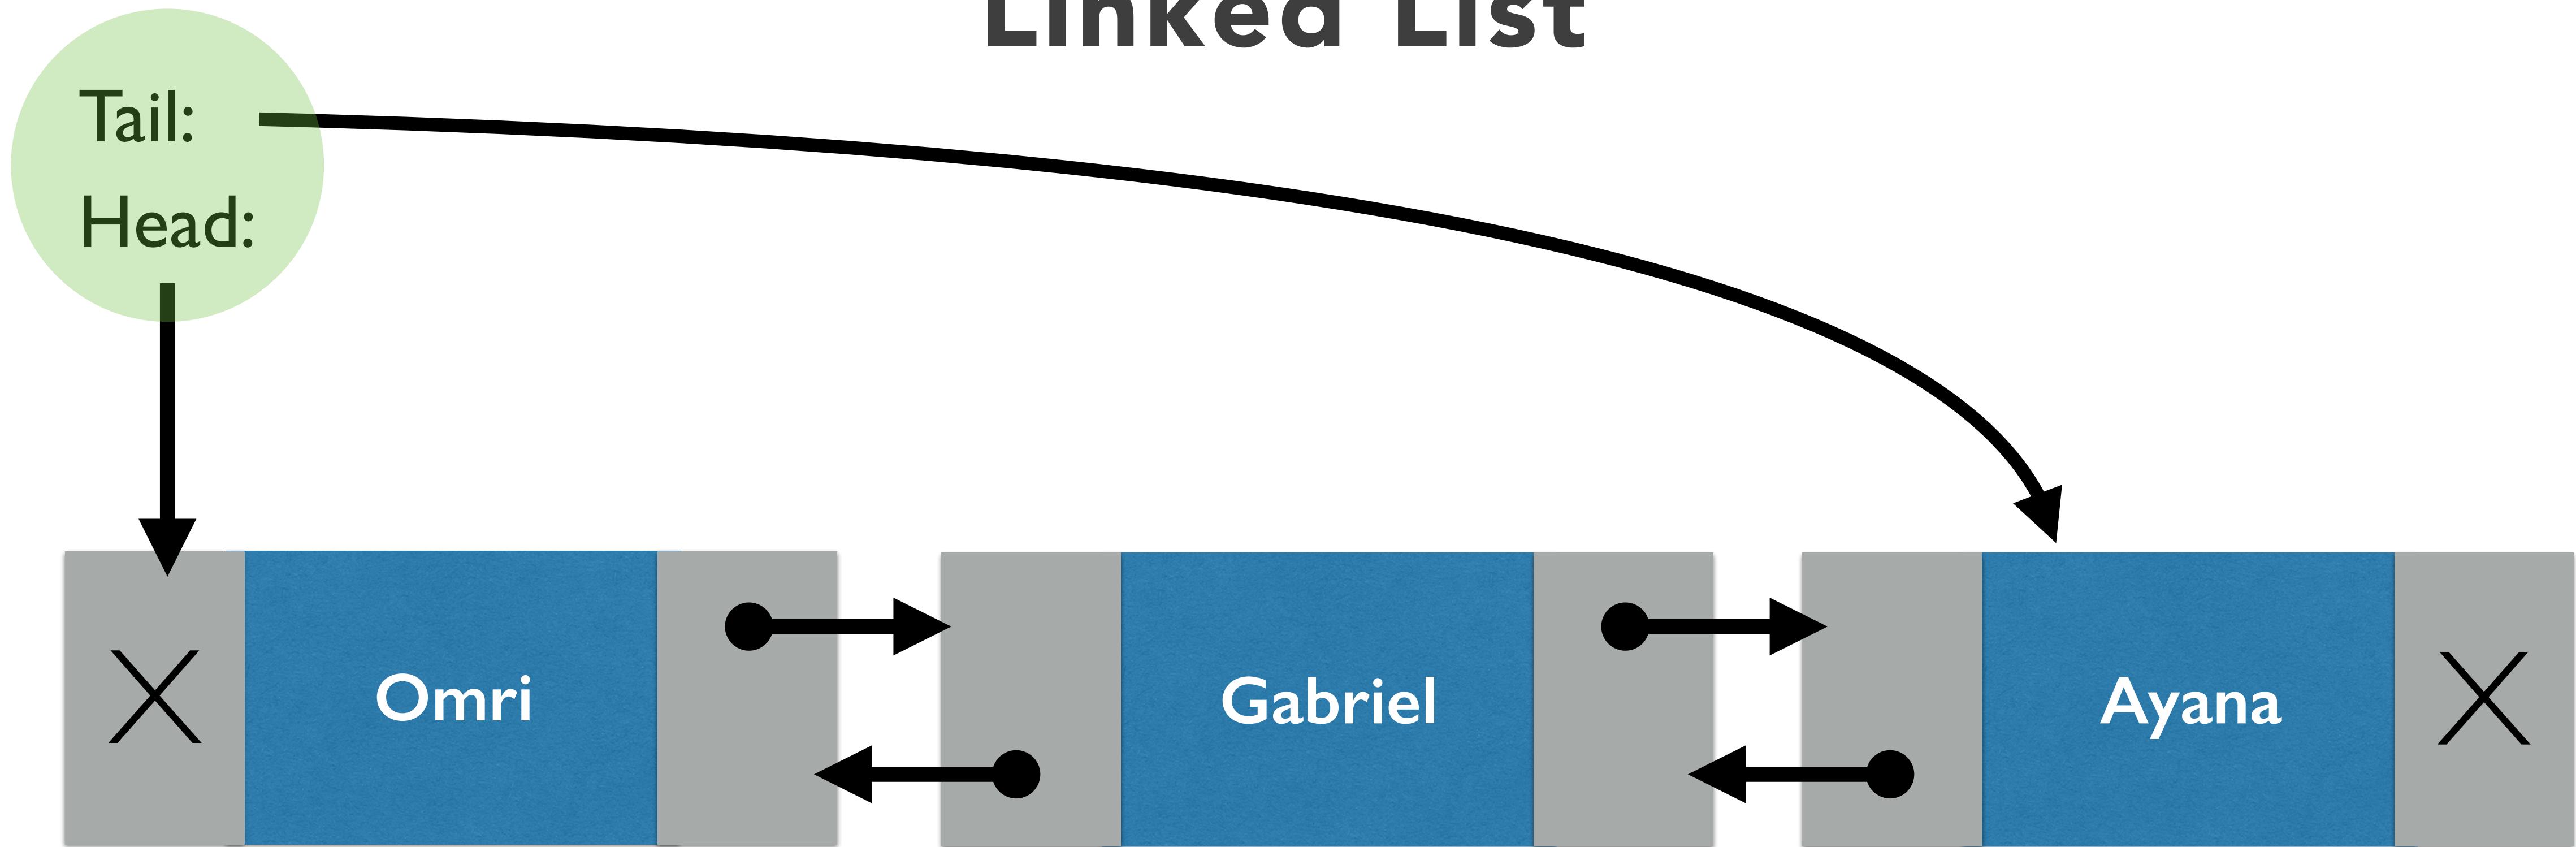



(some) pros/cons: Linked Lists vs Arrays

Operation	Linked List	Typed Array
Reach element in middle	Must crawl though nodes	Constant time
Insert in middle or start	Constant time (if we have ref). With handle, constant time	Must move all following elements
Add element to end	With handle, constant time	Constant time
Space per element	Container + element + pointer(s)	Just element!
Total space	Grows as needed	Pre-reserved & limited*
Physical locality	Not likely	Best possible

WORKSHOP

