

PTS (Package Template Script)

An Implementation of Package Templates in TypeScript

Petter Sæther Moen



Thesis submitted for the degree of
Master in Informatics: Programming and System
Architecture
60 credits

Department of Informatics
Faculty of mathematics and natural sciences

UNIVERSITY OF OSLO

Spring 2021

PTS (Package Template Script)

*An Implementation of Package
Templates in TypeScript*

Petter Sæther Moen

© 2021 Petter Sæther Moen

PTS (Package Template Script)

<http://www.duo.uio.no/>

Printed: Reprosentralen, University of Oslo

Contents

Abstract	iii
Acknowledgments	v
1 Introduction	1
1.1 What is PT?	1
1.2 Purpose of Implementing PT in TS	1
1.3 Structure of Thesis	1
2 Background	3
2.1 Package Templates	3
2.1.1 Syntax	3
2.1.2 Merging classes	8
2.2 TypeScript	9
2.2.1 JavaScript / ECMAScript	9
3 The Language - PTS	11
3.1 Syntax	11
3.2 The PTS Grammar	12
4 Planning the project	15
4.1 What Do We Need?	15
4.2 TypeScript vs JavaScript	15
4.2.1 Verifying templates	15
4.3 Choosing the right approach	15
4.3.1 Preprocessor for the TypeScript Compiler	16
4.3.2 TypeScript Compiler Plugin / Transform	16
4.3.3 Babel plugin	16
4.3.4 TypeScript Compiler Fork	17
5 Implementation	19
5.1 Compiler Architecture	19
5.2 Lexer and Parser	19
5.2.1 Parser Generator	19
5.2.2 Instantiation and Renaming	21
5.2.3 Verification of Templates	22
5.2.4 Code Generation	22
5.3 Notes on Performance	22
5.4 Testing	22
5.4.1 Lexer and Parser	22

5.4.2	Transpiler	22
6	Does PTS Fulfill The Requirements of PT?	25
6.1	The Requirements of PT	25
6.1.1	Parallel Extension	25
6.1.2	Hierarchy Preservation	25
6.1.3	Renaming	26
6.1.4	Multiple Uses	26
6.1.5	Type Parameterization	26
6.1.6	Class Merging	26
6.1.7	Collection-Level Type-Checking	26
6.2	Verifying Templates	26
7	Difference between PTS and PTj	27
7.1	Nominal vs. Structural Typing	27
7.1.1	Advantages of Nominal Types	27
7.1.2	Advantages of Structural Types	29
7.1.3	What Difference Does This Make For PT?	29
7.1.4	Which Better Fits PT?	29
8	Results	31

Abstract

Acknowledgements

Chapter 1

Introduction

1.1 What is PT?

1.2 Purpose of Implementing PT in TS

1.3 Structure of Thesis

Chapter 2

Background

2.1 Package Templates

Krogdahl proposed Generic Packages in 2001, which is a language mechanism aimed at "large scale code reuse in object oriented languages"[4]. The idea behind this mechanism was to make modules of classes, called *packages*, that could later be imported and instantiated. This would make "textual copies" of the package body, and would also allow for further expanding the classes of the packages. Modularizing through Generic Packages made the programming more flexible as you would easily be able to write modules with a certain functionality and be able to later import it several times when there is a need for the functionality.

Generic Packages was later extended (nevne SWAT-project?) and the mechanism is now called Package Templates (while the textual program modules themselves are simply called templates). Of special interest in this essay is that the system allows a special type of multiple inheritance (by "merging" classes from different templates), and templates may build upon other templates to any depth). The system is not fully implemented and there exists a number of proposals for extending it.

2.1.1 Syntax

In this section we will look at the syntax of Package Templates (further referred to as *PT*) in a Java-like language as proposed in [jot].

Defining packages and package templates

Packages are defined by a set of classes similar to a normal Java package. Package templates (later just templates for short), are defined similar except for using the keyword *template*. Listing 1 on the following page shows an example of defining packages and templates. The contents of a package can be used as you would with a normal Java package.

```
package P {  
    interface I { ... }  
    class A extends I { ... }  
}  
  
template T {  
    class B { ... }  
}
```

Listing 1: Defining a package P and a template T. **Merk at dette ikke er syntaksen til en vanlig pakke i Java. Dette må beskrives.**

```
// Before compile time instantiation of T  
template T {  
    class A { ... }  
    class B { ... }  
}  
  
package P {  
    inst T;  
    class C { ... }  
}  
  
// After compile time instantiation of T  
package P {  
    class A { ... }  
    class B { ... }  
    class C { ... }  
}
```

Listing 2: Instantiating template T in package P

Instantiating templates

Instantiating is what really makes PT useful. When defining packages, PT allows for including already defined templates through instantiating. Instantiation is done inside the body of a package with the use of a `inst`-clause. Instantiating a template will make "textual copies" of the classes, interfaces and enums from the instantiated template and insert them replacing the instantiation statement at compile time. Note that the template itself still exist and that it can be instantiated again in the same program. Listing 2 shows an example of instantiating a template inside a package. The resulting package P will then have the classes A and B from template T and its own class C.

Renaming

During instantiations it is possible to rename classes (as well as interfaces and enums) and class methods. Renaming is a part of the instantiation of templates, and will only affect the copy made for this instantiation, and it is done for this copy before it replaces the `inst`-statement. Renaming is denoted by a `with`-clause. In the `with`-clause one can rename classes using the following fat arrow syntax, `A => B`, where class `A` is renamed to `B`, and you can rename class attributes with a similar arrow syntax, `i -> j`, where the attribute `i` is renamed to `j`. For method renaming you have to give the signature of the method so that it is possible to distinguish between overloaded versions, i.e. `m1(int) -> m2(int)`¹.

Det var vel altså egentlig noe historisk tull at vi skilte mellom "`=>`" og "`->`". Må gjerne bruke are en, f.eks. "`->`", så har man "`=>`" helt fri til andre formål. Sparer dette til masteroppgaven, da essayet fokuserer på hvordan PT er nå, mens masteroppgaven vil fokusere mer på "min versjon" av PT.

Attribute renaming comes after the class renaming surrounded by a set of parentheses. Renaming classes will also affect the signatures of any methods using this class. Listing 3 on the following page shows an often used example of renaming, where a graph template is renamed to better fit a domain, in this case a road map. When renaming the class `Node` the signature of the methods in `Edge` using this `Node` was also changed to reflect this, i.e. the method `Node getNodeFrom()` would become `City getNodeFrom()` with the class rename, and `City getCityFrom()` with the method renaming.

Renaming makes it possible to instantiate templates with conflicting names of classes, or even instantiate the same templates multiple times. Listing 4 on page 7 shows an example of this where we instantiate the same template `T` twice without any issues.

Additions to a template

When instantiating a template you can also add attributes to the classes of the template, as well as extending the classes implemented interfaces and this will only apply to the current copy. These additions are written inside an `addto`-clause. Extending the class with additional attributes is done in the body of the clause, like you would in a normal Java class. If an addition has the same signature as an already existing attribute from the instantiated template class, then the addition will override the already existing attribute, like in traditional inheritance. Extending the list of implemented interfaces for a class can be done by suffixing the `addto`-clause with `implements` and the list of interfaces. Listing 5 on page 8 shows an example of adding attributes and implemented interfaces to an instantiated class. The resulting class `A` in package `P` would have the

¹On a more technical level the compiler will find the class or attribute declaration that is gonna be renamed, and then find all name occurrences bound to this declaration and rename these.

```
template Graph {
  class Node {
    ...
  }

  class Edge {
    Node getNodeFrom() { ... }
    Node getNodeTo() { ... }
  }

  class Graph {
    ...
  }
}

package RoadMap {
  ...
  inst Graph with
    Node => City,
    Edge => Road
    (getNodeFrom() -> getStartingCity(),
     getNodeTo() -> getDestinationCity()),
    Graph => RoadSystem;
  ...
}
```

Listing 3: Example of renaming classes during instantiation. This could be used to make the classes fit the domain of the project better.

```
template T {  
    class A {  
        void m() { ... }  
    }  
}  
  
package P {  
    inst T;  
    inst T with A => B;  
}  
  
// package P after compile time instantiation and renaming  
package P {  
    class A {  
        void m() { ... }  
    }  
  
    class B {  
        void m() { ... }  
    }  
}  

```

Listing 4: Example of instantiating the same template twice solved by renaming.

```
template T {
    class A {
        void someMethod() { ... }
    }
}

package P {
    inst T;
    addto A implements Runnable {
        int i;
        void someOtherMethod() { ... }
        void run() { ... }
    }
}
```

Listing 5: Adding new attributes and extending the implemented interface for the instantiated class A in package P

attribute `i`, methods `someMethod`, `someOtherMethod` and `run`, as well as implementing the interface `Runnable`.

The extension of classes using the `addto`-clause is done independently for each class, ignoring any inheritance-patterns. If there is a class A with a subclass B, they can both get extensions independently from each other. Any extensions made to class A would of course still be inherited to class B, as with normal Java inheritance.

2.1.2 Merging classes

Since this is the mechanism of PT that gives rise to the theme of this essay, a sort of multiple inheritance (namely "static multiple inheritance"), we will be going a bit more in-depth in this section.

If two or more classes in the same or in different instantiations share the same name they will be merged into one class. Through this mechanism PT achieves a form of static multiple inheritance. If two classes don't share the same name, it is still possible to merge them by first using renaming. Through renaming it is possible to force merging by giving the classes the same name. In [listing 6 on the next page](#) we see an example of renaming class B to A to force these classes to be merged under the class name A. Merging the classes would simply lead to having a single class A with the attributes from both classes. The two classes A and B, from templates T1 and T2 respectively, no longer exists in package P, but have formed the new class A, which is a union of both. Any pointers typed with the old A or B will now be pointing ot the new merged class A.

```
template T1 {  
  class A {  
    ...  
  }  
}  
  
template T2 {  
  class B {  
    ...  
  }  
}  
  
package P {  
  inst T1 with A;  
  inst T2 with B => A;  
}
```

Listing 6: Instantiation with class merging through renaming

2.2 TypeScript

2.2.1 JavaScript / ECMAScript

When I talk about JavaScript in this thesis I will be referring to the ECMAScript standard (More precisely ES6(Kanskje ikke så viktig å spesifisere dette?)).

Chapter 3

The Language - PTS

3.1 Syntax

For the implementation of PT we need syntax for the following:

- Defining packages (`package` in PTj)
- Defining templates (`template` in PTj)
- Instantiating templates (`inst` in PTj)
- Renaming classes (`=>` in PTj)
- Renaming methods (`->` in PTj)
- Additions to classes (`addto` in PTj)

`template` and `inst` are both not in use nor reserved in the ECMAScript standard or in TypeScript, and can therefore be used in Package Template Script without any issues.

The keyword `package` in TS / ES is as of yet not in use, however the ECMAScript standard has reserved it for future use. In order to "future proof" our implementation we should avoid using this reserved keyword, as it could have some conflicts with a potential future implementation of packages in ECMAScript. It could also be beneficial to not share the keyword in order to avoid creating confusion between the future ES packages and PT Packages. `module` is also a keyword that could be used to describe a PT package, however this is already used in the ES standard, and should therefore also be avoided for similar reasons to `package`, to avoid confusion. We will therefore use `pack` instead.

For renaming classes PTj uses `=>`, however in JavaScript this is used in arrow-functions[2]. To avoid confusion, and a potentially ambiguous grammar we will have to choose a different syntax for renaming classes. PTj, for historical purposes, uses a different operator (`->`) for renaming class methods, however for keeping our language simple we will stick to only having one common operator for renaming.

JavaScript currently supports renaming of destructured fields using the `:` (colon) operator and aliasing imports using the keyword `as`. We could

```

template T {
    class A {
        function f() : string {
            ...
        }
    }
}

pack P {
    // Function overloading not supported, so don't need to give signature for
    inst T { A -> A (f -> g) };
    addto A {
        i : number = 0;
    }
}

```

Listing 7: Renaming in PTS

opt to choose one of these for renaming in PTS as well, however in order to keep the concepts separated, as well as making the syntax more familiar for Package Template users, we will go for the `->`(thin arrow) syntax.

3.2 The PTS Grammar

PTS is an extension of TypeScript, and the grammar is also therefore an extension of the TypeScript grammar. There is no published official TypeScript grammar (other than interpreting it from the implementation of the TypeScript compiler), however up until recently there used to be a TypeScript specification[7]. This TypeScript specification was deprecated as it proved a to great a task to keep updated with the ever-changing nature of the language. However, most of the essential parts are still the same. The PTS grammar is therefore based on the TypeScript specification, and on the ESTree Specification[8].

In figure 3.1 on the facing page we can see the PTS BNF grammar. This is not the full grammar for PTS, as I have only included any additions or changes to the original TypeScript/JavaScript grammars. More specifically the non-terminal `<declaration>` is an extension of the original grammar, where we also include package and template declarations as legal declarations. The productions for non-terminals `<id>`, `<class declaration>`, `<interface declaration>`, and `<class body>` are also from the original grammar.

$\langle \text{declaration} \rangle$	$\models \dots \mid \langle \text{package declaration} \rangle \mid \langle \text{template declaration} \rangle$
$\langle \text{package declaration} \rangle$	$\models \text{pack } \langle \text{id} \rangle \langle \text{PT body} \rangle$
$\langle \text{template declaration} \rangle$	$\models \text{template } \langle \text{id} \rangle \langle \text{PT body} \rangle$
$\langle \text{PT body} \rangle$	$\models \{ \langle \text{PT body decls} \rangle \}$
$\langle \text{PT body decls} \rangle$	$\models \langle \text{PT body decls} \rangle \langle \text{PT body decl} \rangle \mid \lambda$
$\langle \text{PT body decl} \rangle$	$\models \langle \text{inst statement} \rangle \mid \langle \text{addto statement} \rangle \mid$ $\langle \text{class declaration} \rangle \mid \langle \text{interface declaration} \rangle$
$\langle \text{inst statement} \rangle$	$\models \text{inst } \langle \text{id} \rangle \langle \text{inst rename block} \rangle$
$\langle \text{inst rename block} \rangle$	$\models \{ \langle \text{class renamings} \rangle \} \mid \lambda$
$\langle \text{class renamings} \rangle$	$\models \langle \text{class rename} \rangle \mid \langle \text{class rename} \rangle, \langle \text{class renamings} \rangle$
$\langle \text{class rename} \rangle$	$\models \langle \text{rename} \rangle \langle \text{field rename block} \rangle$
$\langle \text{field rename block} \rangle$	$\models (\langle \text{field renamings} \rangle) \mid \lambda$
$\langle \text{field renamings} \rangle$	$\models \langle \text{rename} \rangle \mid \langle \text{rename} \rangle, \langle \text{field renamings} \rangle$
$\langle \text{rename} \rangle$	$\models \langle \text{id} \rangle \rightarrow \langle \text{id} \rangle$
$\langle \text{addto statement} \rangle$	$\models \text{addto } \langle \text{id} \rangle \langle \text{addto heritage} \rangle \langle \text{class body} \rangle$
$\langle \text{addto heritage} \rangle$	$\models \langle \text{class heritage} \rangle \mid \lambda$

Figure 3.1: BNF grammar for PTS. The non-terminals $\langle \text{declaration} \rangle$, $\langle \text{id} \rangle$, $\langle \text{class declaration} \rangle$, $\langle \text{interface declaration} \rangle$, and $\langle \text{class body} \rangle$ are productions from the TypeScript grammar. The ellipsis in the declaration production means that we extend the TypeScript production with some extra choices.

Legend: Non-terminals are surrounded by $\langle \text{angle brackets} \rangle$. Terminals are in typewriter font. Meta-symbols are in regular font.

```
template T {  
  class A {  
    String f() {  
      ...  
    }  
  }  
}  
  
package P {  
  inst T with A => A (f() -> g());  
  addto A {  
    int i = 0;  
  }  
}
```

Listing 8: Renaming in PTj

Chapter 4

Planning the project

4.1 What Do We Need?

- The ability to add custom syntax (access to the tokenizer / parser)
- Some semantic analysis.

In addition to these we would also like to look for some other desirable traits for our implementation:

- Loosely coupled implementation (So that new versions of typescript not necessarily breaks our implementation).
- Mer?

4.2 TypeScript vs JavaScript

4.2.1 Verifying templates

One of the requirements for PT is that each template should be verifiable. There is no easy way to verify if some JavaScript code is verifiable without executing it. With TypeScript on the other hand, with the language being statically typed, we can, at least to a much larger extent, verify if some piece of code is type secure. And thus we can also use this to validate each separate template in PT.

Now it should be noted that due to TypeScript's type system being unsound one could argue that this requirement of PT is not met. While this is true it still outperforms JavaScript on this remark, and we will later in section ?? on page ?? discuss more in-depth to what extent this requirement is met.

4.3 Choosing the right approach

Before jumping into a project of this magnitude it is important to find out what approach to use. The goal of this project is to extend TypeScript with the Package Templates language mechanism, this could be achieved by one of the following methods:

- Making a fork of the TypeScript compiler
- Making a preprocessor for the TypeScript compiler
- Making a compiler plugin / transform
- Making a custom compiler from scratch

4.3.1 Preprocessor for the TypeScript Compiler

More work than ex plugin / transformer.

4.3.2 TypeScript Compiler Plugin / Transform

At the time of writing the official TypeScript compiler does not support compile time plugins. The plugins for the TypeScript compiler is, as the TypeScript compiler wiki specifies, "for changing the editing experience only"[6]. However, there are alternatives that do enable compile time plugins / transformers;

- ts-loader[13], for the webpack ecosystem
- Awesome Typescript Loader[9], for the webpack ecosystem. Depreciated
- ts-node[14], REPL / runtime
- ttypescript[3], TypeScript tool TODO: Les mer på dette

Unfortunately ts-loader, Awesome Typescript Loader and ts-node does not support adding custom syntax, as it only transforms the AST produced by the TypeScript compiler. Because of this they are not a viable option for our use-case and will therefore be discarded.

4.3.3 Babel plugin

Babel isn't strictly for TypeScript, but for JavaScript as a whole, however we could write our plugin to be dependent on the TypeScript transformation plugin.

Making a Babel plugin will make it very accessible as most web-projects use Babel, and the upkeep is cheap, as plugins are loosely coupled with the core.

In order for a Babel plugin to support custom syntax it has to provide a custom parser, a fork of the Babel parser. Through this we can extend the TypeScript syntax with our syntax for PT. This is all hidden away from the user, as this custom parser is a dependency of our Babel plugin.

Seeing as we have to make a fork of the parser in order to solve our problem, the upkeep will not be as cheap as first anticipated. However, being able to have most of the logic loosely coupled with the compiler core it will still make it easier to keep updated than through a fork of the TypeScript compiler.

4.3.4 TypeScript Compiler Fork

Possible, however not as accessible as other alternatives and will make upkeep expensive.

The TypeScript compiler is a monolith. It has about 2.5 million lines of code, and therefore has a quite steep learning curve to get into. If we were to go with this route it would be quite hard to keep up with the TypeScript updates, as updates to the compiler might break our implementation. However, as we have seen, going the plugin / transform route also requires us to fork the underlying compiler and make changes to it, however with the majority of the implementation being loosely coupled it would still make it easier to keep up-to-date. That being said it will probably be a lot easier to do semantic analysis in a fork of the TypeScript compiler vs in a plugin / transform.

Chapter 5

Implementation

In this chapter we are going to look at the implementation of PTS.

5.1 Compiler Architecture

5.2 Lexer and Parser

5.2.1 Parser Generator

There are a lot of parser generators out there, but there is no one-size-fits-all solution. In order to navigate through the sea of options we need to set some requirements in functionality, so that we can more easily find the right tool for the task.

As we talked about in [section 4.1 on page 15](#), we set ourselves the goal to find an approach that would allow us to create an implementation that was loosely coupled with TypeScript. TypeScript is a large language that is constantly updated, and is getting new features fairly often. Because of this one of the requirements for our choice of parser generator is the possibility for extending grammars. This is important because we want to keep our grammar loosely coupled with the TypeScript grammar, and don't want to

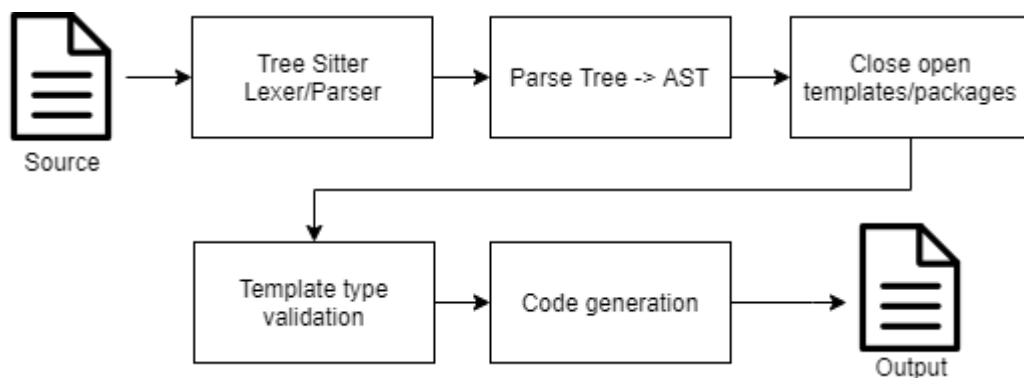


Figure 5.1: Overview of the compiler

be forced to rewrite the entire TypeScript grammar, as well as keeping it up-to-date.

We will be working with the TypeScript API, which only has a runtime library in JavaScript/TypeScript. Therefore, another desired attribute is a runtime library in TypeScript. This is not as essential as the requirement above, as we can get around using the TypeScript API and instead use the TypeScript CLI, or create a CLI in the language of the parser generator tools runtime library.

ANTLR4

ANTLR, ANother Tool for Language Recognition, is a very powerful and versatile tool, used by many, such as Twitter for query parsing in their search engine[10].

ANTLR supports extending grammars, or more specifically importing them. Importing a grammar works much like a "smart include". It will include all rules that are not already defined in the grammar. Through this you can extend a grammar with new rules or replacing them. It does not however support extending rules, as in referencing the imported rule while overriding[10]. This isn't a major issue however as you could easily rewrite the rule with the additions.

The only supported runtime library in ANTLR is in Java. This does not mean that you won't be able to use it in any other language, as you could simply invoke the runtime library through command line, however it is worth keeping in mind.

Overall ANTLR seems like a good option for our project, but the lack of a runtime library in TypeScript is a hurdle we would rather get a round if we can.

GNU Bison

Tree-sitter

Tree-sitter is a fairly new parser generator tool, compared to the others in this list. It aims to be general, fast, robust and dependency-free[tree-sitter]. The tool has been garnering a lot of traction the last couple of years, and is being used by Github, VS Code and Atom to name a few. It has mainly been used in language servers and syntax highlighting, however it should still work fine for our compiler since it does produce a parse tree.

Although it isn't a documented feature, Tree-sitter does allow for extending grammars. Extending a grammar works much like in ANTLR, where you get almost a superclass relation to the grammar. One difference from ANTLR though is that it does allow for referencing the grammar we are extending during rule overriding. This makes it easier and more robust to extend rules than in ANTLR.

Tree-sitter also has a runtime library for TypeScript, which makes it easier for us to use it in our implementation than the previous candidates.

```
_declaration: ($, previous) =>
  choice(
    previous,
    $.template_declaration,
    $.package_declaration
  )
```

Listing 9: Snippet from the PTS grammar, where we override the `_declaration` rule from the TypeScript grammar, and adding two additional declarations.

Another cherry on top is that Tree-sitter is becoming one of the mainstream ways of syntax highlighting in modern editors and IDEs, which means that we could utilize the same grammar to get syntax highlighting for our language.

All this makes Tree-sitter stand out as the best candidate for our project.

Implementing Our Grammar in Tree-sitter

Tree-sitter uses the term rule instead of production, and I will therefore also refer to productions as rules here.

Extending a grammar in Tree-sitter works much like extending a class in an object-oriented language. A "sub grammar" inherits all the rules from the "super grammar", so an empty ruleset would effectively work the same as the super grammar. Just like most object-oriented languages have access to the super class, we also have access to the super grammar in Tree-sitter. All of this enables us to add, override, and extend rules in an existing grammar, all while staying loosely coupled with the super grammar. By extending the grammar, and not forking it, we are able to simply update our dependency on the TypeScript grammar, minimizing the possibility for conflicts.

As mentioned, Tree-sitter allows for referencing the super grammar during rule overriding, effectively making it possible to combine the old rule and the new. A good example of overriding and combining rules can be found in the grammar of PTS, see listing 9, where we override the `_declaration` rule from the TypeScript grammar, to include the possibility for package and template declarations.

5.2.2 Instantiation and Renaming

Scoping

For creating scopes I chose the following node types for "making new scopes".

- `class_body`
- `statement_block`

- `enum_body`
- `if_statement`
- `else_statement`
- `for_statement`
- `for_in_statement`
- `while_statement`
- `do_statement`
- `try_statement`
- `with_statement`

Transforming Nodes to References

5.2.3 Verification of Templates

ts api

5.2.4 Code Generation

generate ts and compile ts to js through ts api.

5.3 Notes on Performance

Very slow compiler/PP because of the chosen implementation, with tree traverser for every step.

5.4 Testing

5.4.1 Lexer and Parser

Tree-sitter tests are simple `.txt` files split up into three sections, the name of the test, the code that should be parsed, and the expected parse tree in S-expressions[12].

5.4.2 Transpiler

Started with jest, and used some time to get it to work with typescript files, however had to switch because jest doesn't handle native libraries (tree-sitter) too well. It requires the same native library several times, making the wrapping around the native program to break.

```
=====
Closed template declaration
=====

template T {
  class A {
    i = 0;
  }
}

---
(program
  (template_declaration
    name: (identifier)
    body: (package_template_body
      (class_declaration
        name: (type_identifier)
        body: (class_body
          (public_field_definition
            name: (property_identifier)
            value: (number)))))))
```

Listing 10: Example of tree-sitter grammar test

Chapter 6

Does PTS Fulfill The Requirements of PT?

6.1 The Requirements of PT

What are the requirements of PT?

As described in [jot]

- Parallel extension
- Hierarchy preservation
- Renaming
- Multiple uses
- Type parameterization
- Class merging
- Collection-level type-checking

6.1.1 Parallel Extension

6.1.2 Hierarchy Preservation

```
class A {  
    ...  
}
```

Listing 11: Example of hierarchy preservation

6.1.3 Renaming

6.1.4 Multiple Uses

In addition to using it for cities and roads, we could in the same program use it to form the structure of pipes and joints in a water distribution system.

6.1.5 Type Parameterization

6.1.6 Class Merging

6.1.7 Collection-Level Type-Checking

6.2 Verifying Templates

Talk about unsoundness of TypeScript. Talk about unsoundness of Java [1]
Talk about since the requirement is met with Java we assume it is adequately met with TypeScript as well.

Chapter 7

Difference between PTS and PTj

7.1 Nominal vs. Structural Typing

One of the most notable differences between PTS and PTj are the underlying languages type systems. PTS, as an extension of TypeScript, has structural typing, while PTj on the other hand, an extension of Java, has nominal typing.

Nominal and structural are two major categories of type systems. Nominal is defined as "being something in name only, and not in reality" in the Oxford dictionary. Nominal types are as the name suggests, types in name only, and not in the structure of the object. They are the norm in mainstream programming languages, such as Java, C, and C++. A type could be A or BinTree, and checking whether an object conforms to a type restriction, is to check that the type restriction is referring to the same named type, or a subtype. Structural types on the other hand is not tied to the name of the type, but to the structure of the object. These are not as common in mainstream programming languages, but are very prominent in research literature. However, in more recent (mainstream) programming languages, such as Go, TypeScript and Julia (at least for implicit typing), structural typing is becoming more and more common. A type in a structurally typed programming language, are often defined as records, and could for example be `name: string`.

7.1.1 Advantages of Nominal Types

Subtypes

In nominal type systems it is trivial to check if a type is a subtype of another, as this has to be explicitly stated, while in structural type systems this has to be structurally checked, by checking that all members of the super type, are also present in the subtype. Because of this each subtype relation only has to be checked once for each type, which makes it easier to make a more performant type checker for nominal type systems. However, it is also possible to achieve similar performance in structurally typed languages

```

// Given the class A
class A {
    void f() { ... }
}

// A subtype, B, in nominal typing
class B extends A { ... }

// A subtype, C, in structural typing
class C {
    void f() { ... }
    int g() { ... }
}

```

Listing 12: Example of subtype relations in nominal and structural typing, in a Java-like language.

```

interface BinTree<T> {
    getData(): T;
    getChildren(): [BinTree<T> | null, BinTree<T> | null];
}

```

Listing 13: Usage of a recursive type, `BinTree`, in TypeScript

through some clever representation techniques. We can see an example of subtype relations in both nominal and structural type systems, in a Java-like language, in listing 12. It is important to note that even though `C` is a *subtype* of `A` in a structural language, it is not a *subclass* of `A`.

Recursive types

Recursive types are types that mention itself in its definition, and are widely used in datastructures, such as lists and trees. Another advantage in nominal typing is how natural and intuitive recursive types are in the type system. Referring to itself in a type definition is as easy as referring to any other type. It is however just as easy to do this in structural type systems as well, however for calculi such as type safety proofs, recursive types come for free in nominal type systems, while it is a bit more cumbersome in structurally typed systems, especially with mutually recursive types[11]. Listings 13 and 14 on the facing page shows the use of recursive types in TypeScript(structurally typed) and Java(nominally typed), respectively.

Runtime Type Checking

Often runtime-objects in nominally typed languages are tagged with the types(a pointer to the "type") of the object. This makes it cheap and easy to

```
interface BinTree<T> {  
    T getData();  
    Pair<BinTree<T>, BinTree<T>> getChildren();  
}
```

Listing 14: Usage of a recursive type, BinTree, in Java

do runtime type checks, like in upcasting or doing a `instanceof` check in Java.

7.1.2 Advantages of Structural Types

Tidier and More Elegant

Structural types carry with it all the information needed to understand its meaning.

Advanced Features

Type abstractions (parametric polymorphism, ADTs, user-defined type operators, functors, etc), these do not fit nice into nominal type systems.

More General Functions/Classes

See [5].

7.1.3 What Difference Does This Make For PT?

We are not going to go further into comparing nominal and structural type systems and "crown a winner", as there are a lot useful scenarios for both. We will instead look more closely into how a structural type system fits into PT, and what differences this makes to the features, and constraints, of this language mechanism.

7.1.4 Which Better Fits PT?

```

// Given the following class definitions for A, B and C:
class A {
    void f() {
        ...
    }
}

class B extends A {
    ...
}

class C {
    void f() {
        ...
    }
}

// And a consumer with the following type:
void g(A a) { ... }

// Would result in the following
g(new A()); // Ok
g(new B()); // Ok
g(new C()); // Error, C not of type A

```

Listing 15: Example of a nominally typed program in a Java-like language

```

// Given the same class definitions and
// the same consumer as in the example above.
// Would result in the following
g(new A()); // Ok
g(new B()); // Ok
g(new C()); // Ok, because C is structurally equal to A

```

Listing 16: Example of a structurally typed program in a Java-like language

Chapter 8

Results

Bibliography

- [1] Nada Amin and Ross Tate. ‘Java and scala’s type systems are unsound: the existential crisis of null pointers’. In: *ACM SIGPLAN Notices* 51.10 (Dec. 2016), pp. 838–848. ISSN: 0362-1340. DOI: [10.1145/3022671.2984004](https://doi.org/10.1145/3022671.2984004). URL: <https://dl.acm.org/doi/10.1145/3022671.2984004>.
- [2] *Arrow function expressions - JavaScript* | MDN. URL: https://developer.mozilla.org/en-US/docs/Web/JavaScript/Reference/Functions/Arrow%7B%5C_%7Dfunctions (visited on 19/10/2020).
- [3] Cevek. *ttypescript*. URL: <https://github.com/cevek/ttypescript>.
- [4] Stein Krogdahl. ‘Generic Packages and Expandable Classes’. In: (2001).
- [5] Donna Malayeri and Jonathan Aldrich. ‘Is Structural Subtyping Useful? An Empirical Study’. In: *Programming Languages and Systems, 18th European Symposium on Programming, {ESOP} 2009, Held as Part of the Joint European Conferences on Theory and Practice of Software, {ETAPS} 2009, York, UK, March 22-29, 2009. Proceedings*. 2009, pp. 95–111. DOI: [10.1007/978-3-642-00590-9_8](https://doi.org/10.1007/978-3-642-00590-9_8). URL: https://doi.org/10.1007/978-3-642-00590-9%7B%5C_%7D8.
- [6] Microsoft. *microsoft/TypeScript*. URL: <https://github.com/microsoft/TypeScript/wiki/Writing-a-Language-Service-Plugin>.
- [7] Microsoft Corporation. *Typescript Language Specification Version 1.8*. Tech. rep. Oct. 2012. URL: https://web.archive.org/web/20200808173225if%7B%5C_%7Dhttps://github.com/Microsoft/TypeScript/blob/master/doc/spec.md.
- [8] Mozilla Contributors and ESTree Contributors. *The ESTree Spec*. Tech. rep. URL: <https://github.com/estree/estree>.
- [9] Stanislav Panferov. *Awesome TypeScript Loader*. URL: <https://github.com/s-panferov/awesome-typescript-loader>.
- [10] Terence (Terence John) Parr. *The definitive ANTLR 4 reference*. Dallas, Texas, 2012.
- [11] Benjamin C Pierce. *Types and Programming Languages*. MIT Press, 2002. ISBN: 9780262162098.
- [12] *S-expression - Wikipedia*. URL: <https://en.wikipedia.org/wiki/S-expression> (visited on 25/01/2021).

- [13] TypeStrong. *ts-loader*. URL: <https://github.com/TypeStrong/ts-loader>.
- [14] TypeStrong. *ts-node*. URL: <https://github.com/TypeStrong/ts-node>.