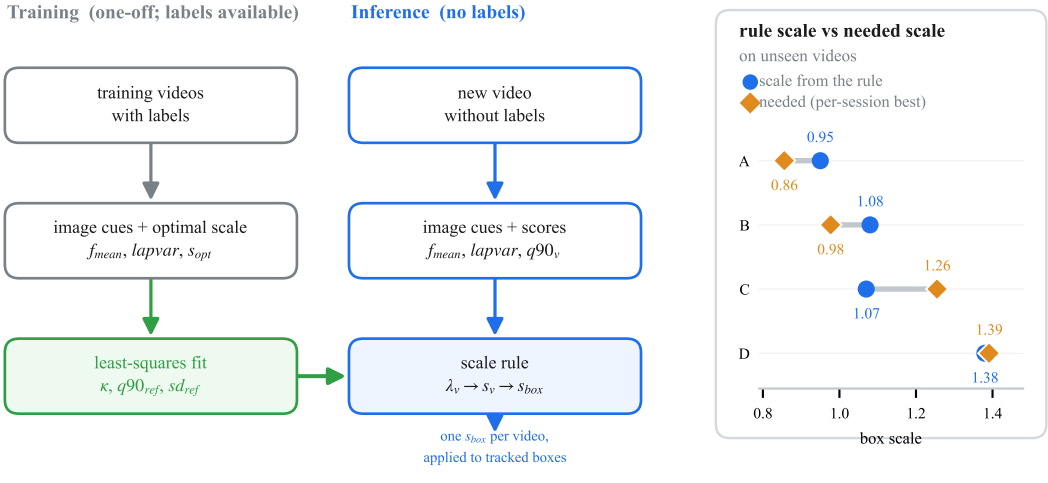
Training (one-off; labels available)
Inference (no labels)
training videos
with labels
image cues + optimal scale
f_{mean}, $lapvar$, s_{opt}
least-squares fit
κ, $q90_{ref}$, sd_{ref}
new video
without labels
image cues + scores
f_{mean}, $lapvar$, $q90_v$
scale rule
$\lambda_v \rightarrow s_v \rightarrow s_{box}$
one s_{box} per video,
applied to tracked boxes
rule scale vs needed scale
on unseen videos
scale from the rule
needed (per-session best)
A
B
C
D
0.95
0.86
1.08
0.98
1.26
1.07
1.39
1.38
0.8
1.0
1.2
1.4
box scale